

15-163-30036-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

Rooks County, Sec. 29 Twp. 9 Rge. 20 (E) (W) X

Location as "NE/CNW/SW" or footage from lines S/2 S/2 NW

Lease Owner Nadel & Gussman

Lease Name Graham Well No. 3

Office Address P. O. Box 158 Plainville, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 11-1-66 19

Application for plugging approved 11-5-66 19


Plugging commenced 11-7-66 19

Plugging completed 12-6-66 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

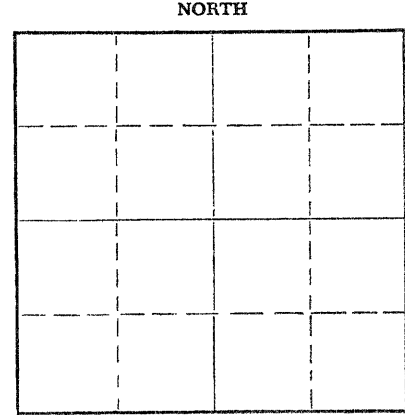

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo F. Massey

Producing formation Depth to top Bottom Total Depth of Well 3883 1/2 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	205	None
				4 1/2	None	3272

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Moved in. Dug cellar. Unpacked braden head.

Rigged up unit. Set in jacks. Took pipe off slips. Sanded back from 3883 1/2 to 3835'. Worked pipe - had 8" tension at 15 joints.

Made up 2" bailer. Cleared hole. Mixed and dumped 4 sacks of cement on sand bridge. Loaded hole with water. Working pipe. Cleared hole for shot - shot pipe at 3258'. Working pipe.

Pulling pipe. Made up 1 1/2" bailer. Tried to bail down - hole wouldn't bail.

Broke down bailer. Broke off braden head. Tore down unit.

Plugged well with 30 sacks of gel and 70 sacks of cement.

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 19 1966  
12-19-66  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.

Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
J. O. Forbes

(employee or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes  
P. O. Box 221 Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 16 day of December, 19 66

My commission expires May 27, 1969

Notary Public.

15-163-30036-00-00

WELL LOG  
\*\*\*\*\*

NADEL AND GUSSMAN

GRAHAM #3

S/2 S/2 NW 29-9-20W  
Rooks County, Kansas

Comm. 3-22-65  
Comp. 4-3-65

Casing: 8-5/8" 205' w/160sax  
4-1/2" 3865' w/75sax  
T D 3883 1/2'

RECEIVED  
STATE CORPORATION COMMISSION

NOV 7 1966  
11-7-66  
CONSERVATION DIVISION  
Wichita, Kansas