


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

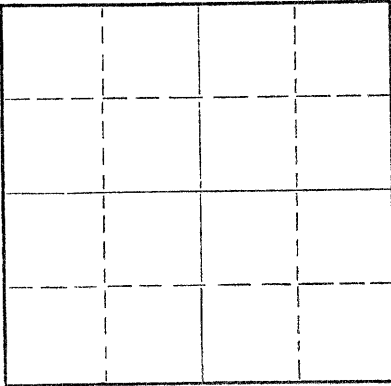Locate well correctly on above
Section Plat

Rooks County. Sec. 28 Twp. 9 Rge. 20 (E) (W) X

Location as "NE/CNW/SW" or footage from lines 660' E 990' S of NW SW
Lease Owner Nadel & Gussman
Lease Name Kern Well No. 2
Office Address P. O. Box 158 Plainville, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19____
Application for plugging filed 11-4-66 19____
Application for plugging approved 11-5-66 19____
Plugging commenced 11-29-66 19____
Plugging completed 12-6-66 19____
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey
Producing formation Depth to top Bottom Total Depth of Well 3883 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	138	None
				5 1/2	None	822


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Moved in. Rigging up.

Finished rigging up. Took pipe off slips. Working pipe - had 8" tension at 20 joints on gauge. Cleared hole for shot - shot pipe at 1273' and 1129'. Mixed and dumped 5 sacks of cement on sand at 3866'.

Working pipe. Pulling pipe.

Plugged well with 18 sacks of gel and 70 sacks of cement.

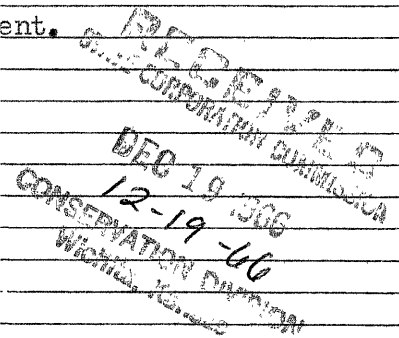

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.
Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
J. O. Forbes

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes
P. O. Box 221 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 16 day of December, 1966

My commission expires May 27, 1969

Notary Public.

15-163 01764-06-02

WELL LOG

NADEL AND GUSSMAN

KERN No. 2

660' E 990' S NW SW
28-9-20W- Rooks County
Kansas

Comm: 8-18-50

Comp: 8-30-50

Casing:

8-5/8" 138' W/110 Sax
5-1/2" 3881' W/100 Sax

Shale	130
Shale and shells	925
Sand, shale and shells	1280
Sand	1515
Shale and shells	1715
Shale and red bed	1780
Anhydrite	1820
Shale and shells	2220
Shale and lime	2455
Broken Lime	2625
Lime and shale	2720
Shale and shells	3175
Shale and lime	3240
Broken lime	3315
Lime	3455
Shale and lime	3510
Lime and shale	3631
Lime	3776
Lime and shale	3836
Lime	3851
Conglomerate	3864
Shale	3881
Arbuckle	3883

T.D.

Geological Tops

Heebner	3534
Dodge	3555
L-K.C.	3574
Base K.C.	3797
Penn Cong.	3851
Simpson Dol.	3871
Arbuckle	3881

RECEIVED
STATE GEOLOGICAL COMMISSION

NOV 7 1950
CONSERVATION DIVISION
TOPEKA, KANSAS

STATE OF KANSAS

COUNTY OF SEDGWICK

) ss:

L. C. Hay, of lawful age, deposes and states that the above formations and depths are true and correct as taken from the daily drilling reports on the Kern No. 2 well in the NW SW of 28-9-20W, Rooks County, Kansas.

L. C. Hay

Subscribed and sworn to before me this 7th day of September, 1950.

R. L. Bask
Notary Public

My commission expires Nov. 3, 1952