

R

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

W

FILE NO. \_\_\_\_\_

LOCATION ~~SEC. 13~~ C 79. 22 SE

SEC. 13 TWP. 9 RGE. 19W

Dry Hole X Abandoned Oil Well \_\_\_\_\_ Abandoned Gas Well \_\_\_\_\_

I have today completed supervision of plugging of:

Well No. 1 Lease Hilgers-14 Hilger

Operator Harbor Welding Co Address Box # 24 - Wichita Kansas

Field \_\_\_\_\_ County Hooker

Total Depth 3574 Feet.

(Describe briefly the manner in which the well was plugged)


Surface Pipe 10 3/4" - 232 ft cemented all around  
5 1/2" casing set at 3550 ft & cemented up to 3150 ft  
Prepacked at 3496 ft - Plug Part in 3 1/2" casing at  
3440 ft x 10 sacks of cement dumped on top of Plug -  
3 1/2" casing shot off at around 3100 ft x Pulled &  
Plug at 240 ft x 15 sacks of cement - Plug  
at 20 ft below surface x 10 sacks of cement -  
Heavy Mud between all Plugs -

Carruth Bros - Pipe Pullers  
Paul Pfeiffer - Tool Pusher

C. M. Stovall  
District Conservation Agent

Date 5-15-47

**PLUGGING**  
FILE SEC. 13 TWP. 9 RGE. 19W  
BOOK PAGE 10 LINE 33

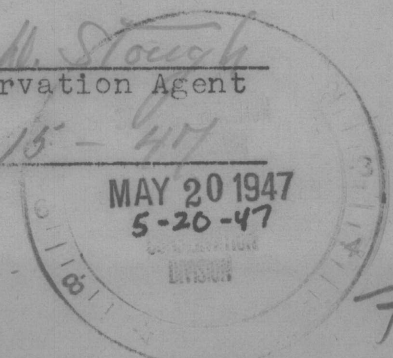

7