

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. 105-23

LOCATION NE NE NW

SEC. 11 TWP. 9 RGE. 20

Dry Hole Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 1 Lease Baldwin

Operator Musgrove Pet Co Address Wichita, Kans

Field _____ County Rooks

Total Depth 3667 Feet.

(Describe briefly the manner in which the well was plugged)

8 5/8" at 192' circulated with cement - 5 1/2" at 3621'


with 100 sax cement behind.

Baker plugs at 3472' - perforated at 3591' - filled with chat

to 3575', set a sax cement with dump bailer - pulled 2850'

5 1/2", filled with mud to 190', set rock and 10 sax cement -

mud to 50', set rock and 10 sax cement to bottom cellar.

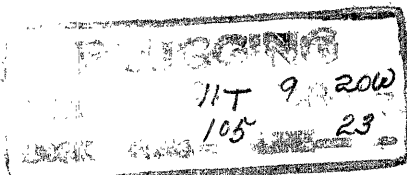

6/22/53

CONSERVATION DIVISION
Wichita, Kansas

Sam Pettey
District Conservation Agent

Date 6-18-53