



MICRO LOG

Company	BEREXCO LLC.	Company	BEREXCO LLC.
Well	CHRISLER-ELLIOTT#21	Well	CHRISLER-ELLIOTT#21
Field	BOWLBY	Field	BOWLBY
County	ELLIS	County	ELLIS
State	KS	State	KS
Location:	API # : 15 051 27062 715' FSL & 1465' FEL	Other Services CDNL DIL	
Permanent Datum	SEC 1 TWP 11S RGE 16W	Elevation	
Log Measured From	Ground Level	K.B. 1937	
Drilling Measured From	KB 10' AGL	D.F. 1935	
	KB	G.L. 1927	
Date	11/14/22		
Run Number	TWO		
Depth Driller	3550		
Depth Logger	3550		
Bottom Logged Interval	3548		
Top Log Interval	2750		
Casing Driller	8 5/8" @ 262		
Casing Logger	262		
Bit Size	7 7/8"		
Type Fluid in Hole	Chemical		
Density / Viscosity	9.2/55		
pH / Fluid Loss	9.0/9.2		
Source of Sample	Pit		
Rm @ Meas. Temp	.6@70degf		
Rmf @ Meas. Temp	.45@70degf		
Rmc @ Meas. Temp	.72@70degf		
Source of Rmf / Rmc	Calculated		
Rm @ BHT	.44@95degf		
Time Circulation Stopped	1:00 P.M		
Time Logger on Bottom	4:15 P.M		
Maximum Recorded Temperature	95degf		
Equipment Number	T605		
Location	Hays, KS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	BRYAN BYNOG		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

FAIRPORT WEST TO 175TH RD 5 NORTH,
WEST INTO.


Thank You for using Gemini Wireline LLC
785-625-1182




MAIN PASS

Database File	berexcochrilerelliott#21oh.db
Dataset Pathname	pass7
Presentation Format	kml
Dataset Creation	Mon Nov 14 18:43:29 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	0	MN 2" (Ohm-m)	20
6	MCAL (in)	16	0	MI 1" (Ohm-m)	20
6	BOREID (in)	16	10000	LTEN (lb)	0
0	MINMK	50			

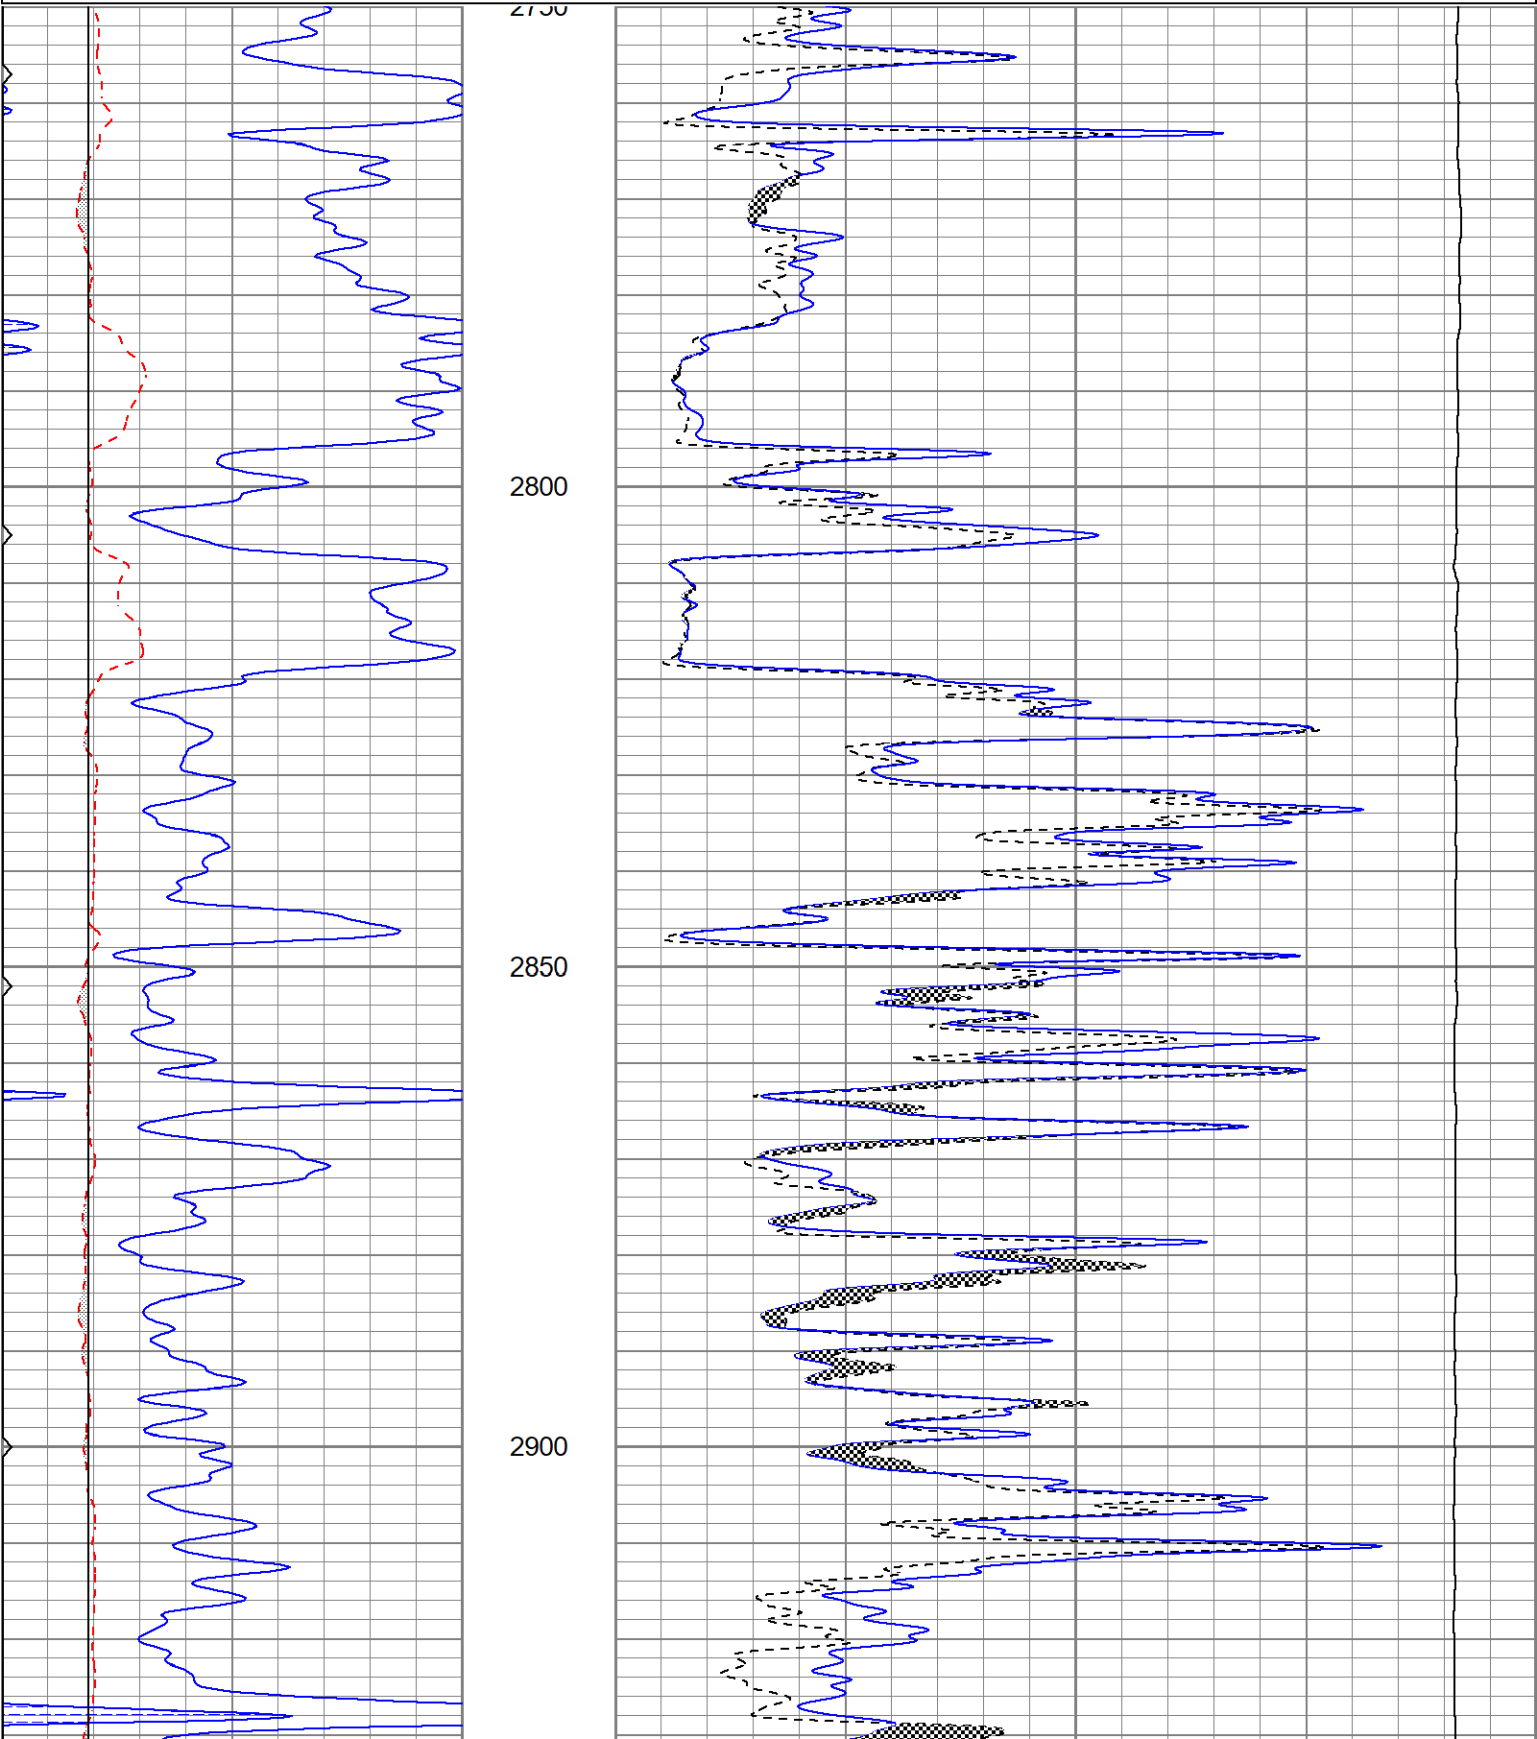

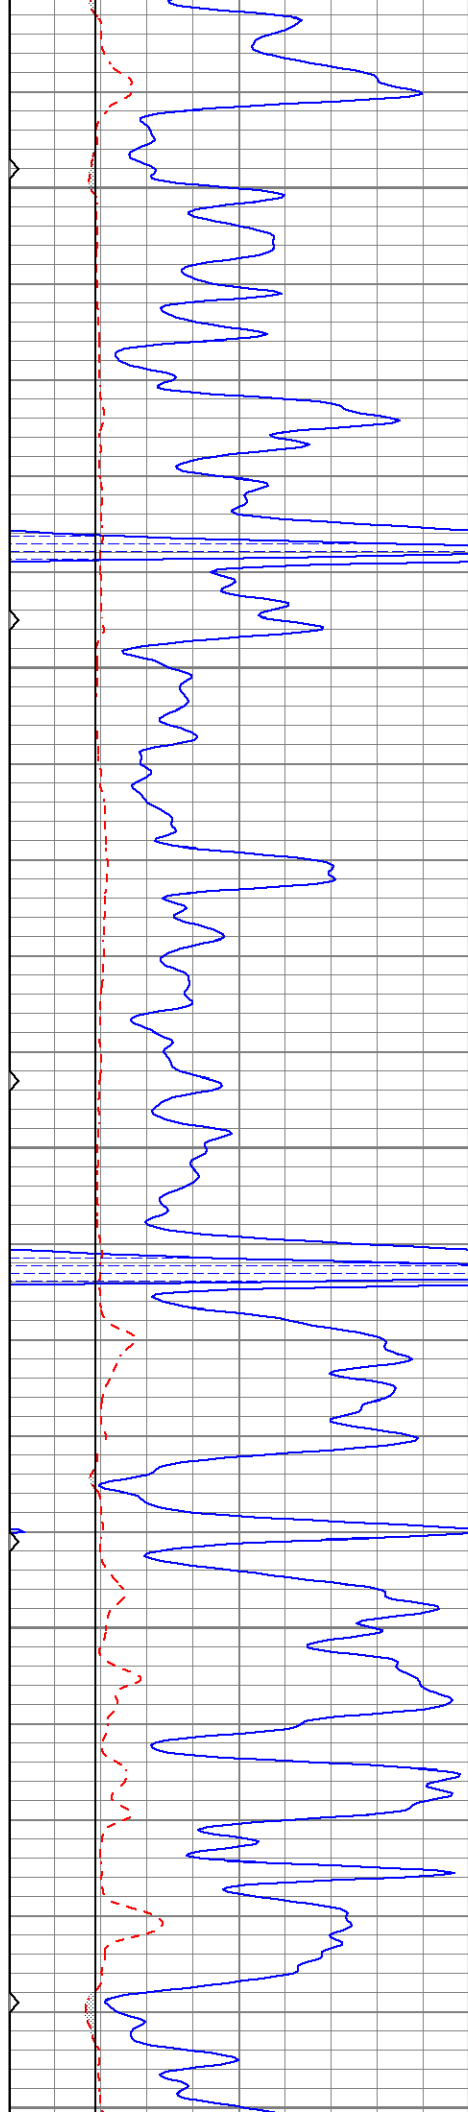


2950


3000

3050

3100

3150

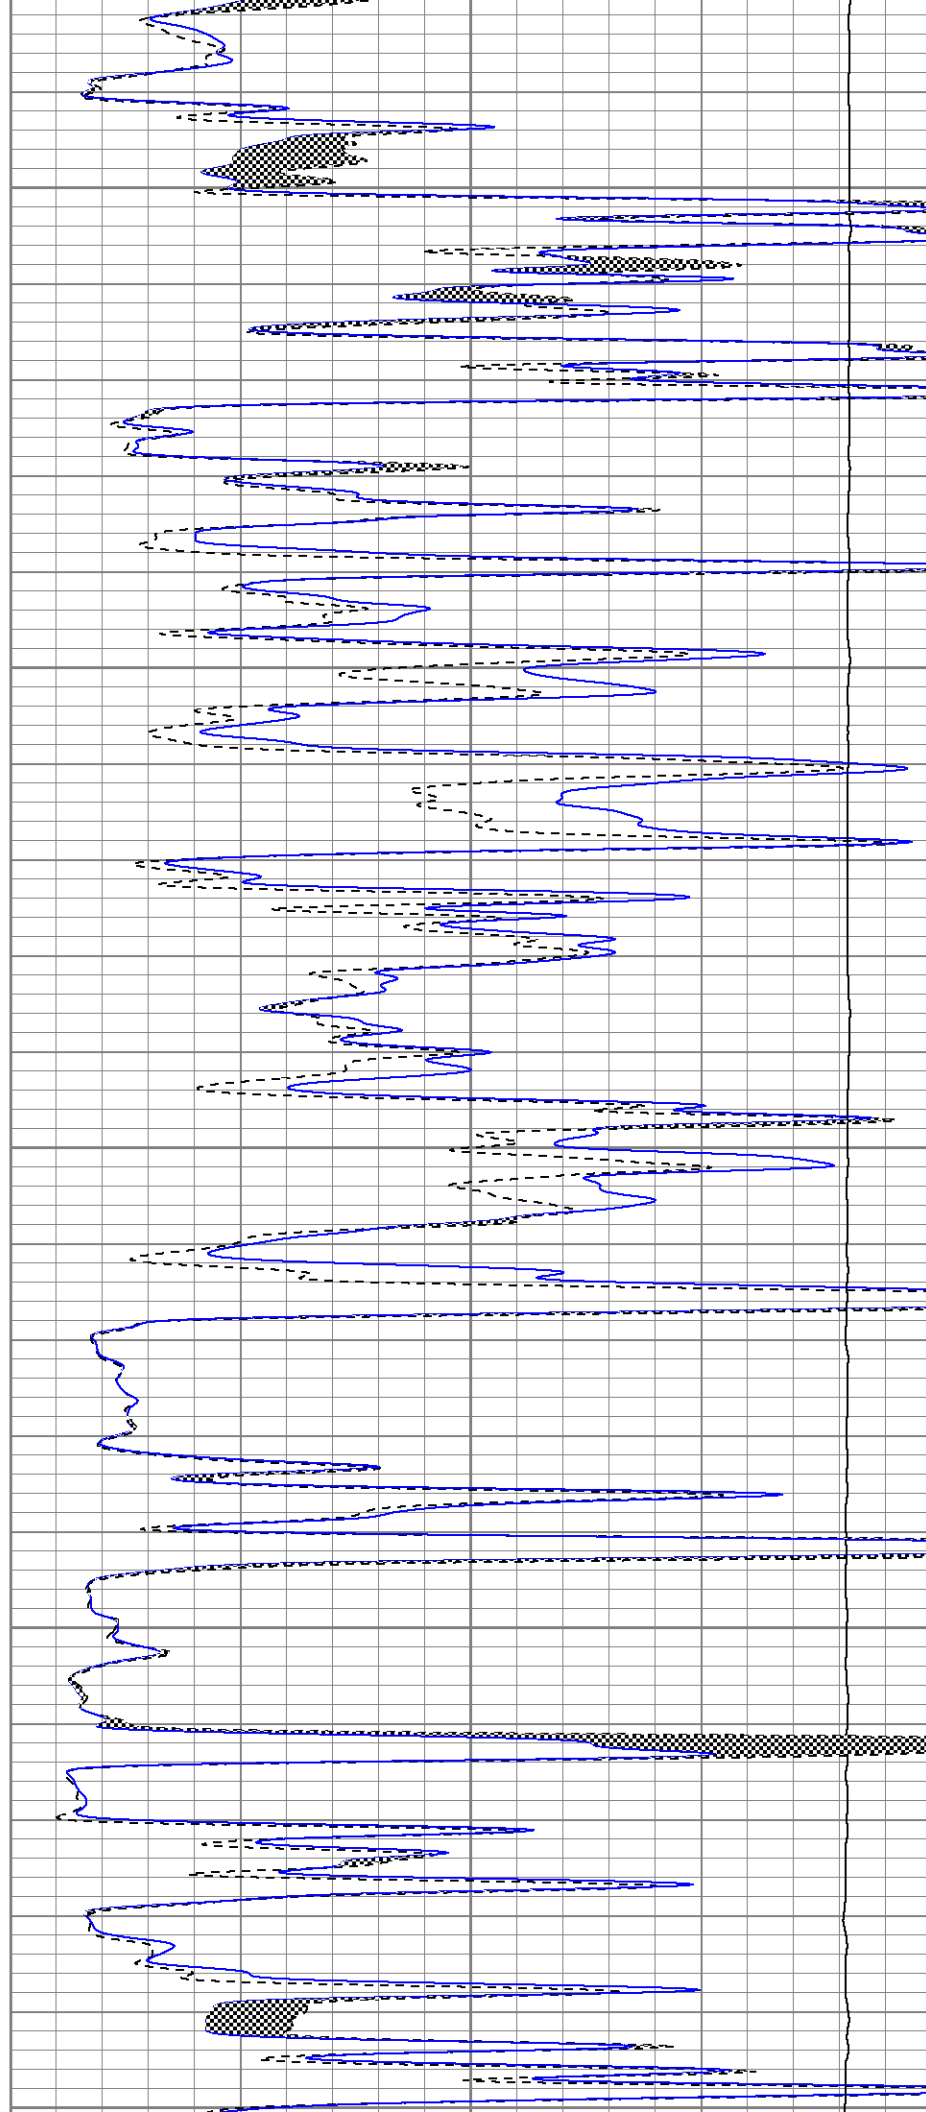

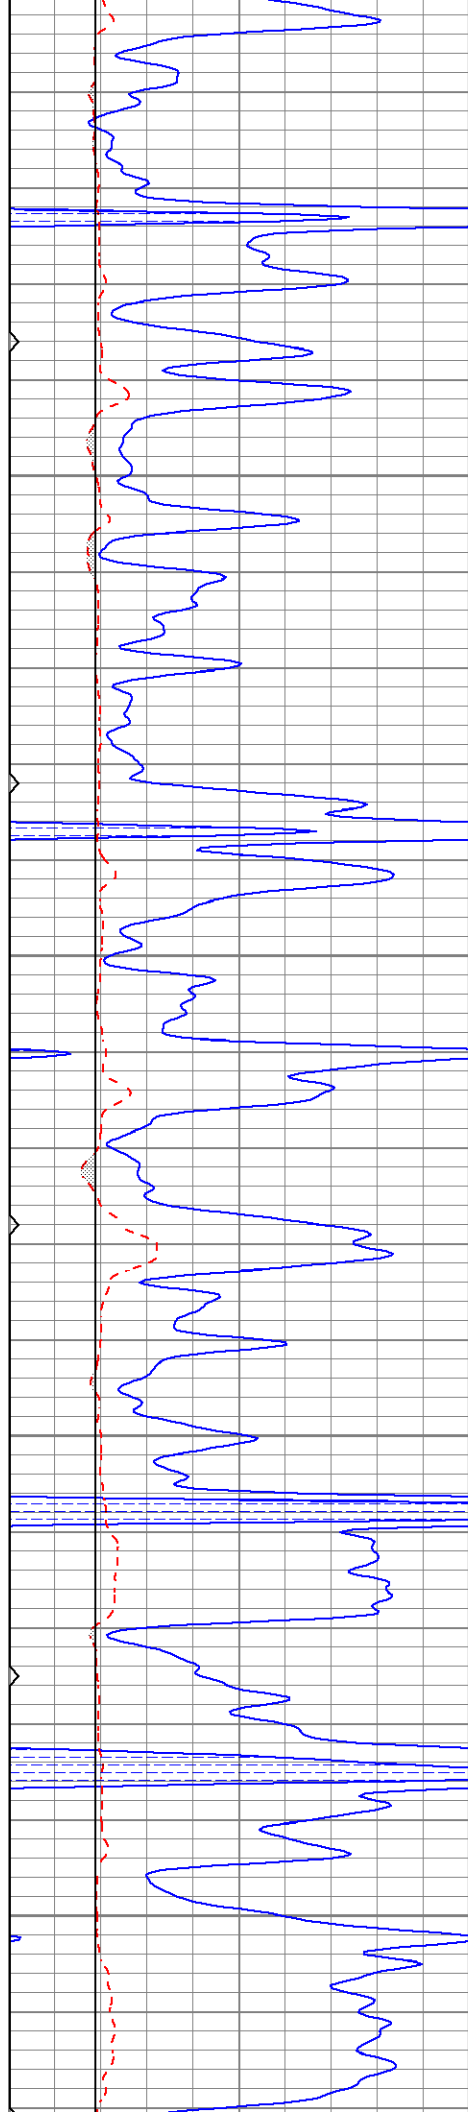


3100



3200

3250

3300

3350

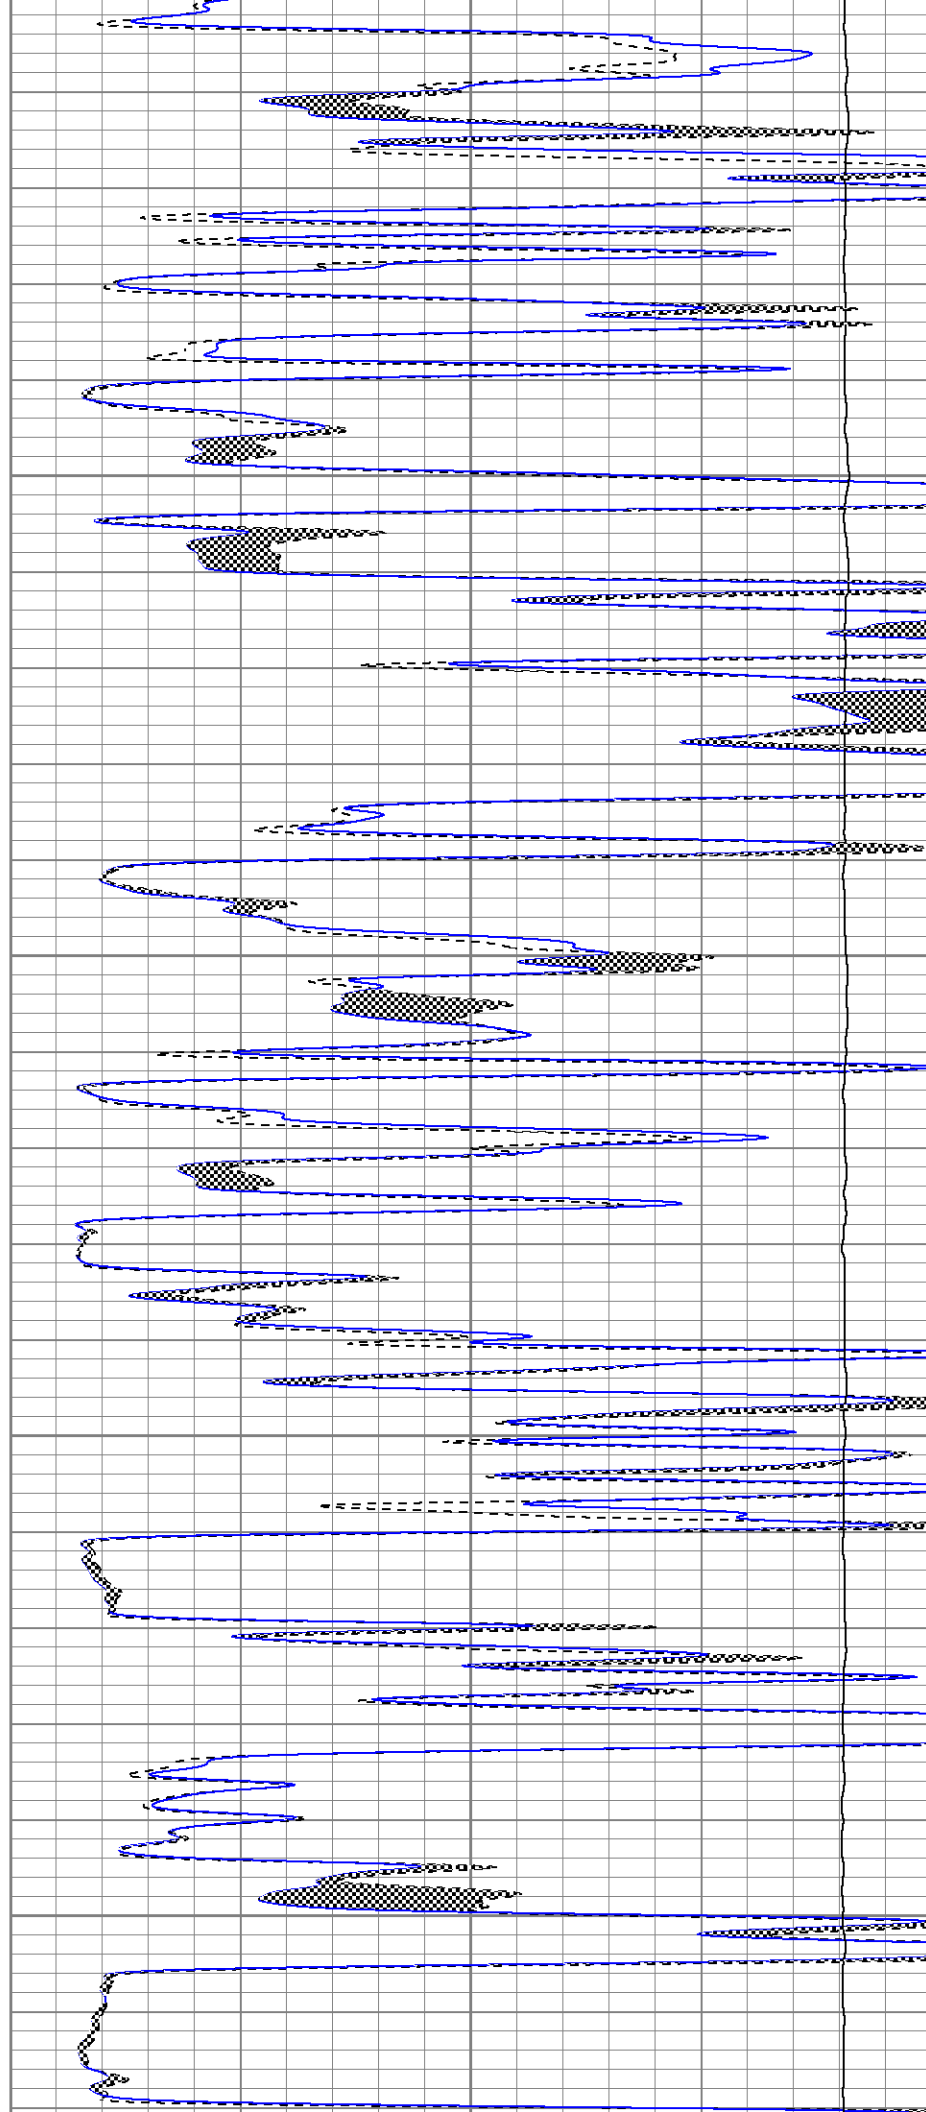

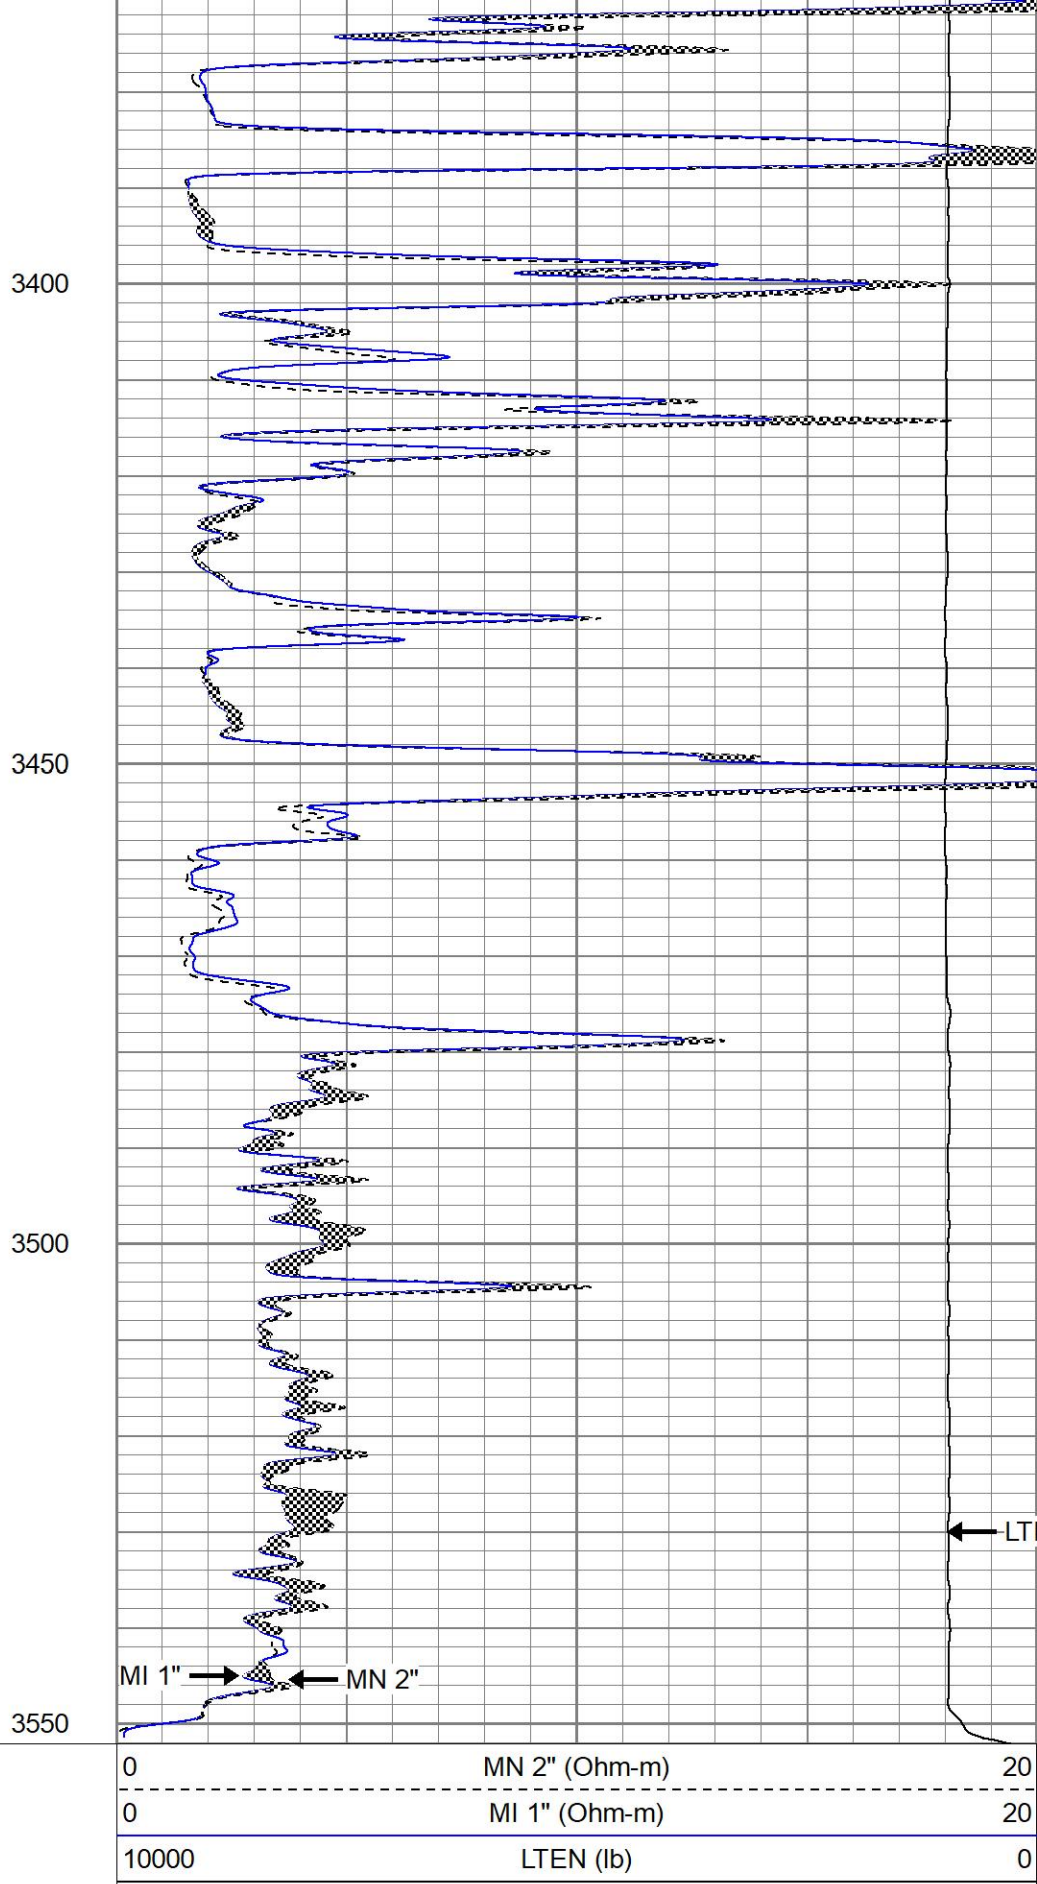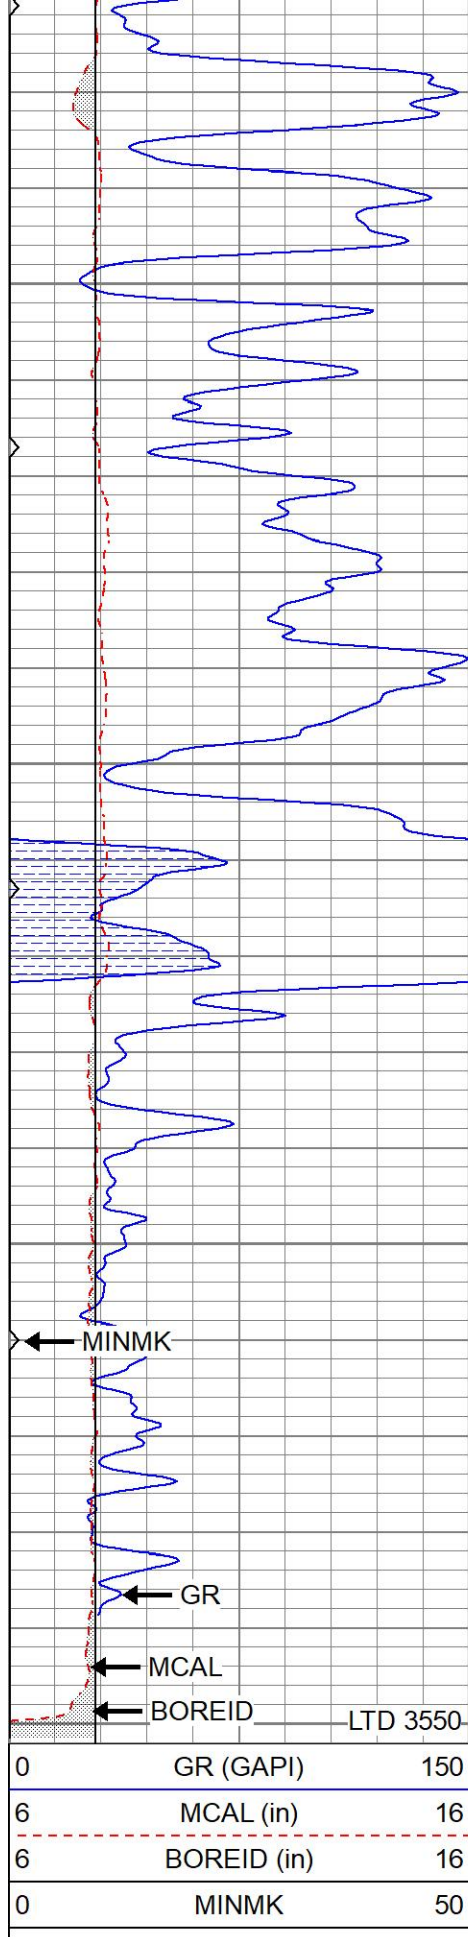


REPEAT SECTION

Database File berexcochrislerelliott#21oh.db
Dataset Pathname pass6.1
Presentation Format kml
Dataset Creation Mon Nov 14 19:02:47 2022
Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

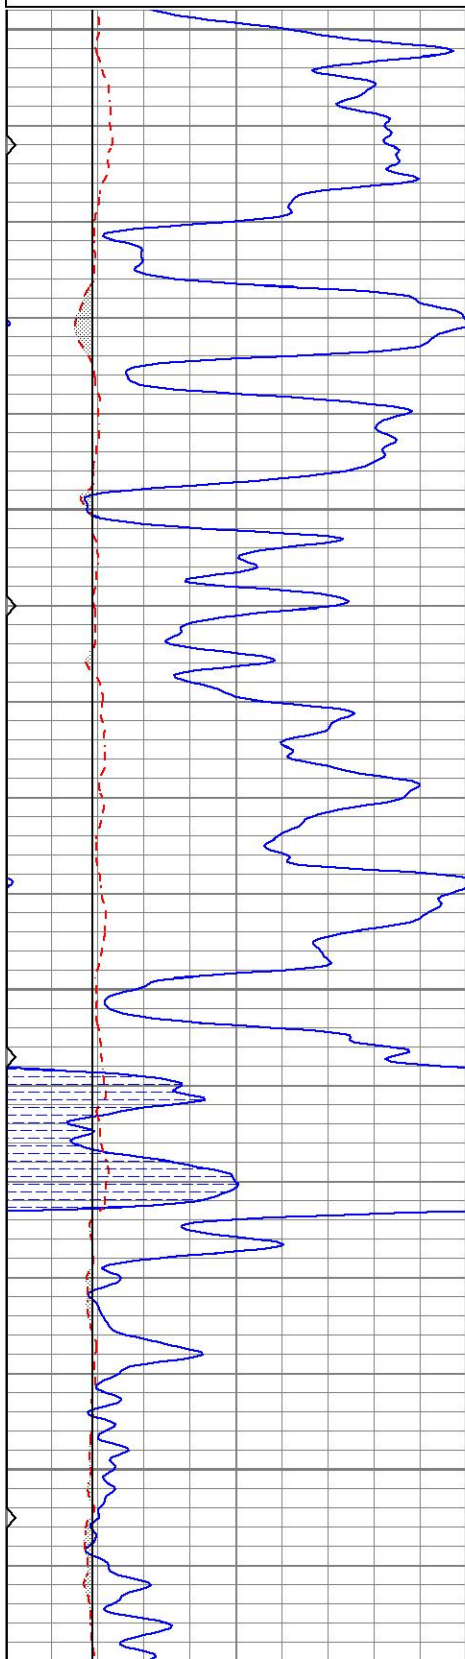



3350

3400

3450

3500

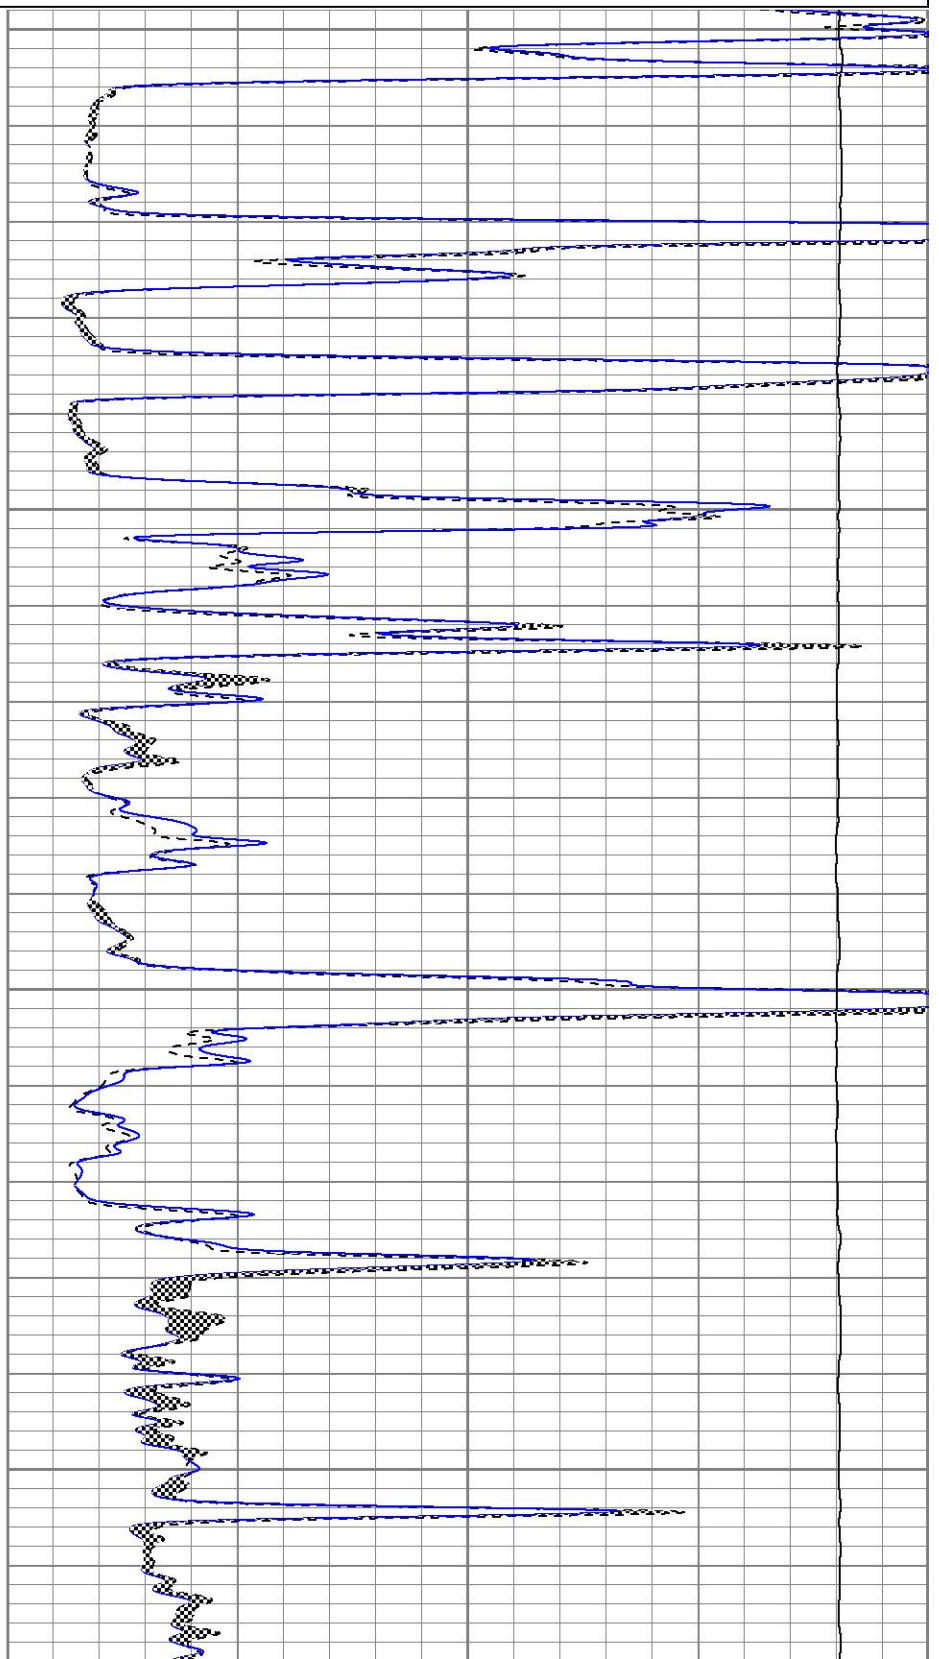

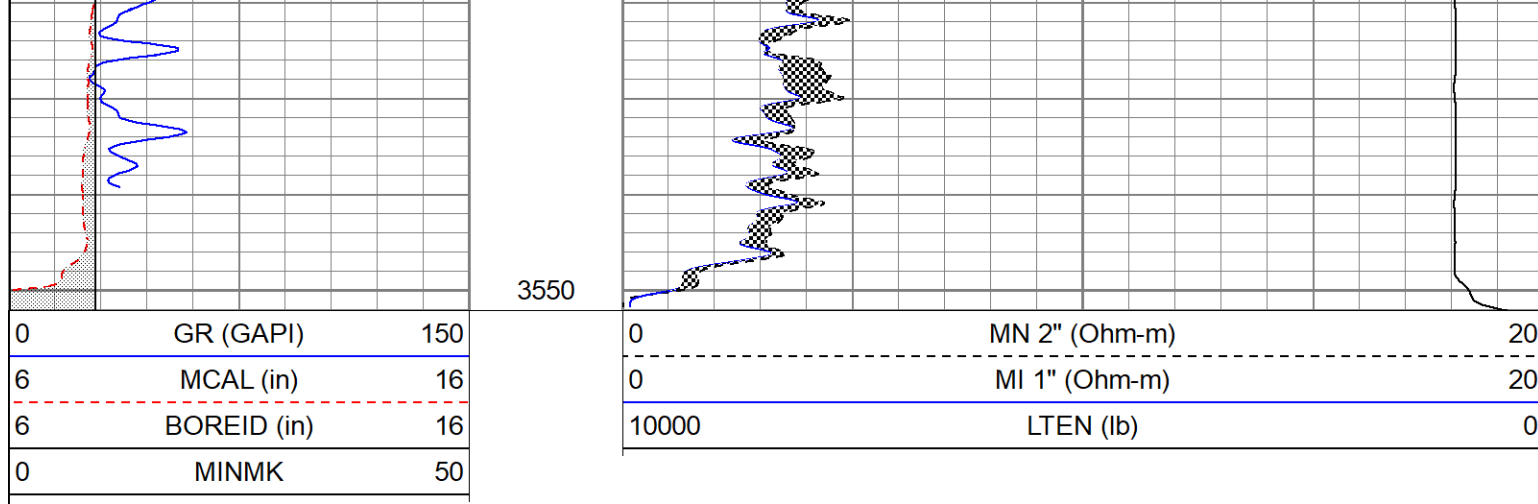

Calibration Report								
Database File	berexcochrislerelliott#21oh.db							
Dataset Pathname	pass6.1							
Dataset Creation	Mon Nov 14 19:02:47 2022							
Microlog Calibration Report								
Serial-Model:			9151-Gerhart					
Performed:			Tue Nov 8 22:42:02 2022					
Readings			References				Results	
	Zero	Cal		Zero	Cal		m	b
Normal	-0.0005	0.4781	V	0.0000	10.0000	Ohm-m	20.8940	0.0097
Inverse	-0.0100	0.6323	V	0.0000	10.0000	Ohm-m	15.5701	0.1555
Caliper	0.9057	2.2211	V	8.4000	15.0000	in	5.0175	2.7555
Gamma Ray Calibration Report								
Serial Number:			2001					
Tool Model:			OH					
Performed:			Wed Jun 15 13:37:15 2022					
Calibrator Value:			1.0		GAPI			
Background Reading:			0.0		cps			
Calibrator Reading:			1.0		cps			
Sensitivity:			0.8200		GAPI/cps			