

DUAL INDUCTION LOG


Company	INDIAN OIL COMPANY, INC.		
Well	PARKER #10		
Field	NESS CITY NORTH		
County	NESS	State	KANSAS
Location:	API # : 15-135-26193-0000 930' FNL & 1190' FWL NE - SE - NW - NW		Other Services CDL/CNL/PE MEL
Permanent Datum	SEC 25 TWP 18S RGE 24W	Elevation	
Log Measured From	GROUND LEVEL	Elevation	K.B. 2258
Drilling Measured From	KELLY BUSHING 7' A.G.L. KELLY BUSHING		D.F. 2256 G.L. 2251
Date	11/10/22		
Run Number	ONE		
Depth Driller	4360		
Depth Logger	4360		
Bottom Logged Interval	4358		
Top Log Interval	00		
Casing Driller	8 5/8"@221'		
Casing Logger	222		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES: 7,500 PPM	
Density / Viscosity	9.1/50		
pH / Fluid Loss	9.5/10.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.580@72F		
Rmf @ Meas. Temp	.435@72F		
Rmc @ Meas. Temp	.827@72F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	.351@119F		
Time Circulation Stopped	2.5 HOURS		
Time Logger on Bottom	7:15 A.M.		
Maximum Recorded Temperature	119F		
Equipment Number	8916		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	AARON YOUNG	ANTHONY FARRAR	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395
DIRECTIONS:
NESS CITY, KS., HWY 283 & RD. 140 (SWIFT CEMENTING) 1 1/2W., S. INTO



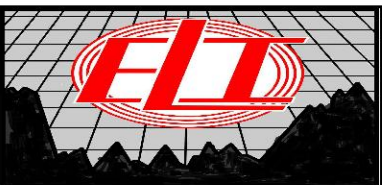




MAIN SECTION



Database File	6719pe.db
Dataset Pathname	pass3.1M
Presentation Format	_dil2
Dataset Creation	Thu Nov 10 09:06:05 2022
Charted by	Depth in Feet scaled 1:600


0	Gamma Ray (GAPI)	150	1000	CILD (mmho/m)	0
-100	SP (mV)	100	0	RLL3 (Ohm-m)	50
-----			0	RILD (Ohm-m)	50
			50	RILD X10 (Ohm-m)	500
			50	RLL3 X10 (Ohm-m)	500

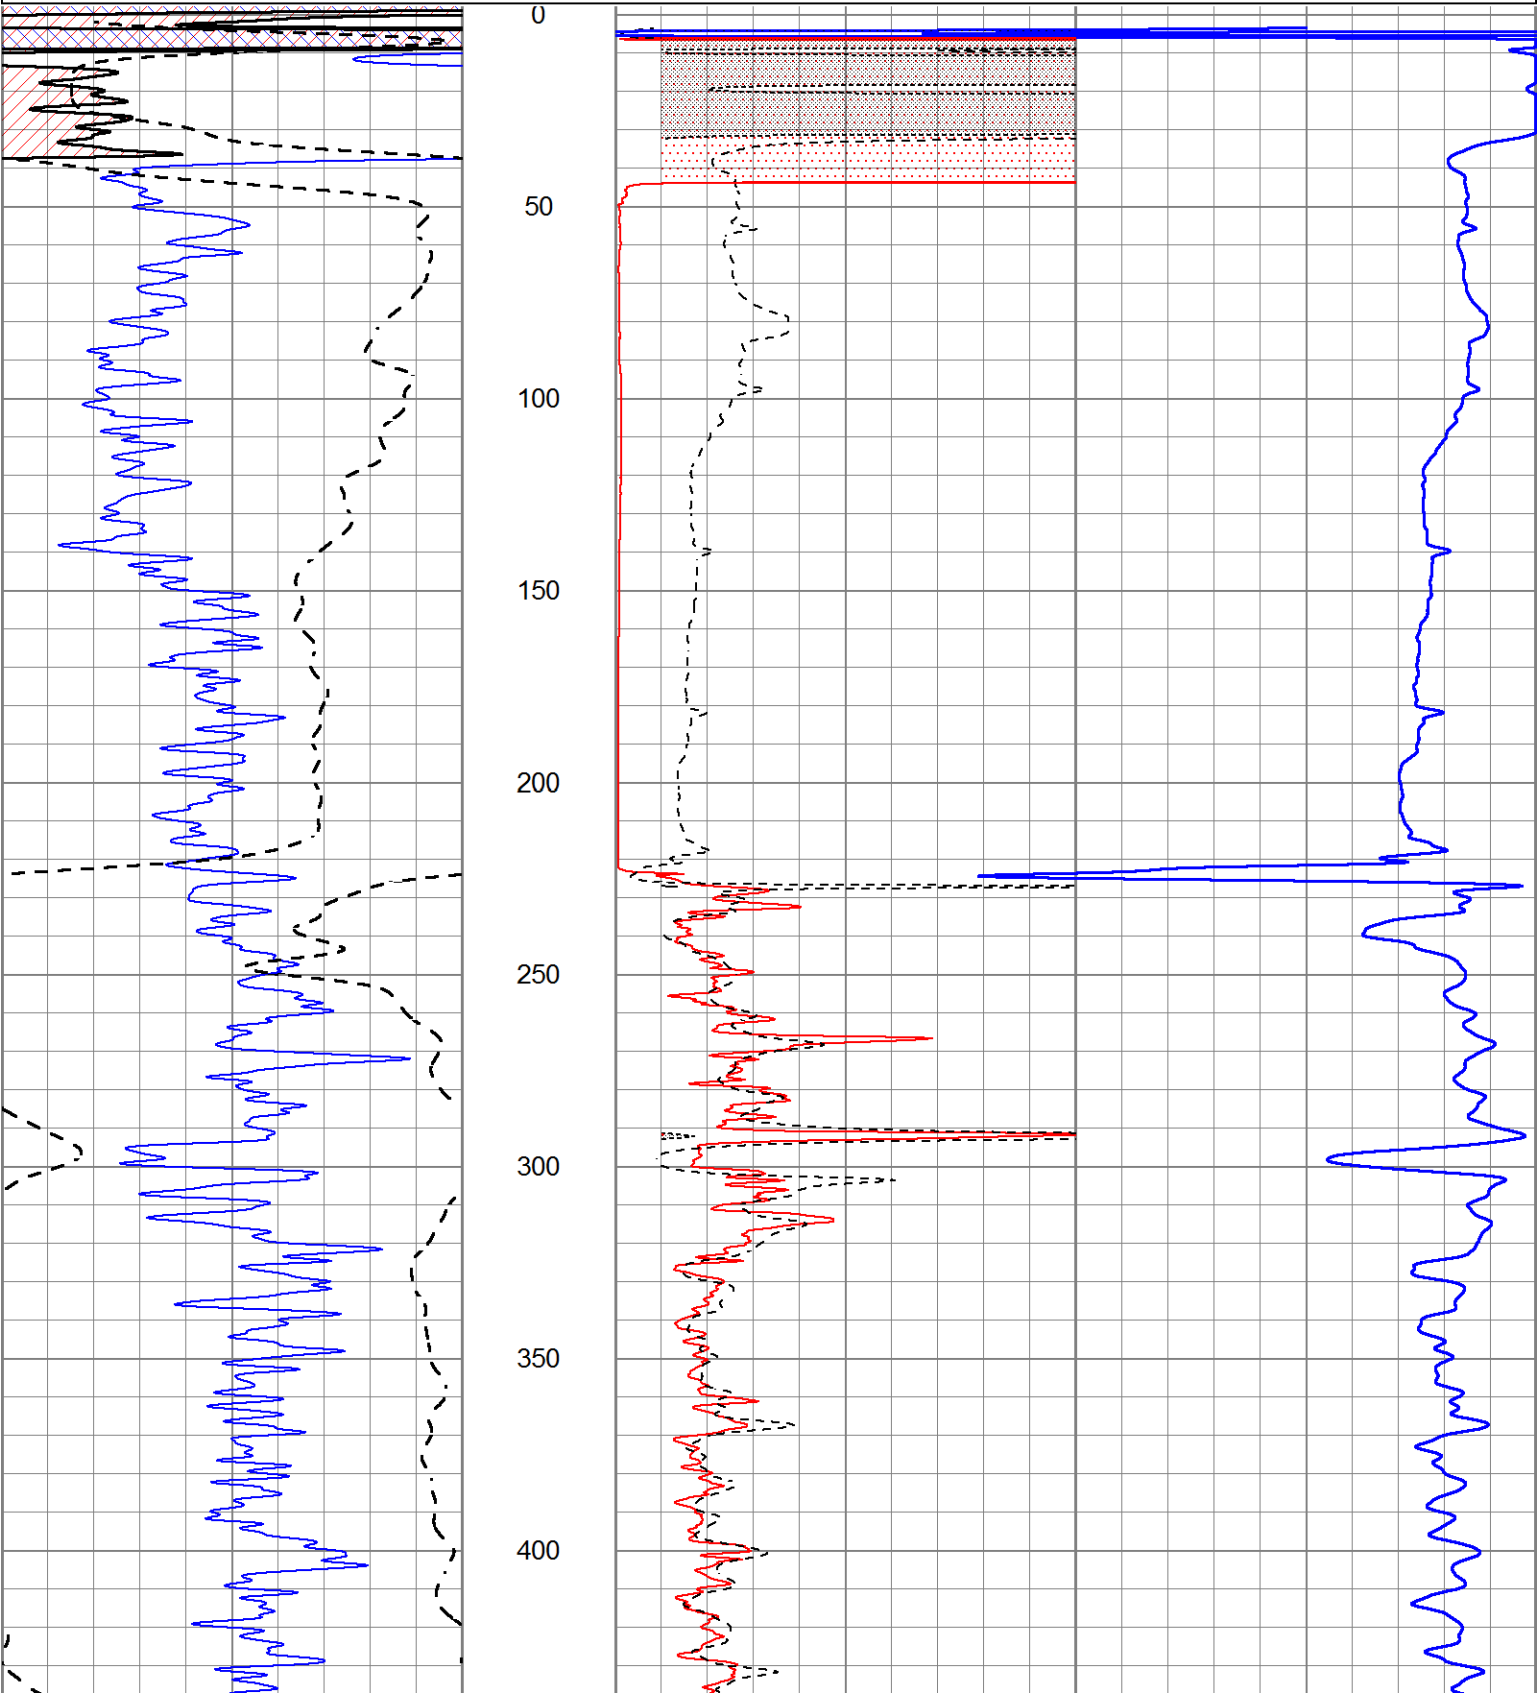

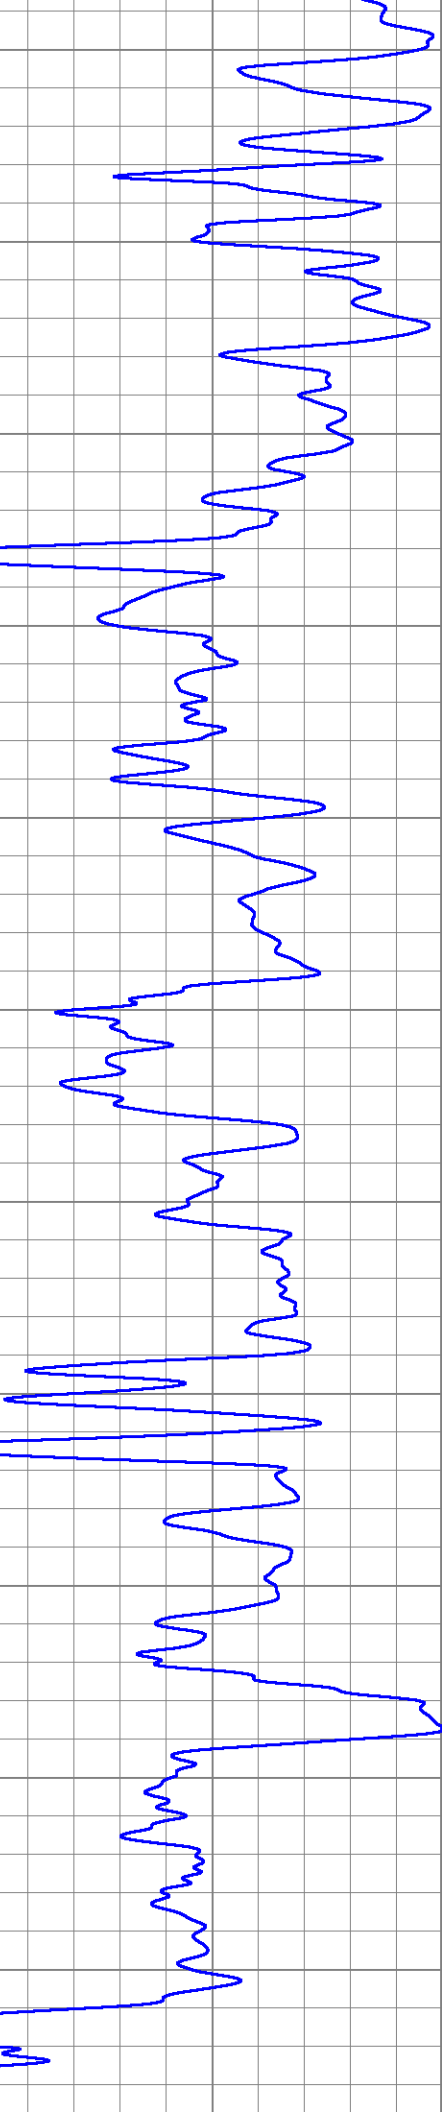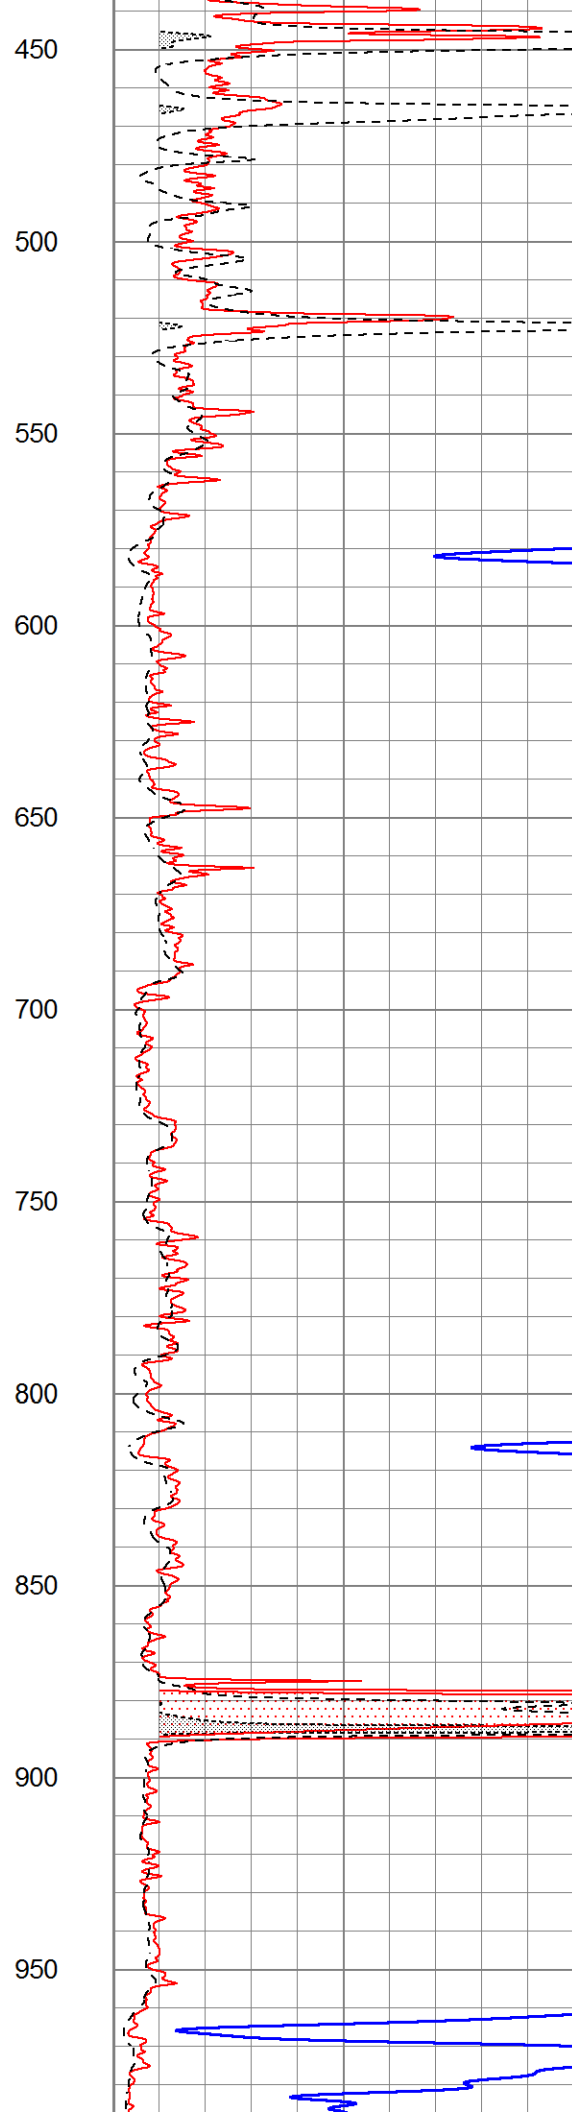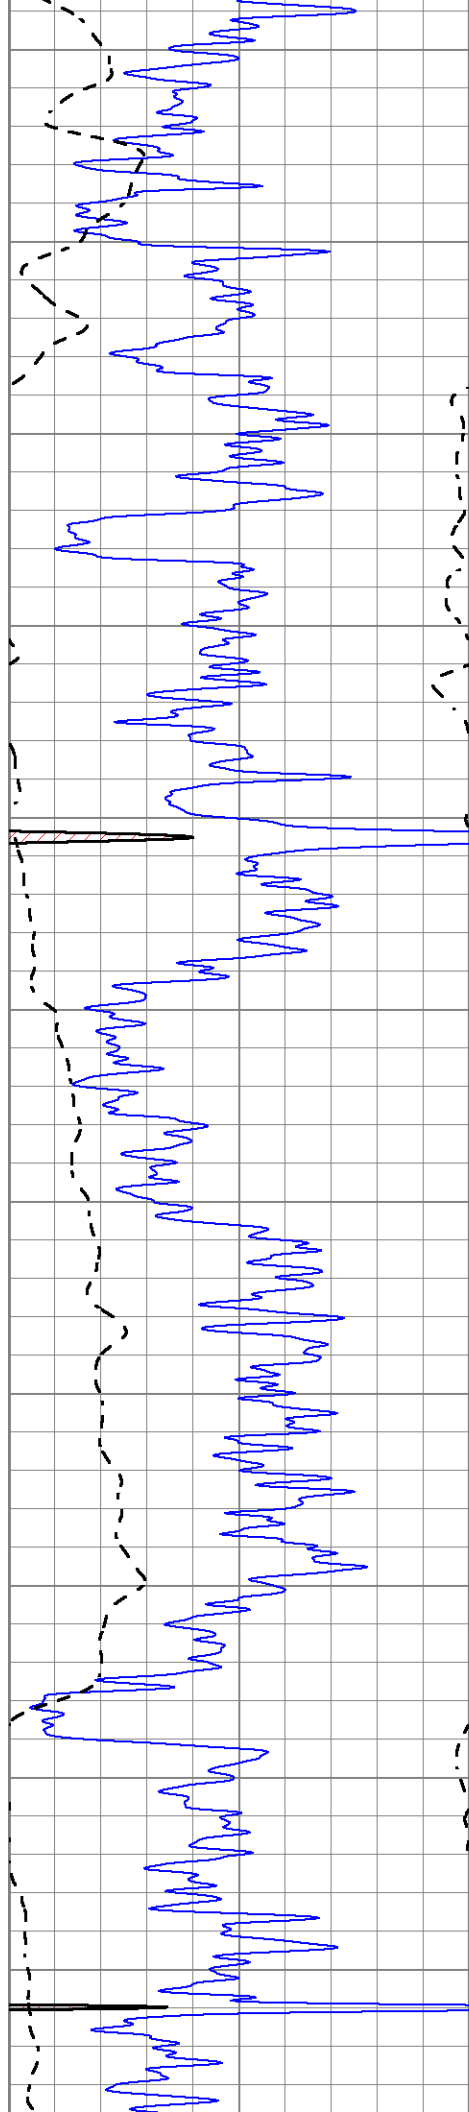

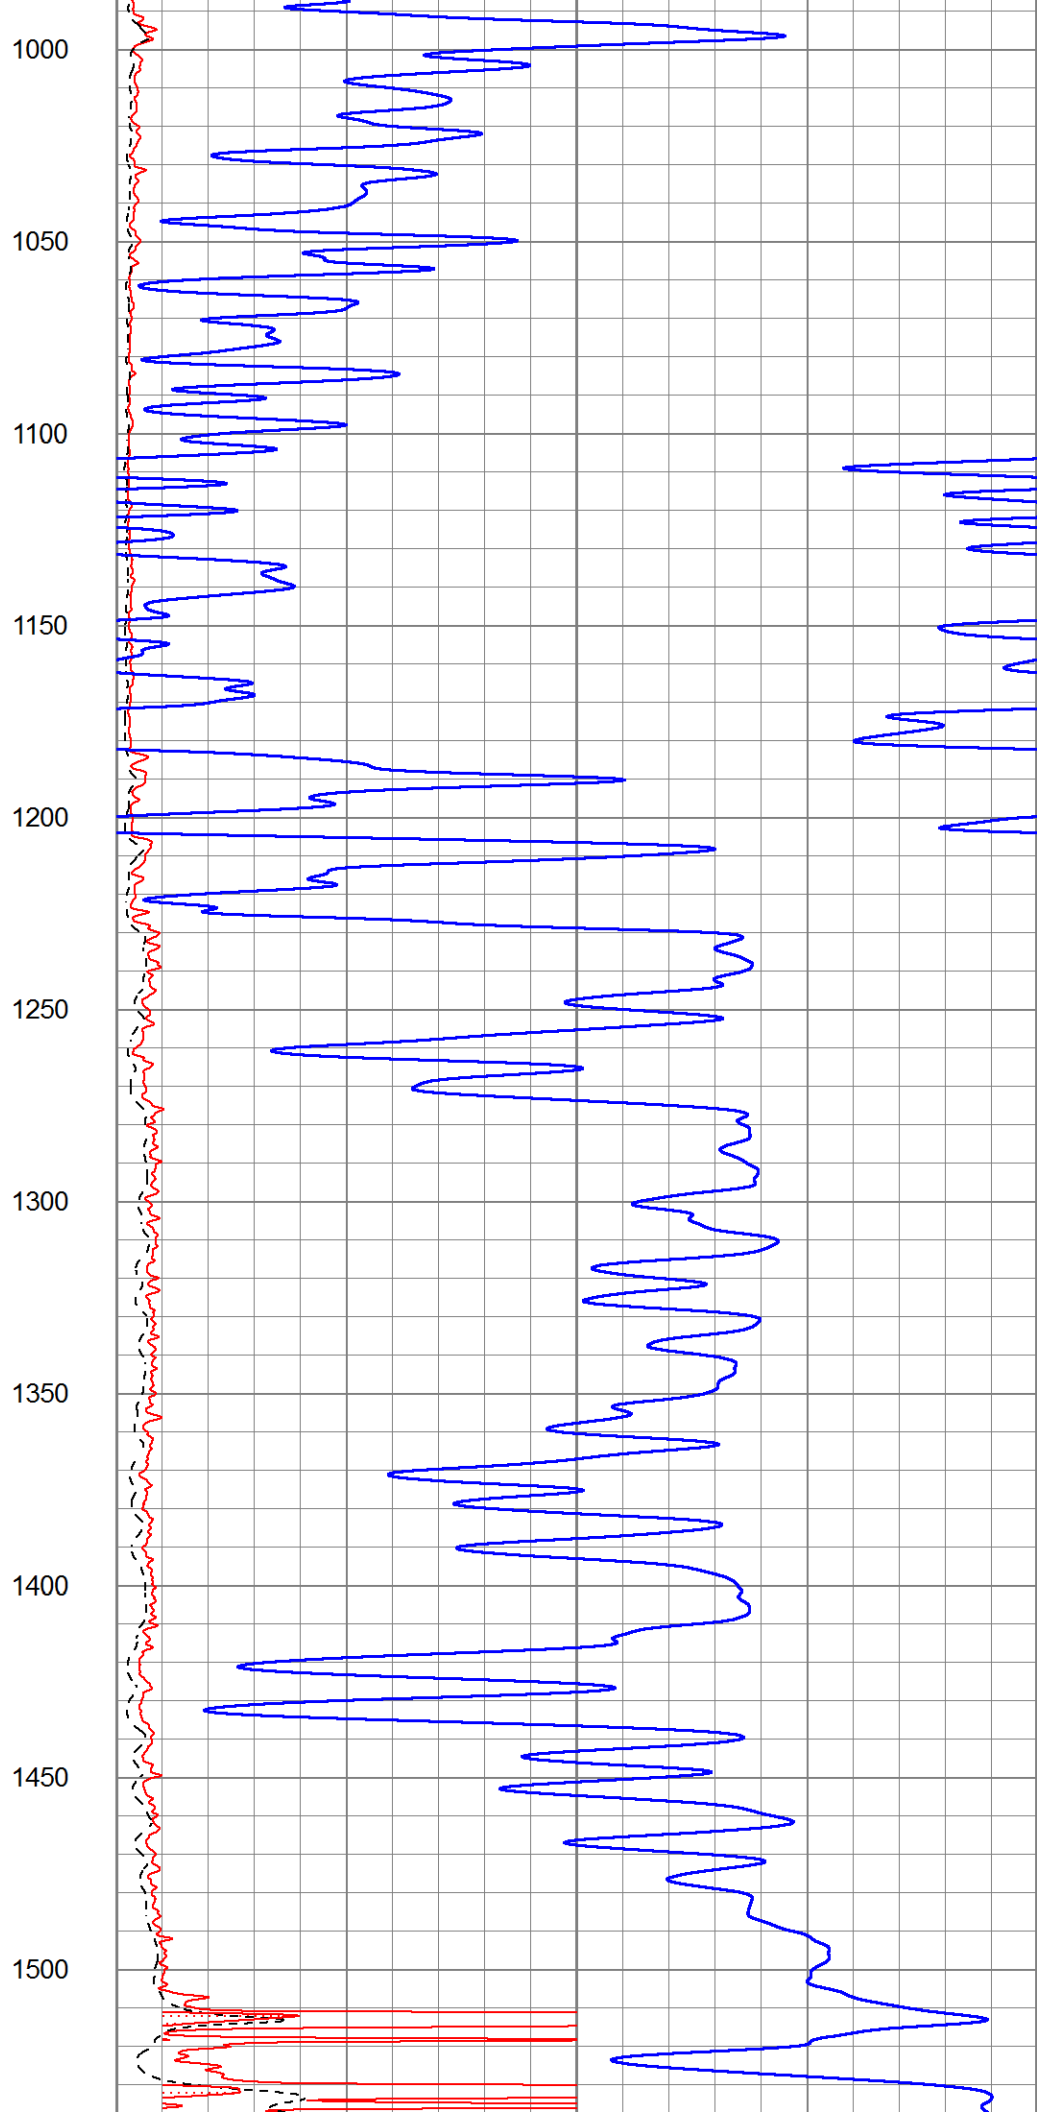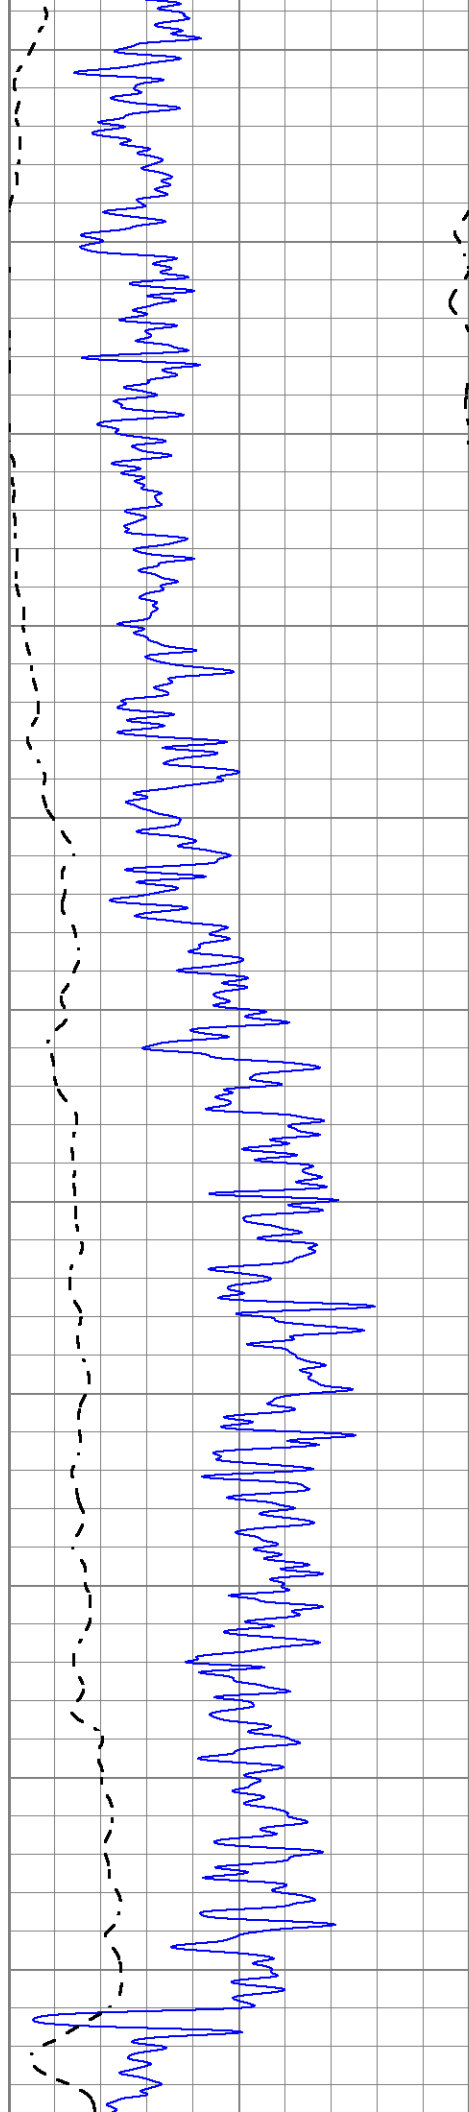

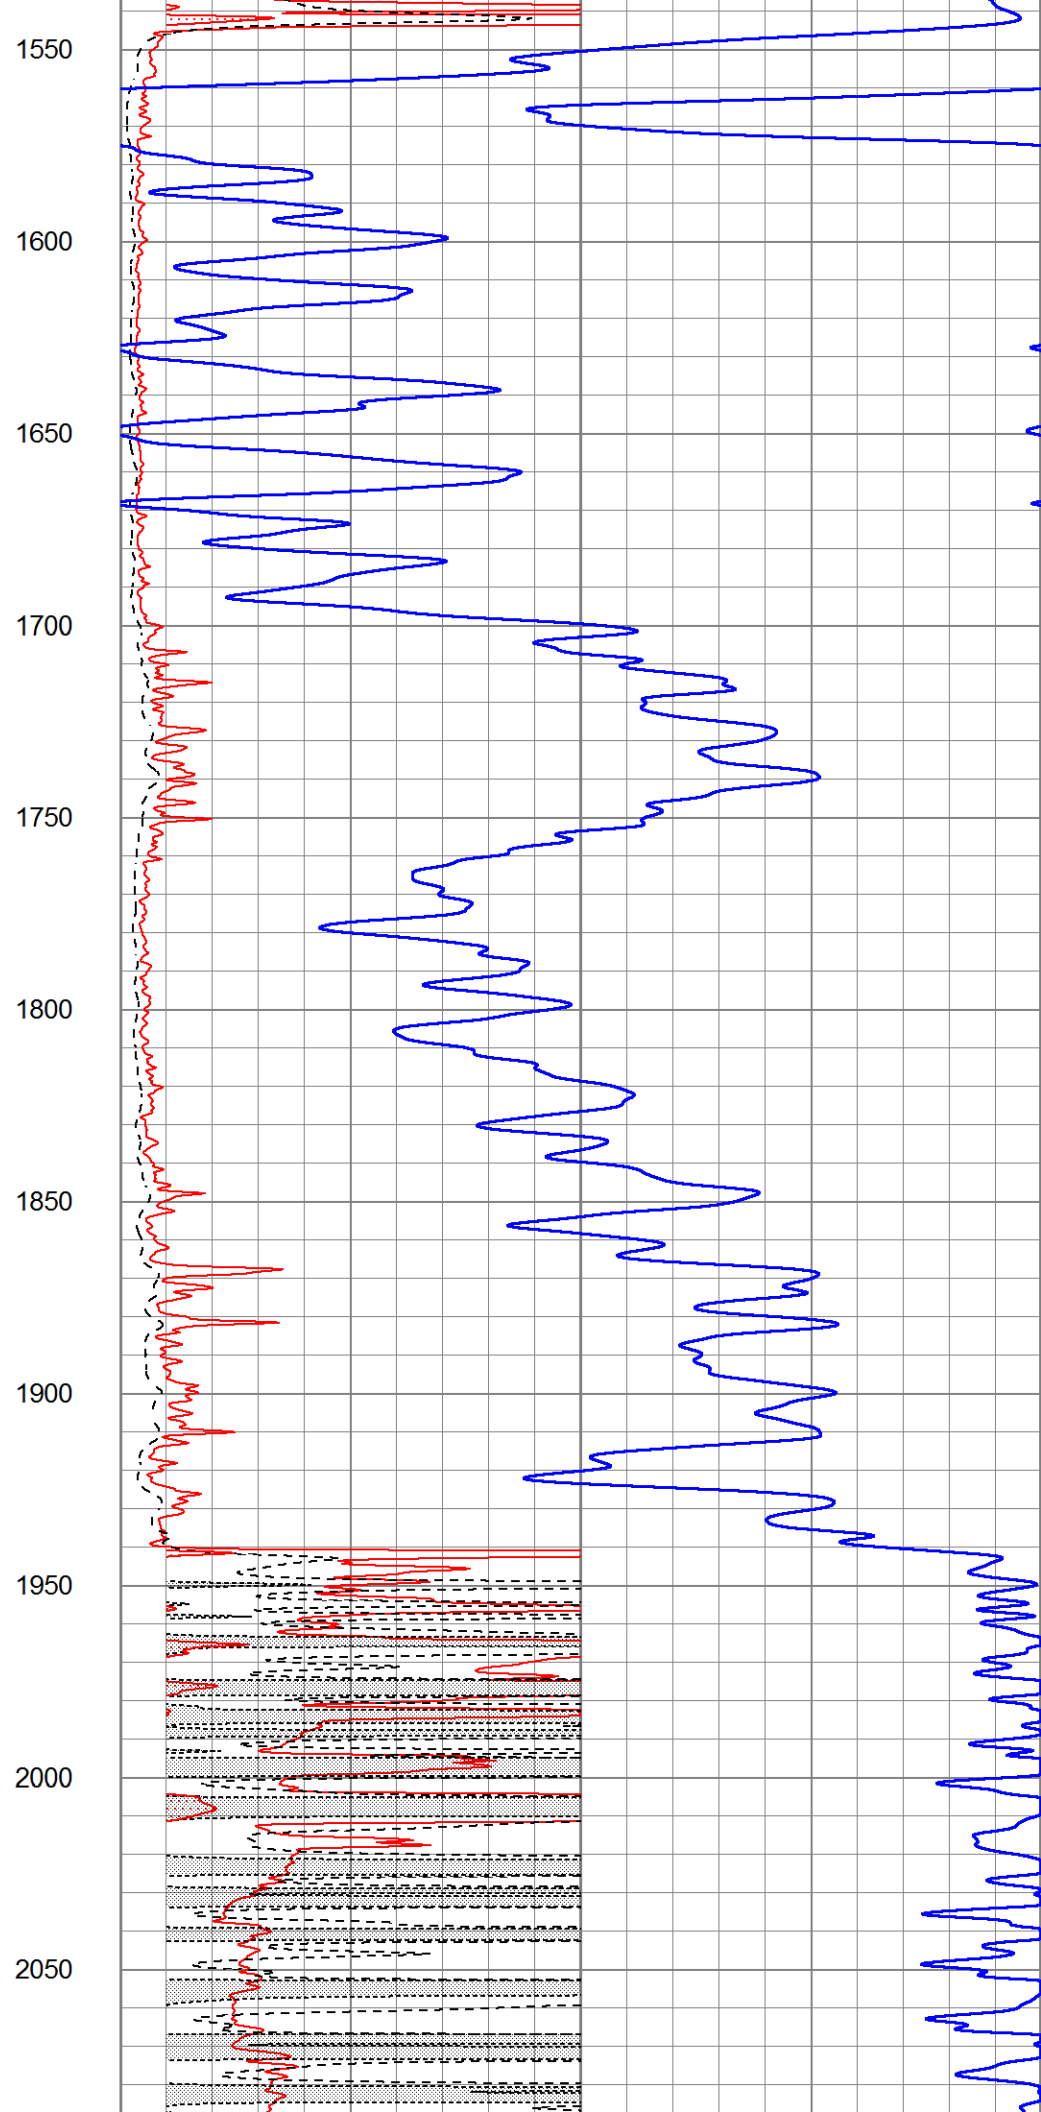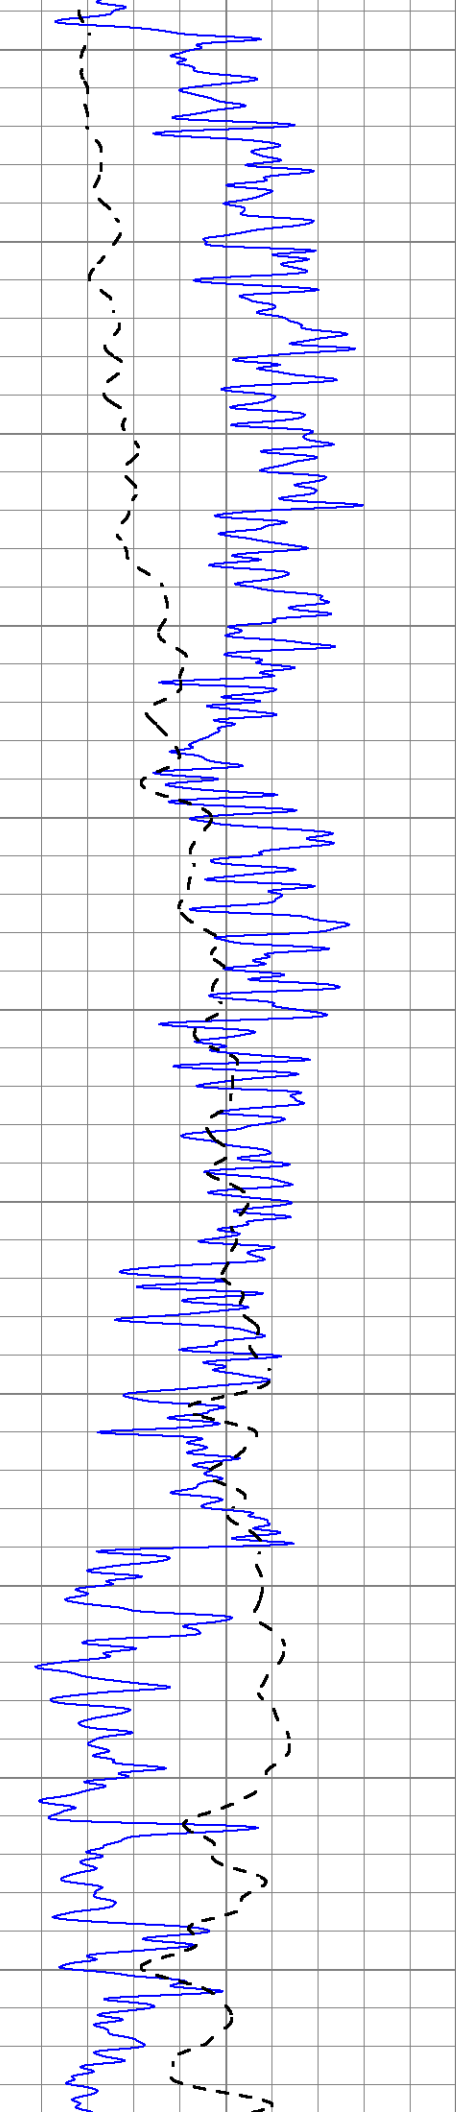

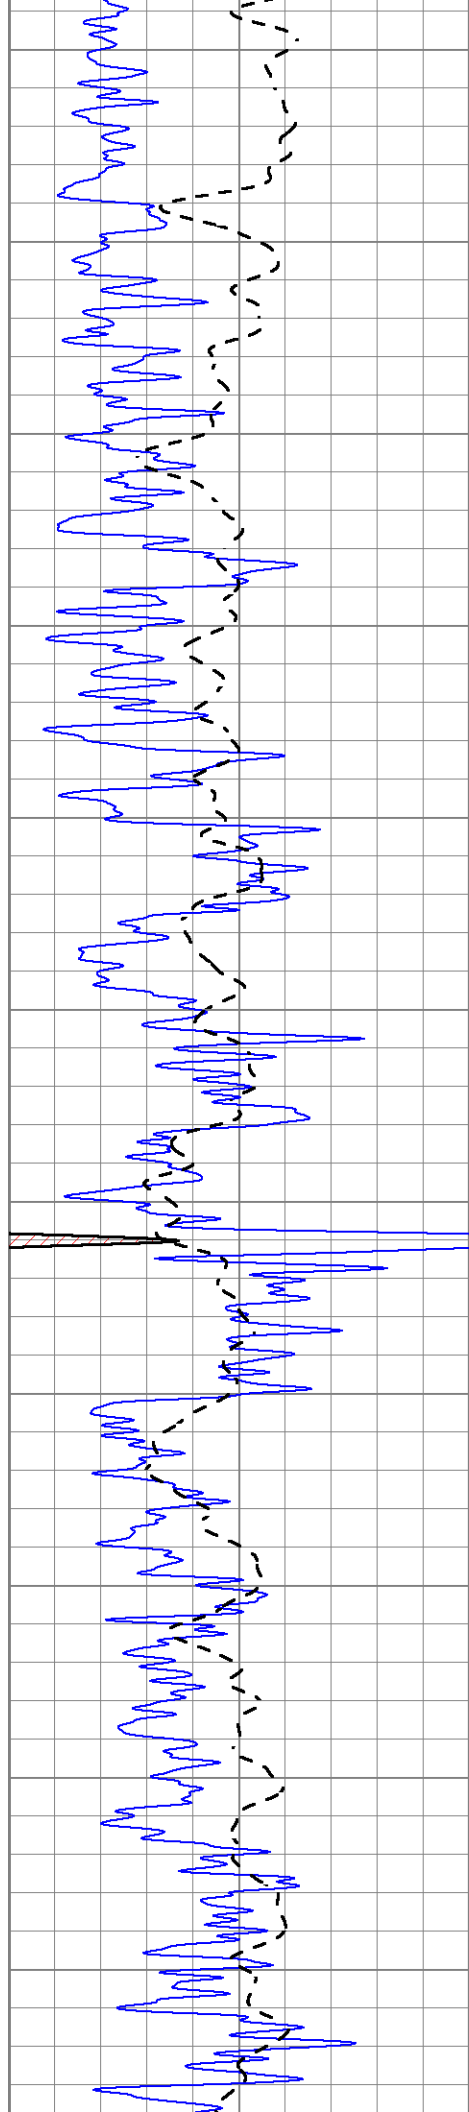

2100

2150

2200

2250

2300

2350


2400



2450



2500


2550

2600

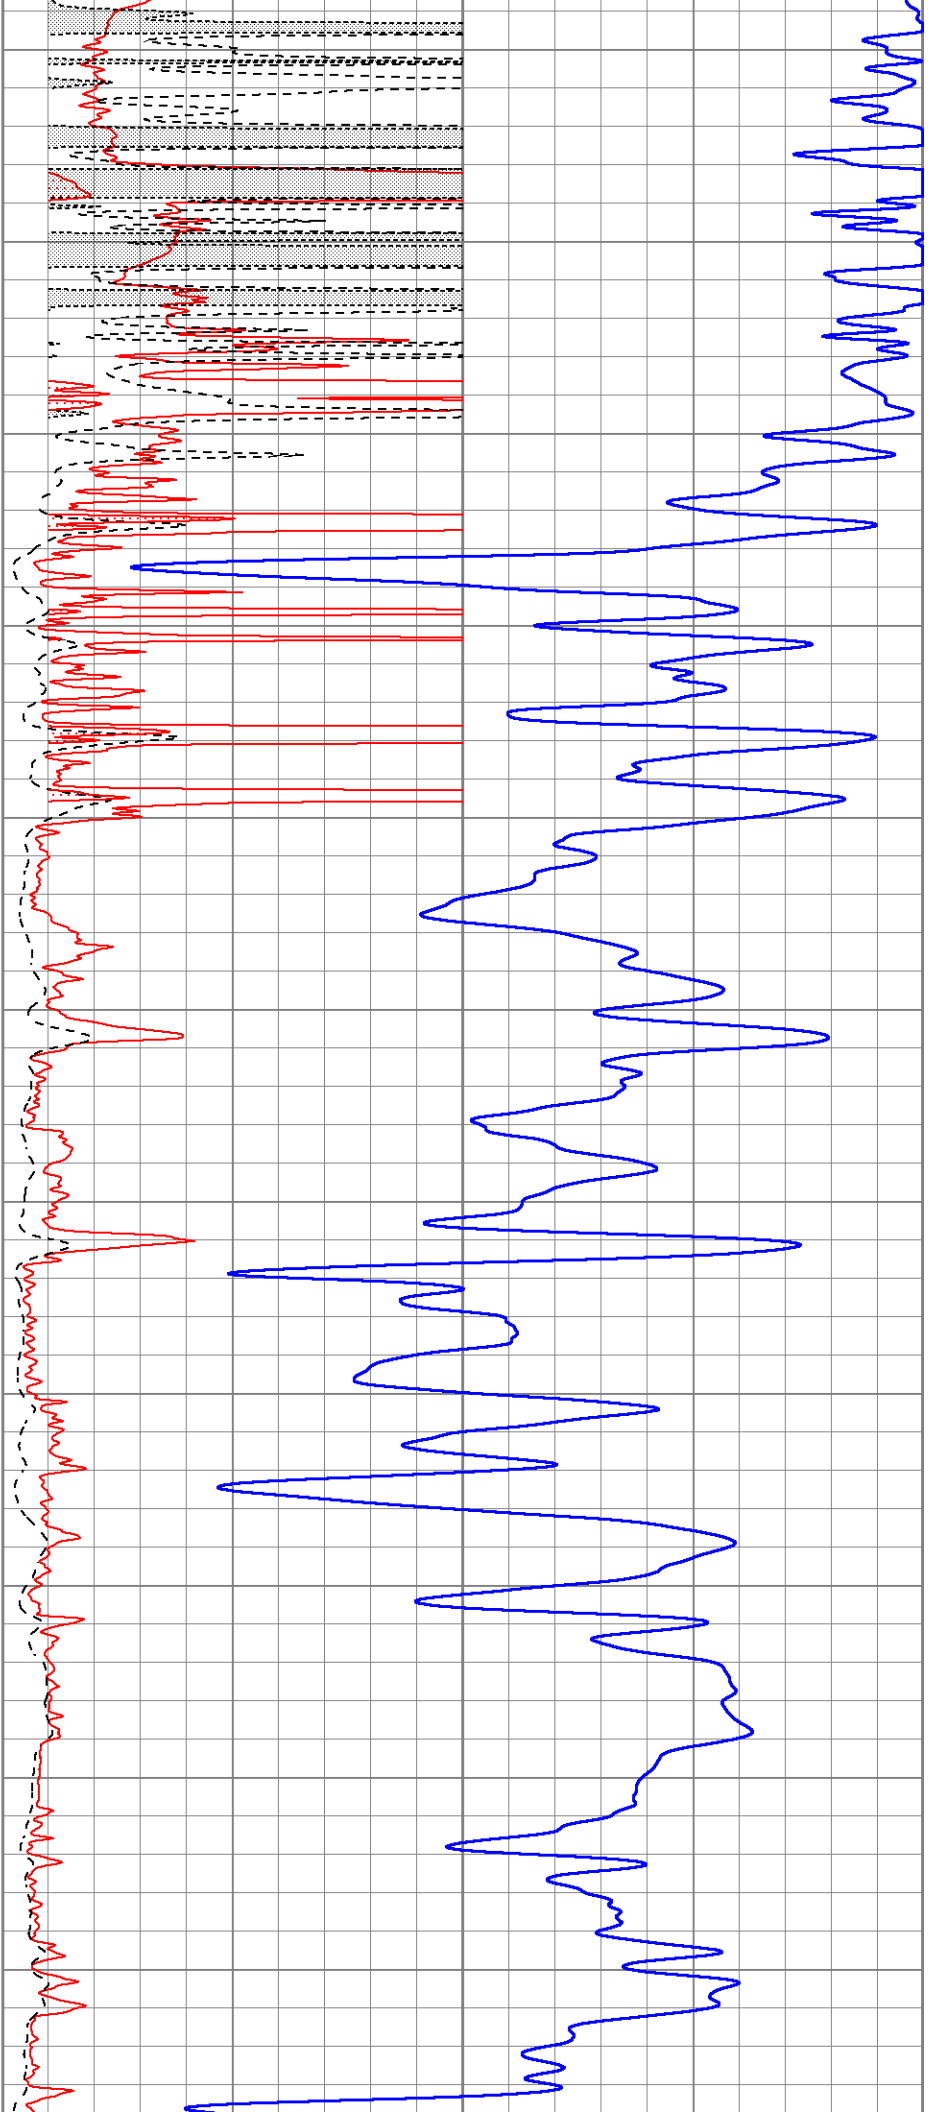

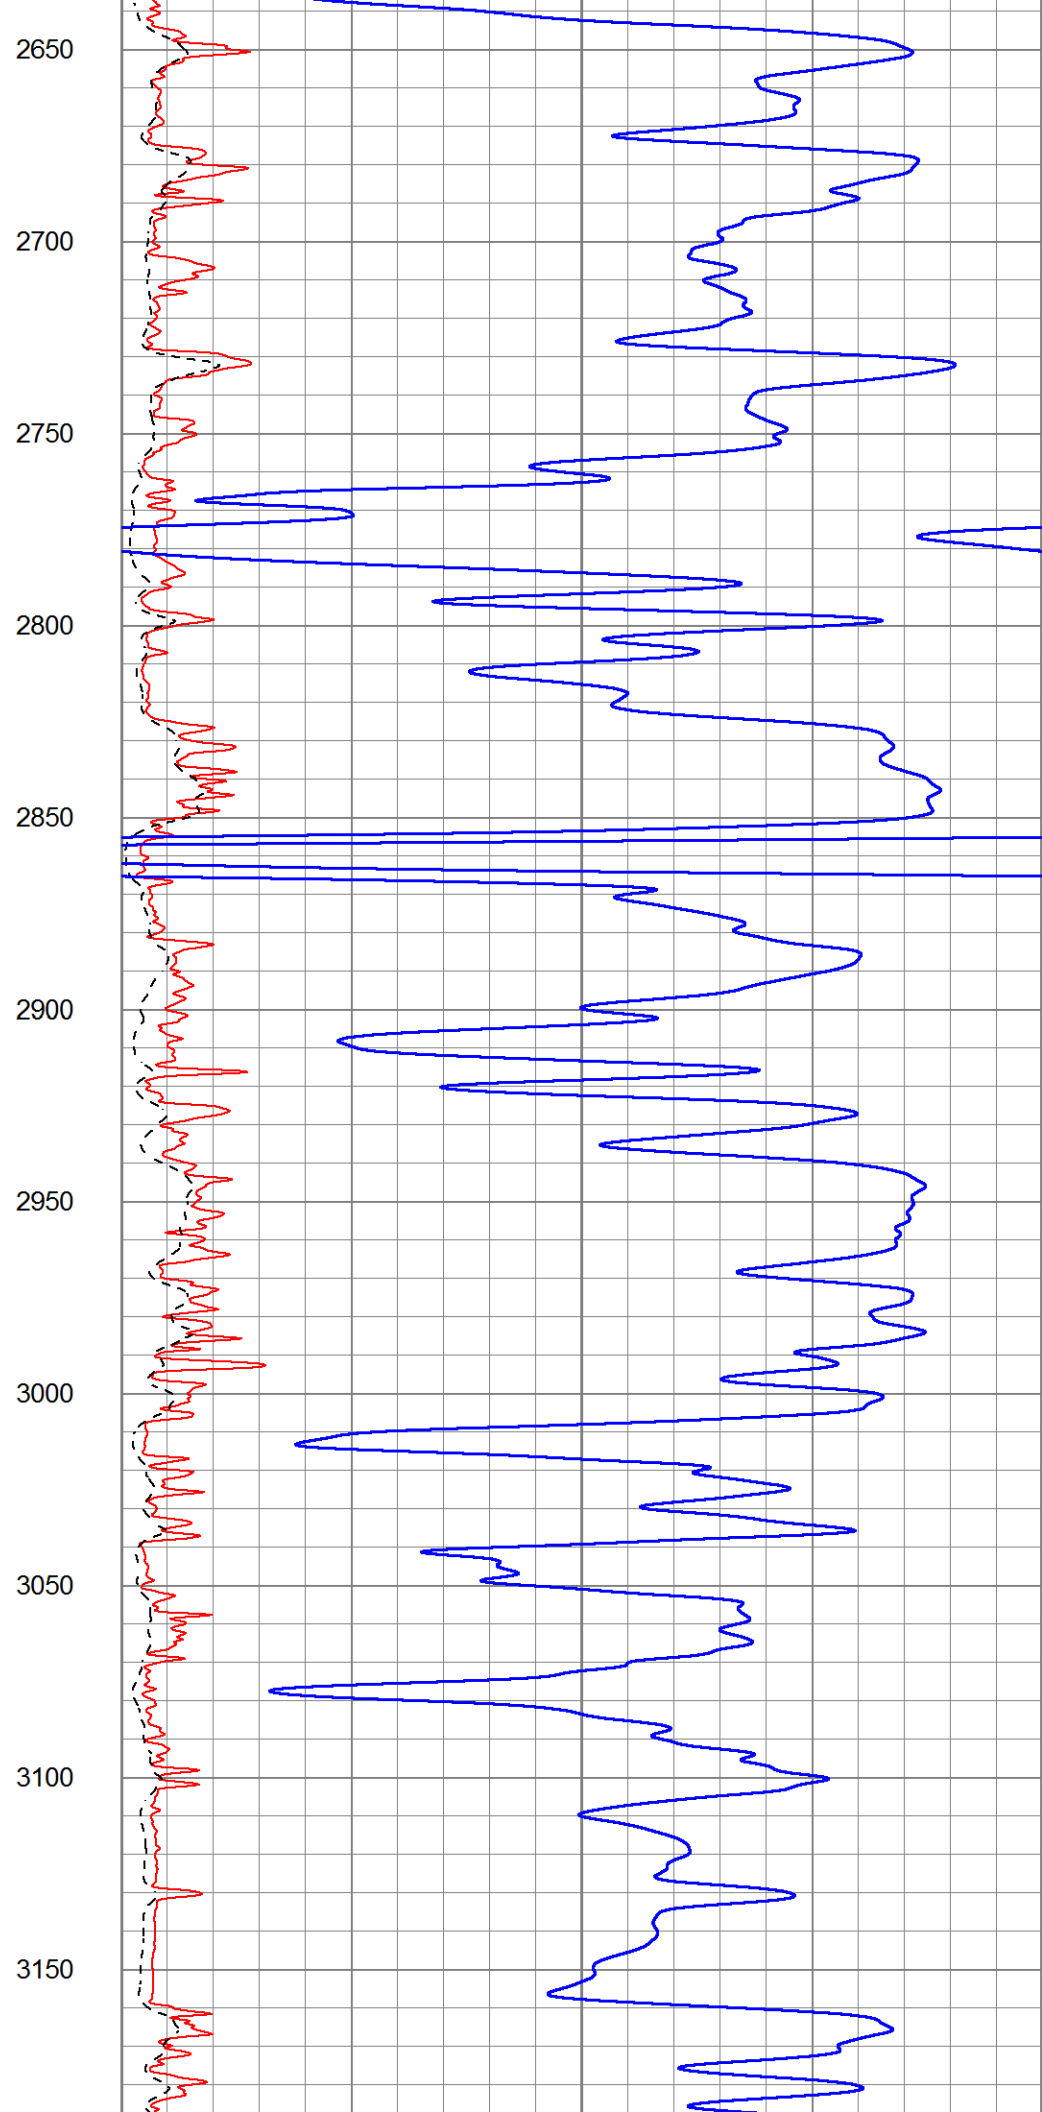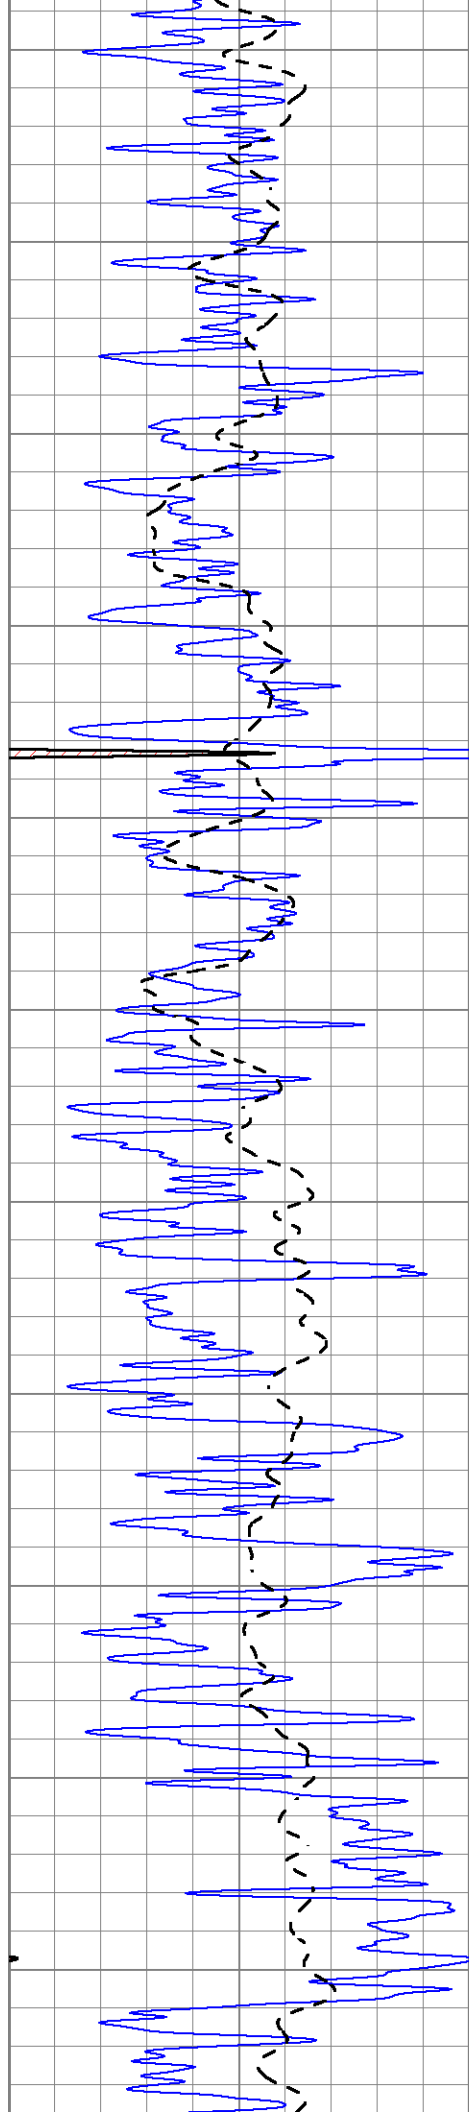

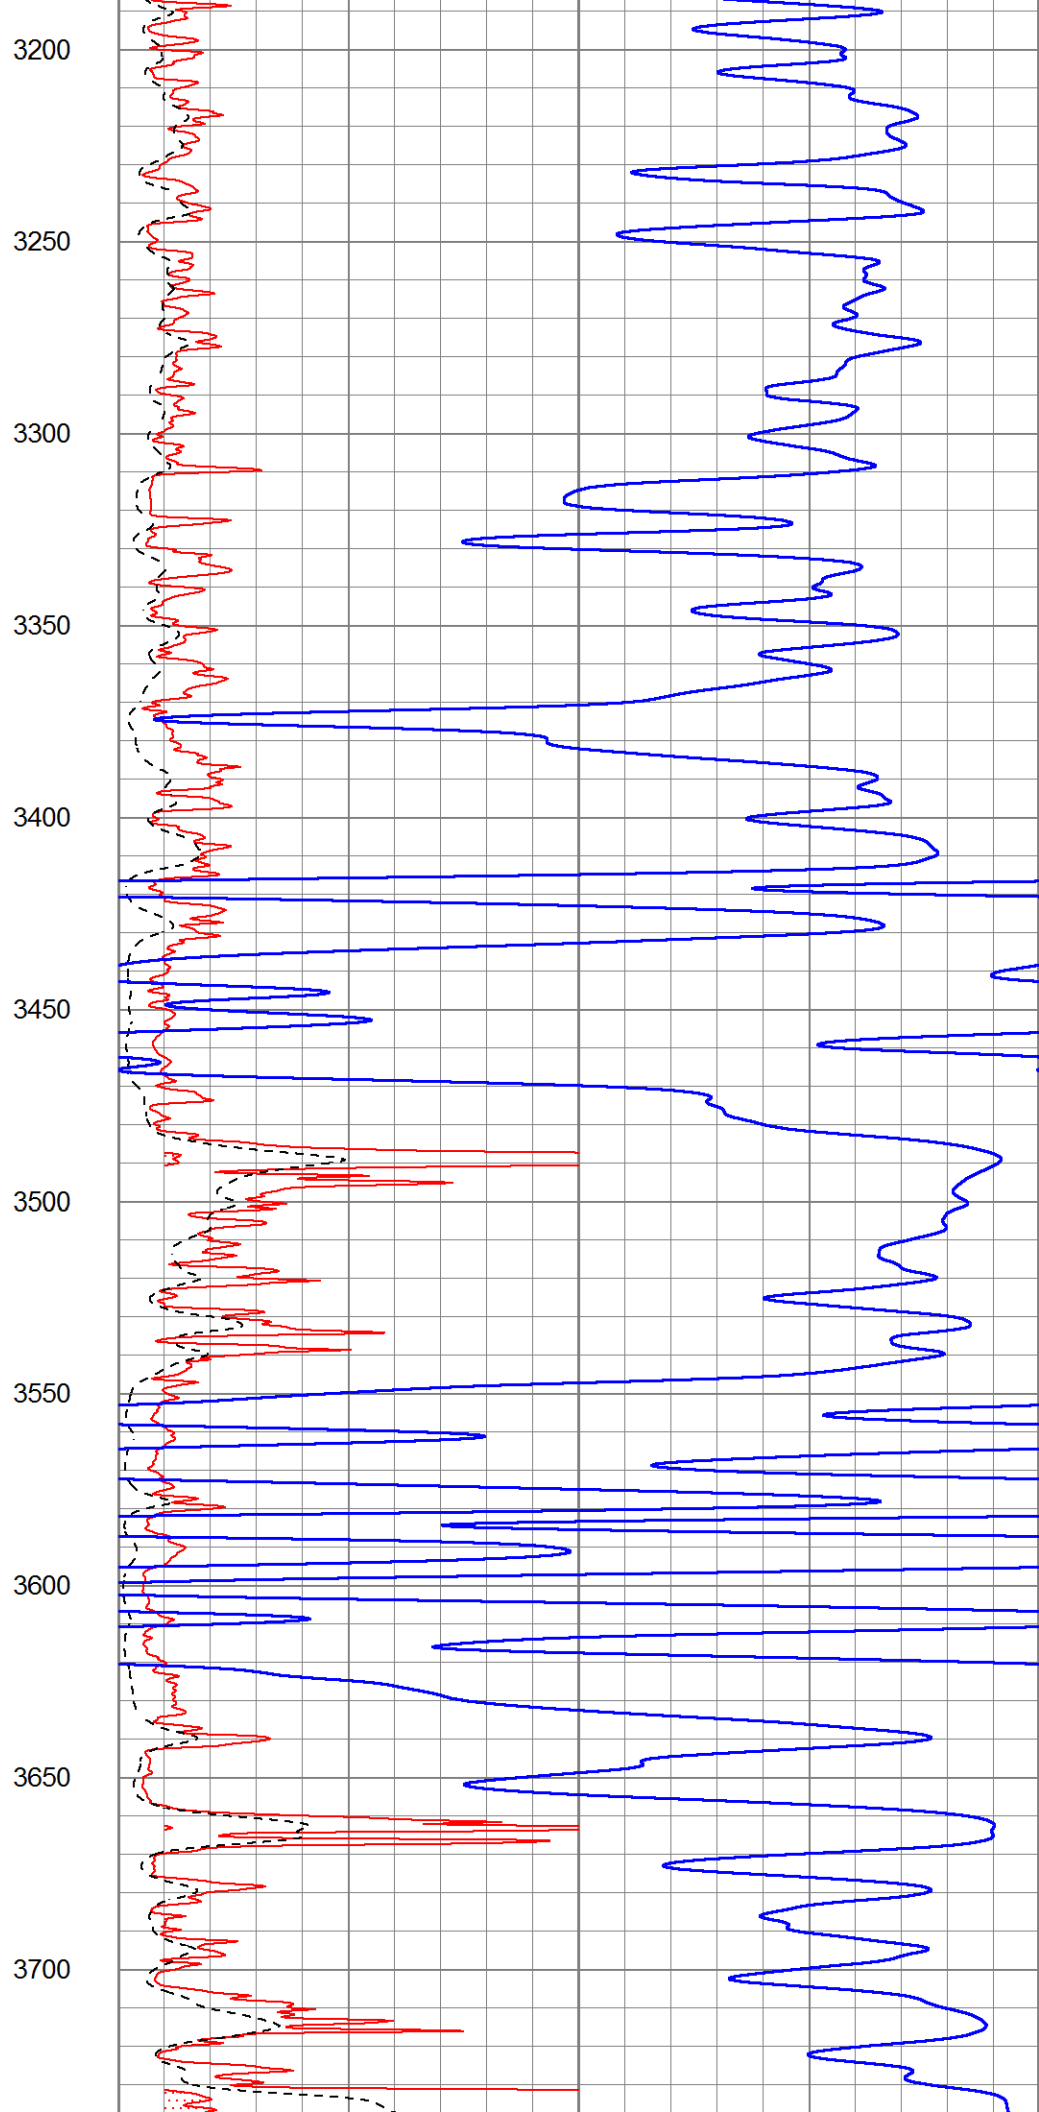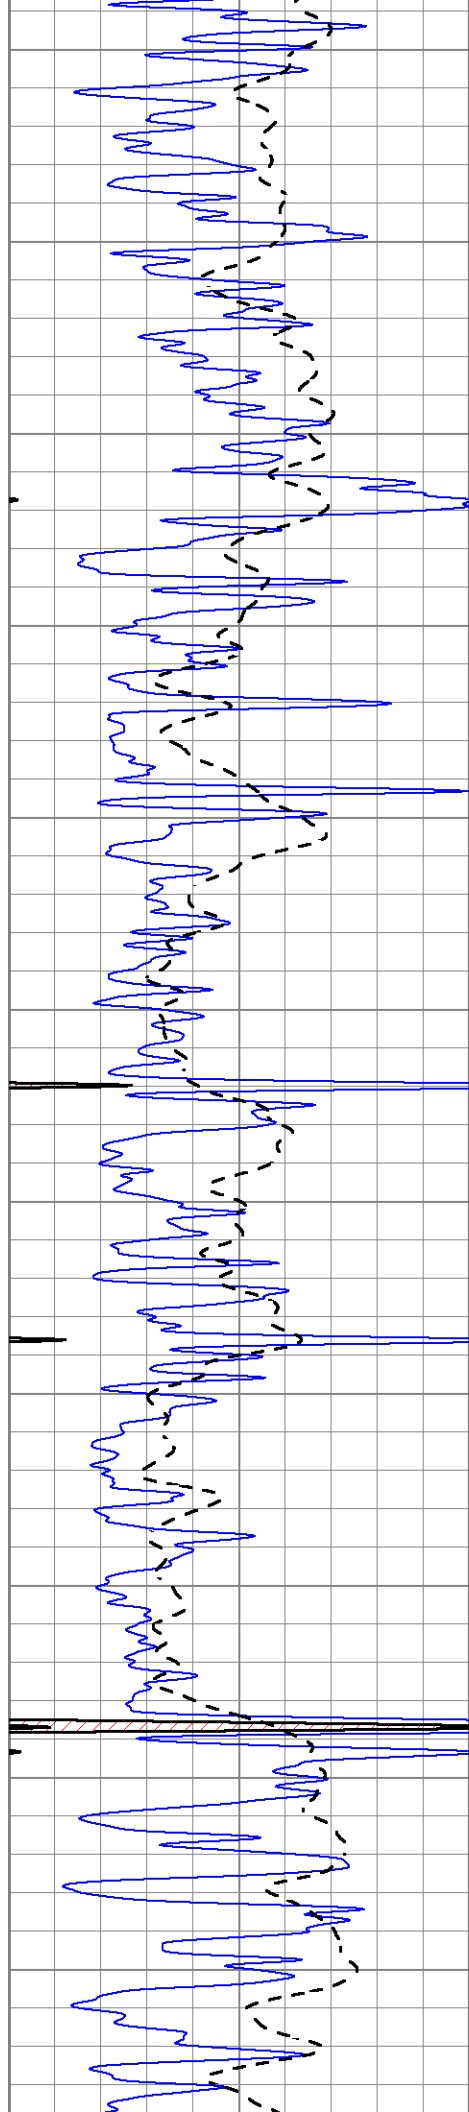

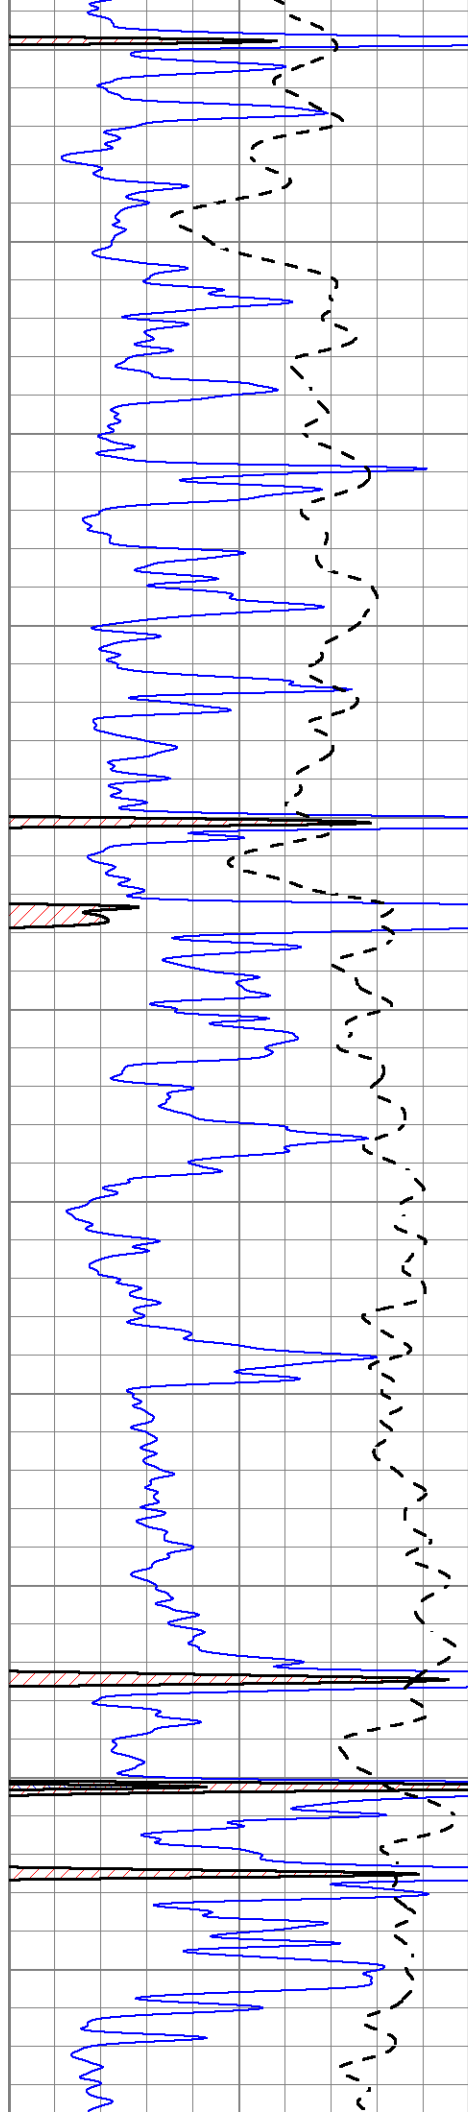

3750

3800

3850

3900

3950

4000



4050


4100

4150

4200


4250

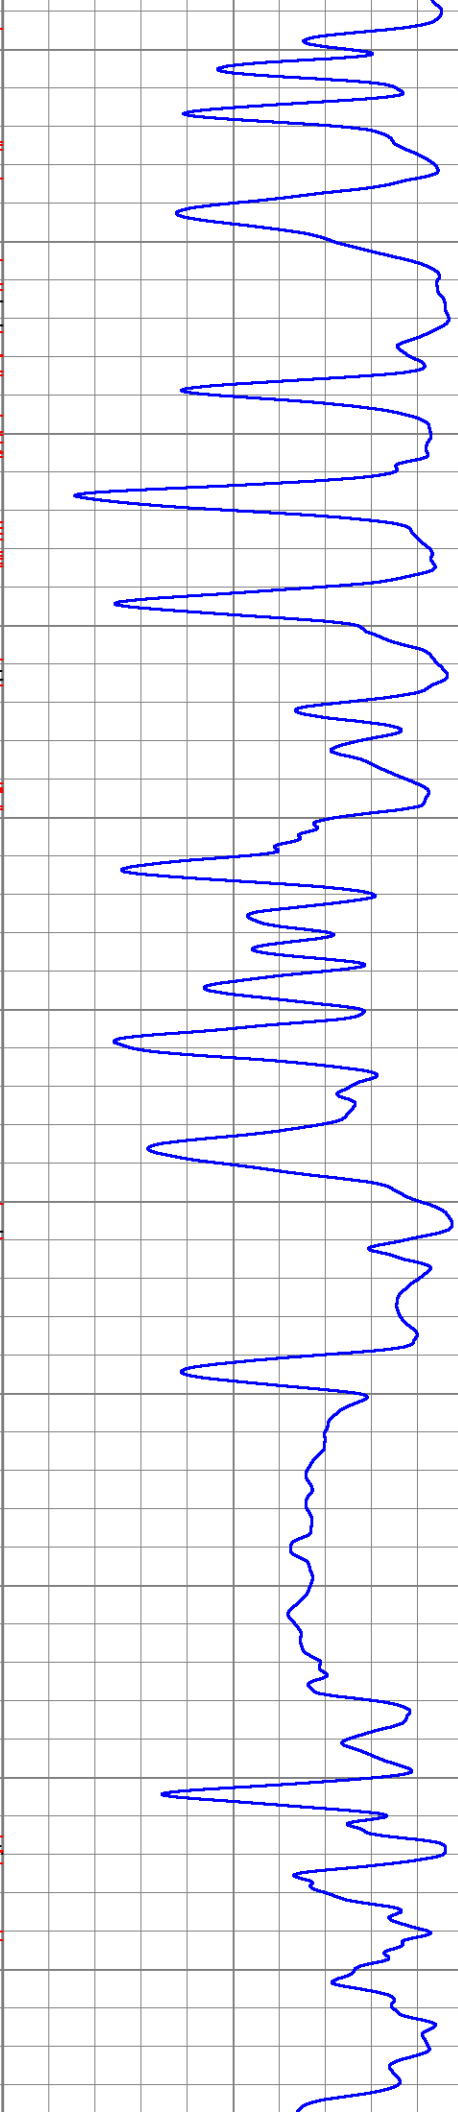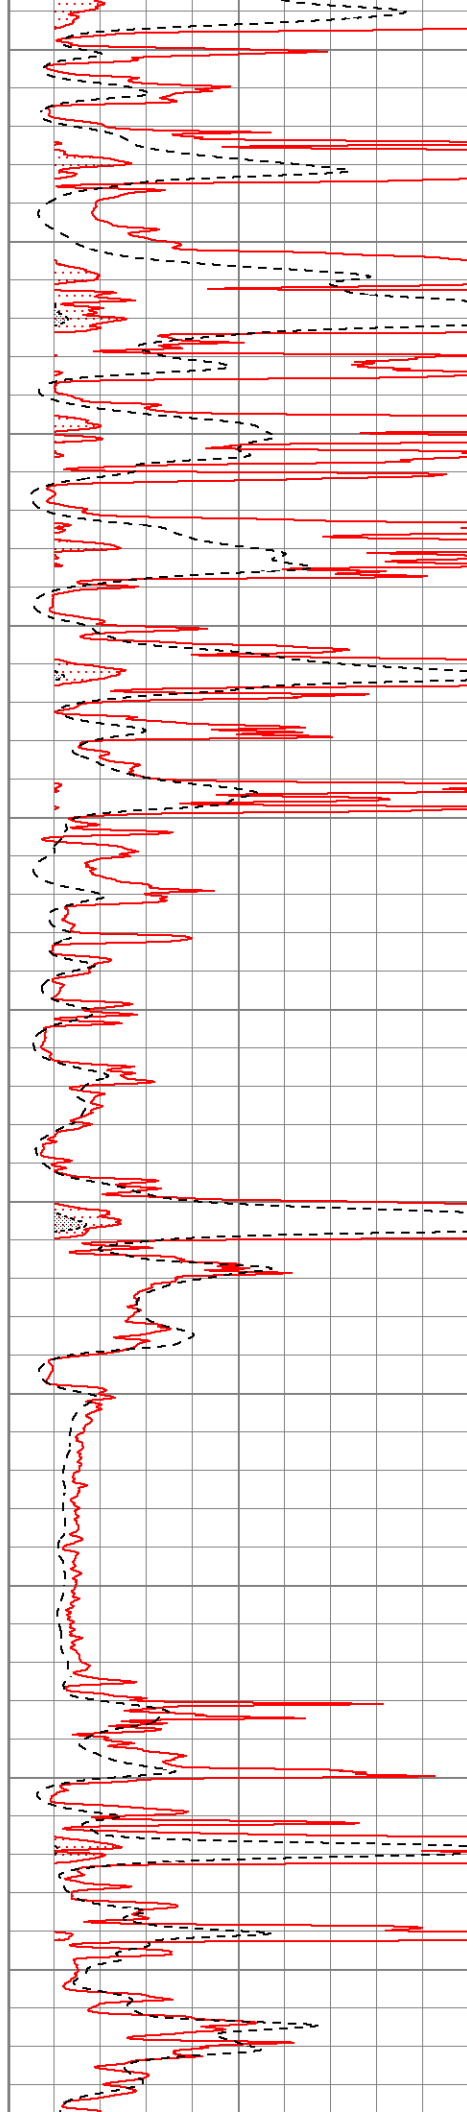

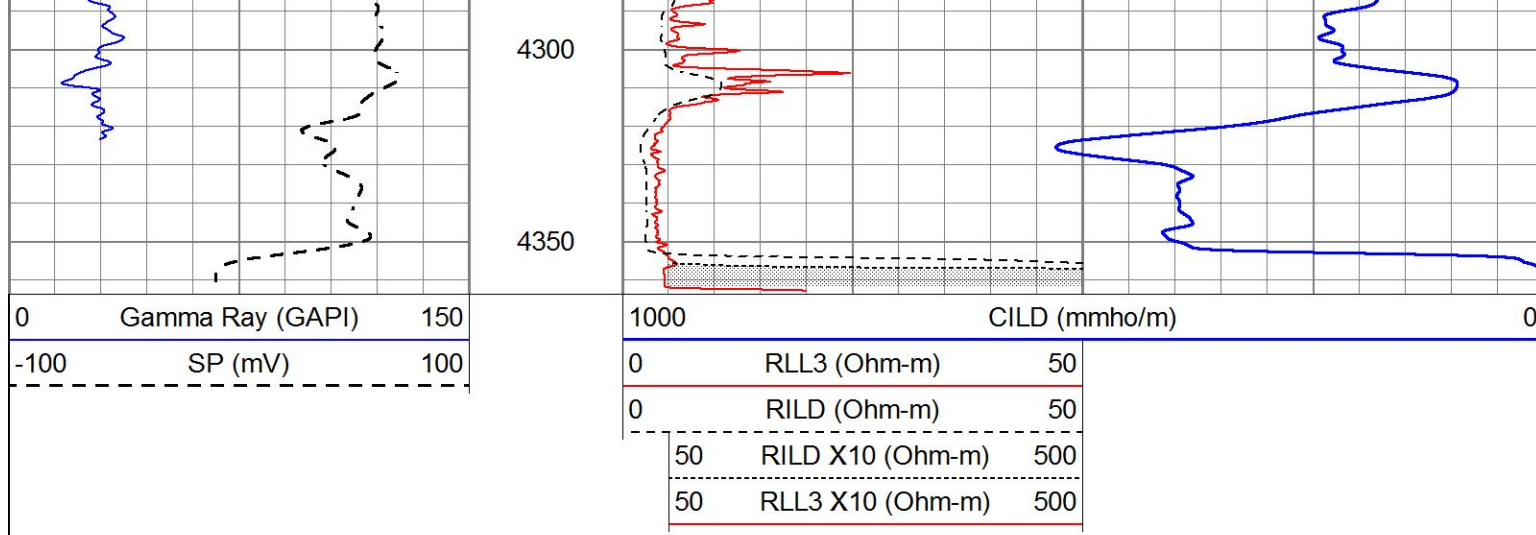

ANHYDRITE

Database File 6719pe.db
 Dataset Pathname pass3.1A
 Presentation Format _dil
 Dataset Creation Thu Nov 10 09:06:28 2022
 Charted by Depth in Feet scaled 1:240

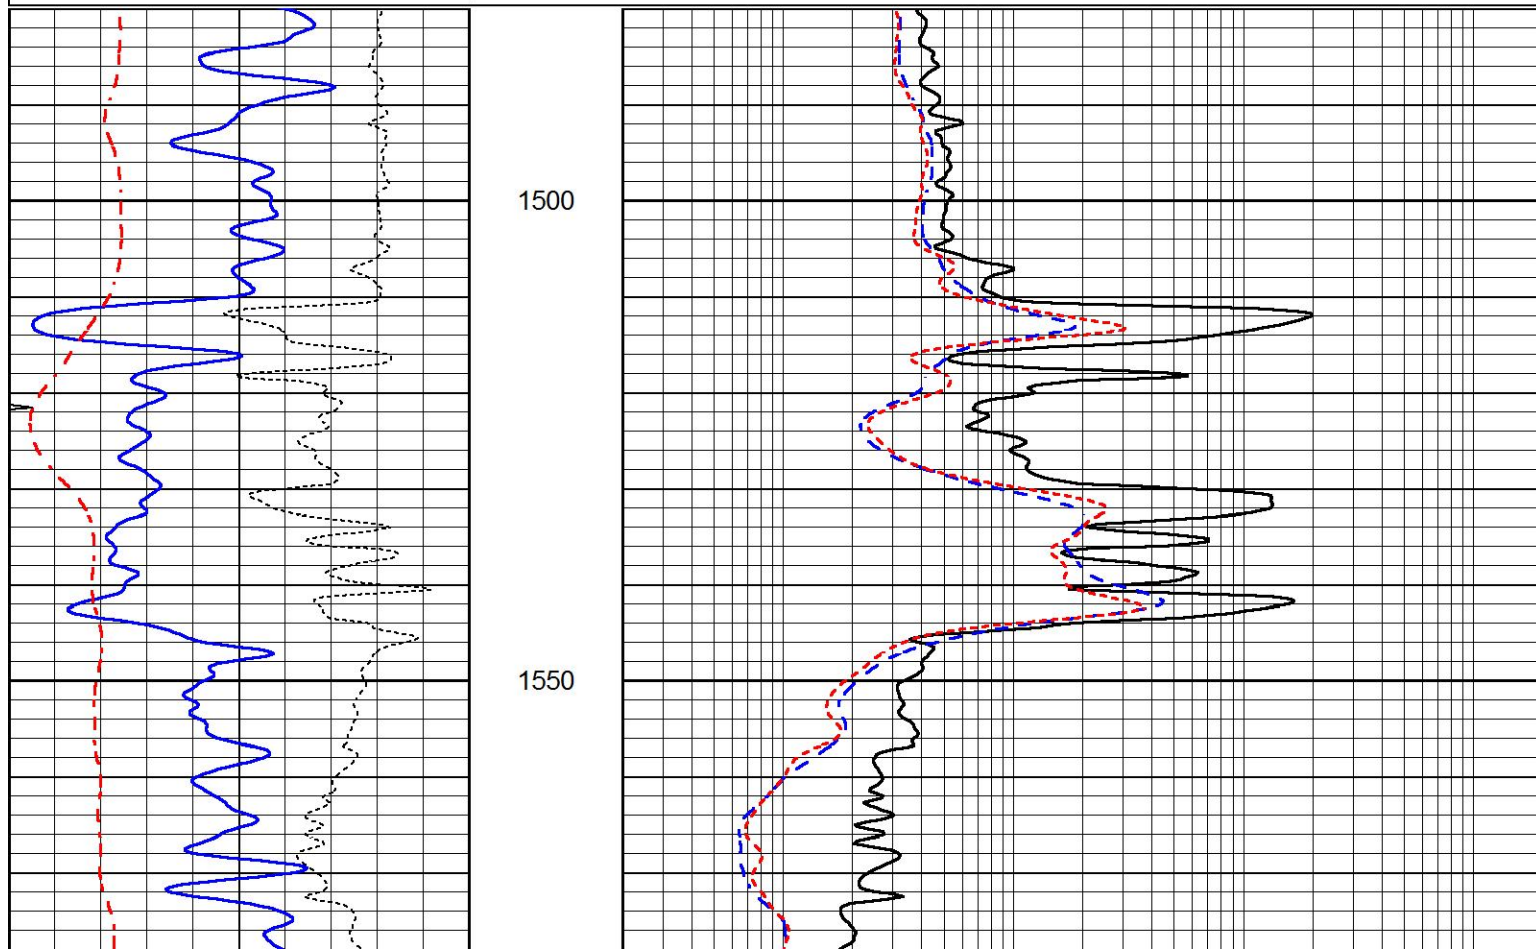

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000




MAIN SECTION

Database File 6719pe.db
 Dataset Pathname pass3.1M
 Presentation Format _dil
 Dataset Creation Thu Nov 10 09:06:05 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

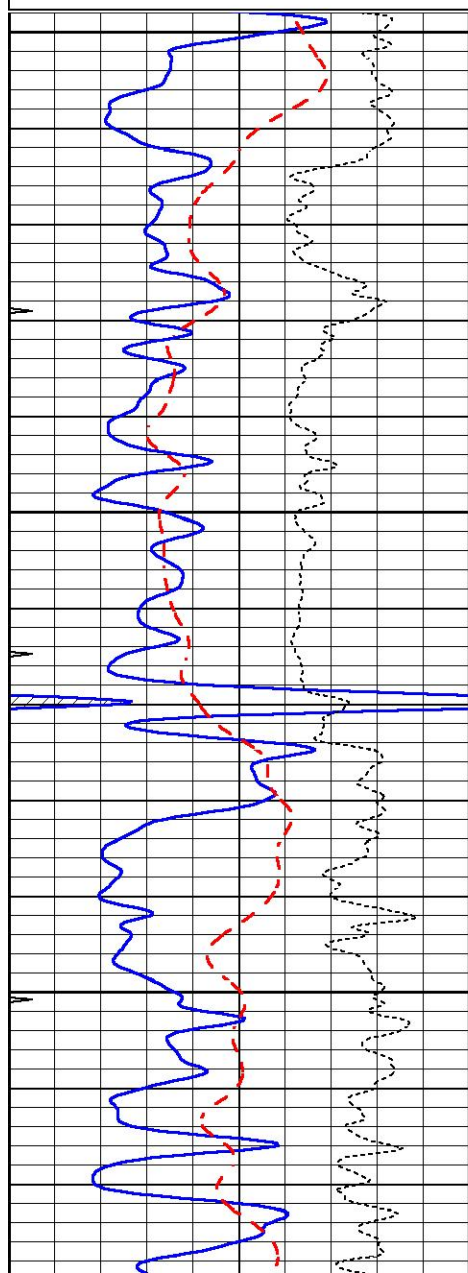


3400

3450

3500

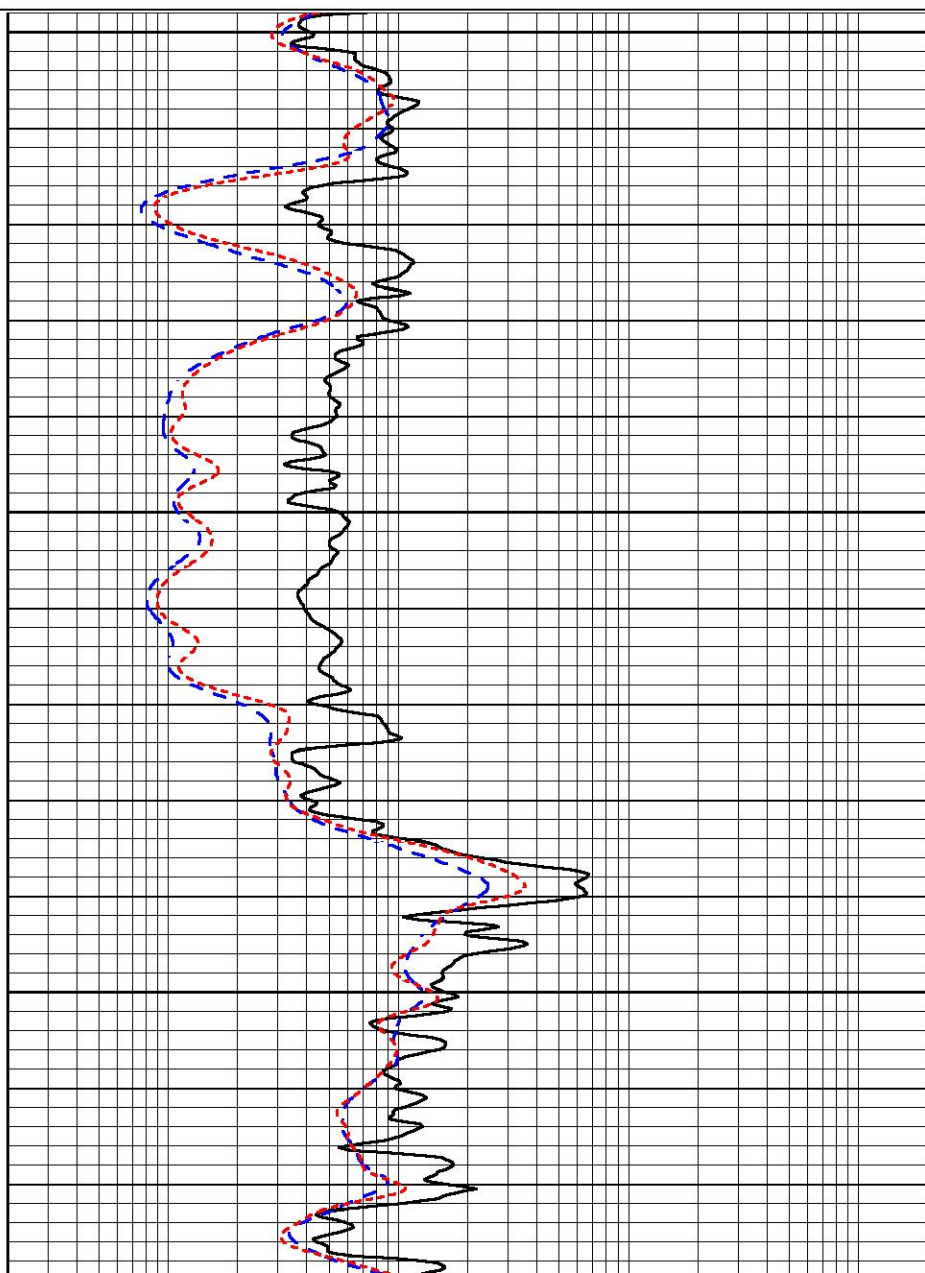

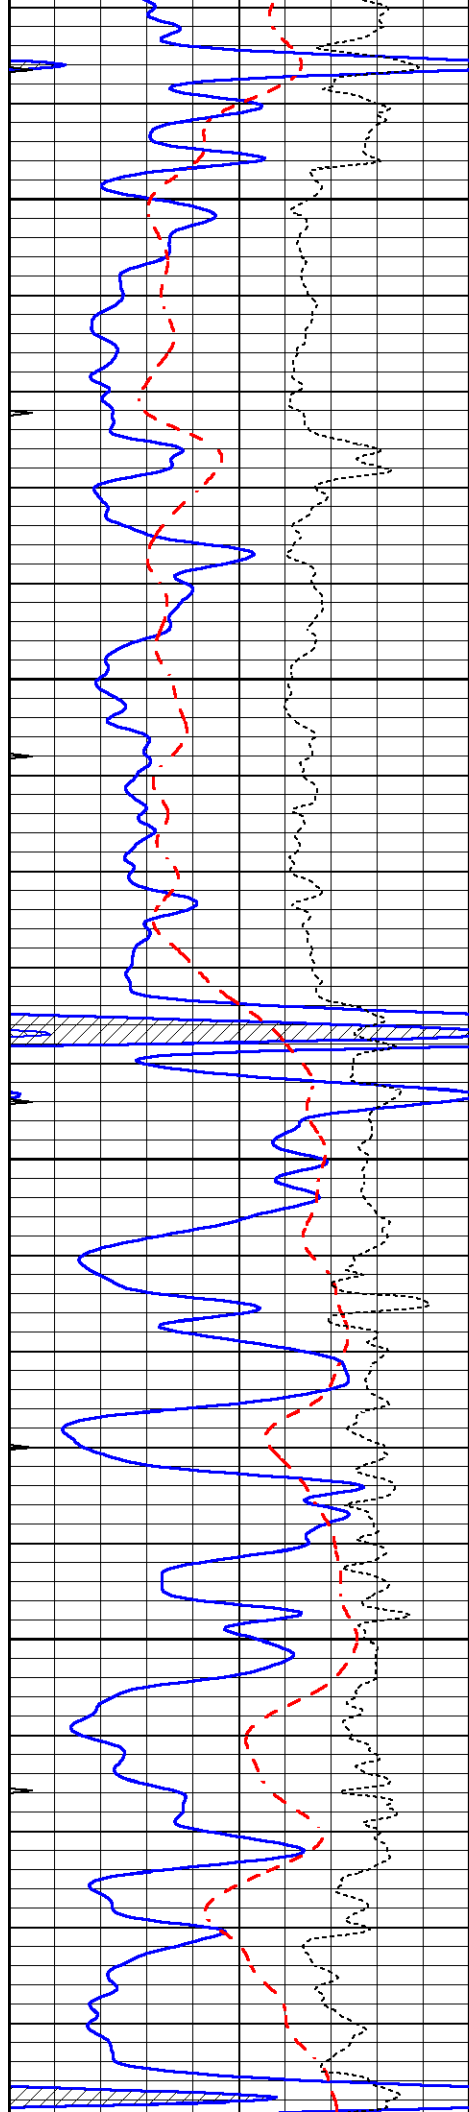


3550


3600

3650

3700

3750

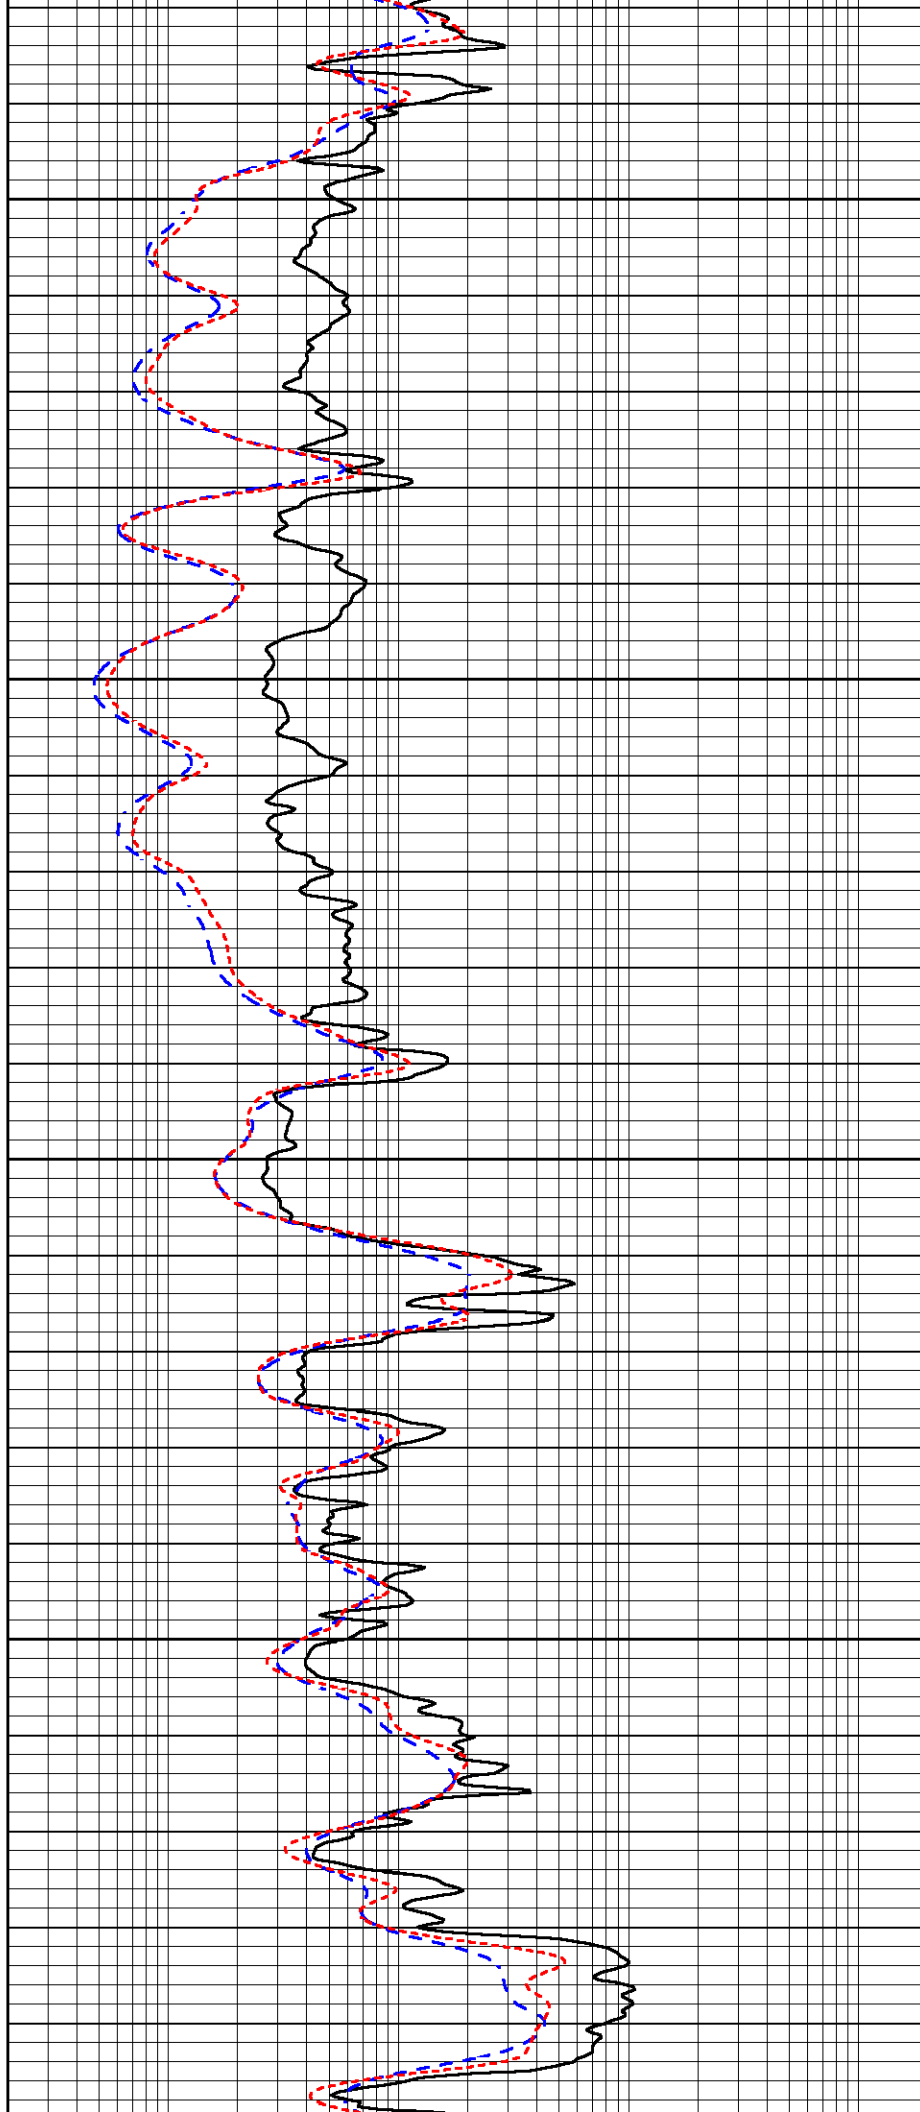

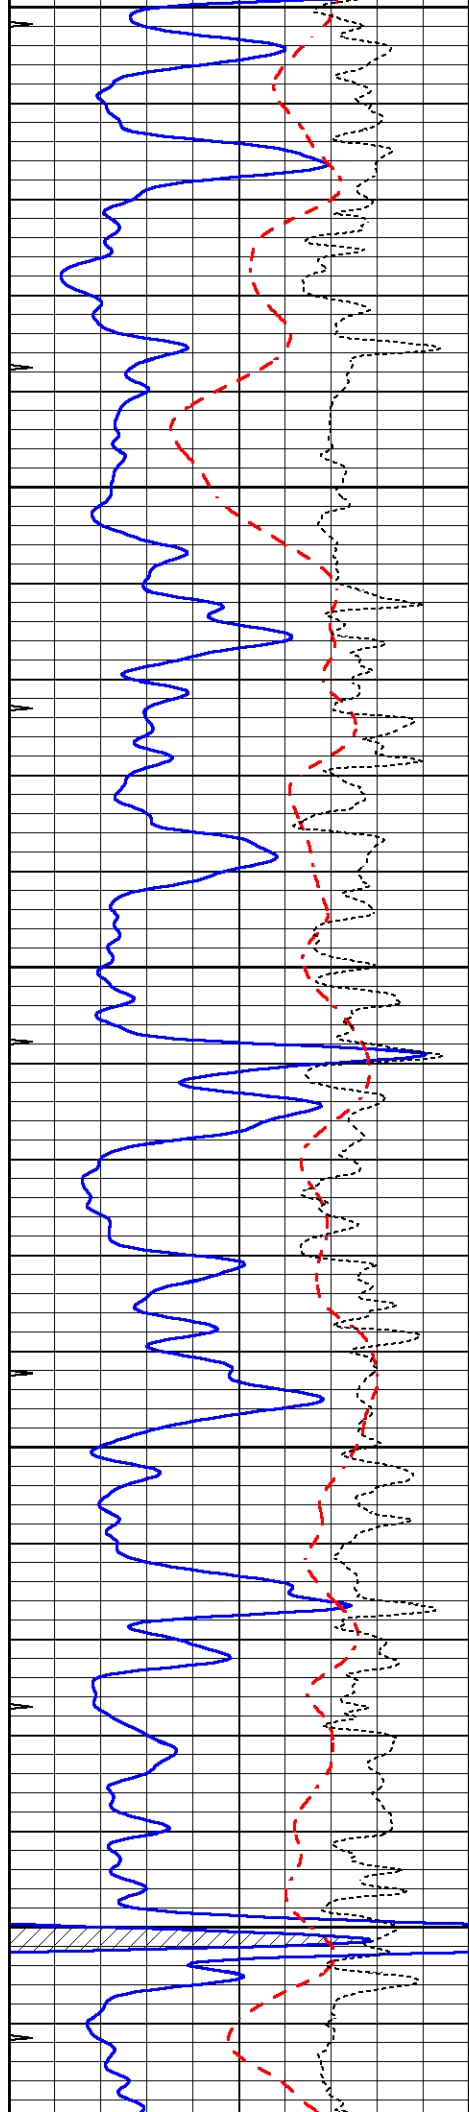


3750


3800

3850

3900

3950

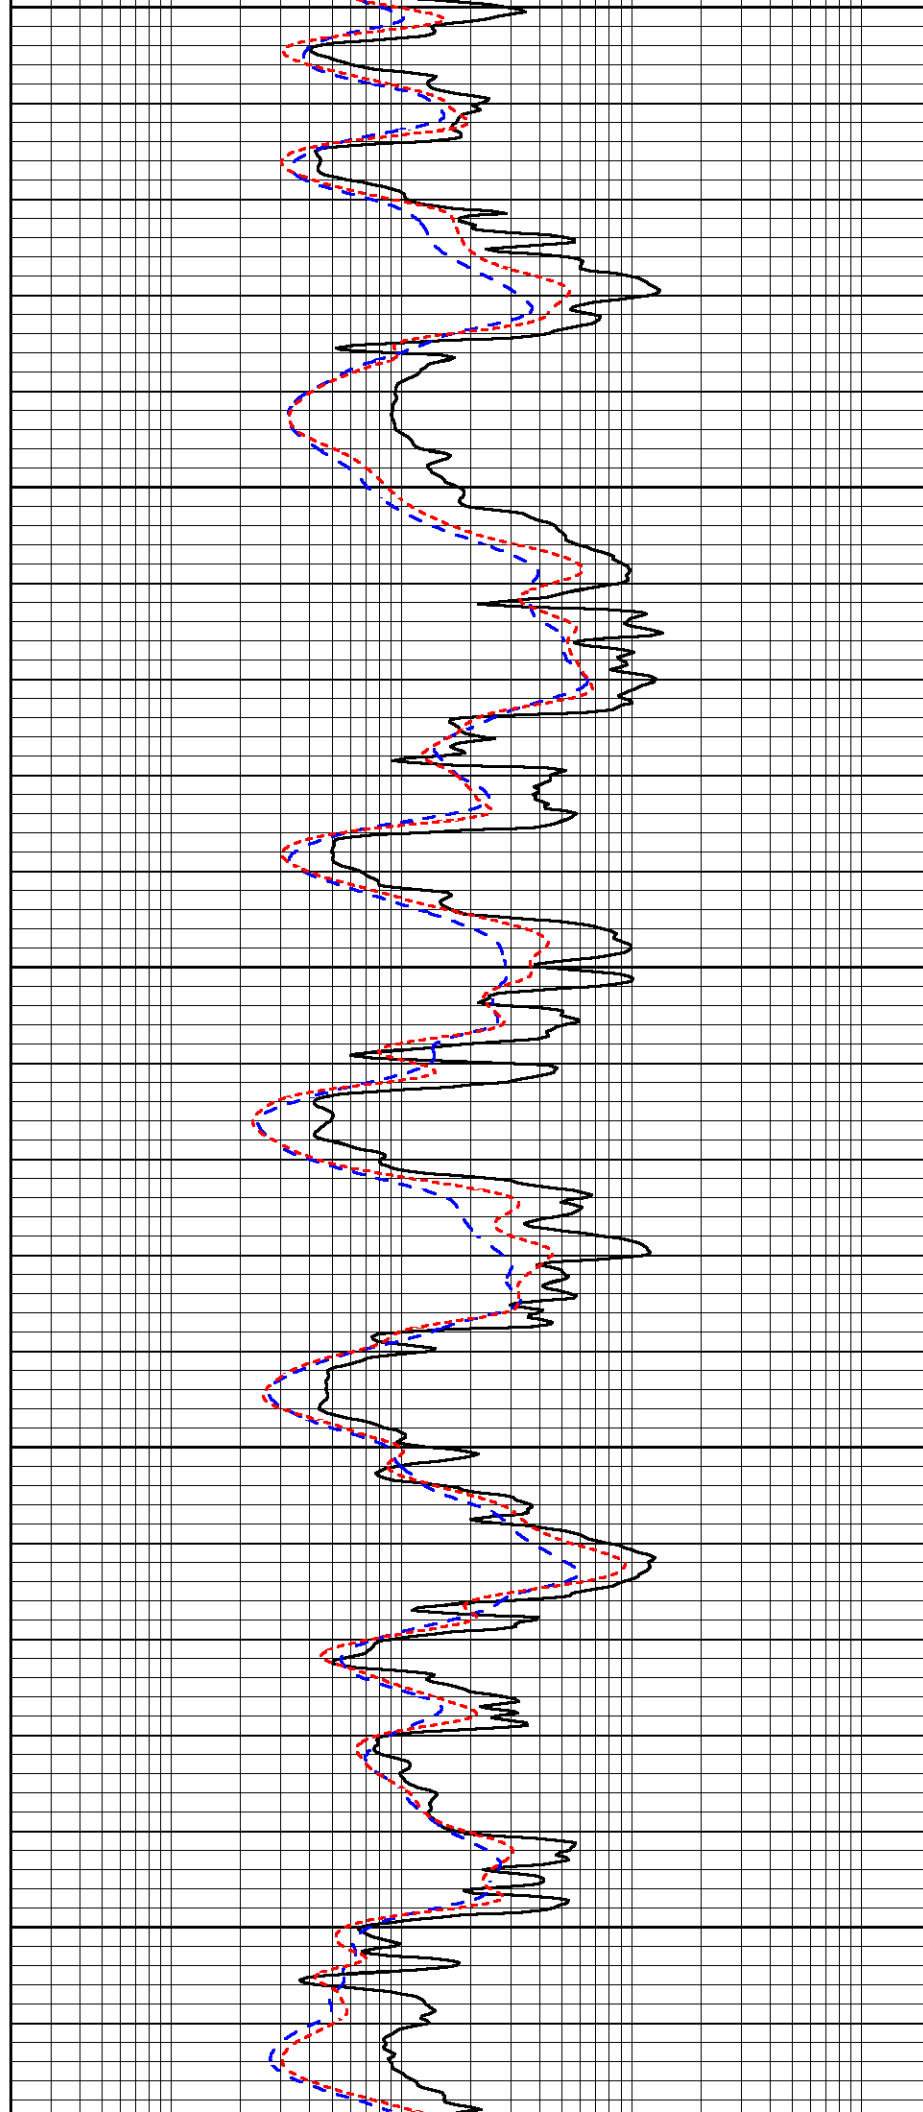

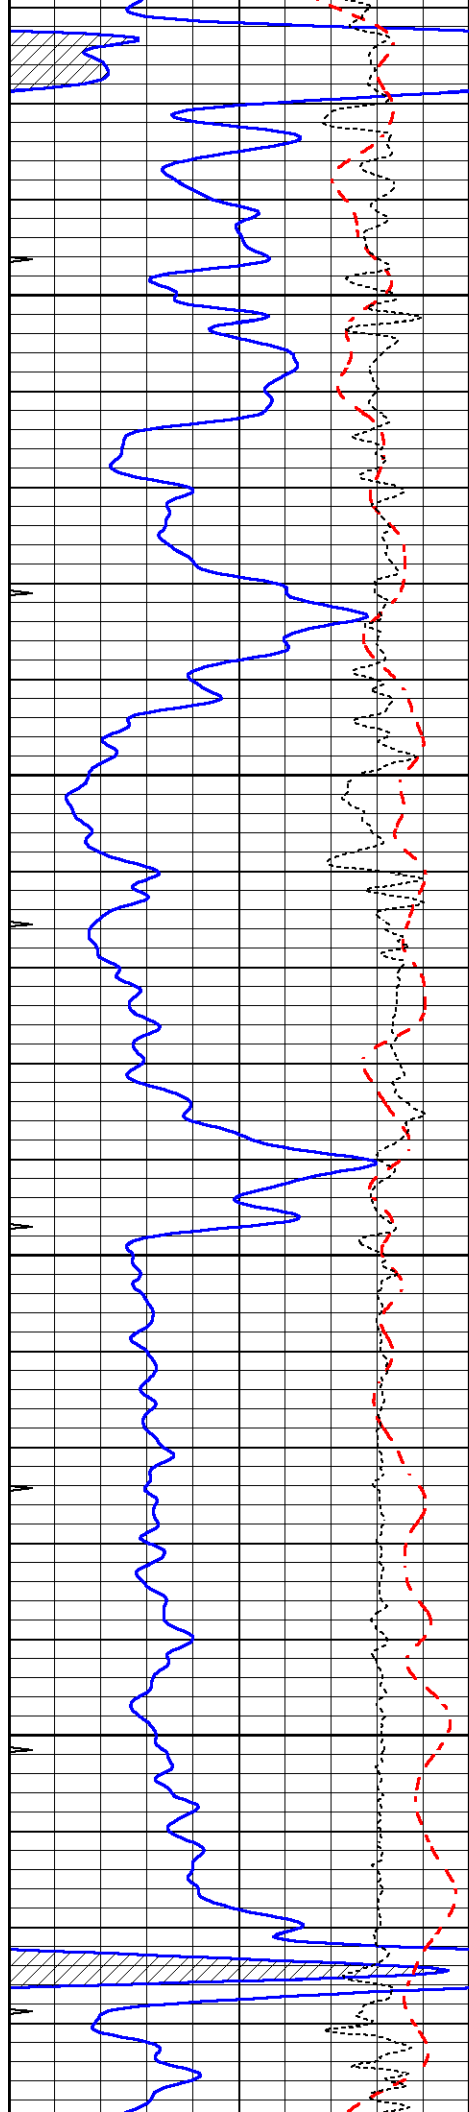




4000

4050

4100

4150

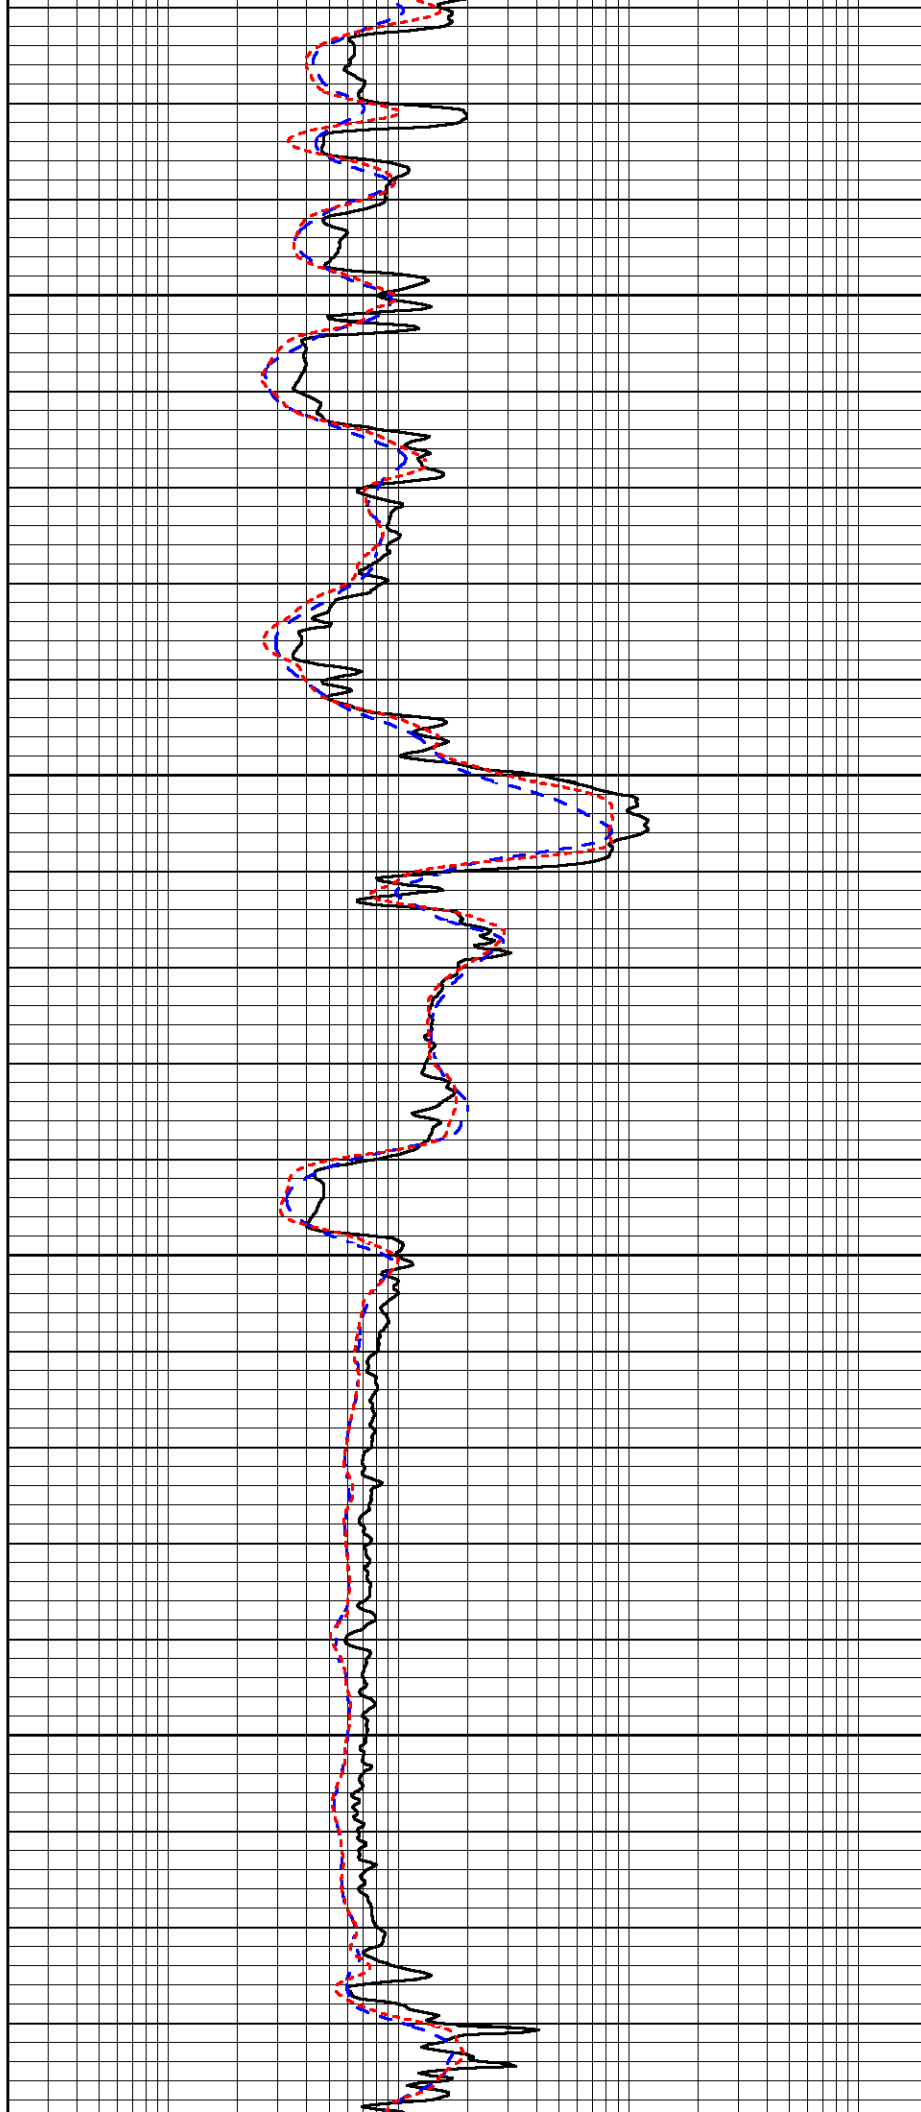


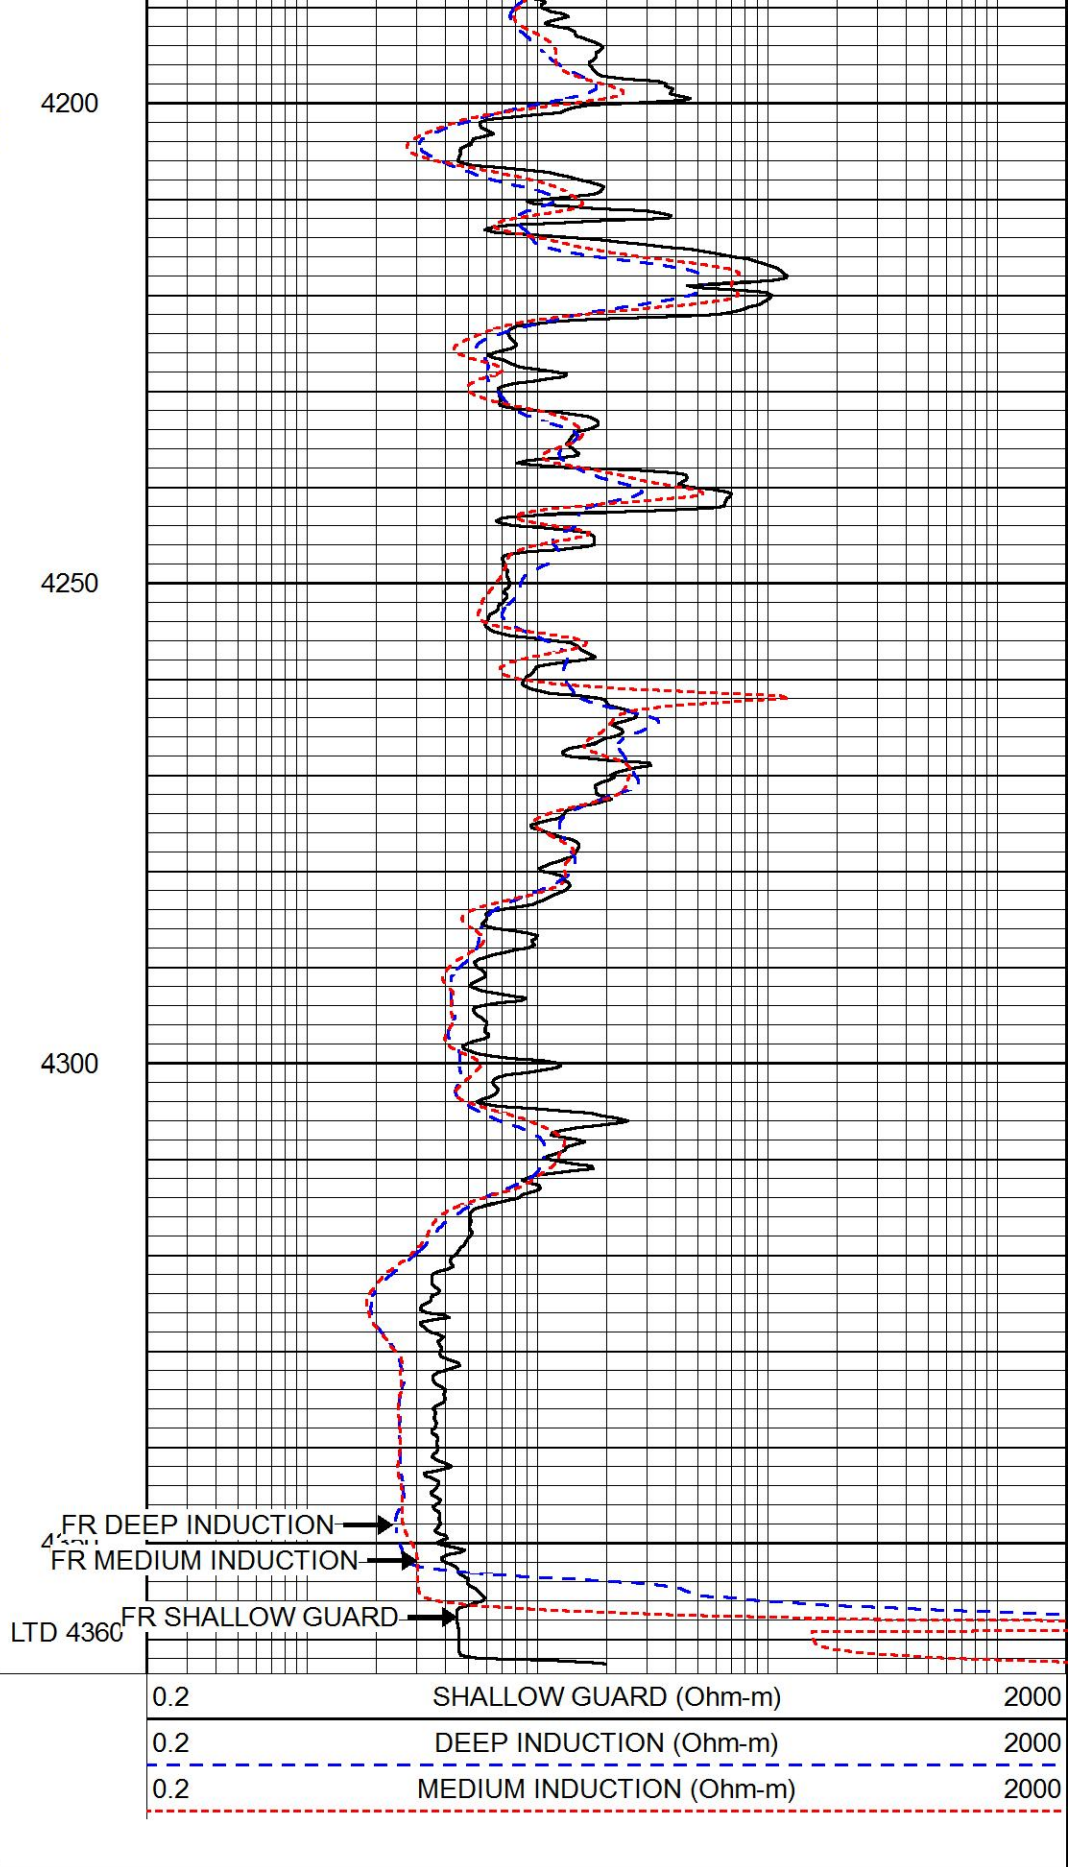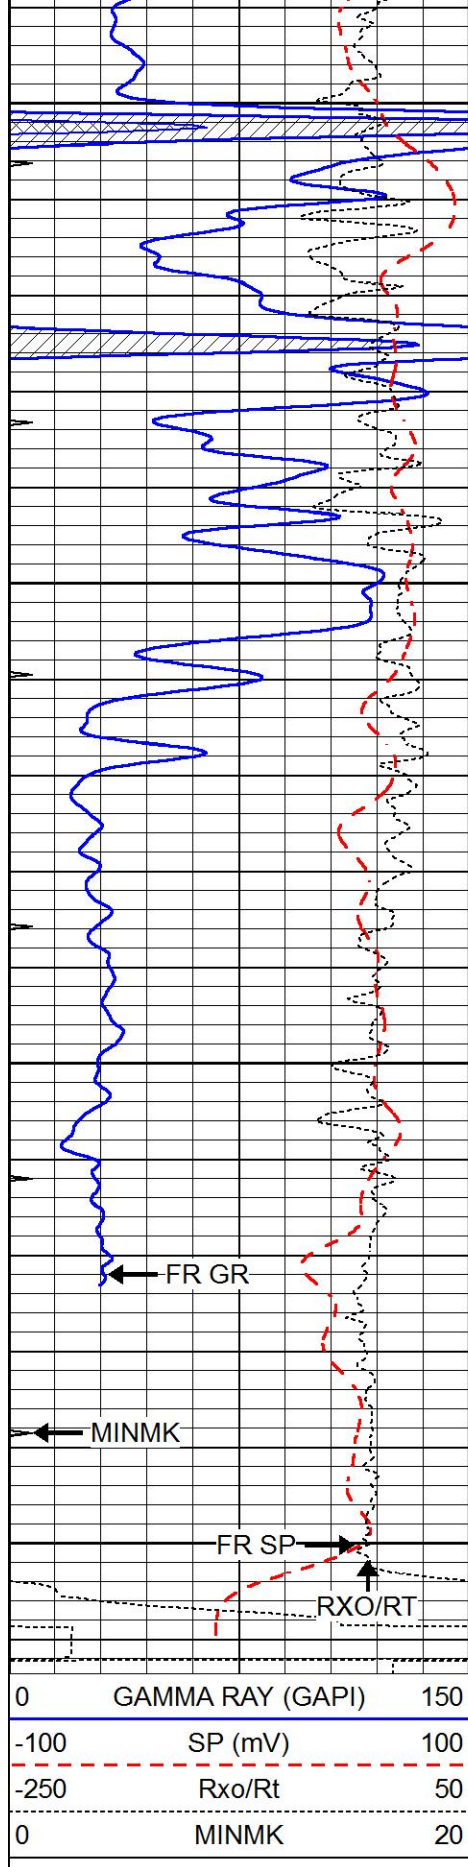

REPEAT SECTION

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

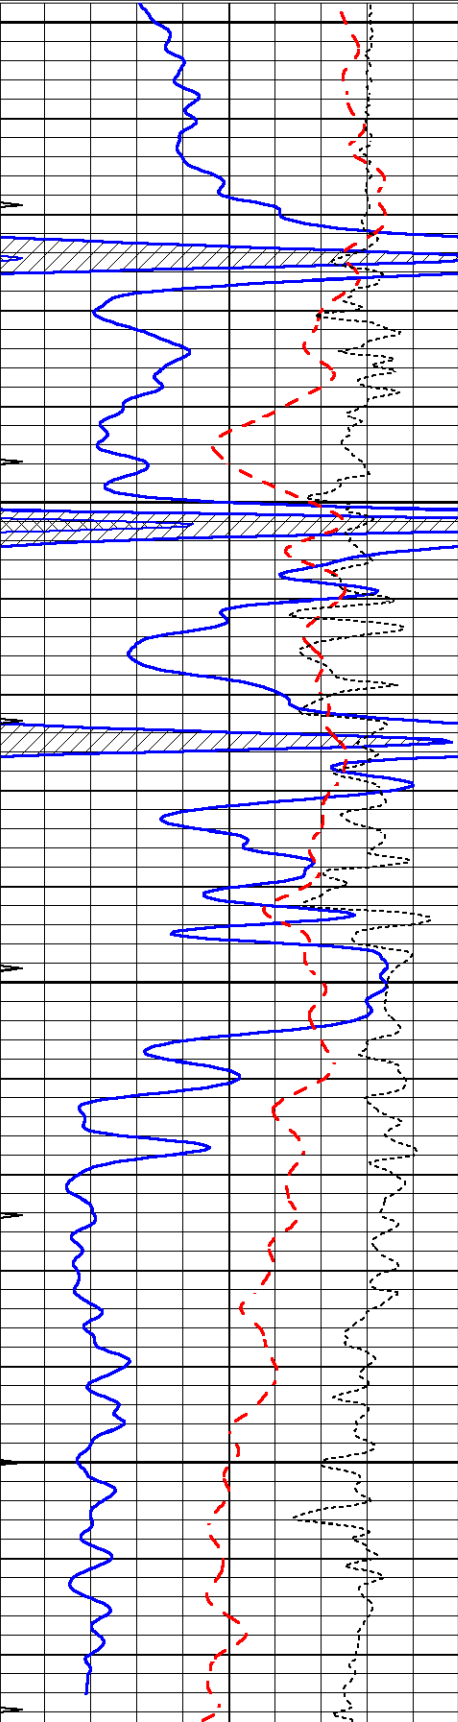


4150

4200

4250

4300

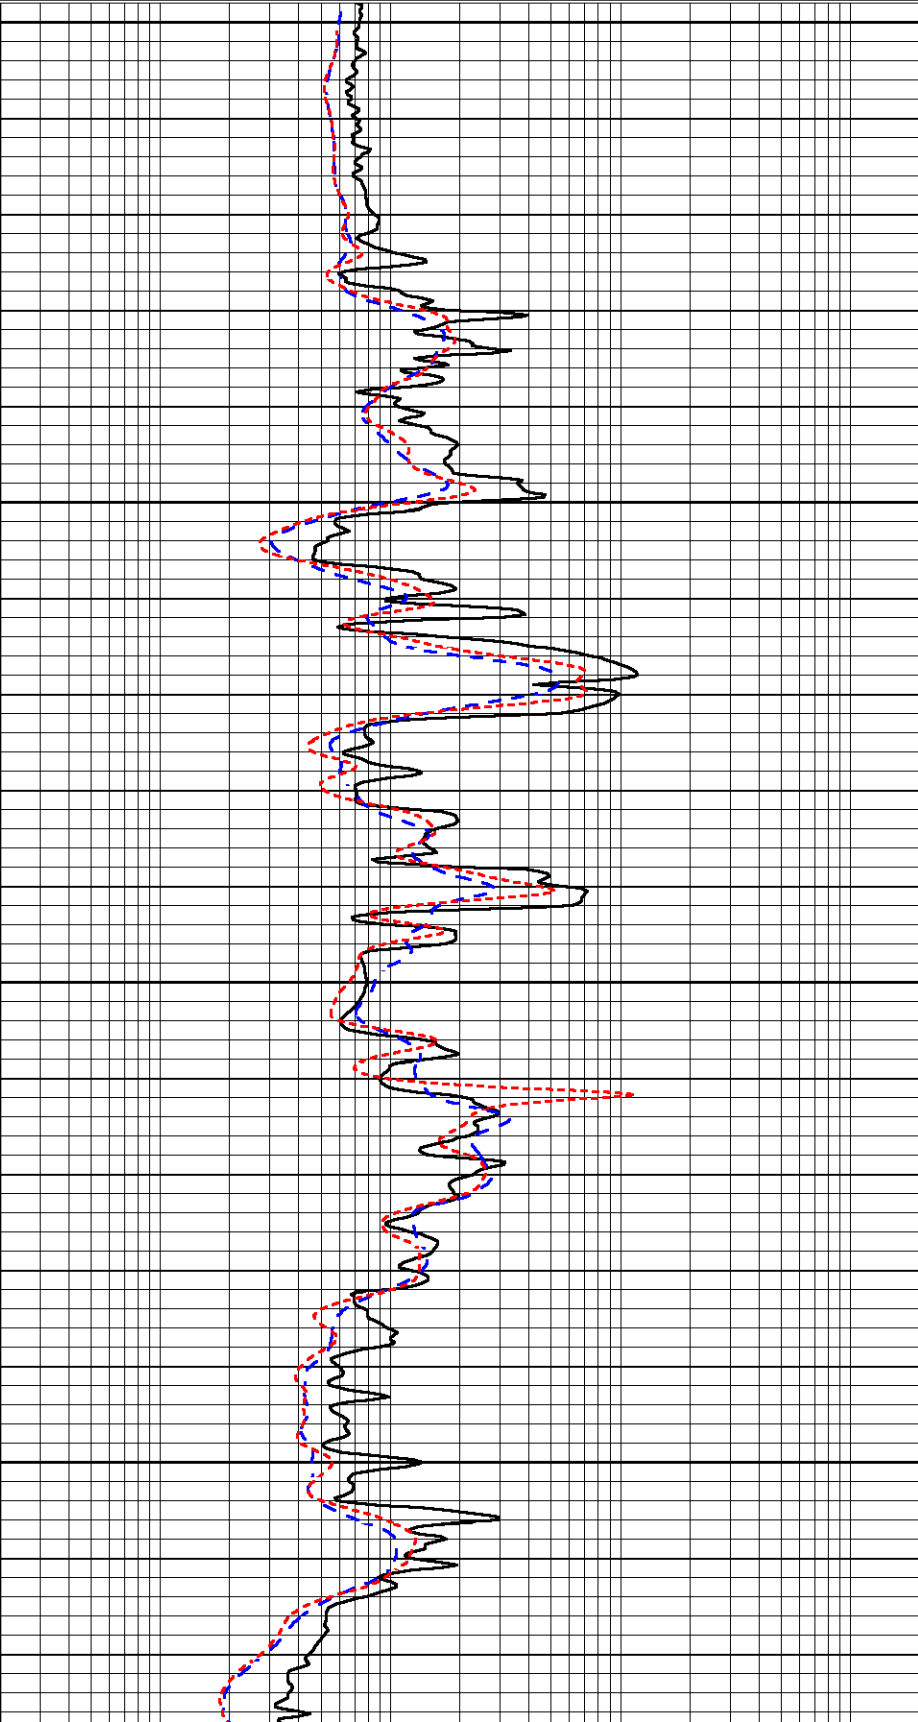

Master Calibration

Performed Fri Nov 04 15:19:59 2022

	Background	Magnesium	Aluminum	Aluminum+Fe	
Window 1	1153.2	7232.1	2536.8	2279.5	cps
Window 2	1055.6	6225.5	2222.3	2030.5	cps
Window 3	902.5	3849.3	1546.4	1462.0	cps
Window 4	254.4	258.2	253.1	253.9	cps
Long Space	0.0	5169.9	1166.7	974.9	cps
Short Space	4.7	1383.0	950.5	792.1	cps
Rho		1.7100	2.5900	0.0000	g/cc
Pe		2.0000	2.7500	5.7900	
Rib Angle	: 45.9	Rib Slope	: 1.031	Density/Spine Ratio	: 0.573
Spine Angle	: 75.9	Spine Slope	: 3.970	Spine Intercept	: -20.2

Before Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 6I
Tool Model: G

CALIBRATION

Detector	Readings		Target		Normalization
Short Space	1.00	cps	1.00	cps	1.0000
Long Space	1.00	cps	1.00	cps	1.0000

PRE-SURVEY VERIFICATION

	Detector	Readings		Measured	Target
1)	Short Space		cps		
	Long Space		cps	pu	pu

2)	Short Space Long Space	cps cps	pu
3)	Short Space Long Space	cps cps	pu
POST-SURVEY VERIFICATION			
	Detector	Readings	Measured Target
1)	Short Space Long Space	cps cps	pu pu
2)	Short Space Long Space	cps cps	pu pu
3)	Short Space Long Space	cps cps	pu pu
Gamma Ray Calibration Report			
Serial Number:		GR6	
Tool Model:		OPEN	
Performed:		Tue Nov 08 13:43:57 2022	
Calibrator Value:		150.0	GAPI
Background Reading:		0.0	cps
Calibrator Reading:		276.0	cps
Sensitivity:		0.8500	GAPI/cps