

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-051-25631-00-00

Spot: NENESE

Sec/Twnshp/Rge: 32-12S-17W

2310 feet from S Section Line,

330 feet from E Section Line

Lease Name: JAMES STAAB

Well #: 7

County: ELLIS

Total Vertical Depth: 3665 feet

Operator License No.: 8754

Op Name: PYLE, TOM DBA PYLE PETROLEUM

Address: 5201 S. BROADWAY, STE 212
TYLER, TX 75703

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	213		

\$ 119.11

Well Type: DH

UIC Docket No:

Date/Time to Plug: 04/16/2007 10:00 AM

Plug Co. License No.: 33493

Plug Co. Name: AMERICAN EAGLE DRILLING LLC

Proposal Rcvd. from: LARRY HINDERGUARD

Company: AMERICAN EAGLE DRILLING LLC Phone: (303) 722-2899

Proposed Plugging Method: Ordered 190 sxs 60/40 pozmix - 6% gel with 1/4# flocele per sack.
Space all plugs with heavy drilling mud through drill pipe.
No ar buckle found.

Plugging Proposal Received By: HERB DEINES

WitnessType: NONE

Date/Time Plugging Completed: 04/16/2007 2:00 PM

KCC Agent: HERB DEINES

Actual Plugging Report:

Perfs:

1st. Plug at 1350' w/25 sxs.
2nd. Plug at 725' w/100 sxs.
3rd. Plug at 265' w/40 sxs.
4th. Plug at 40' w/10 sxs.
Rathole with 15 sxs.


INVOICED
DATE 4-27-07
INV. NO. 2007061663

Remarks: ALLIED CEMENTING COMPANY.

Plugged through: DP

District: 04

Signed

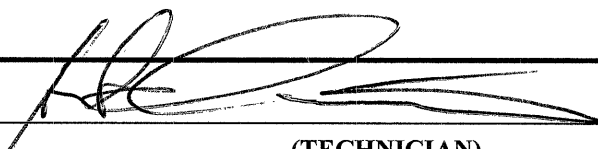

(TECHNICIAN)

RECEIVED
KANSAS CORPORATION COMMISSION
Form CP-2/3
APR 19 2007
CONSERVATION DIVISION
WICHITA, KS

APR 17 2007

DPK