



DUAL INDUCTION LOG

Company		PALOMINO PETROLEUM, INC.	
Well		GOLDEN EYE #2	
Field		CHRIF EAST	
County		NESS	
State		KANSAS	
Location:		API # : 15-135-26188-0000 2015' FNL & 1397' FWL	
Permanent Datum		GROUND LEVEL Elevation 2382	
Log Measured From		KELLY BUSHING 11' A.G.L.	
Drilling Measured From		KELLY BUSHING	
SEC 14 TWP 19S RGE 25W		Elevation K.B. 2393 D.F. 2391 G.L. 2382	
Date	10/26/22		
Run Number	ONE		
Depth Driller	4530		
Depth Logger	4529		
Bottom Logged Interval	4527		
Top Log Interval	00		
Casing Driller	8 5/8" @ 225		
Casing Logger	225		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 5,100 PPM	
Density / Viscosity	9.4/59		
pH / Fluid Loss	11.0/7.6		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.800 @ 80F		
Rmf @ Meas. Temp	.600 @ 80F		
Rmc @ Meas. Temp	.960 @ 80F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.529 @ 121F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	1:00 P.M.		
Maximum Recorded Temperature	121F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	COLE ROBBEN		
Witnessed By	RYAN SEIB		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395

DIRECTIONS:


NESS CITY, KANSAS 8.5 MILES WEST TO COUNTY ROAD 525, SOUTH 3.5 MILES TO 95 ROAD,
EAST 1/2 MILE, NORTH INTO





MAIN SECTION

Database File 7239ddn.db
Dataset Pathname pass3M
Presentation Format _dil2
Dataset Creation Wed Oct 26 15:08:49 2022
Charted by Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150	1000	CILD (mmho/m)	0
-100	SP (mV)	100	0	RLL3 (Ohm-m)	50
-----			0	Deep Induction (Ohm-m)	50
			50	RILD X10 (Ohm-m)	500
			50	RLL3 X10 (Ohm-m)	500

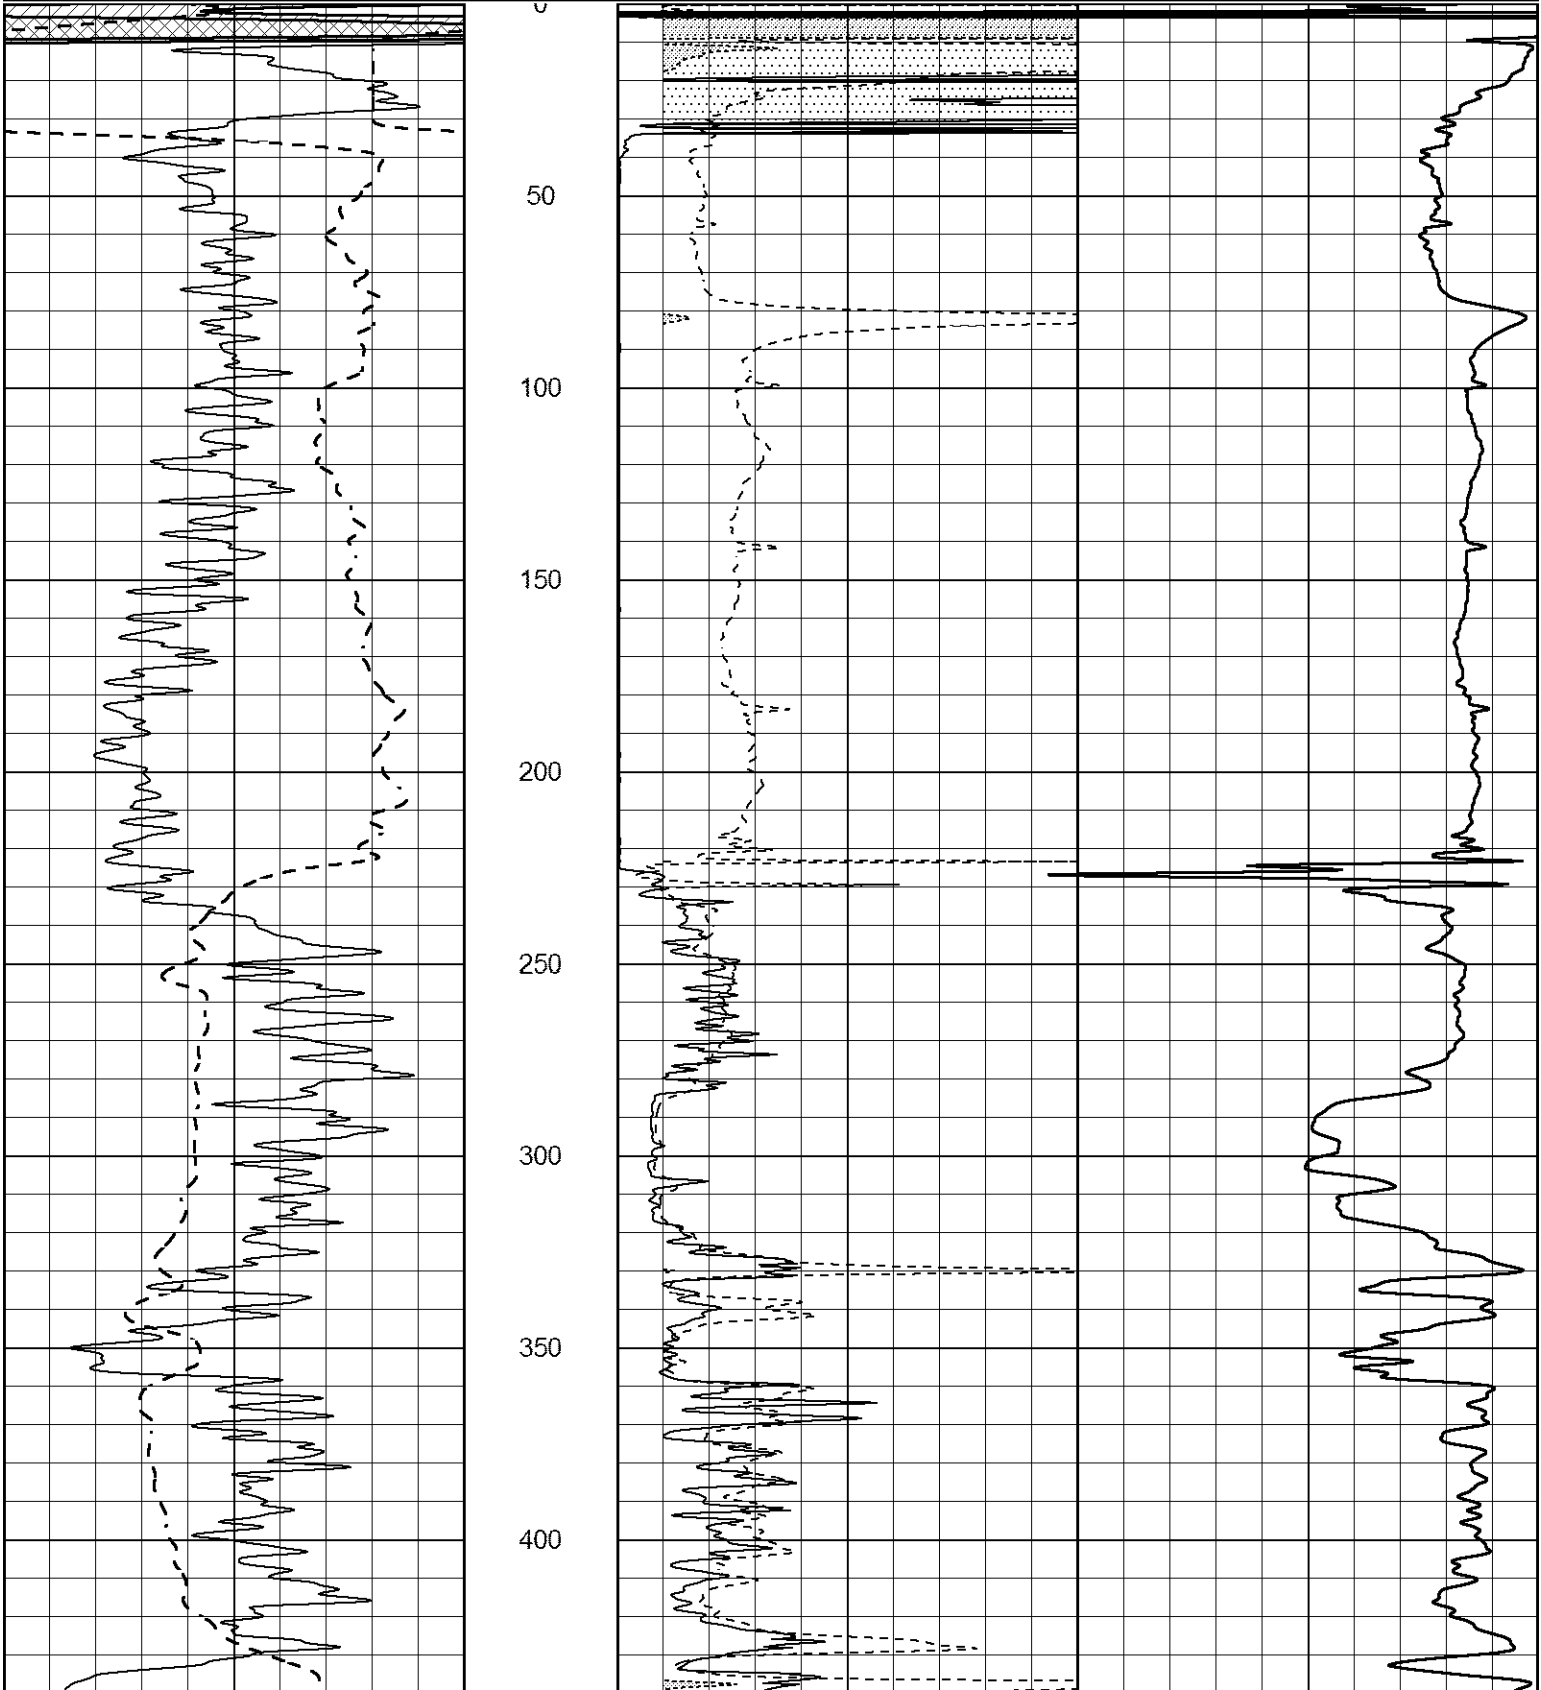

450
500
550
600
650
700
750
800
850
900
950

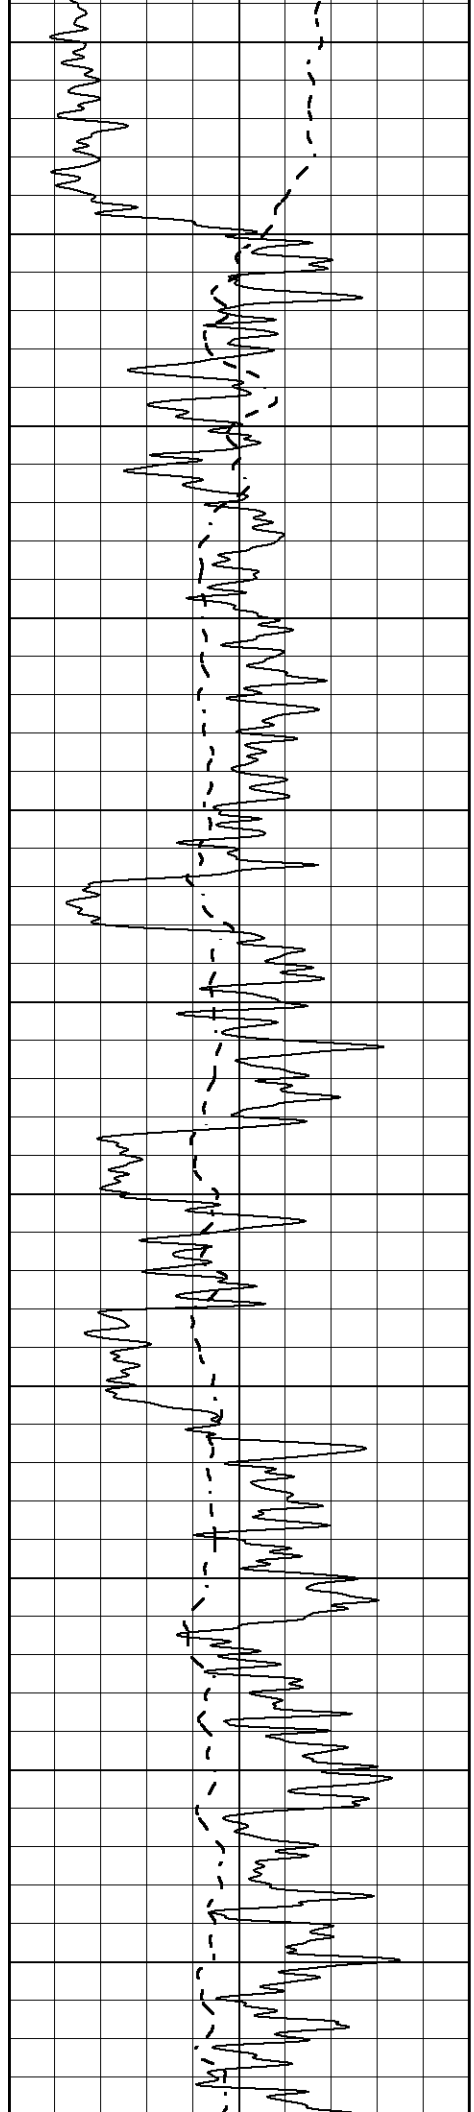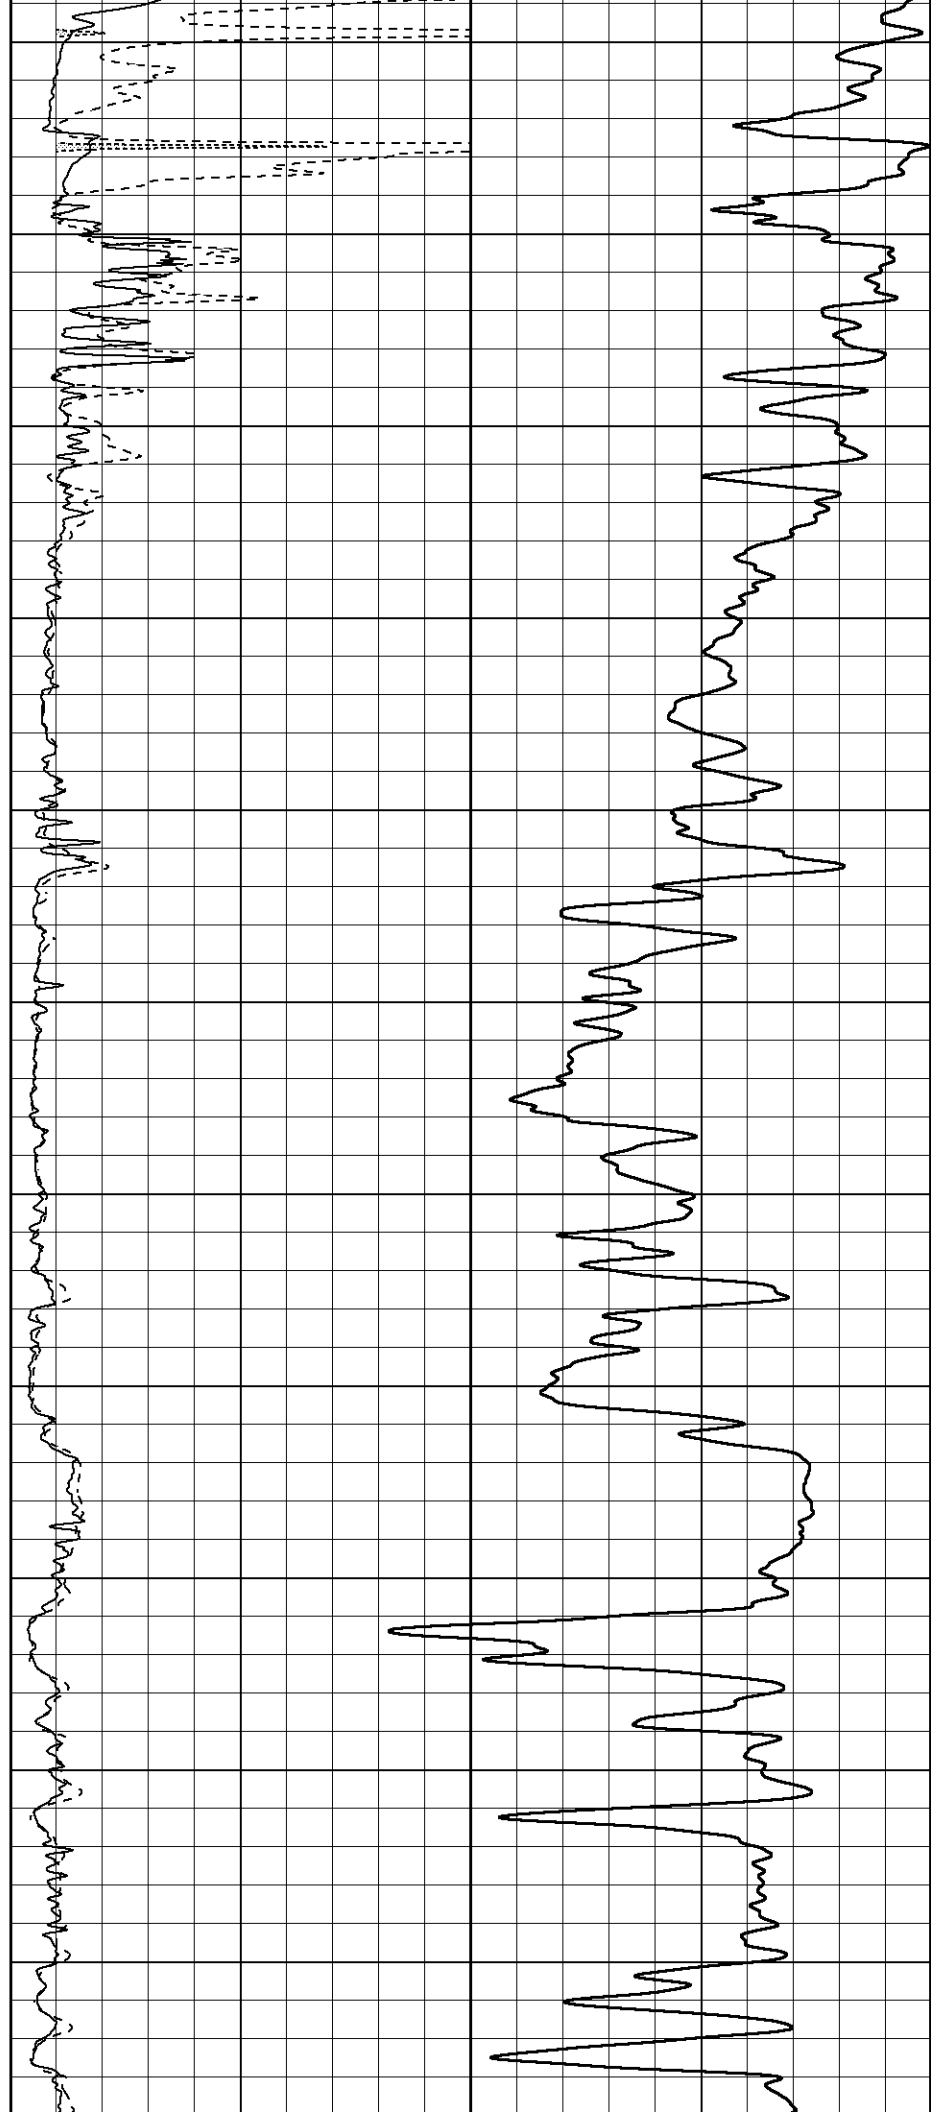

1000

1050

1100

1150

1200

1250



1300



1350


1400

1450

1500

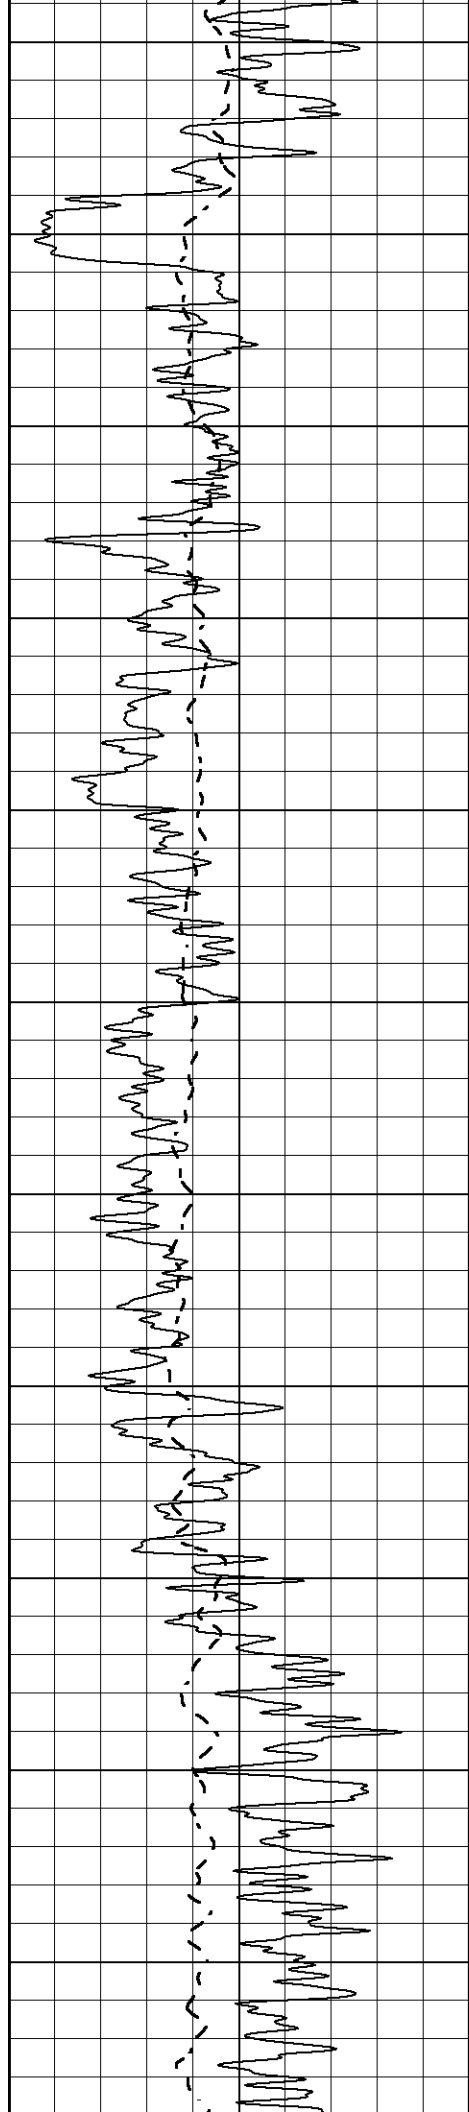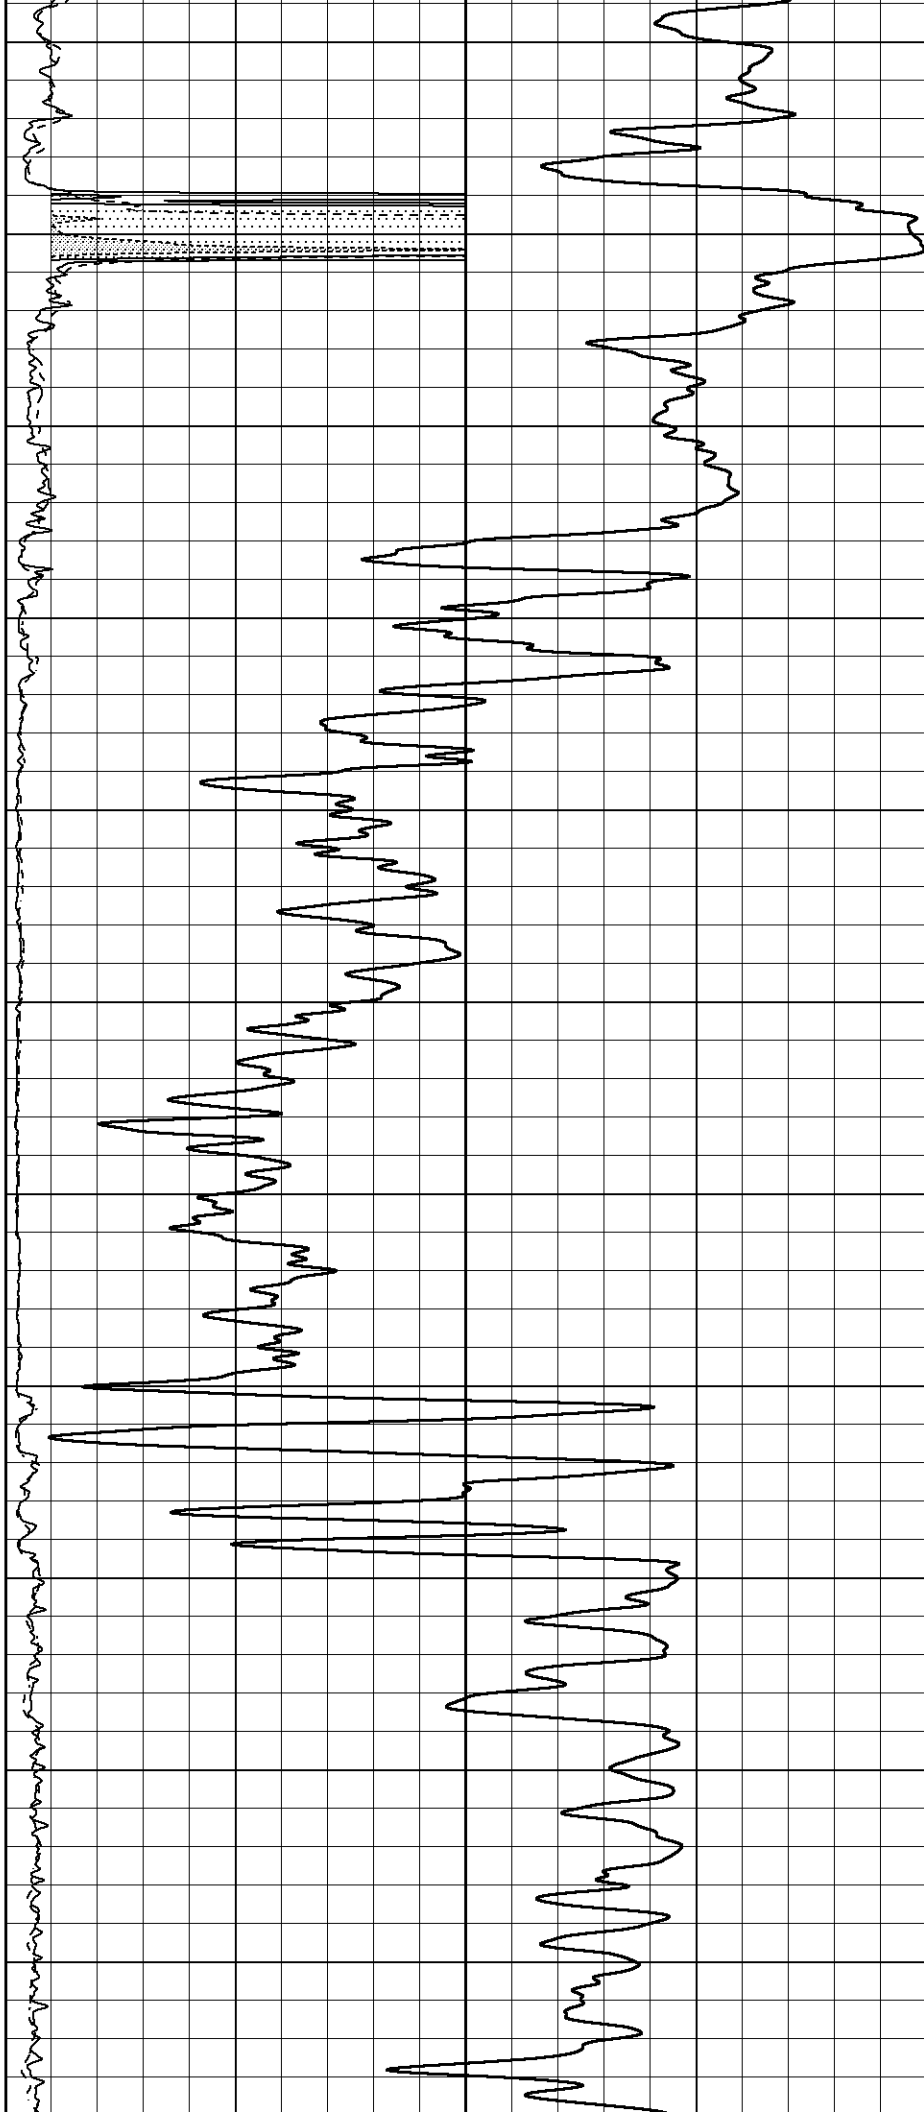

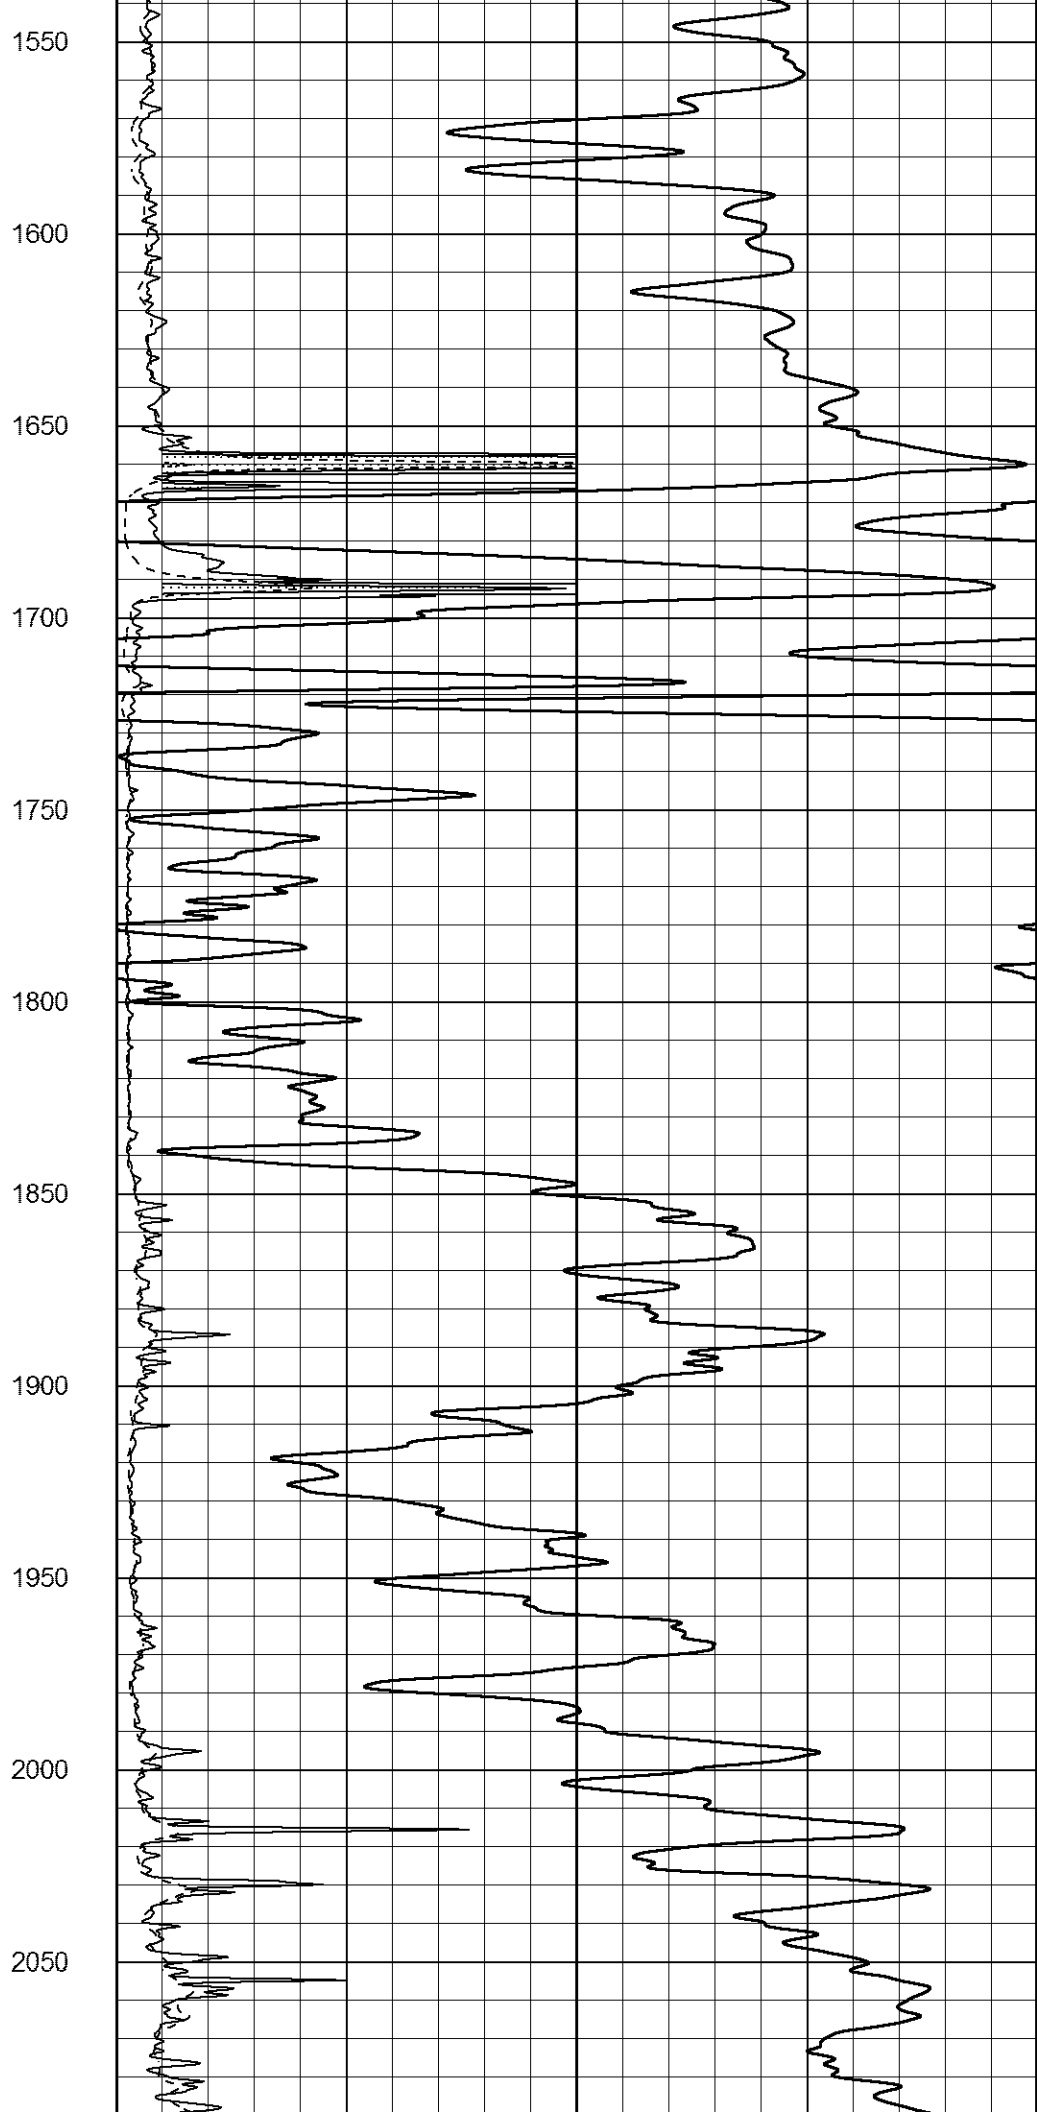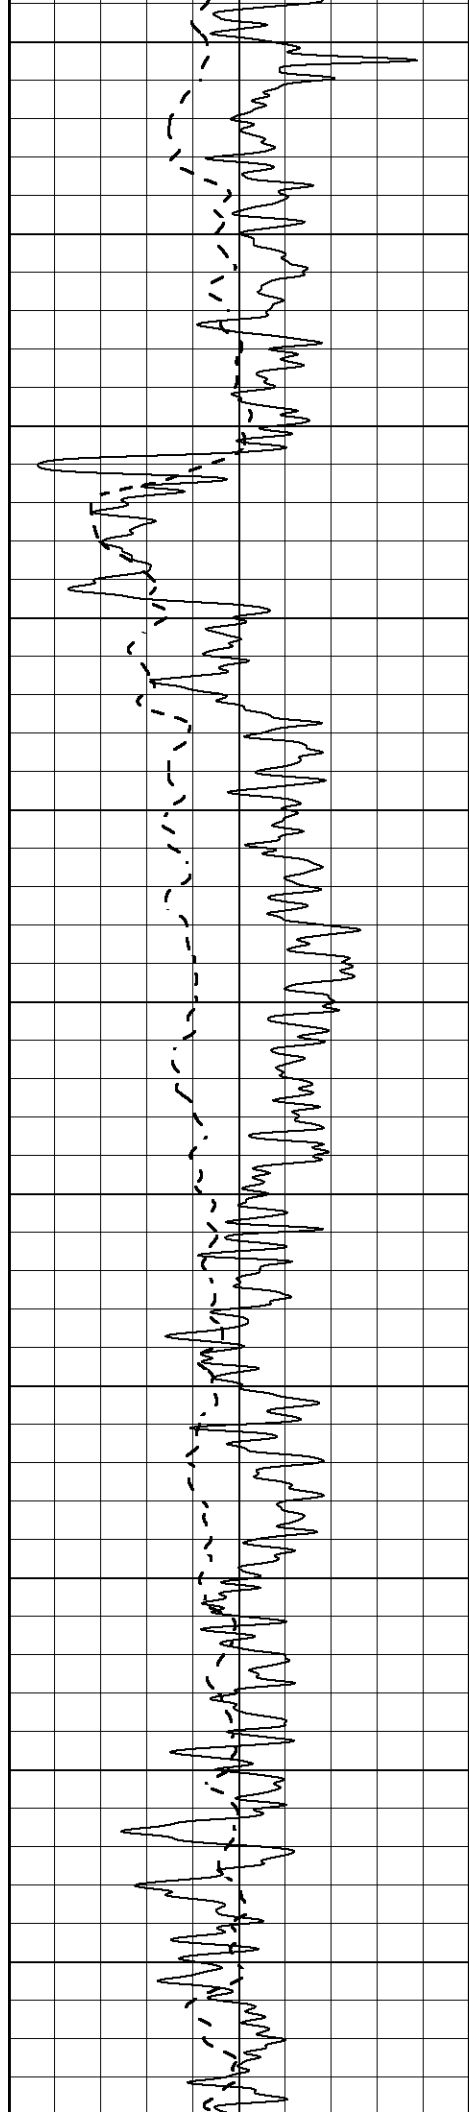

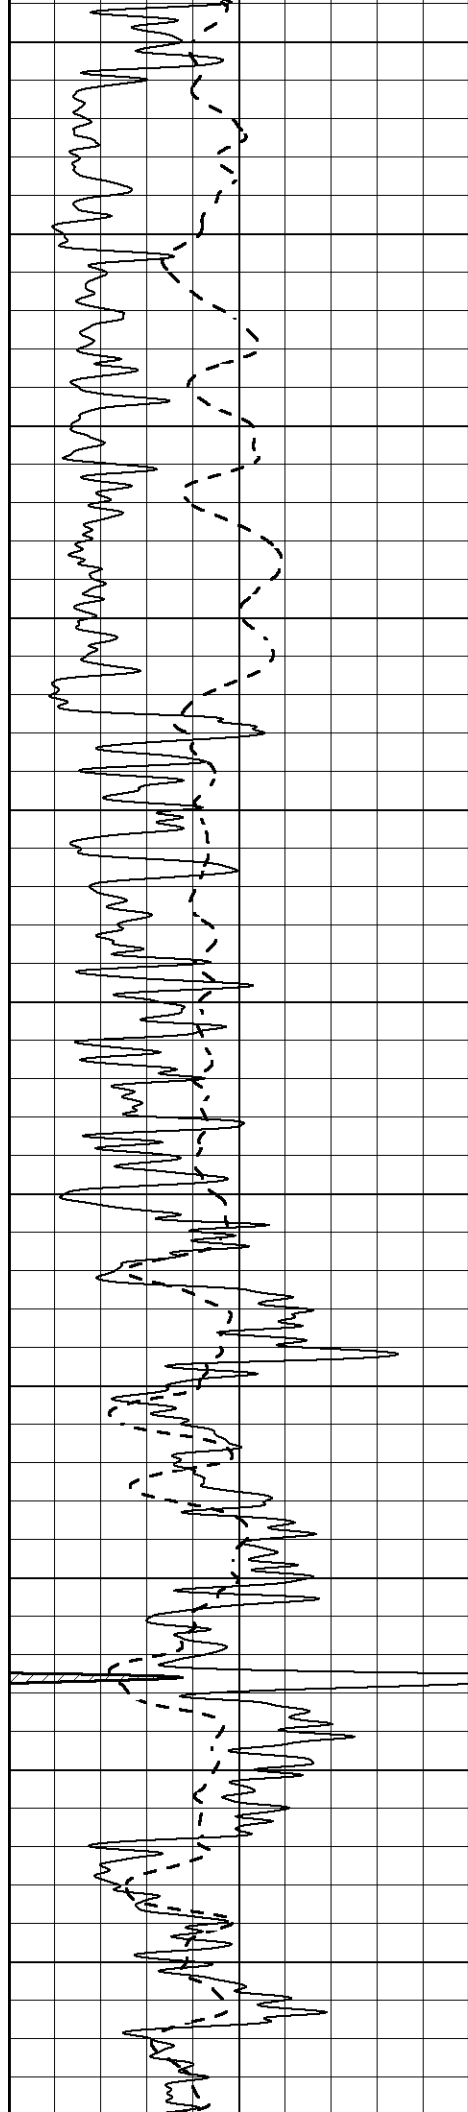

2100

2150

2200

2250

2300

2350



2400


2450

2500

2550

2600

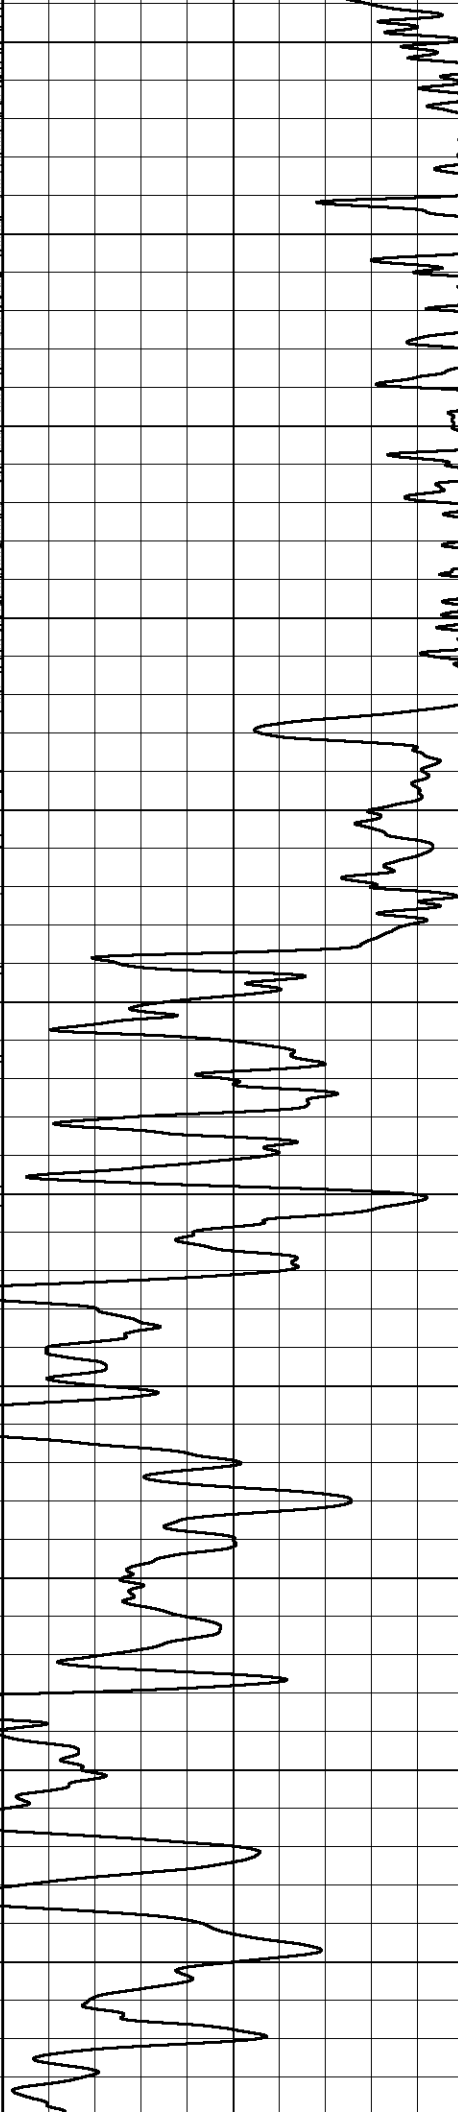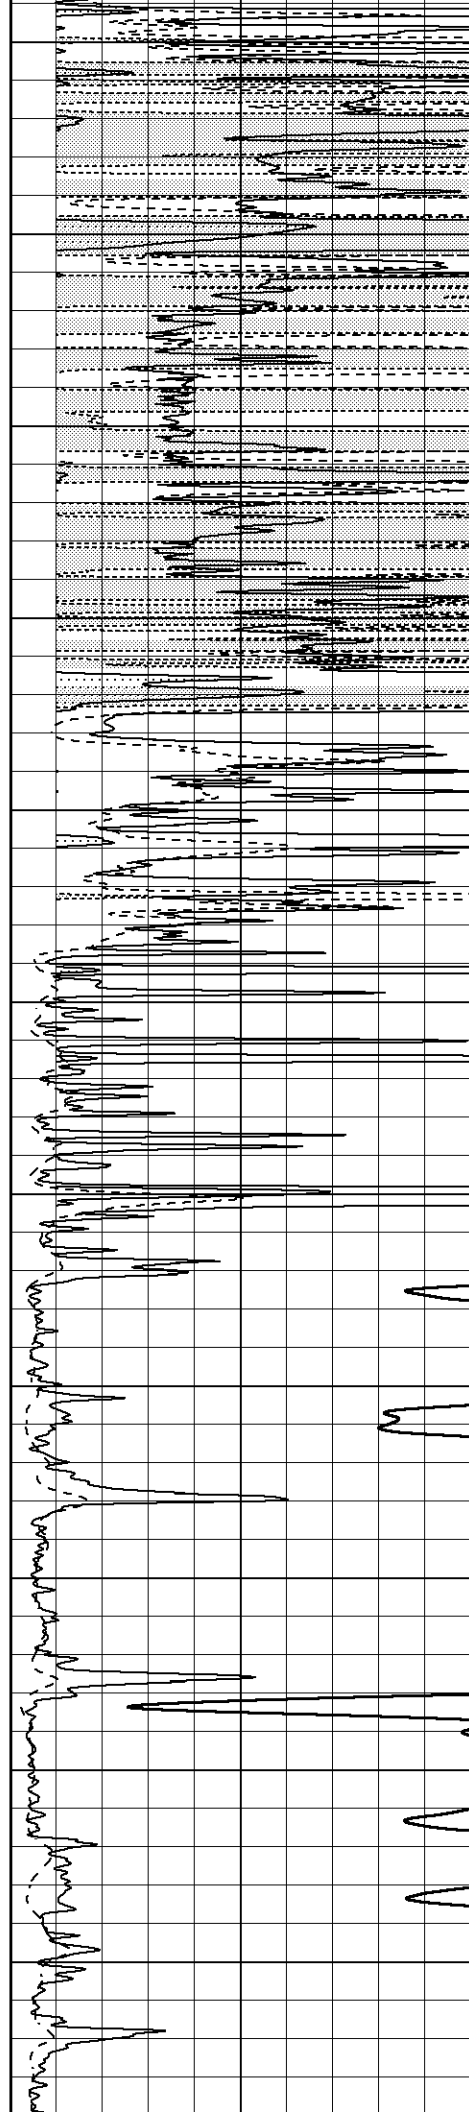

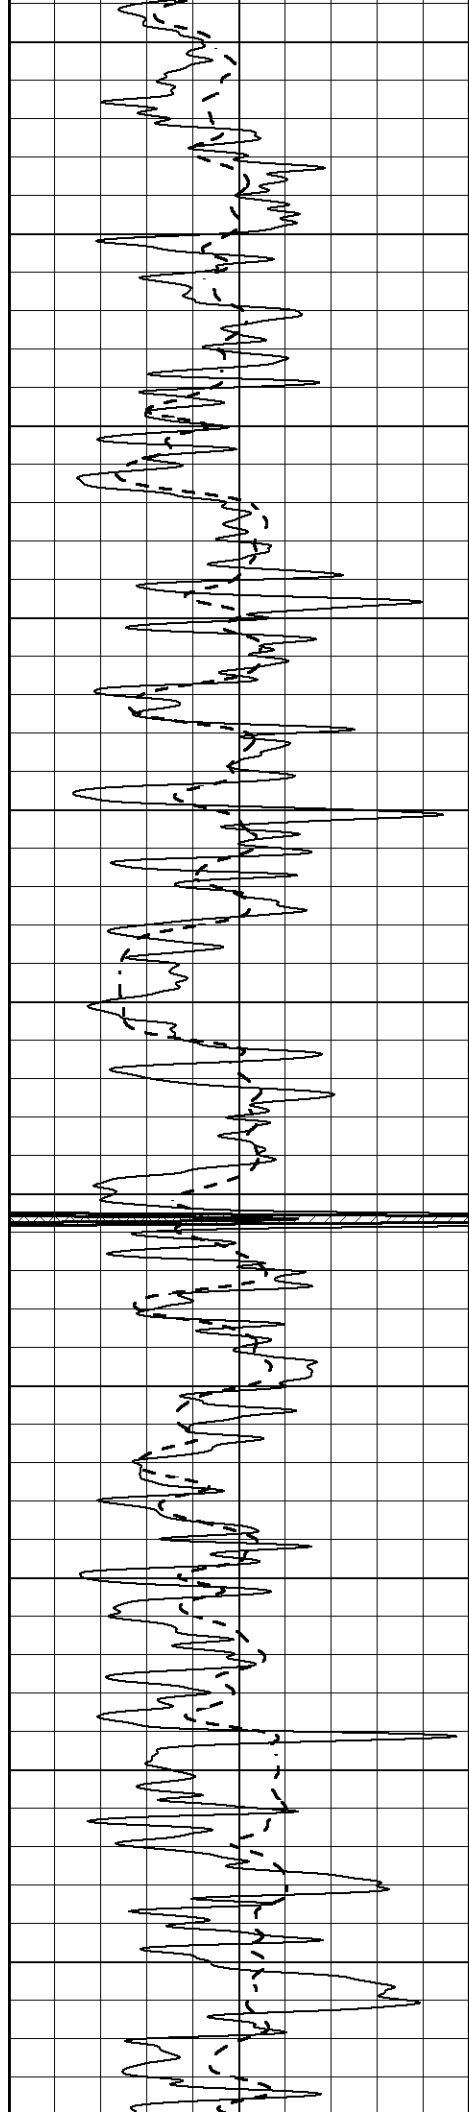

2650

2700

2750

2800

2850

2900


2950

3000

3050

3100

3150

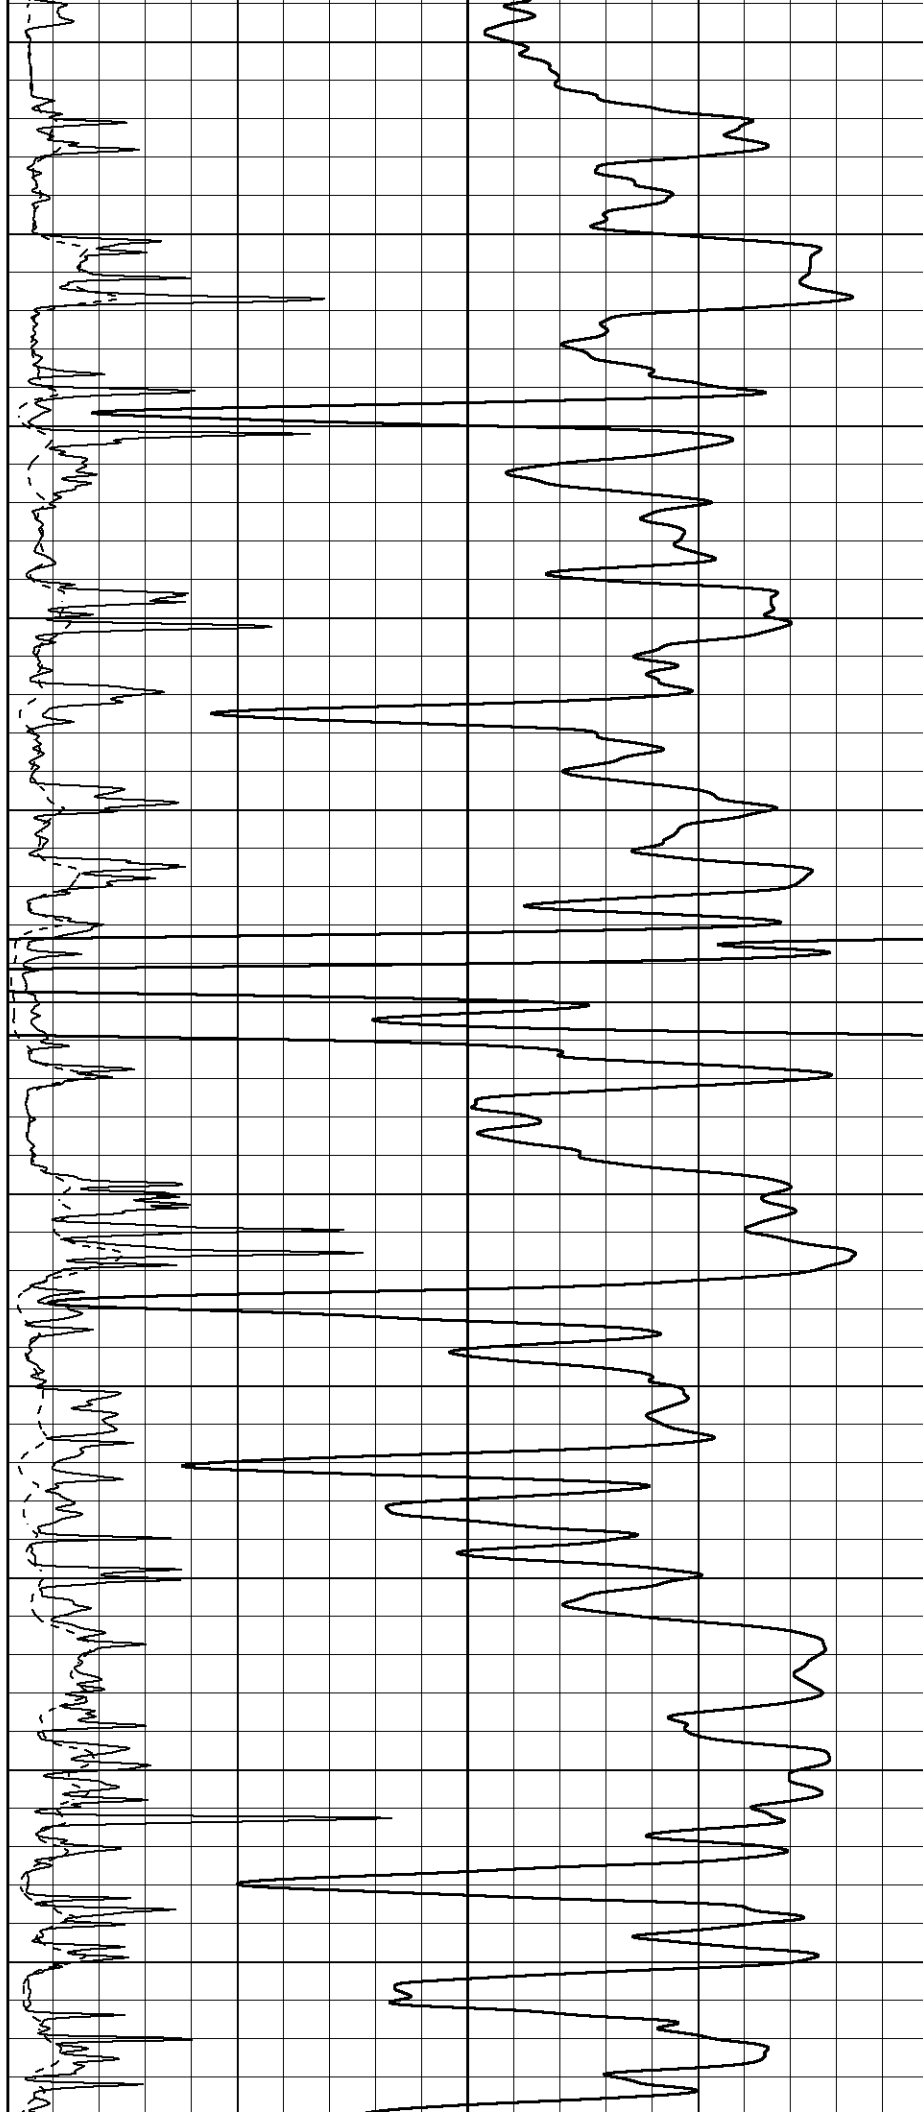

3200

3250

3300

3350

3400

3450



3500


3550

3600

3650

3700

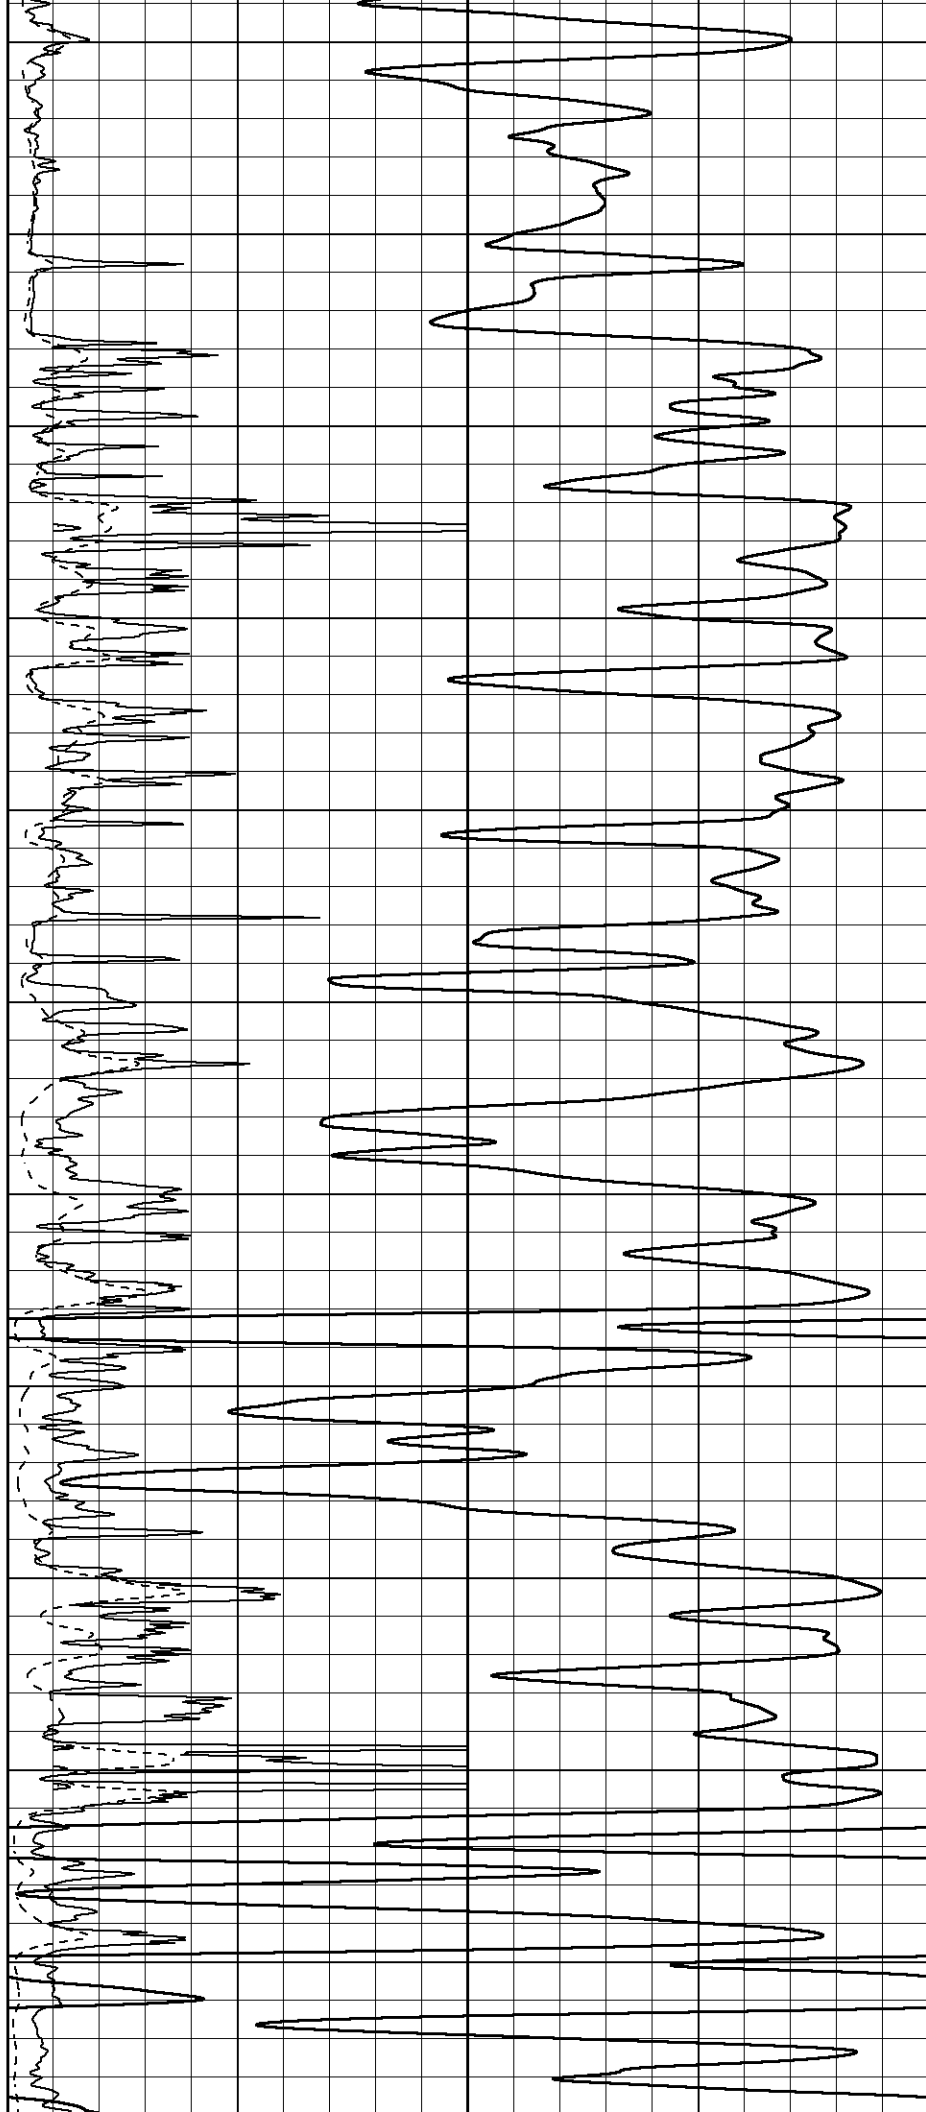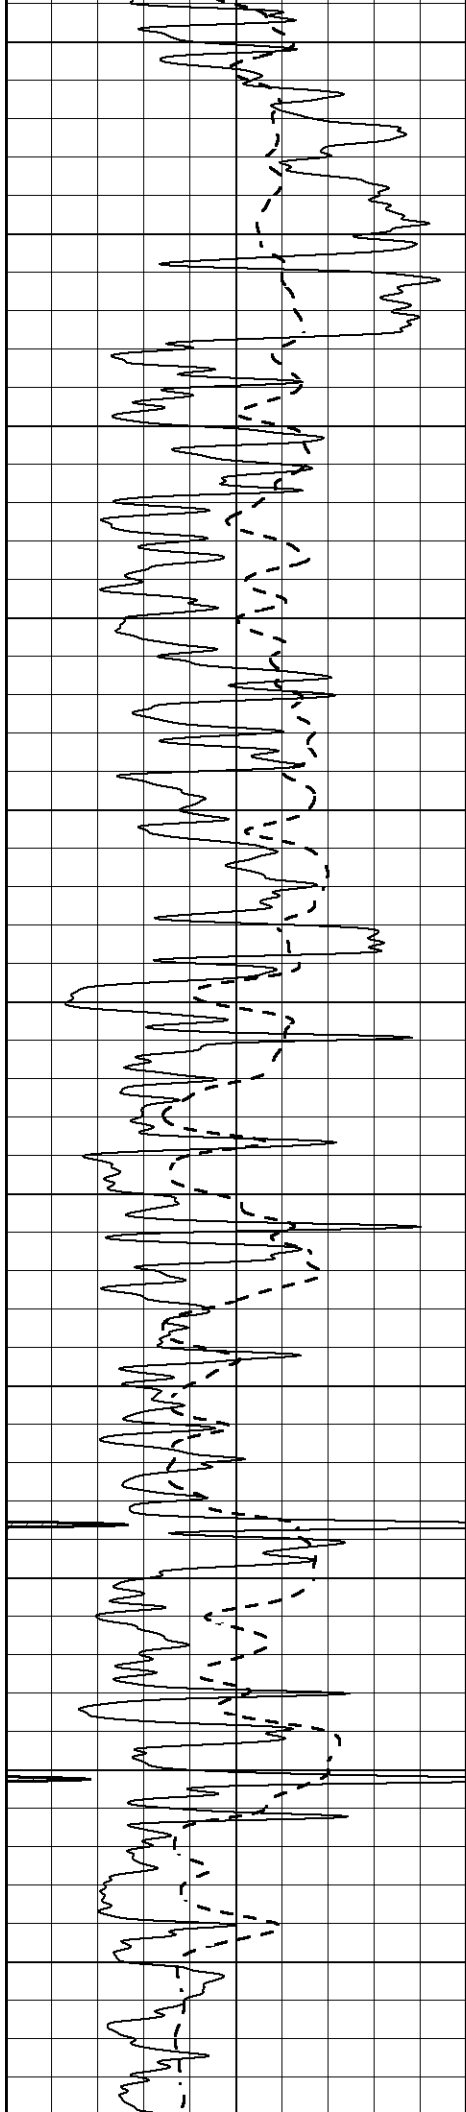

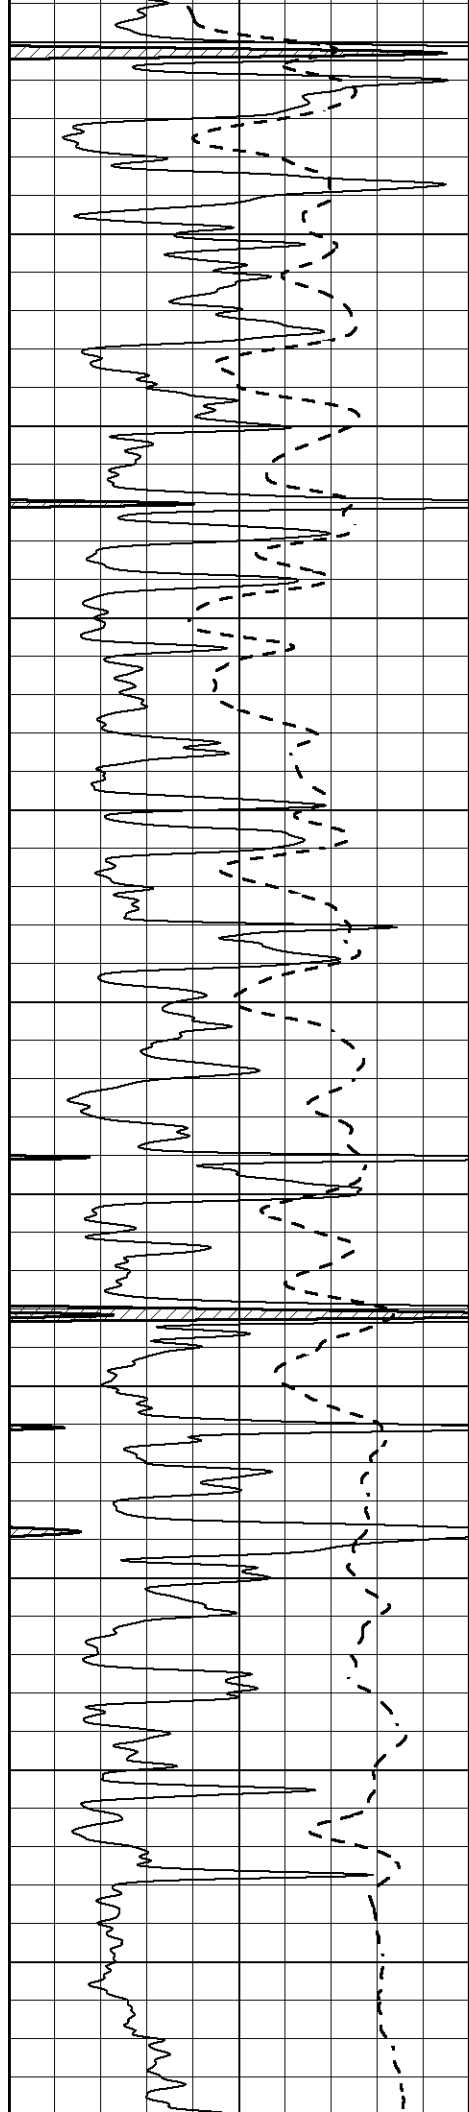

3750

3800

3850

3900

3950

4000



4050



4100

4150

4200

4250

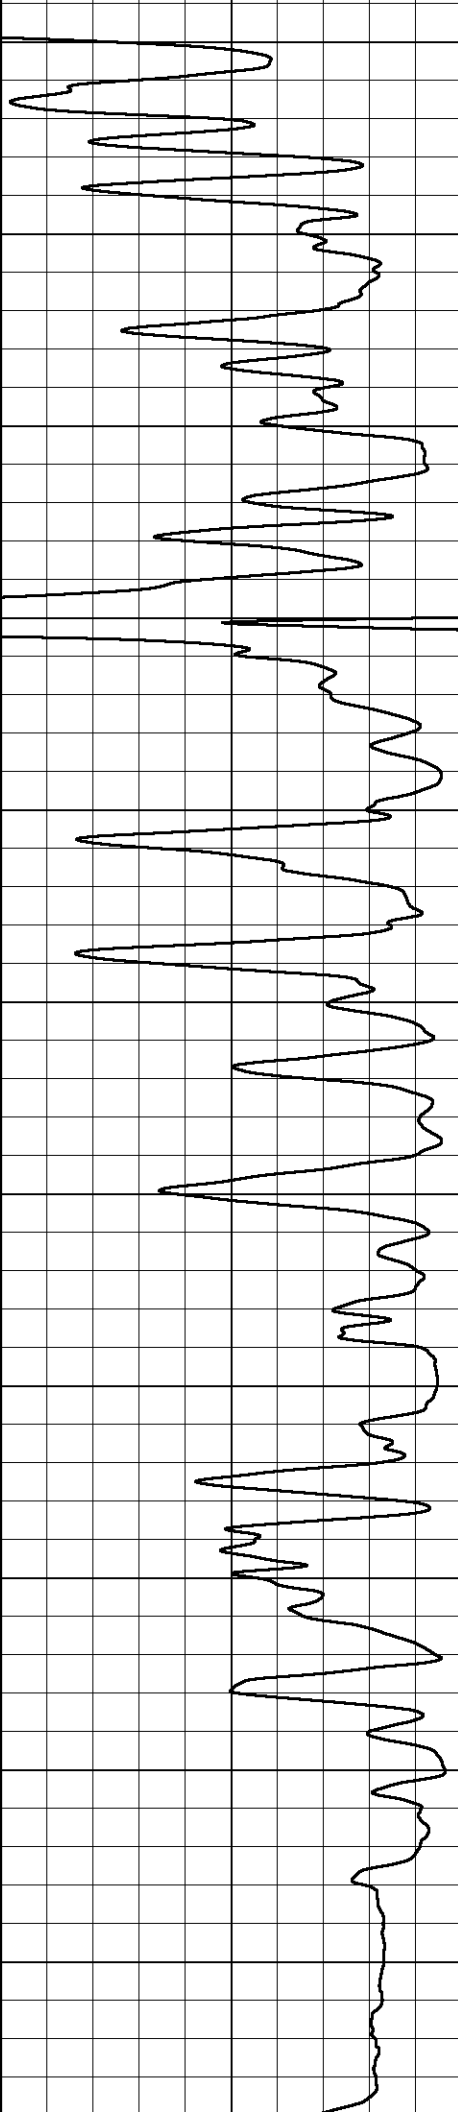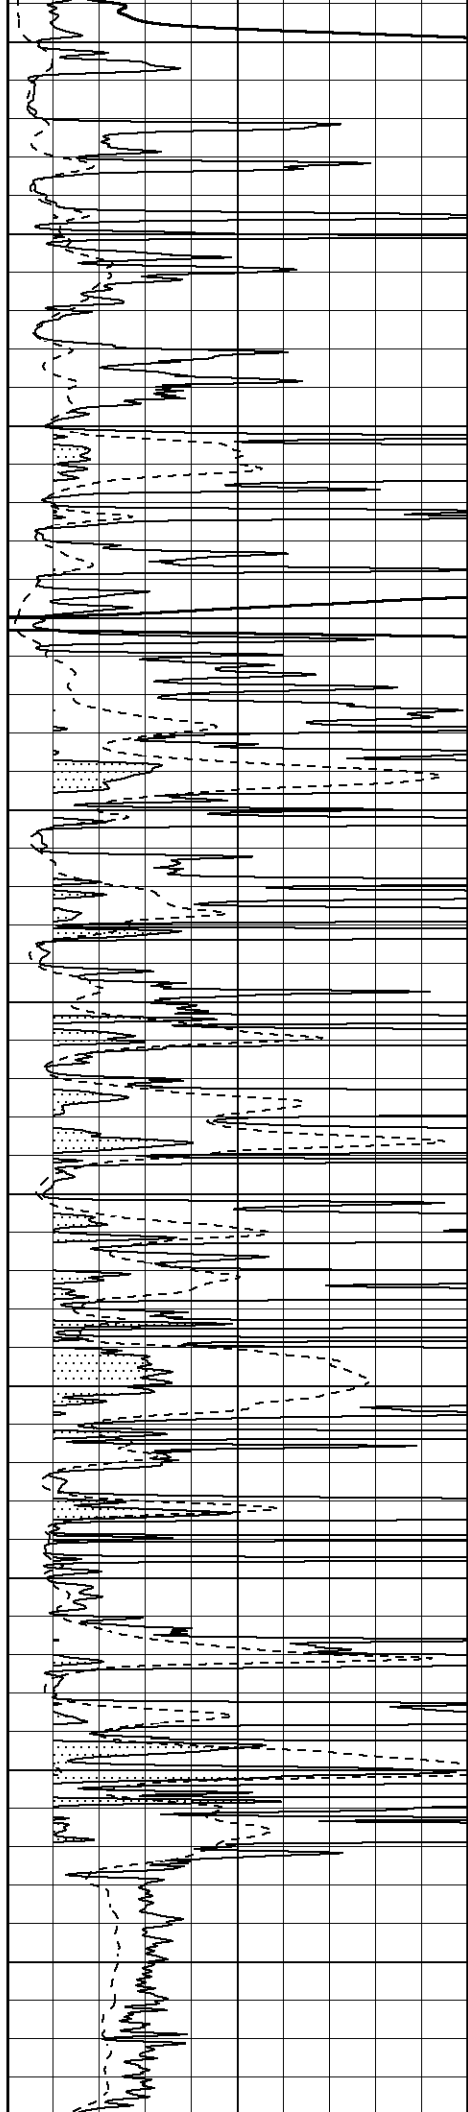


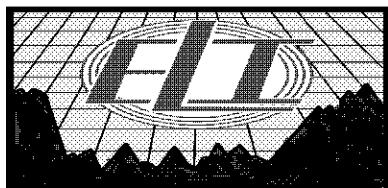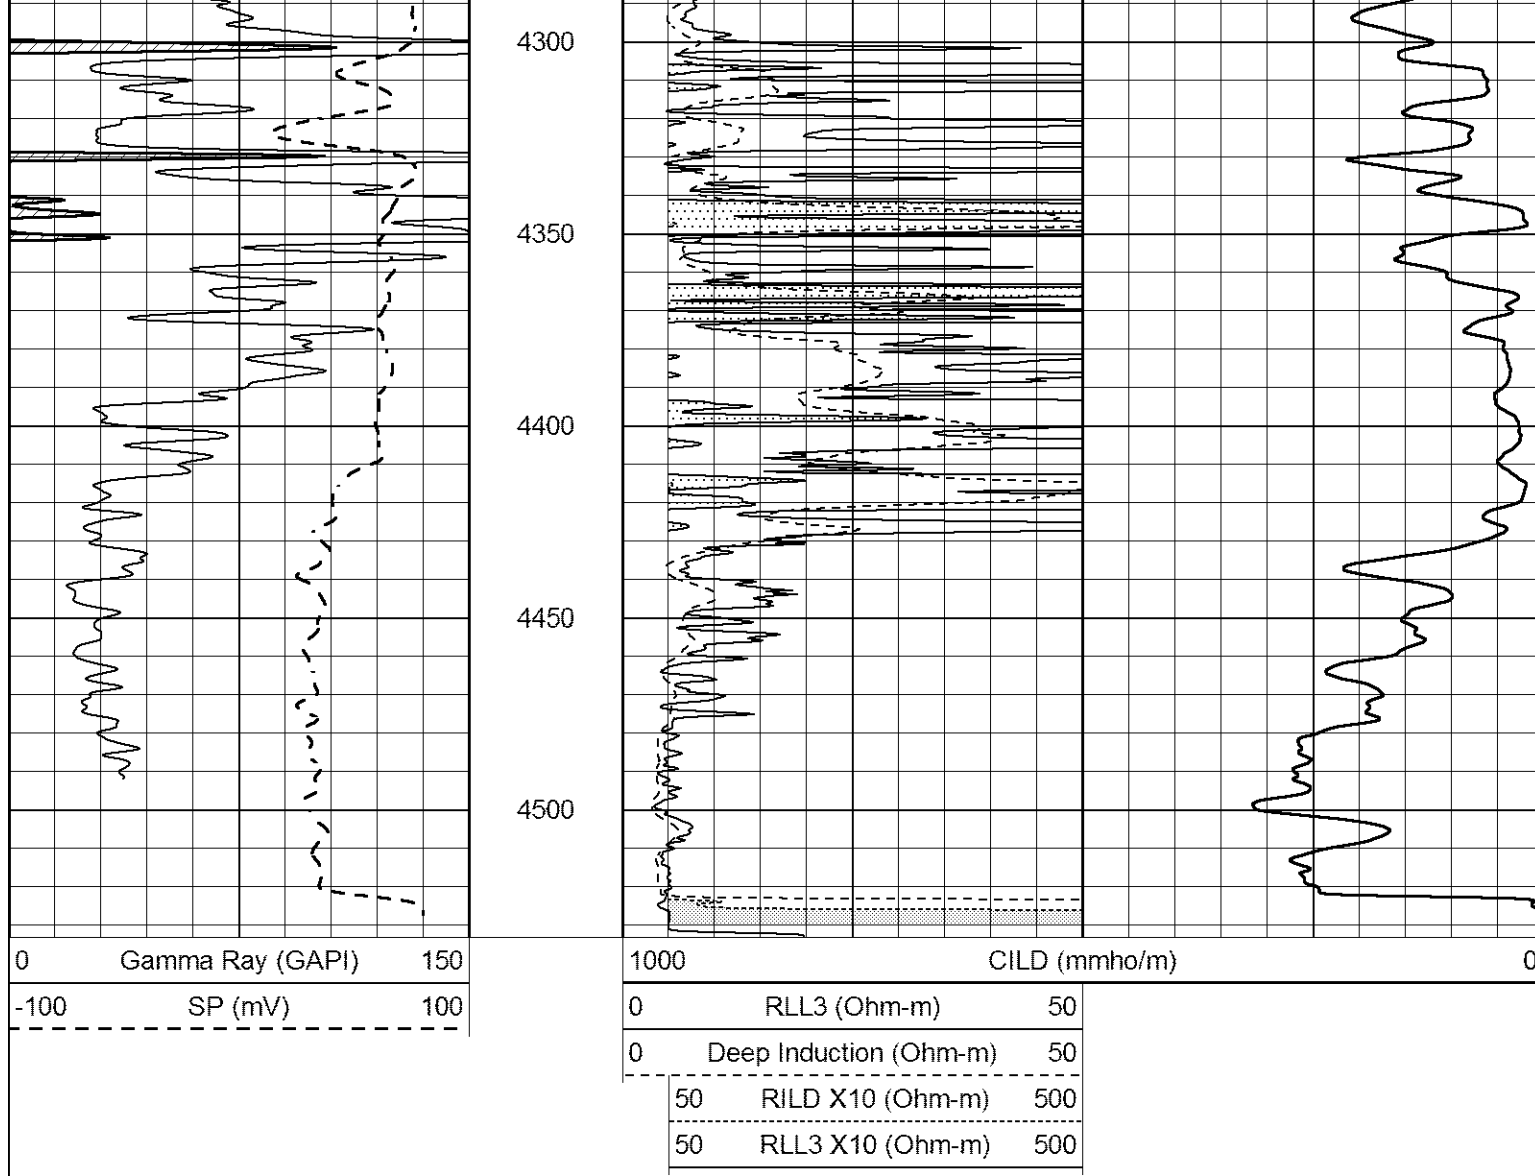


ANHYDRITE



Database File 7239ddn.db
 Dataset Pathname pass3A
 Presentation Format _dil
 Dataset Creation Wed Oct 26 15:09:30 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	0.2	SHALLOW GUARD (Ohm-m)	2000
-100	SP (mV)	100	0.2	MEDIUM INDUCTION (Ohm-m)	2000
-250	Rxo/Rt	50	0.2	DEEP INDUCTION (Ohm-m)	2000

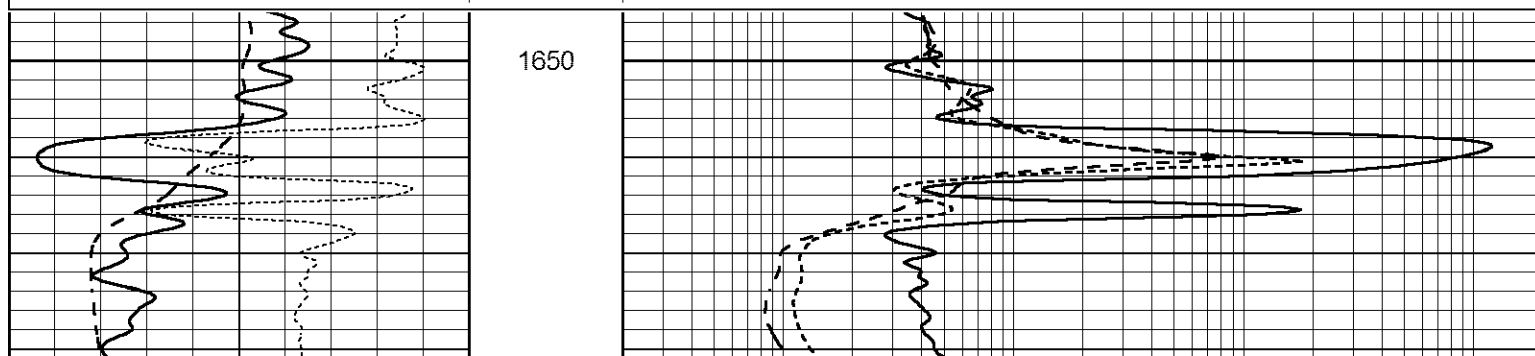

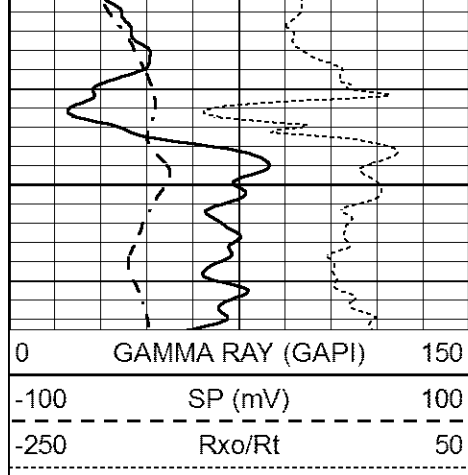


1700

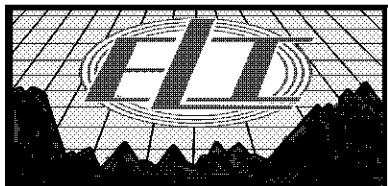
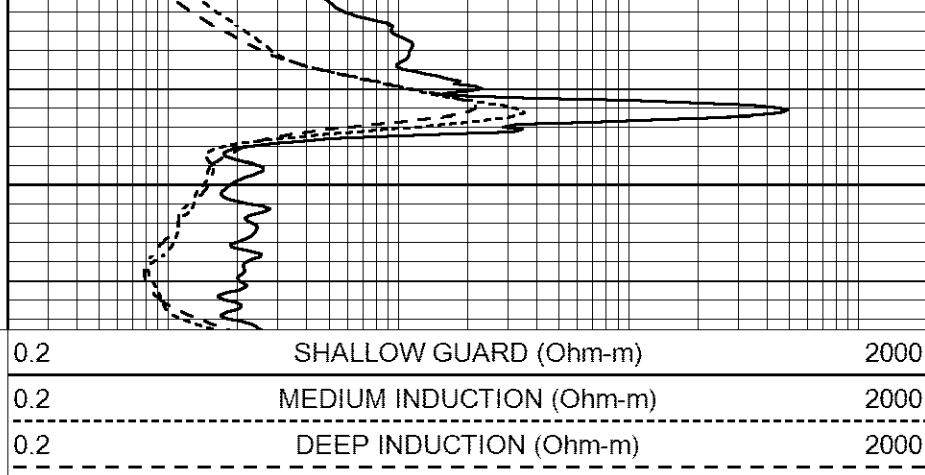


MAIN SECTION


Database File 7239ddn.db
 Dataset Pathname pass3D
 Presentation Format _dil
 Dataset Creation Wed Oct 26 14:57:20 2022
 Charted by Depth in Feet scaled 1:240



1600

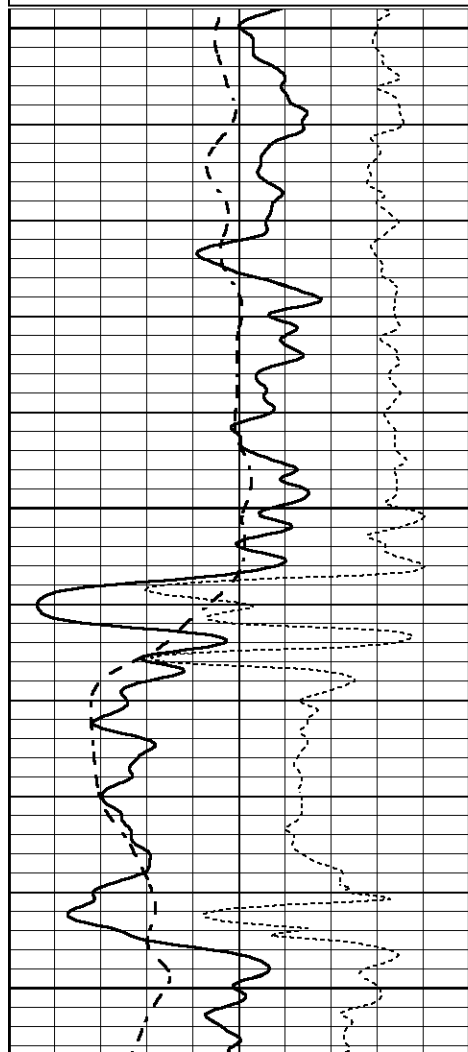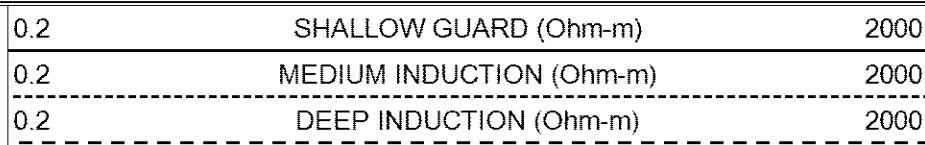

1650

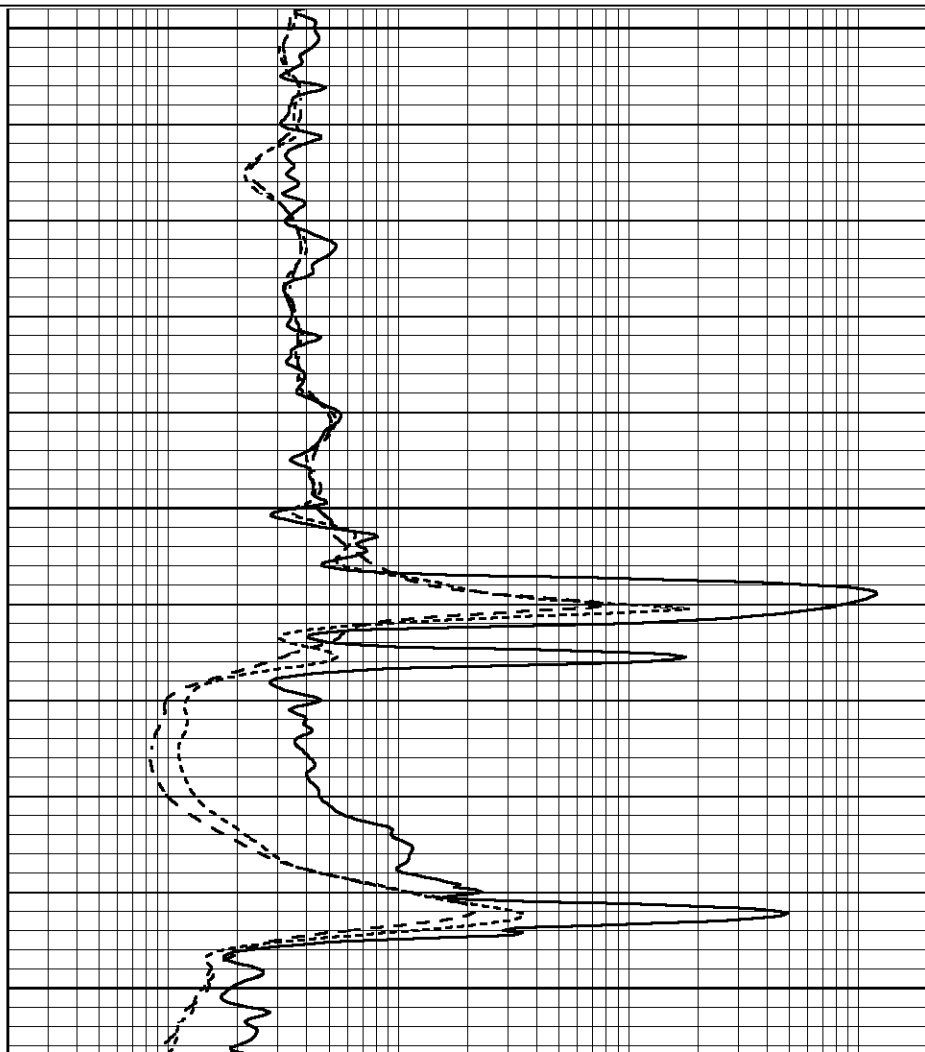

1700





1750

1800

1850

1900

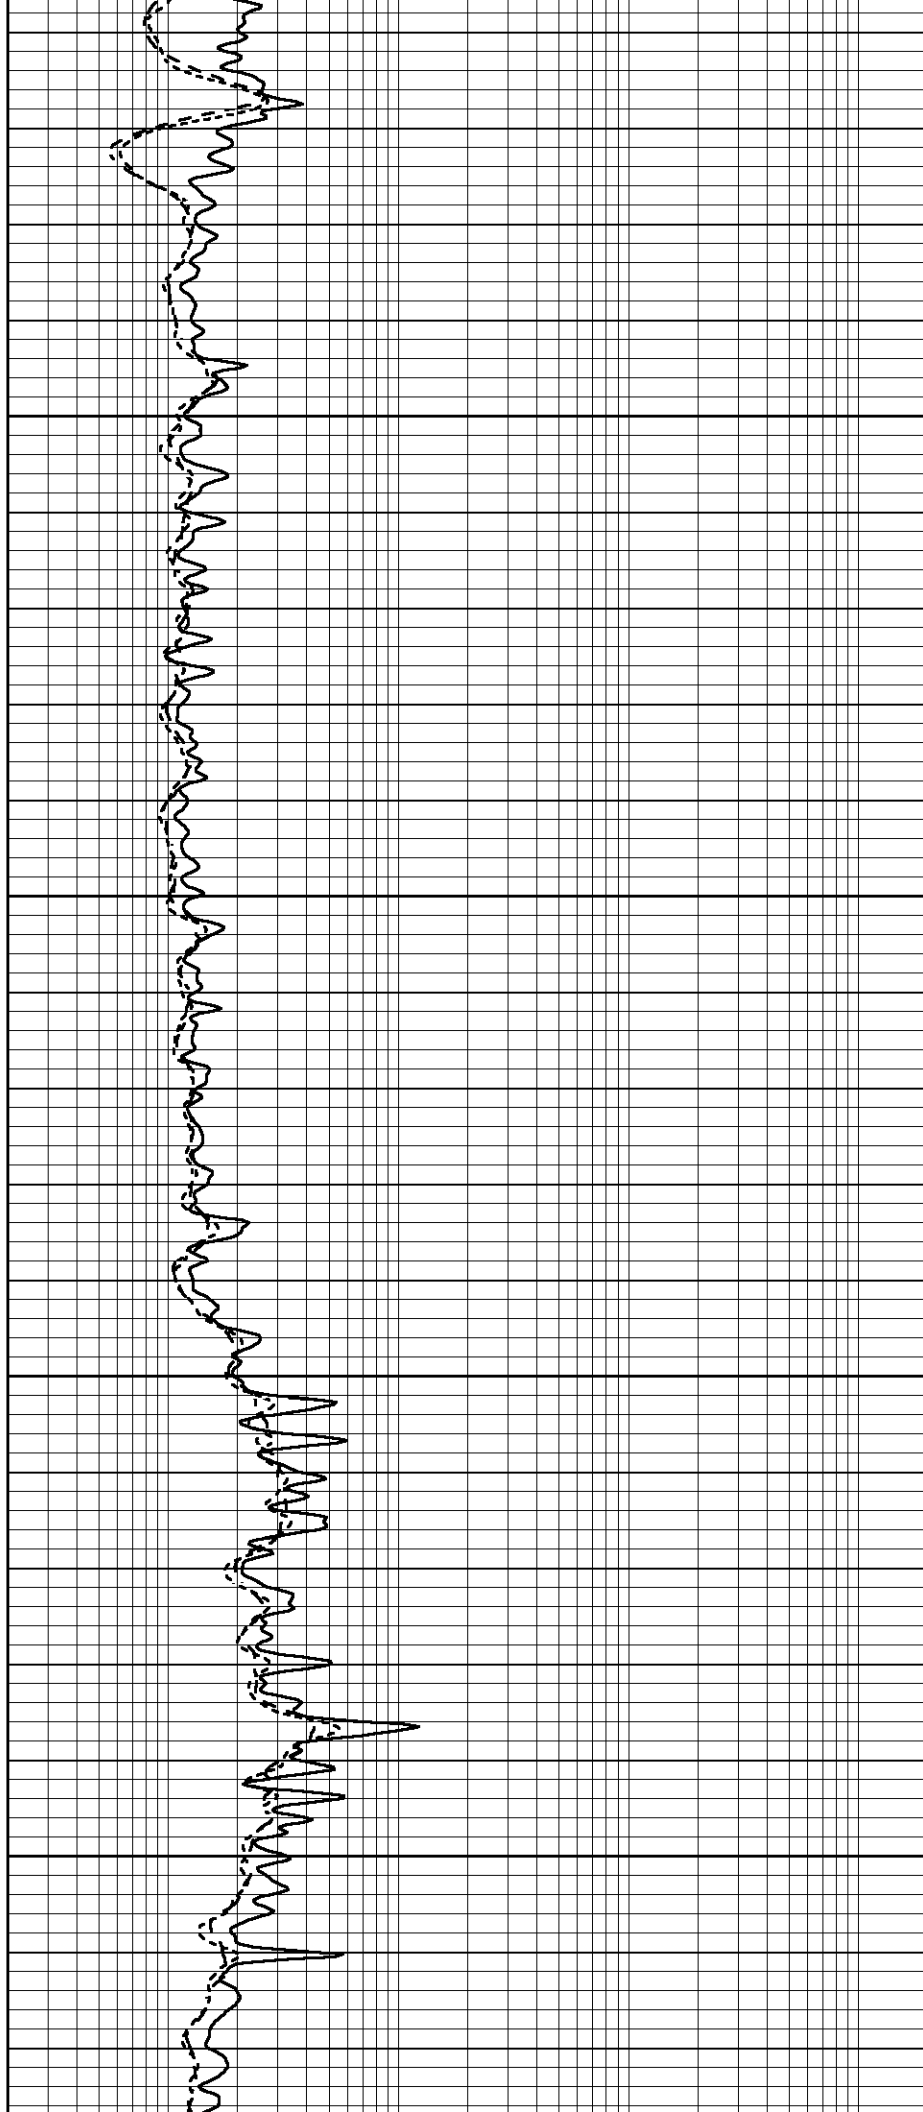

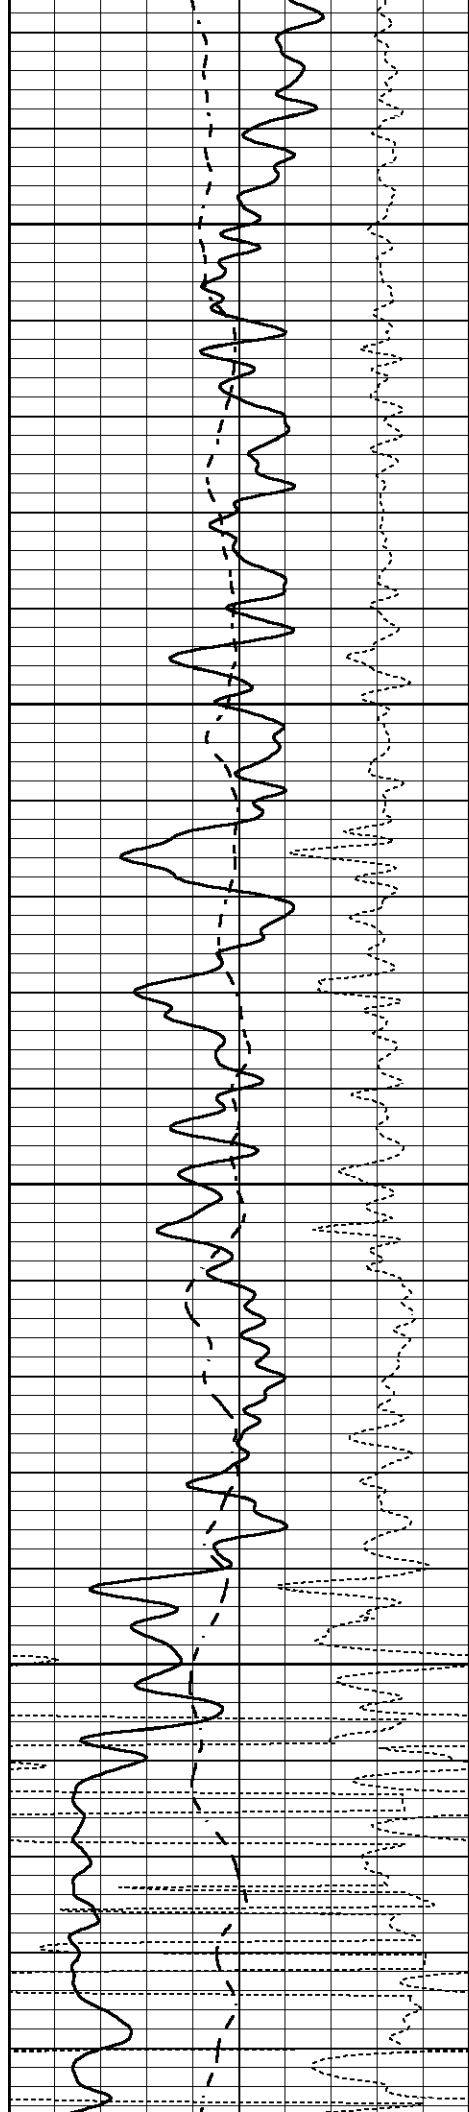



1950

2000

2050

2100

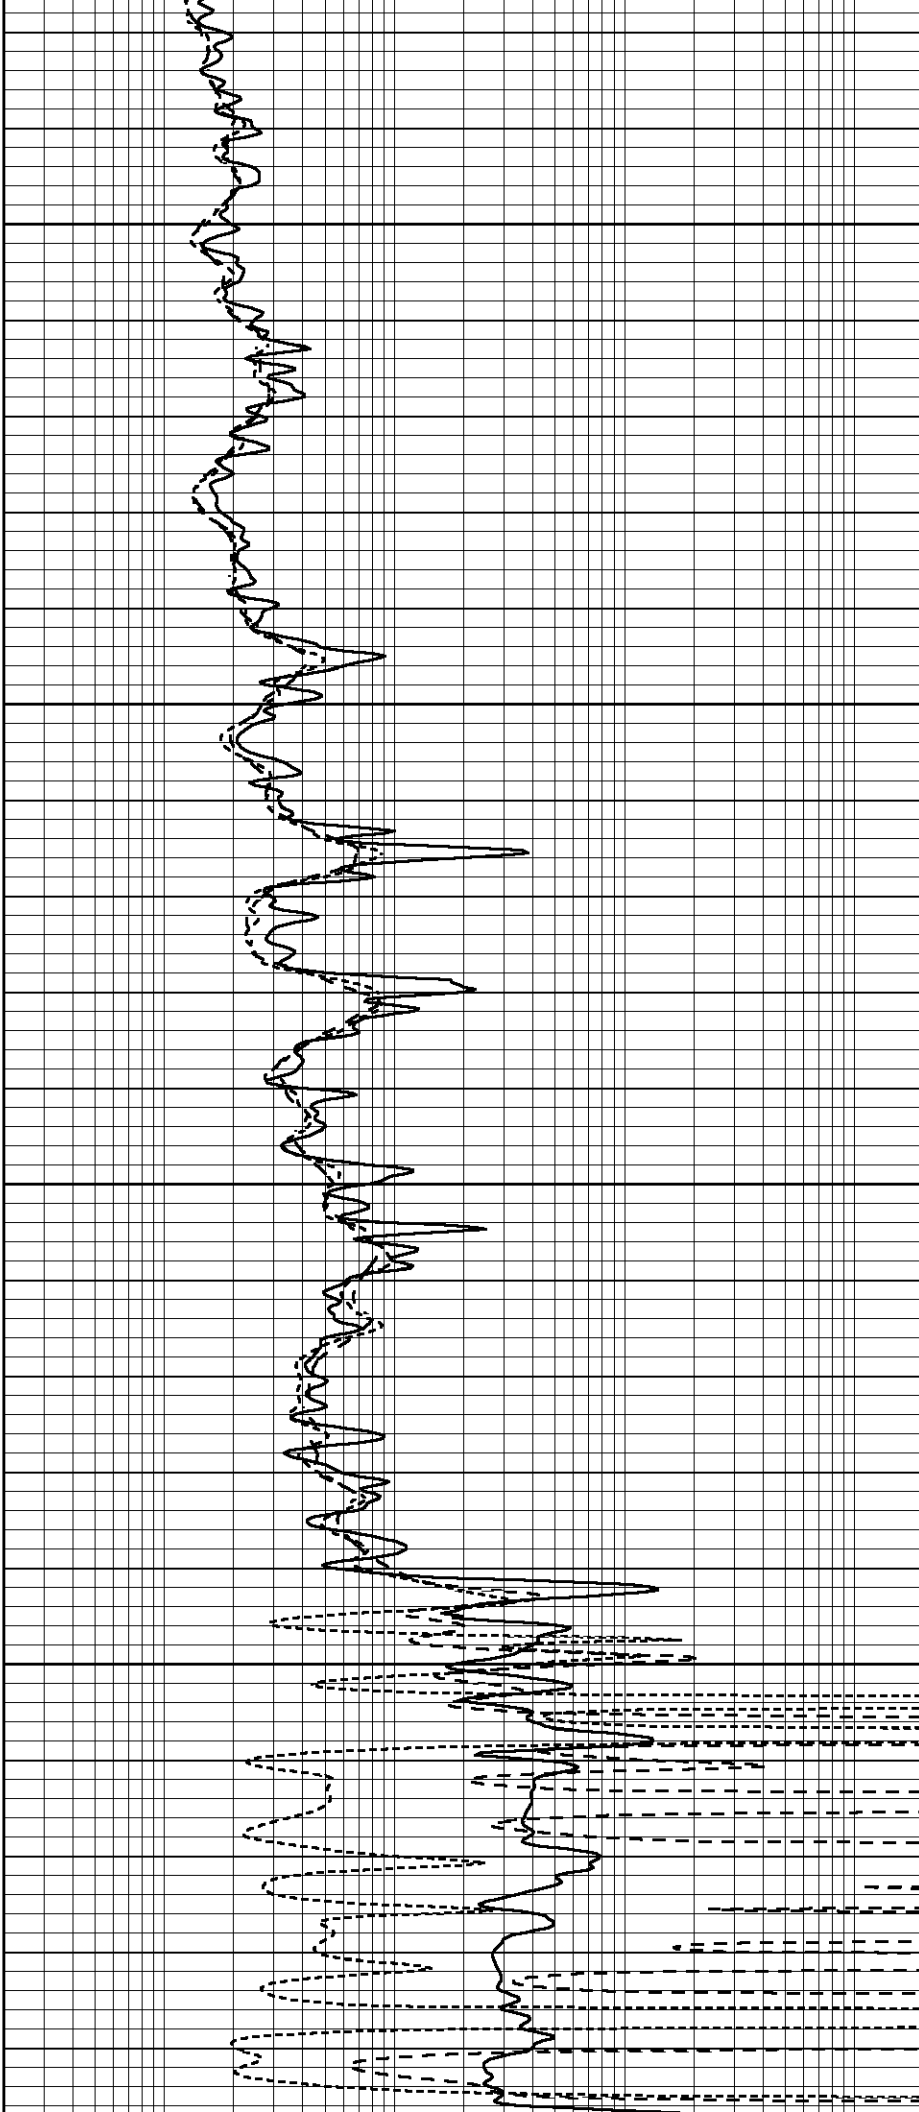

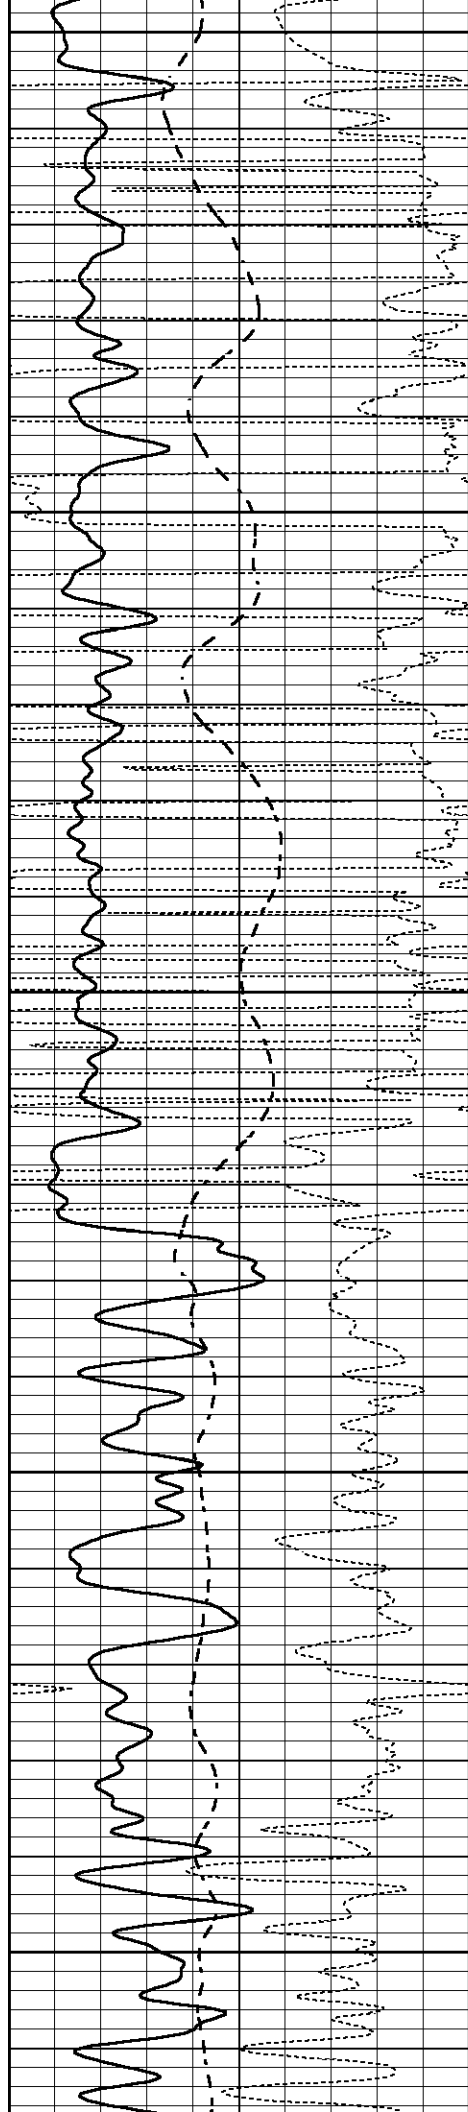


2150


2200

2250

2300

2350

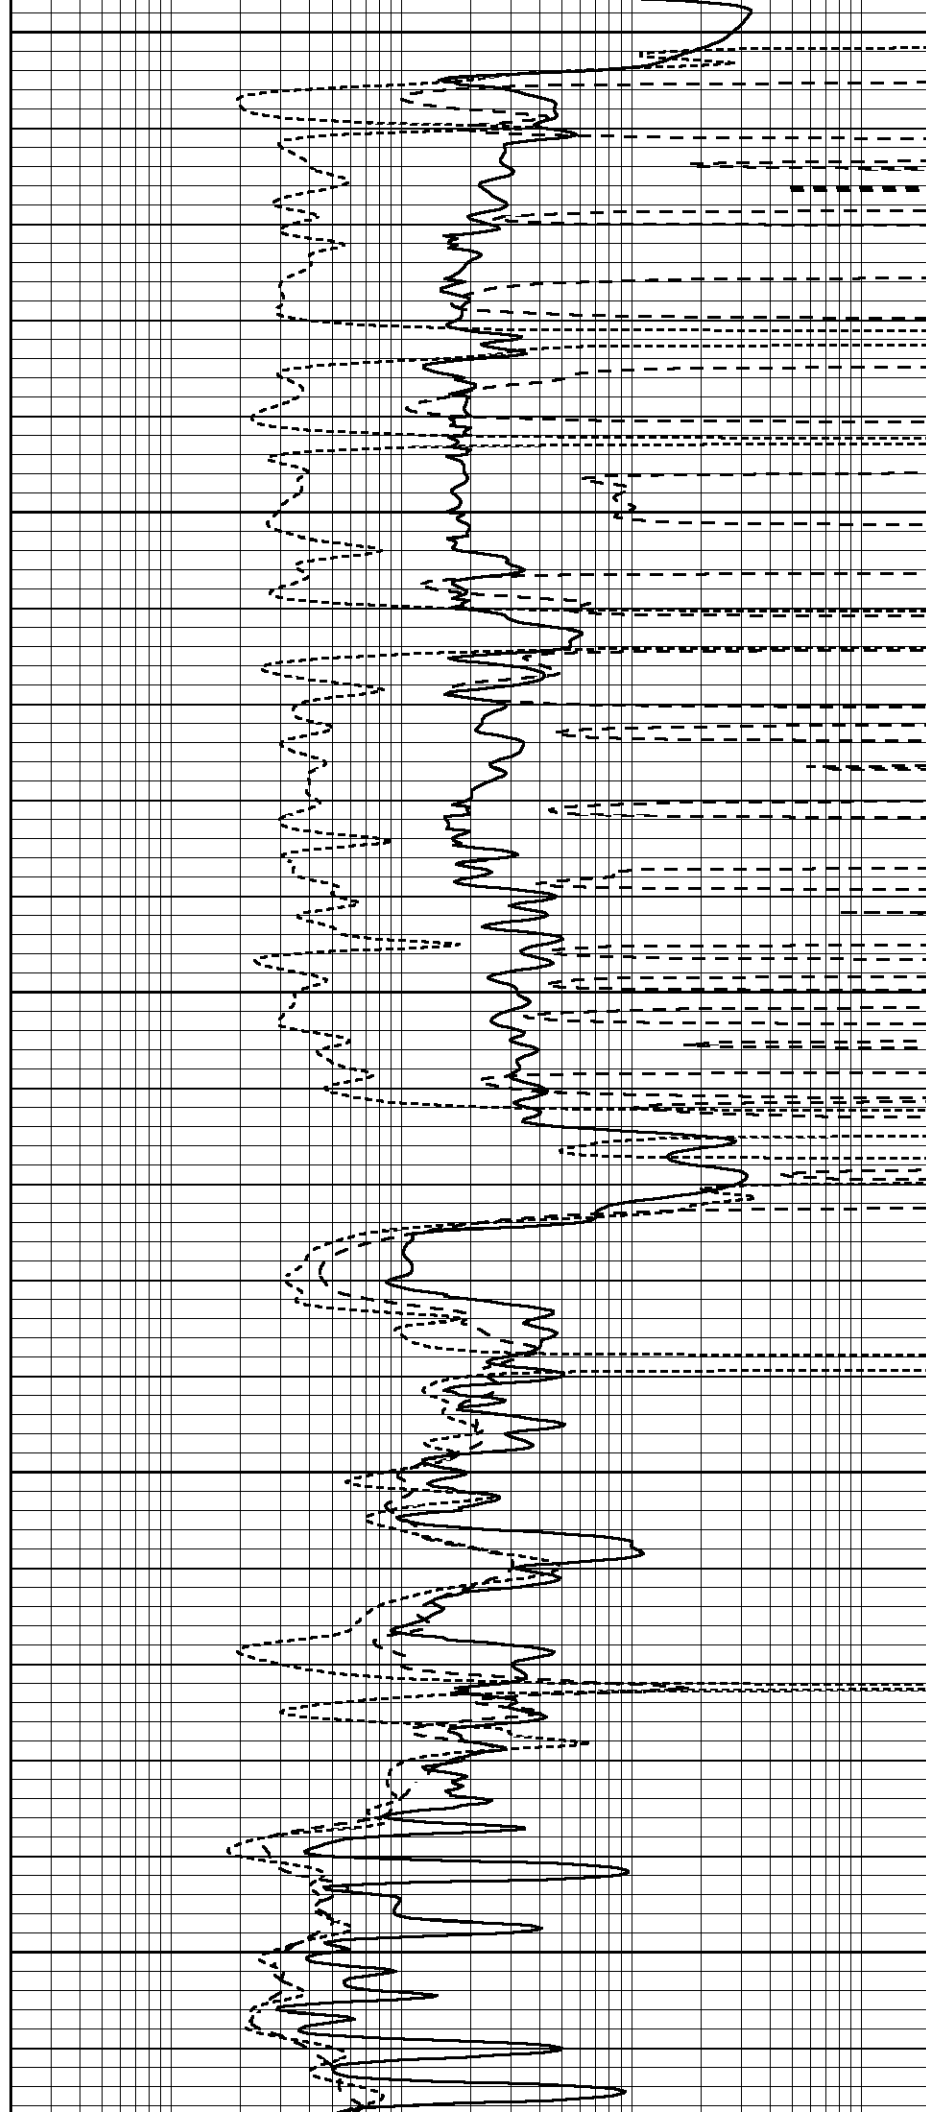

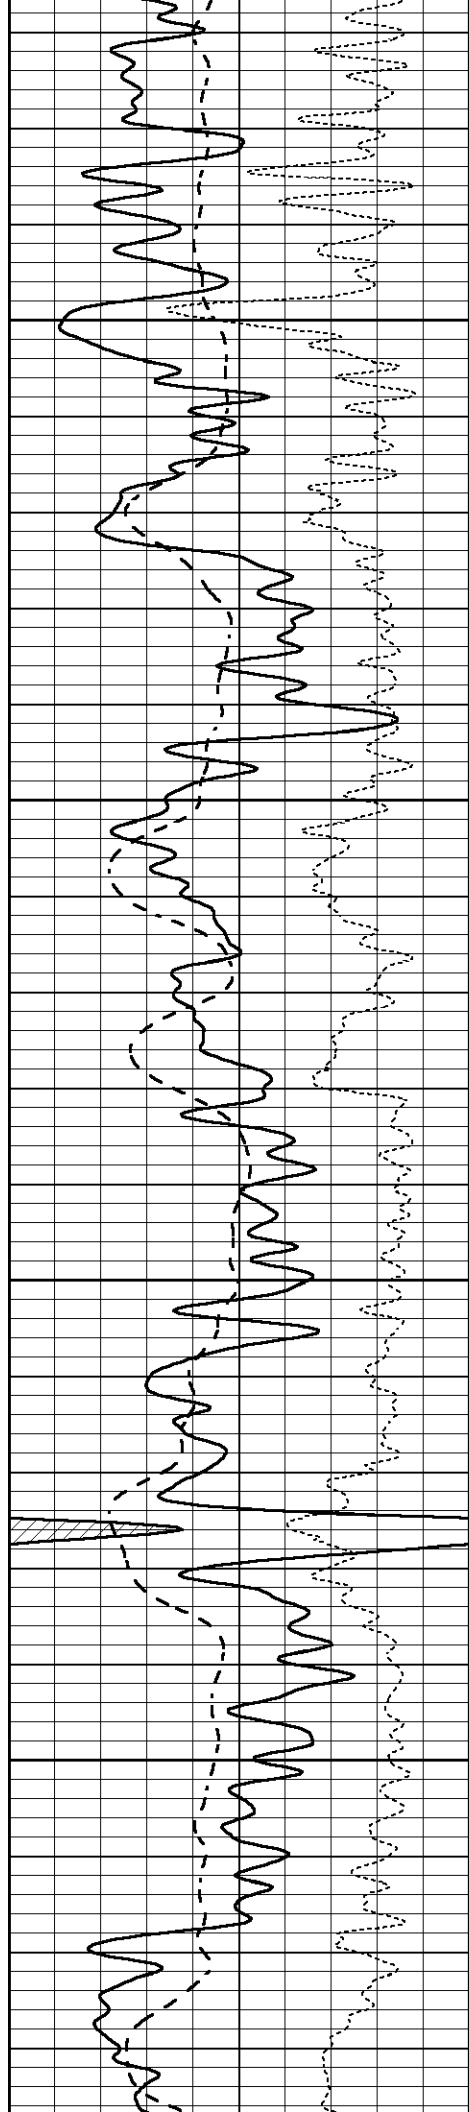


2400

2450

2500

2550

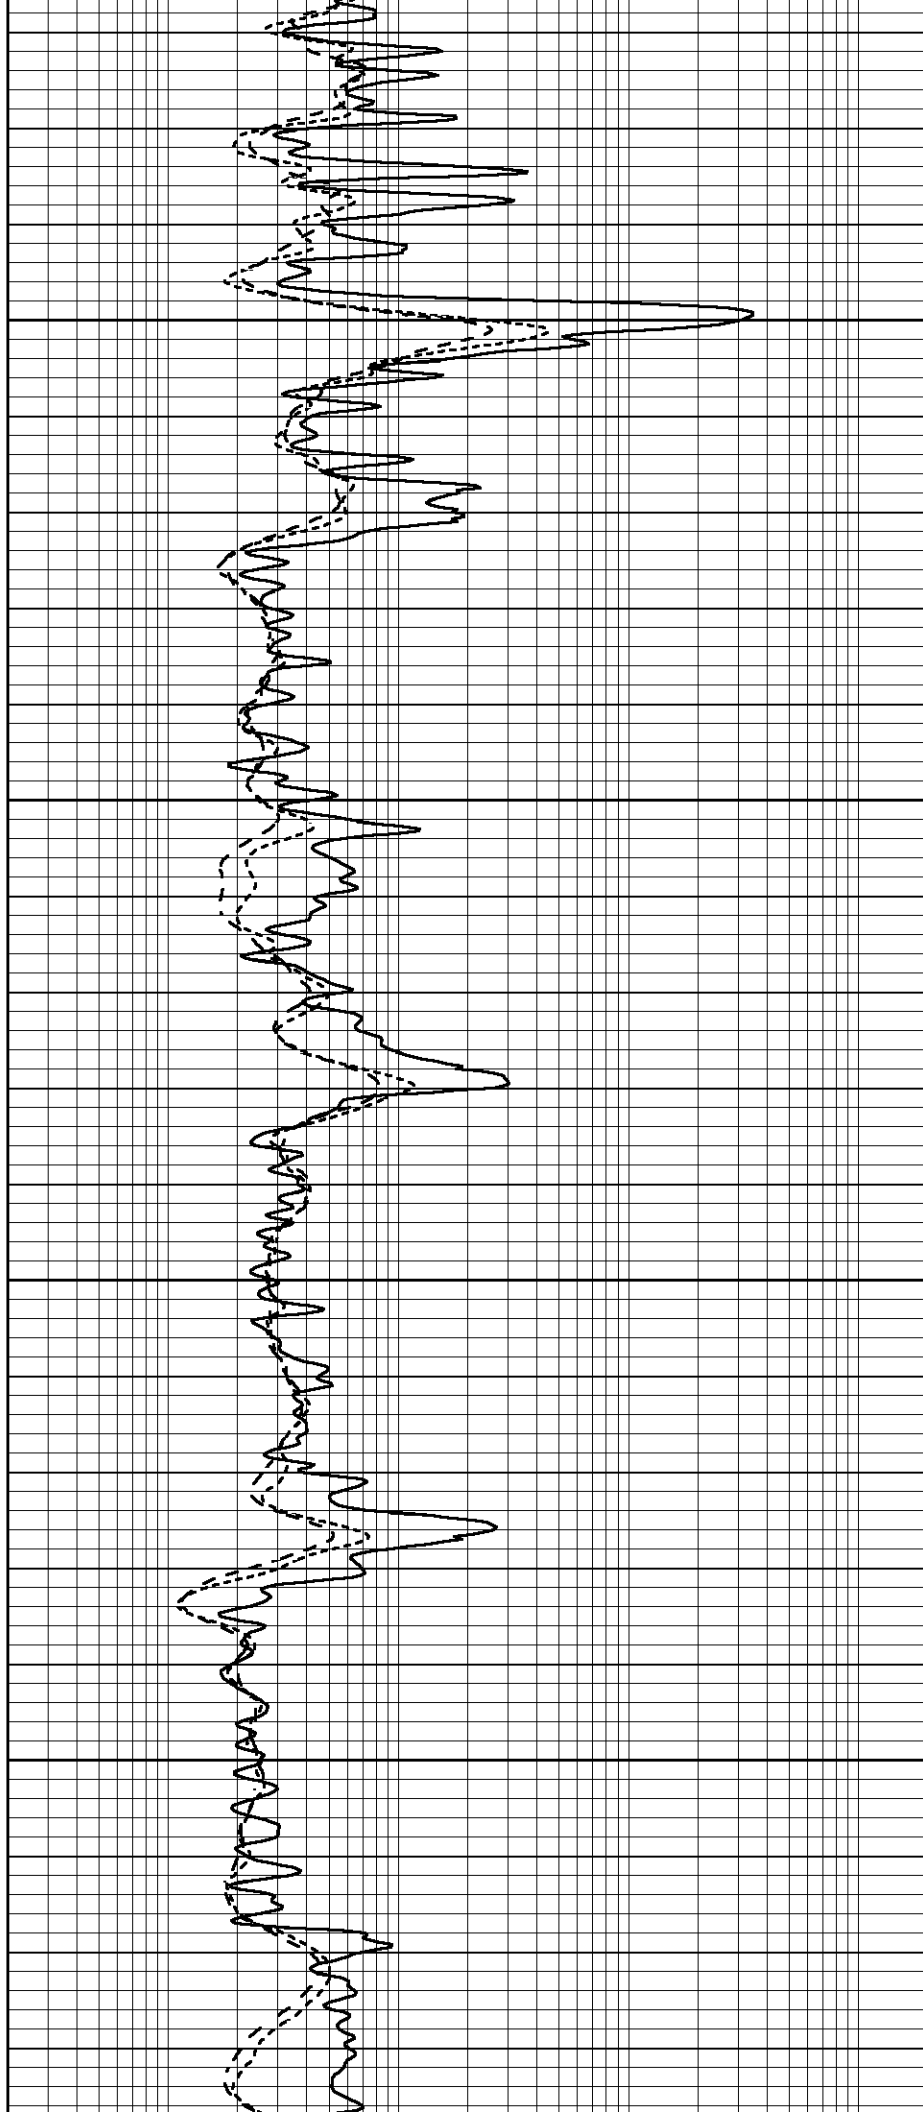



2600


2650

2700

2750

2800

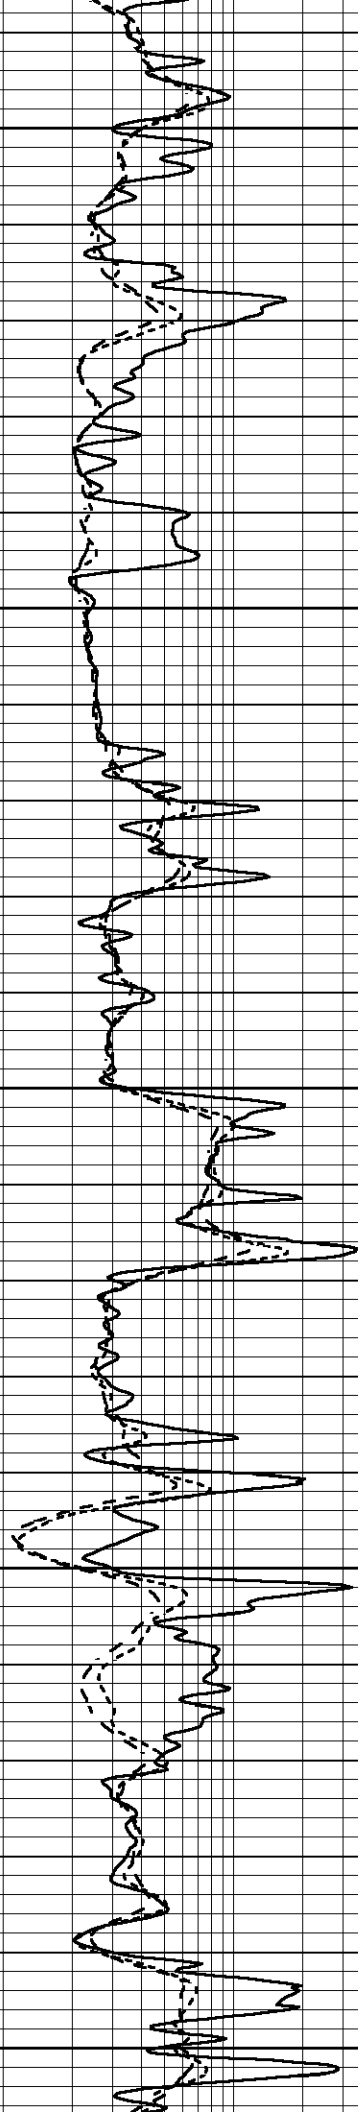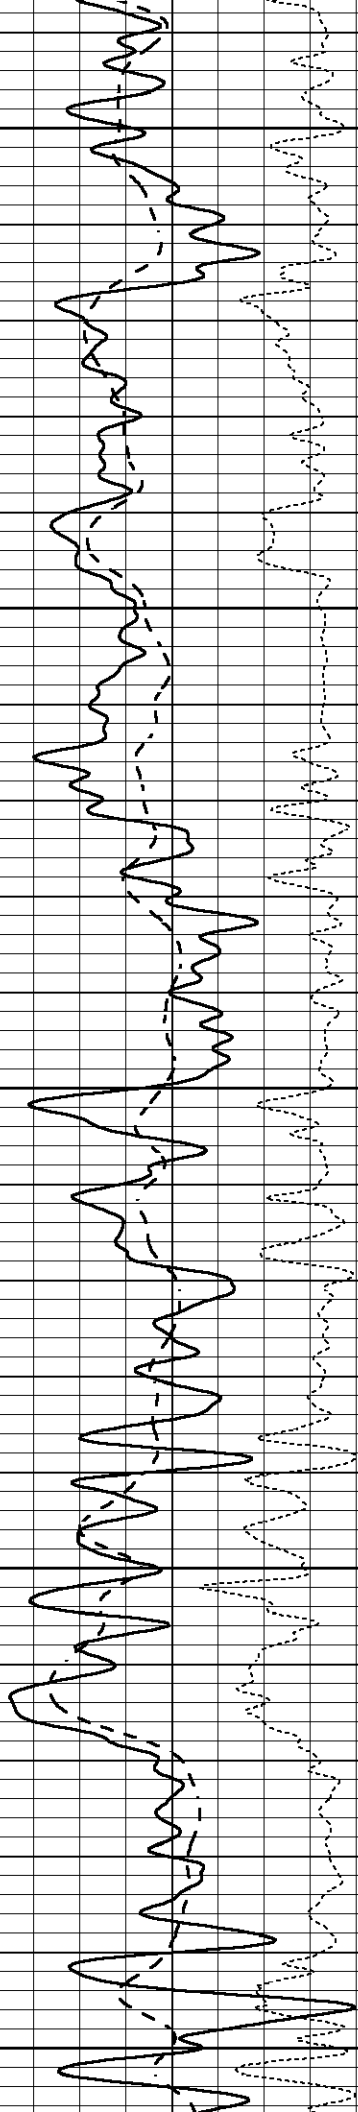

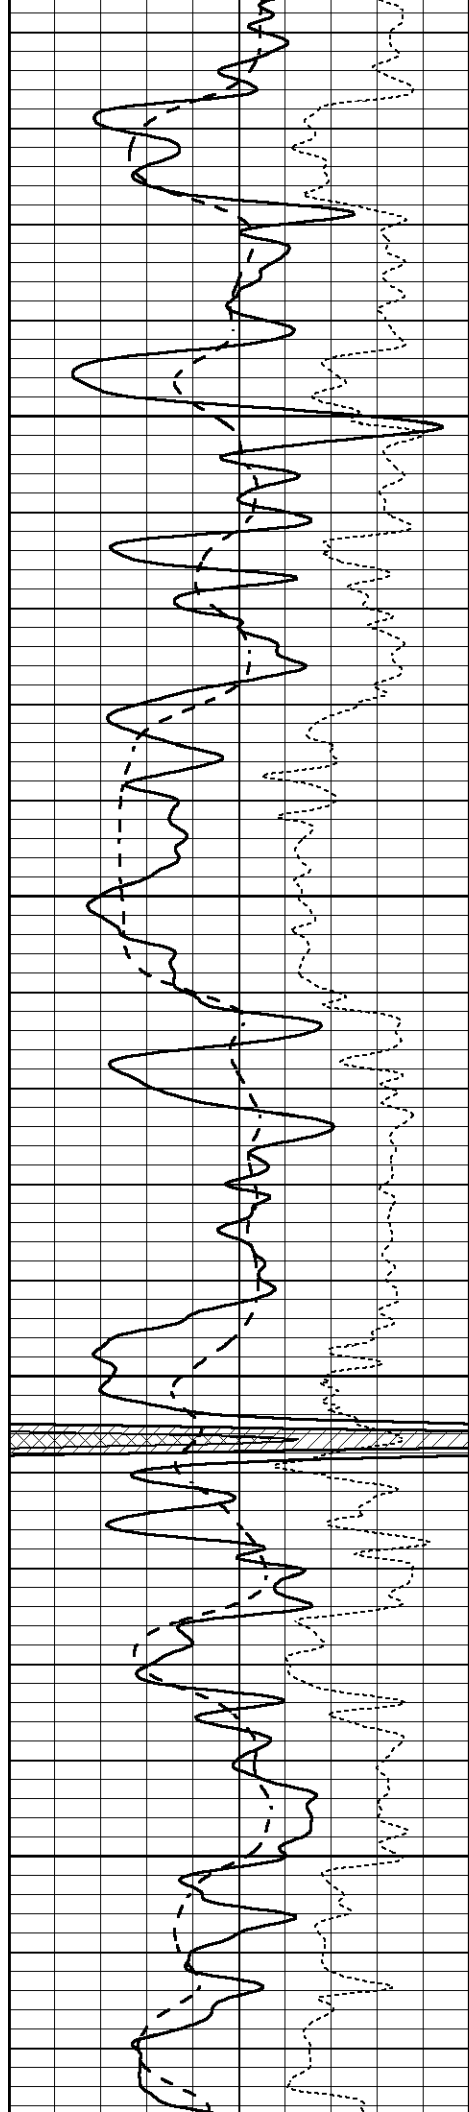



2850

2900

2950

3000

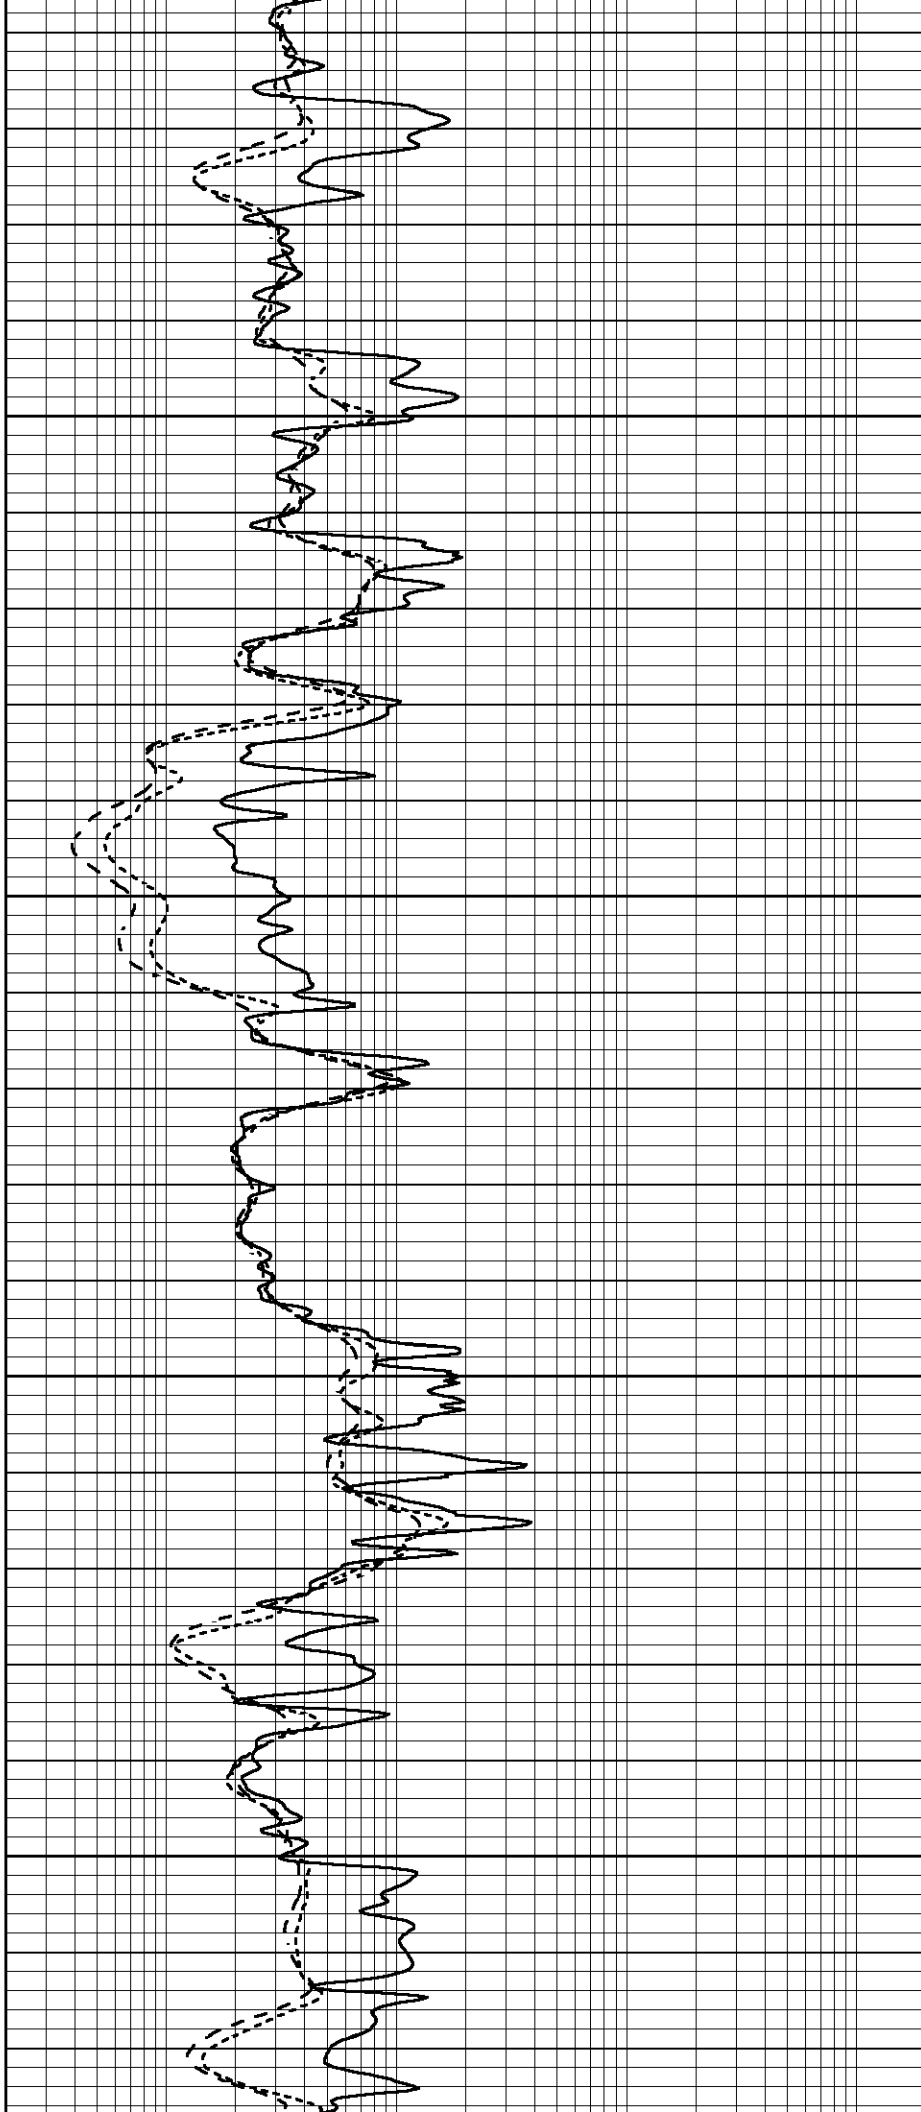

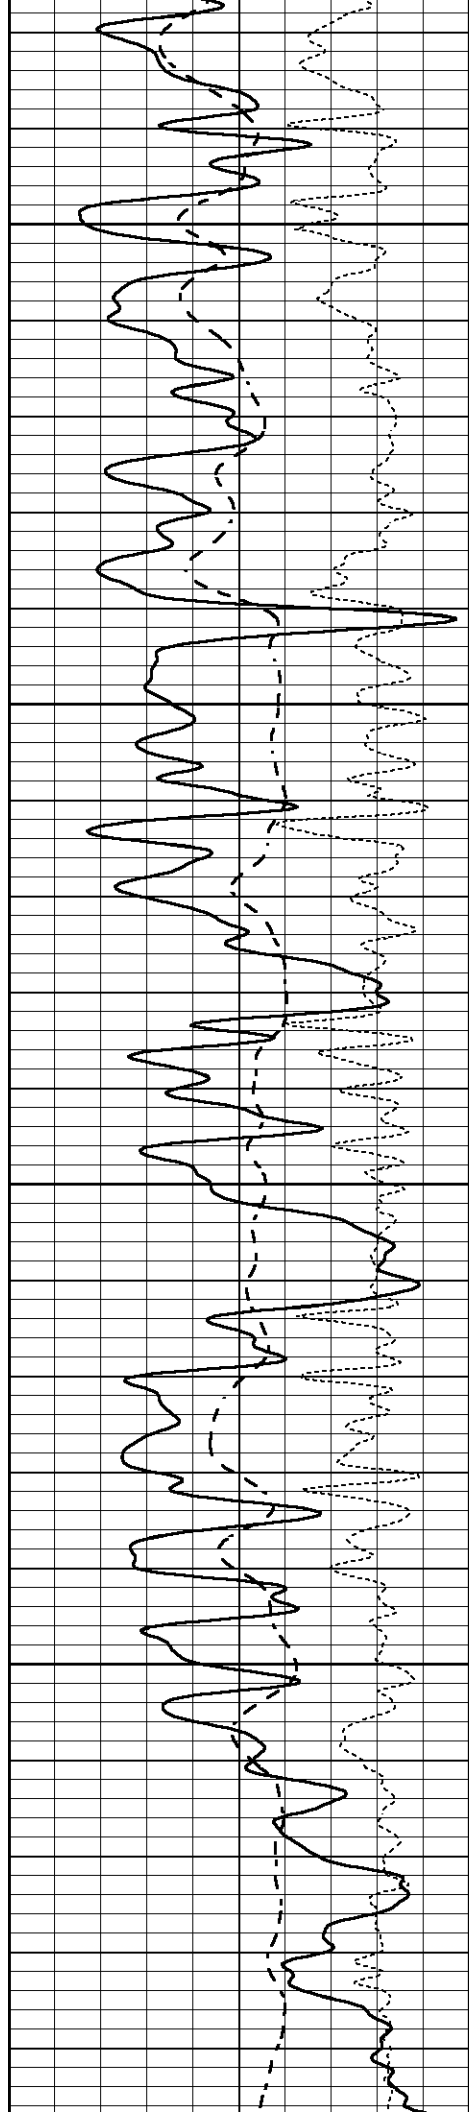


3050

3100

3150

3200

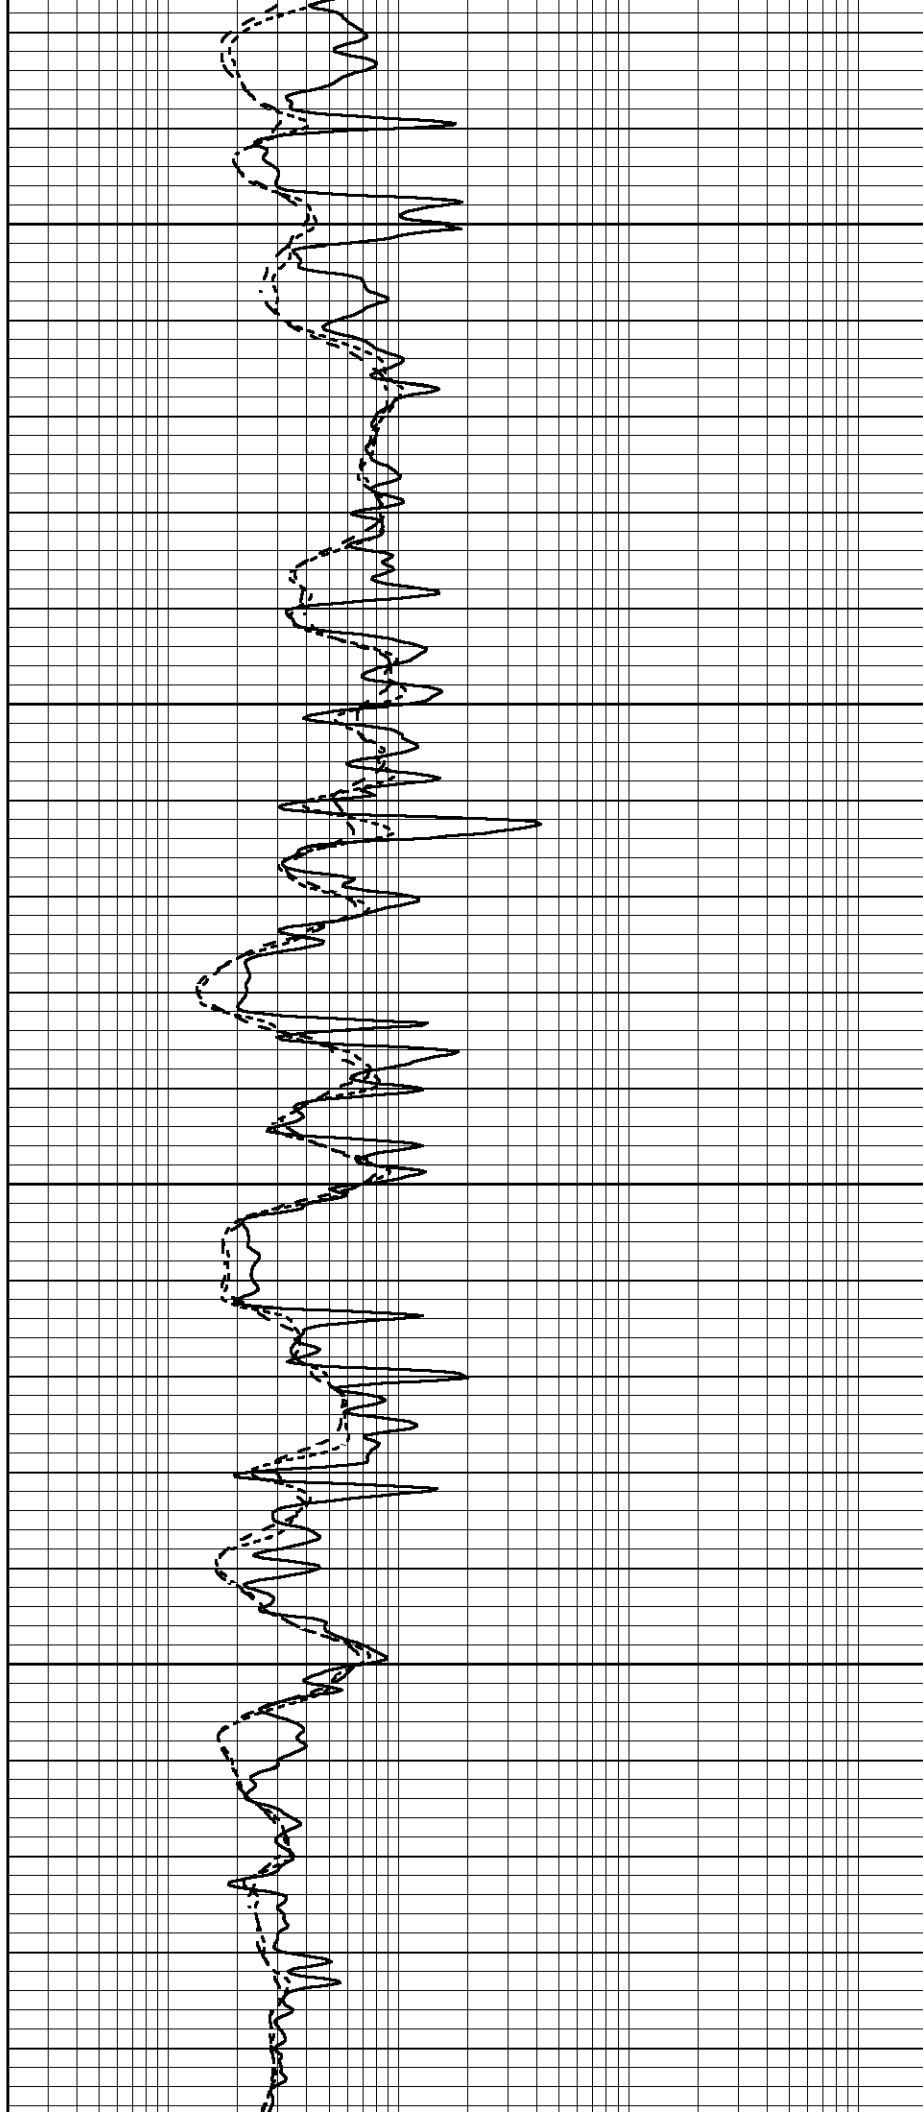



3250


3300

3350

3400

3450

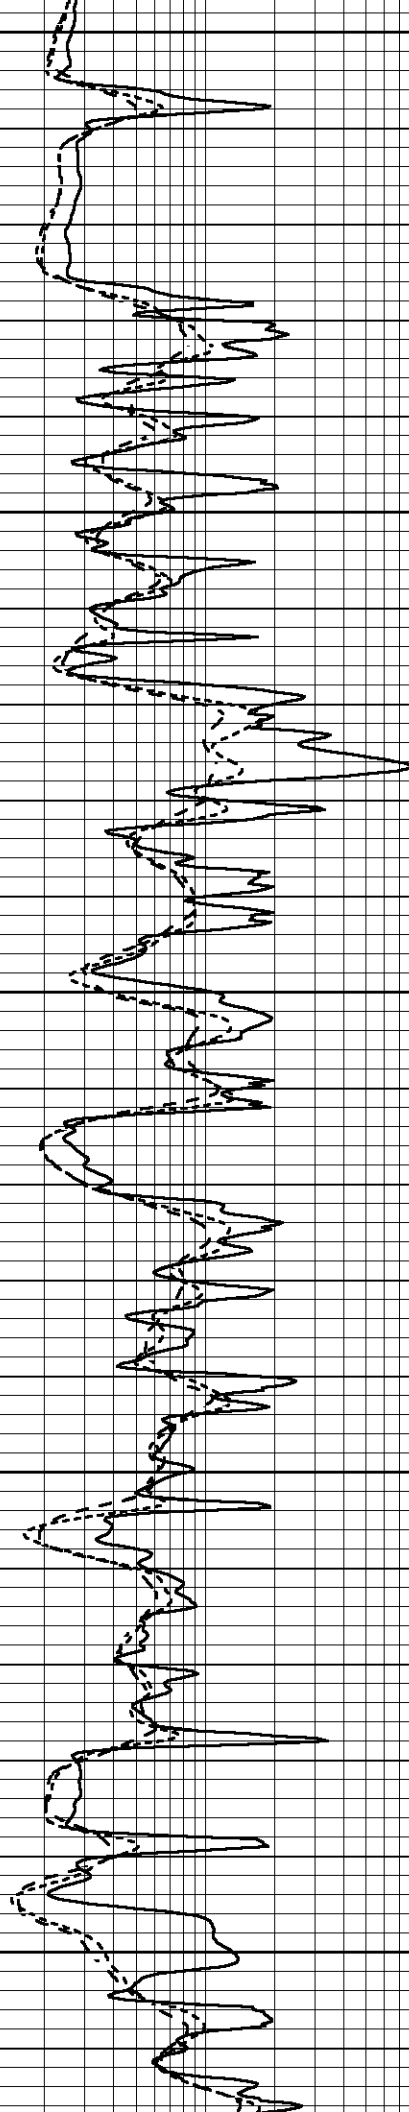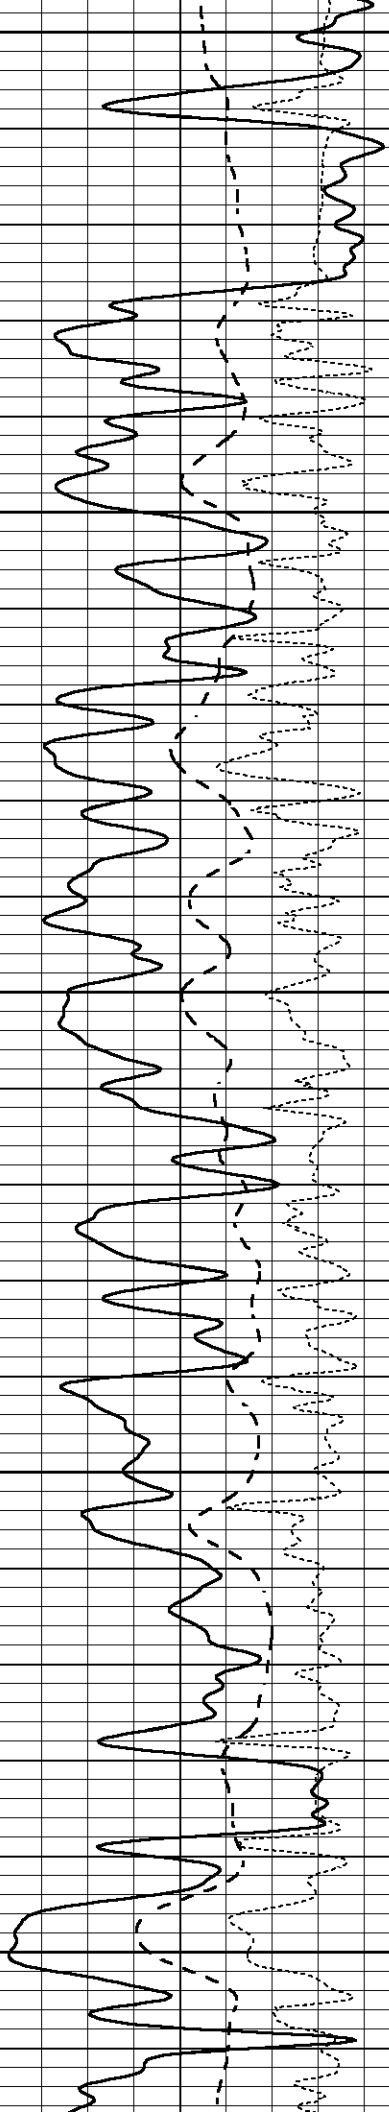

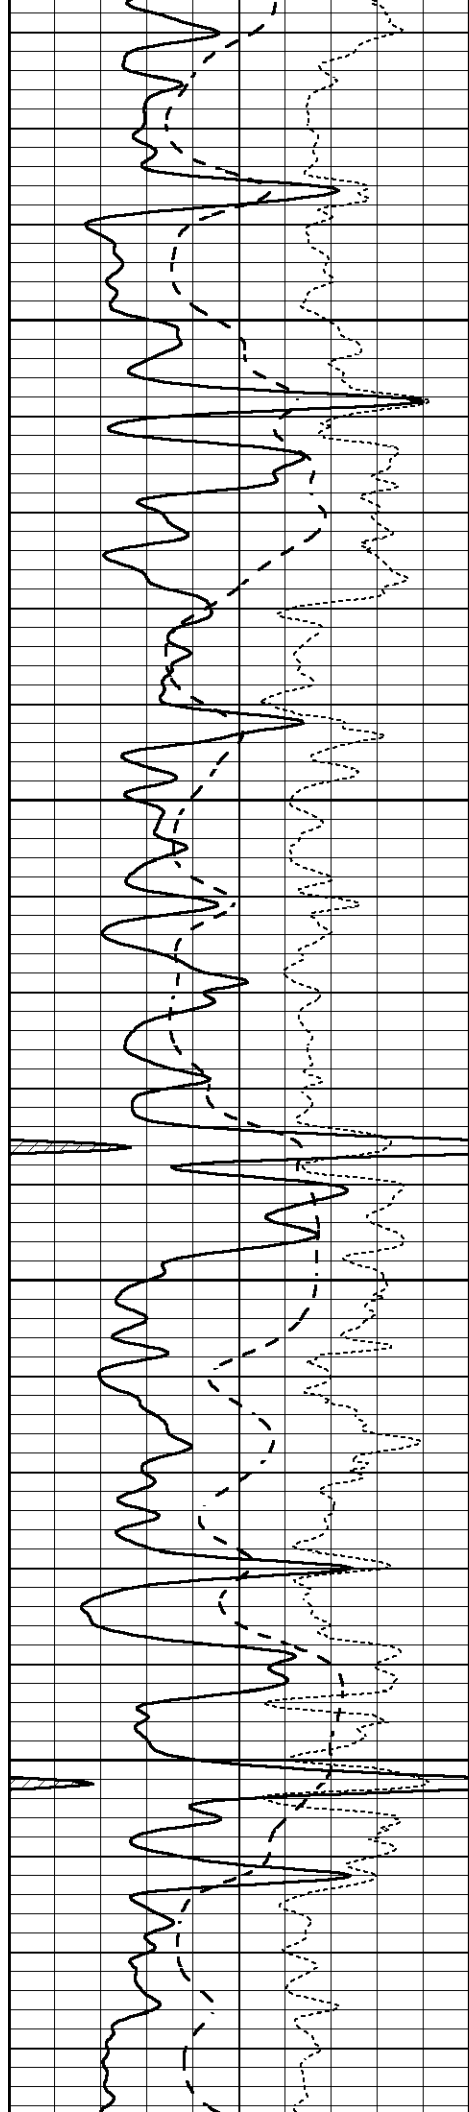



3500

3550

3600

3650

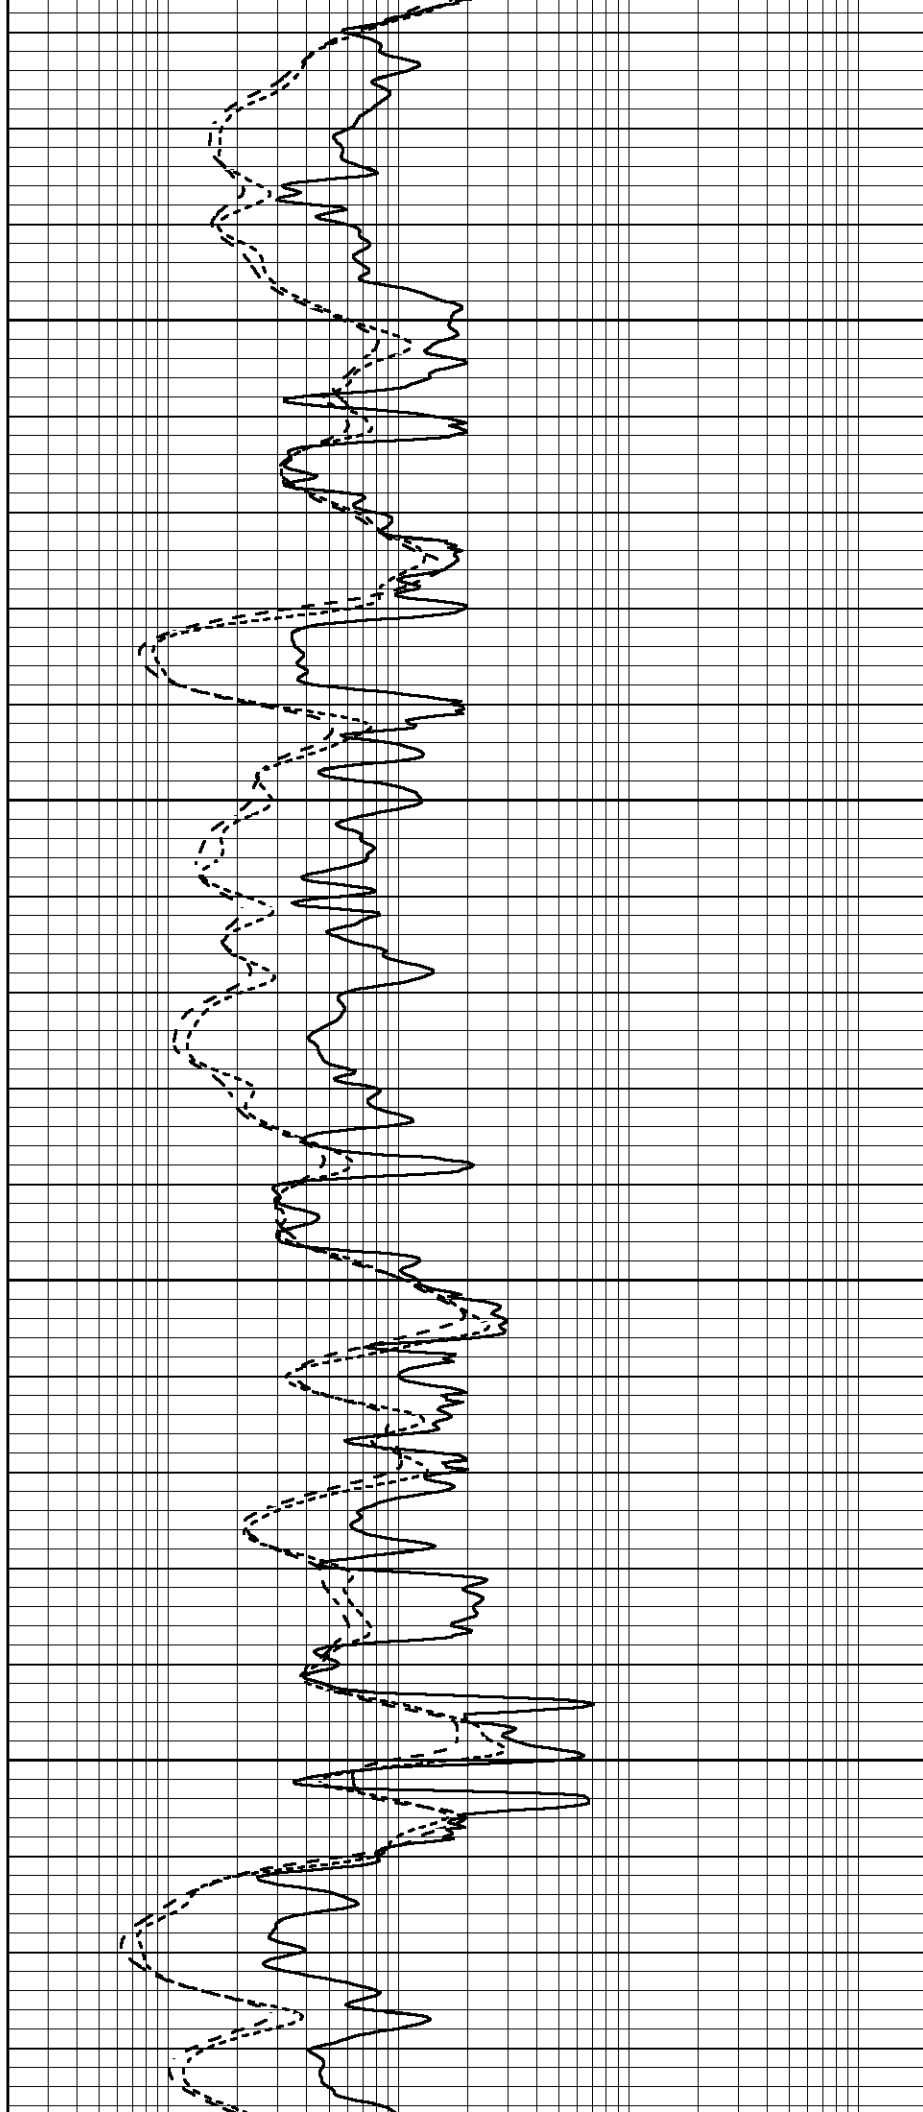

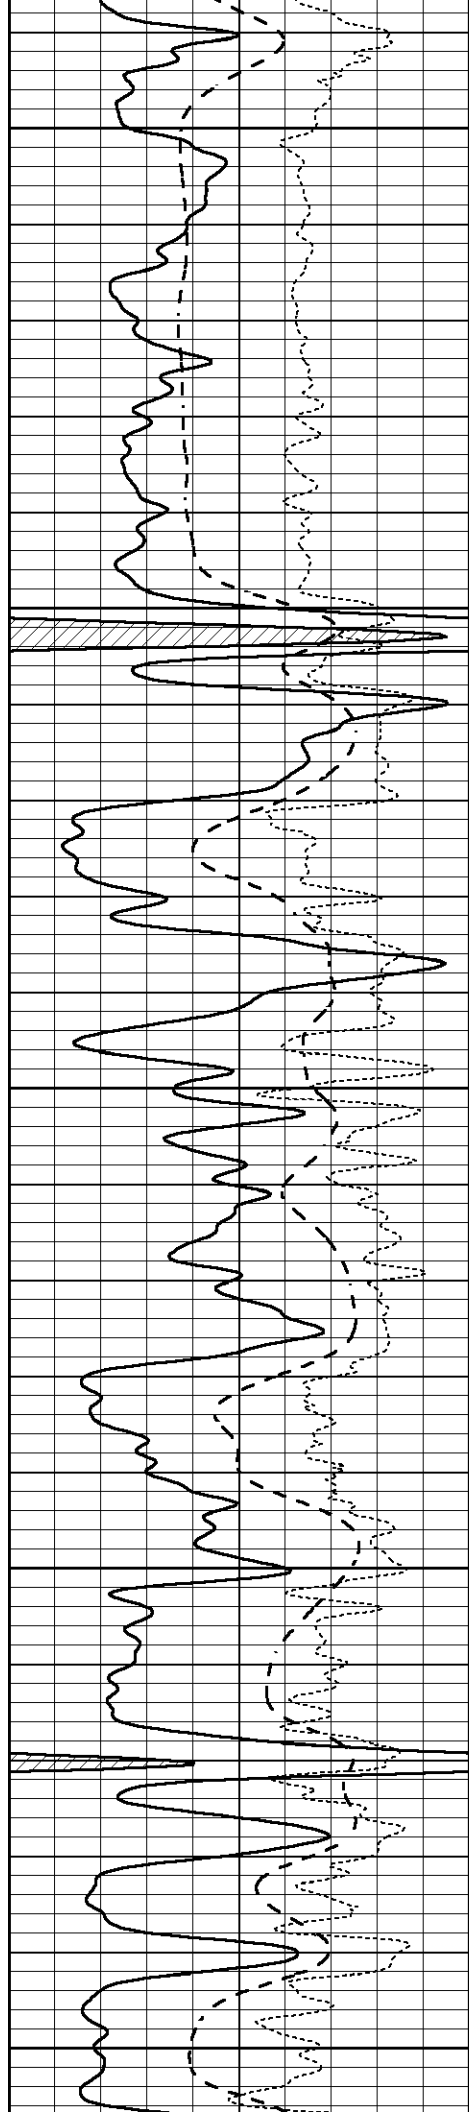


3700


3750

3800

3850

3900

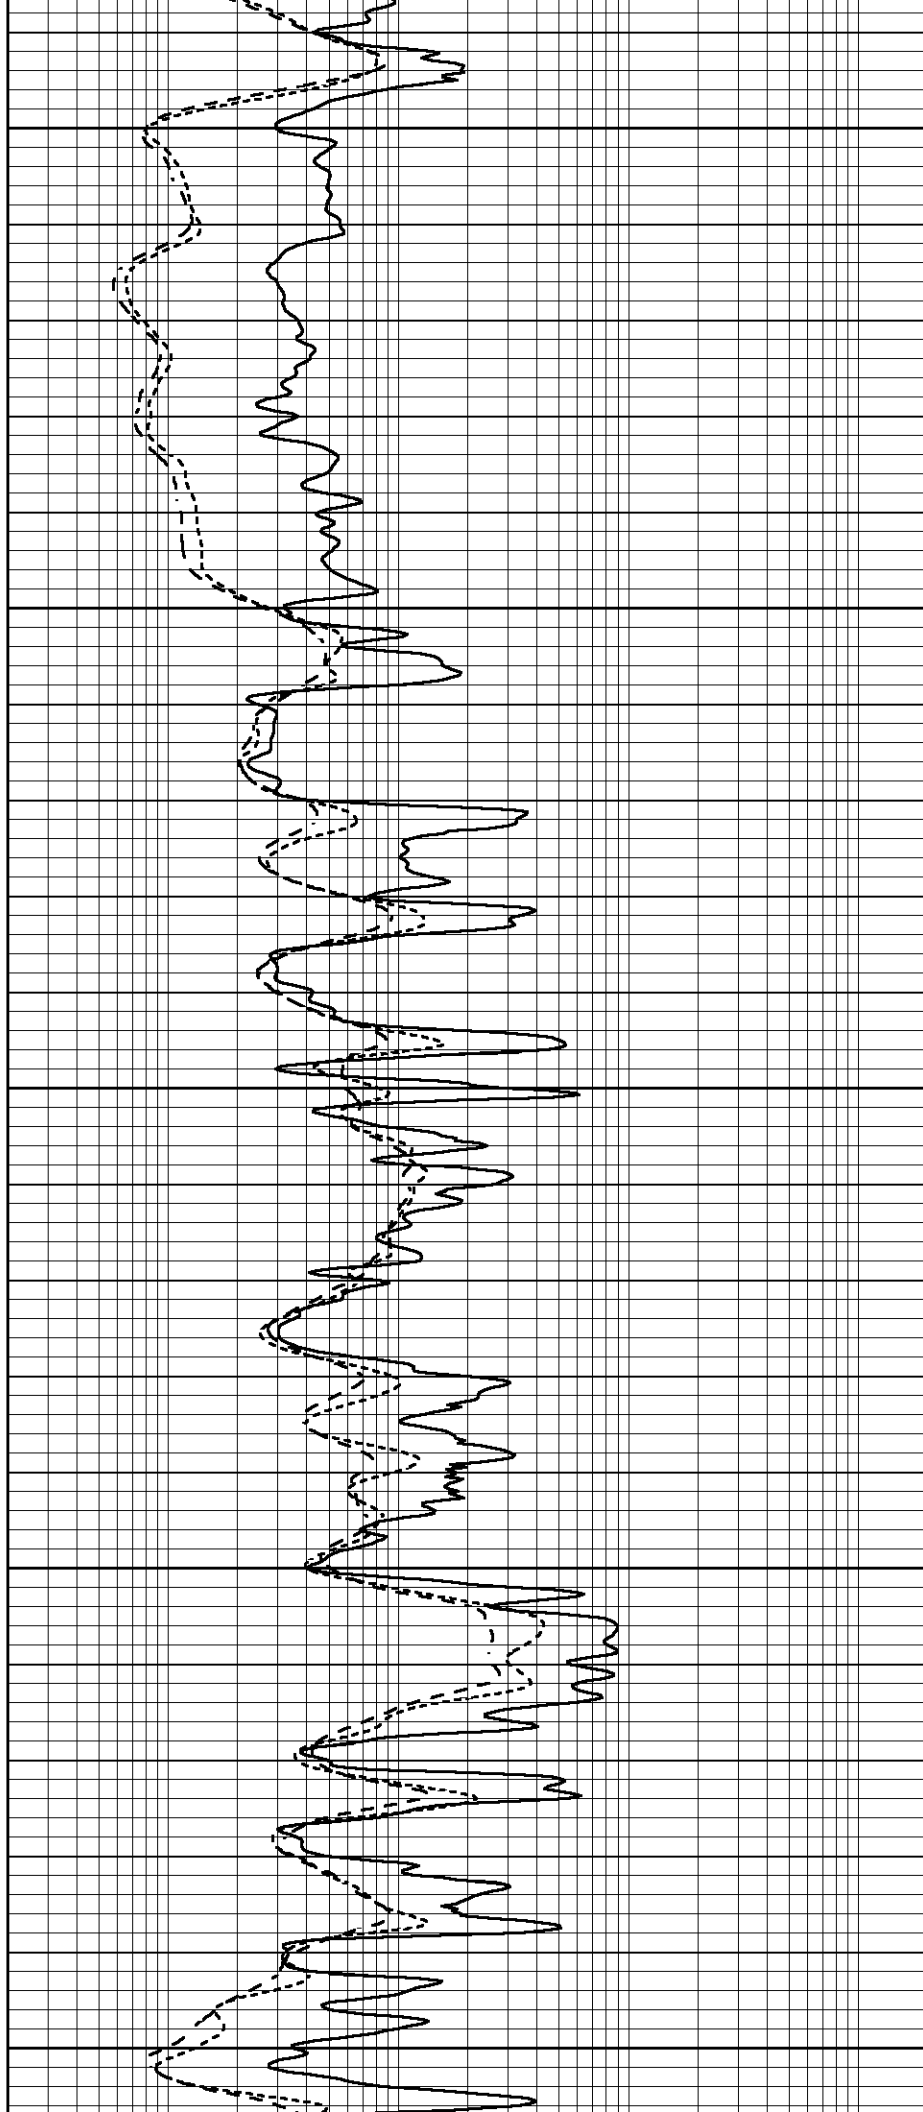

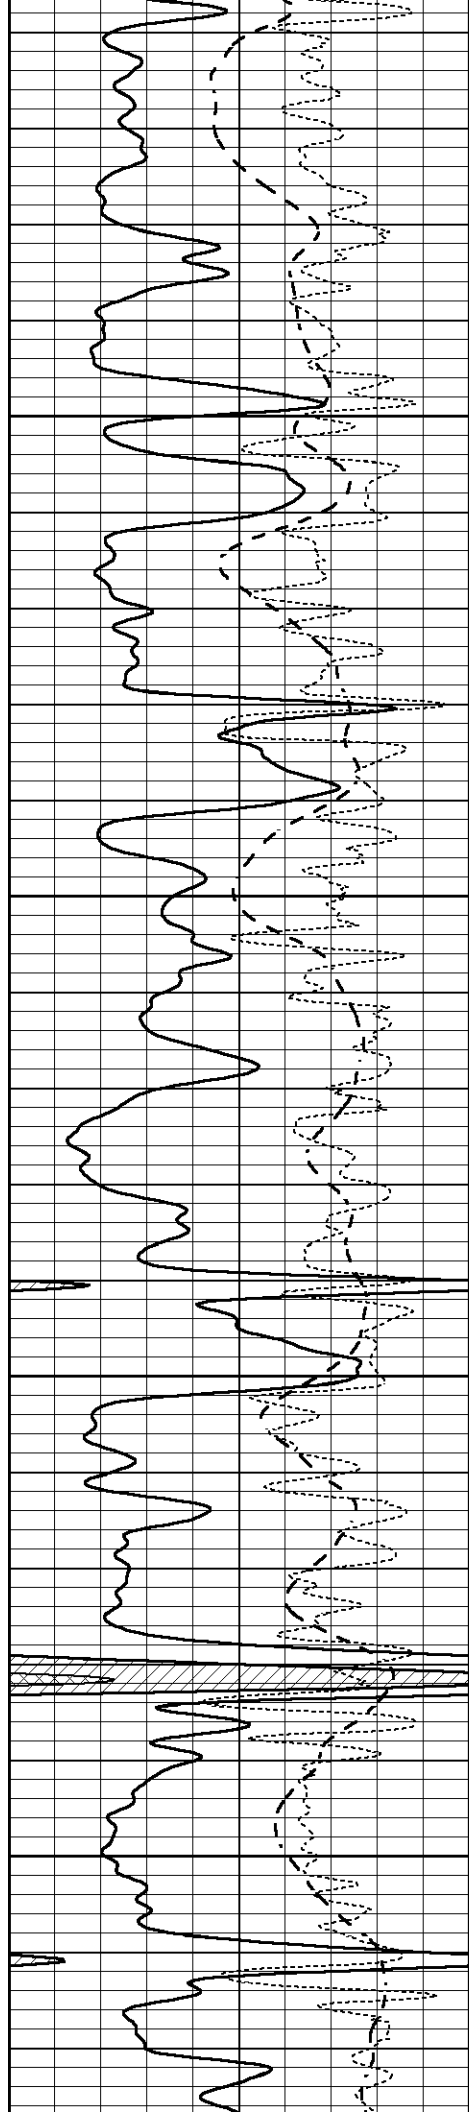



3950

4000

4050

4100

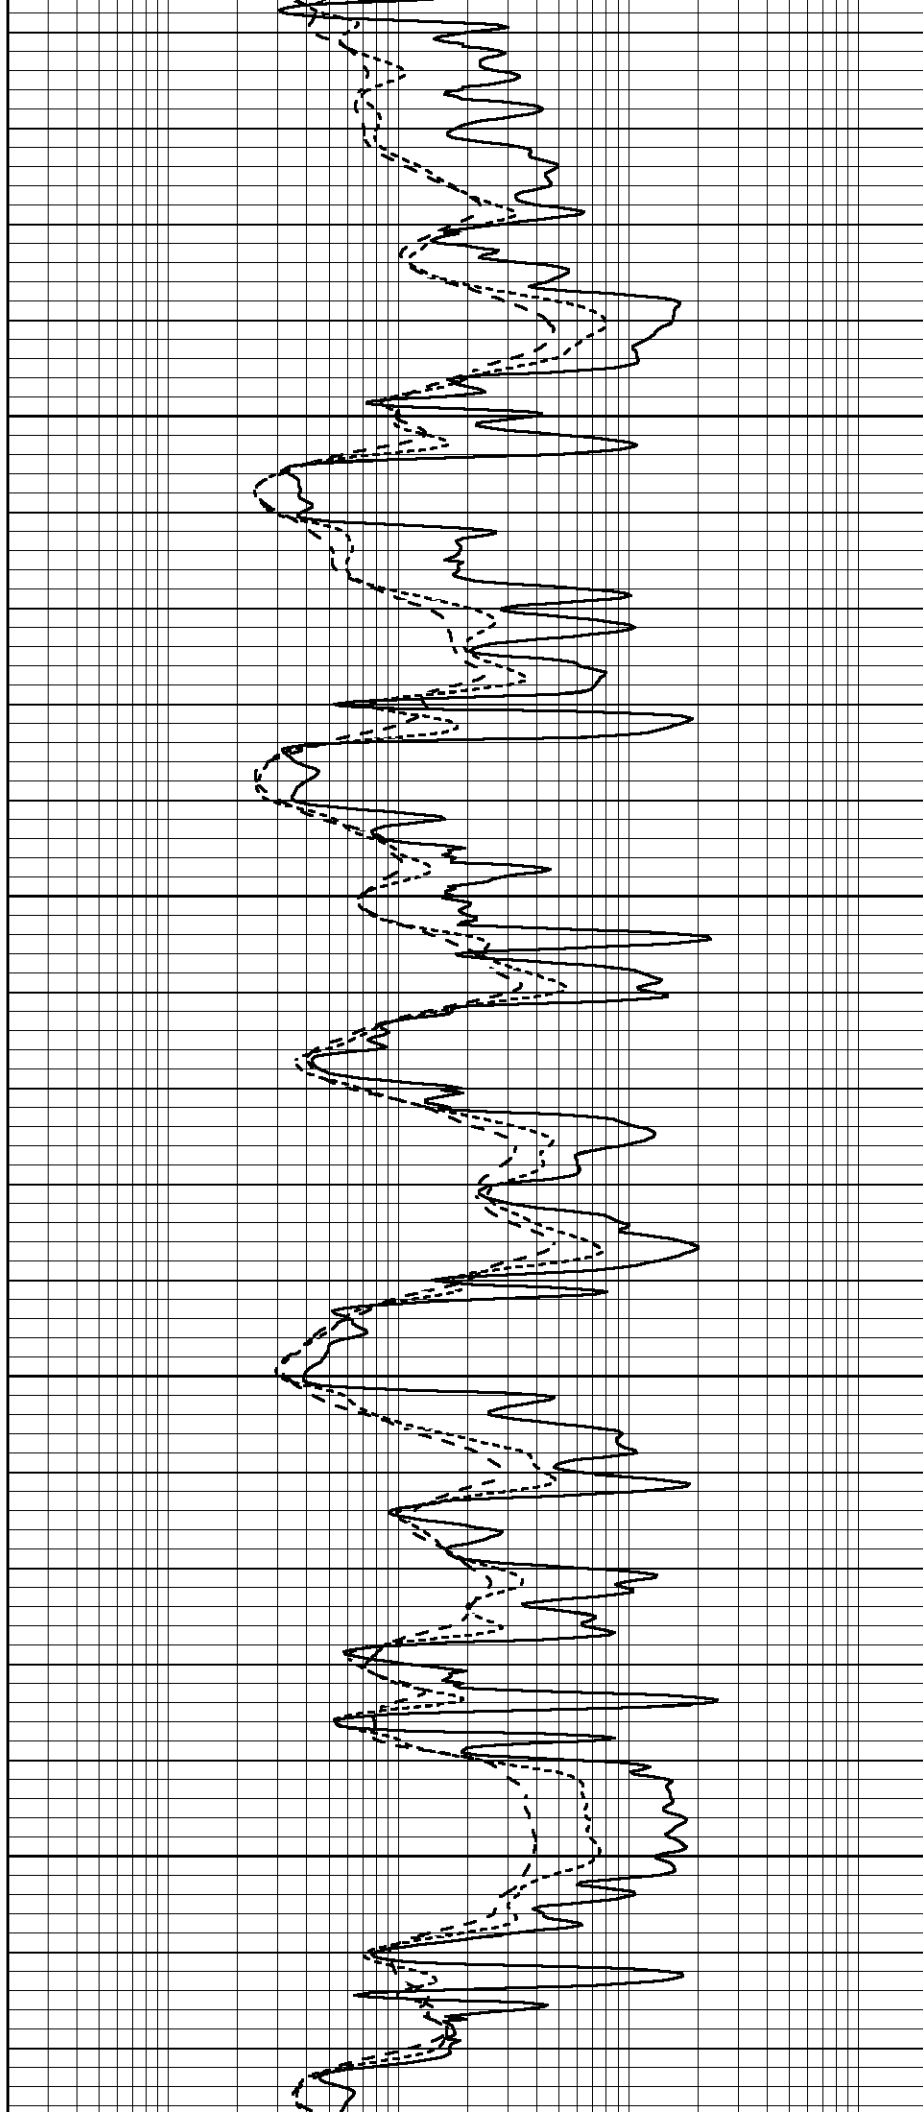

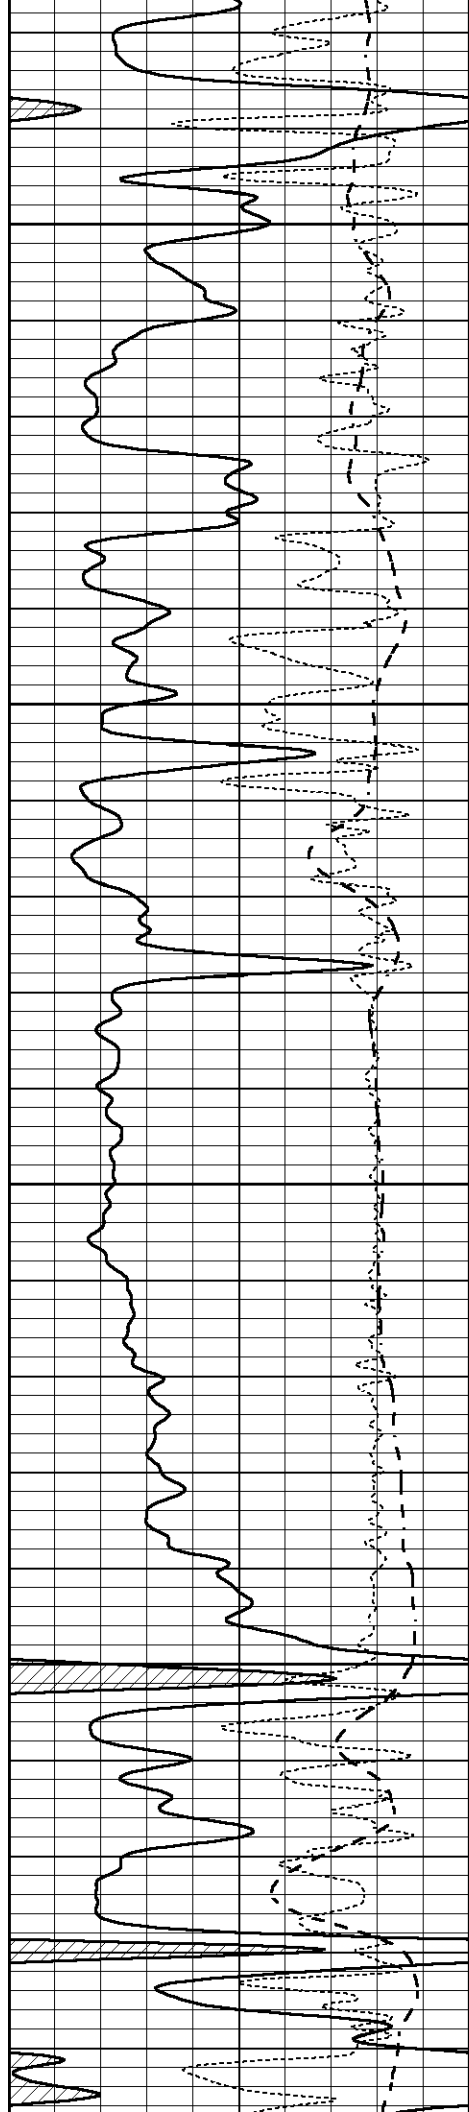



4150

4200

4250

4300

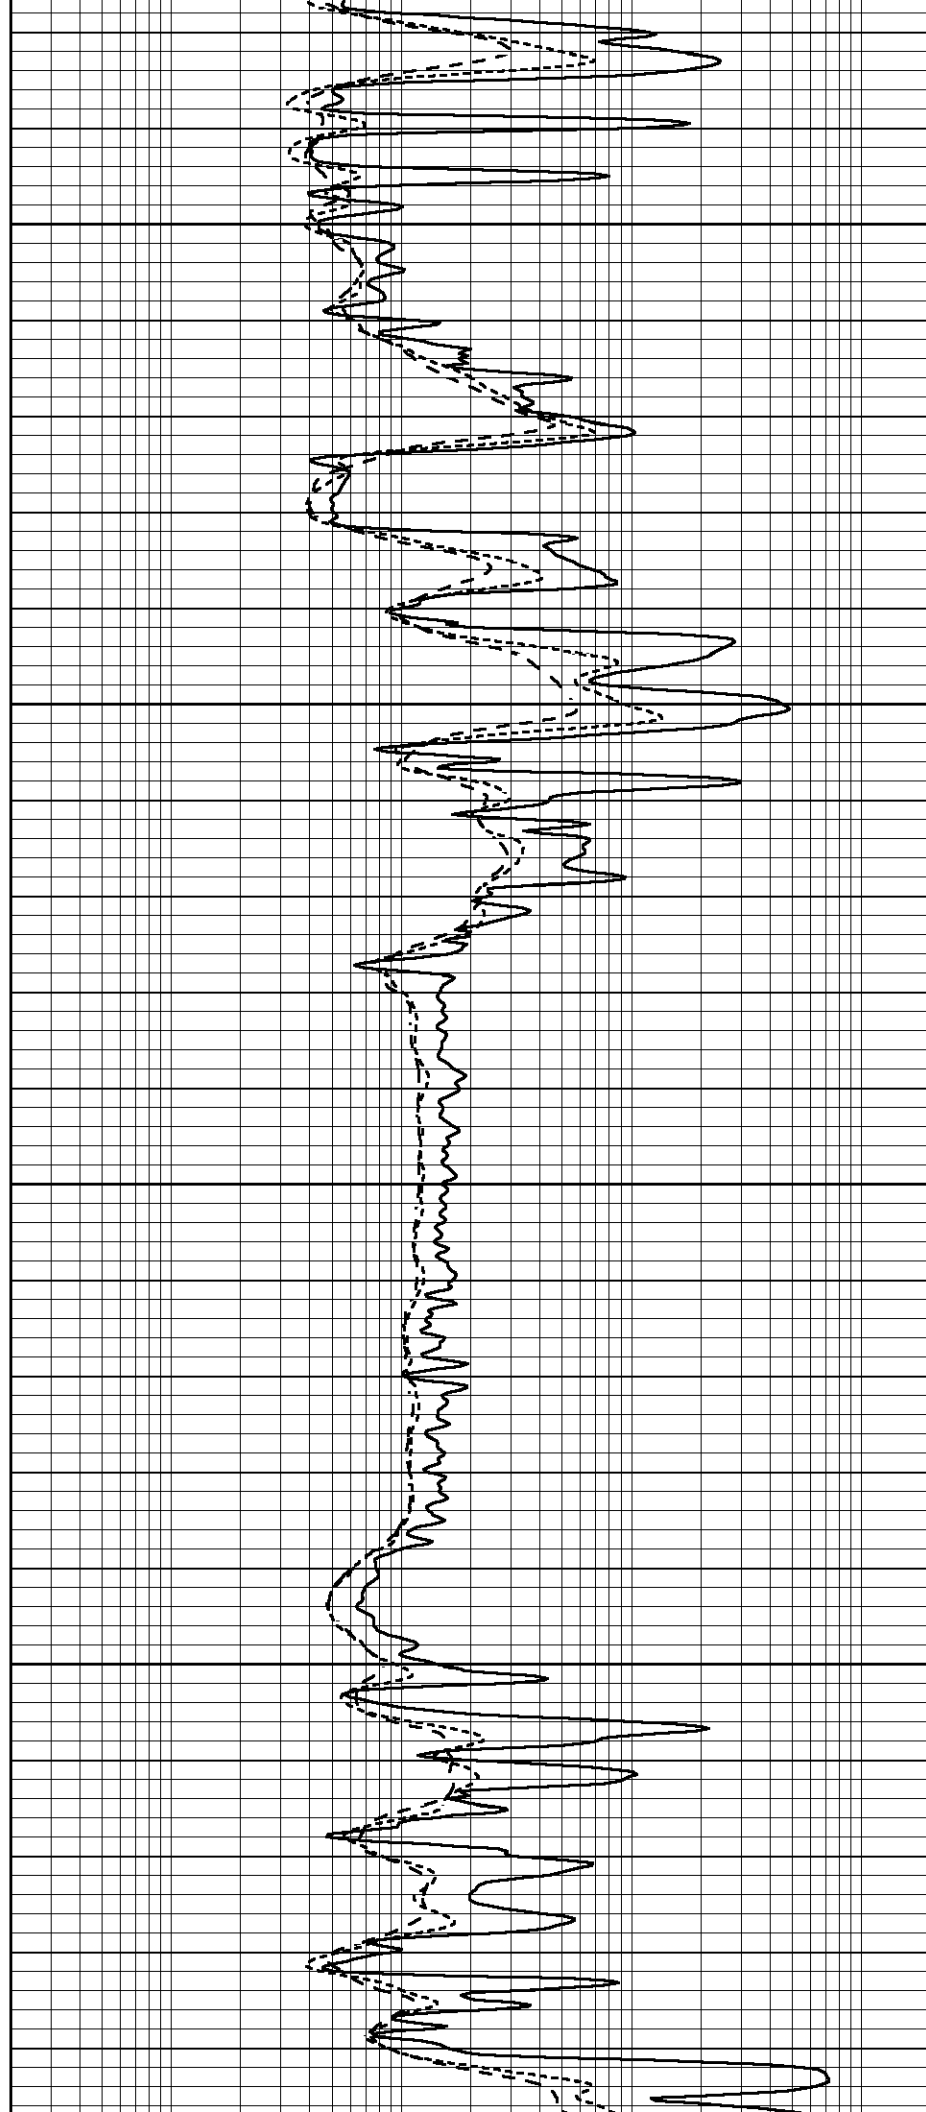

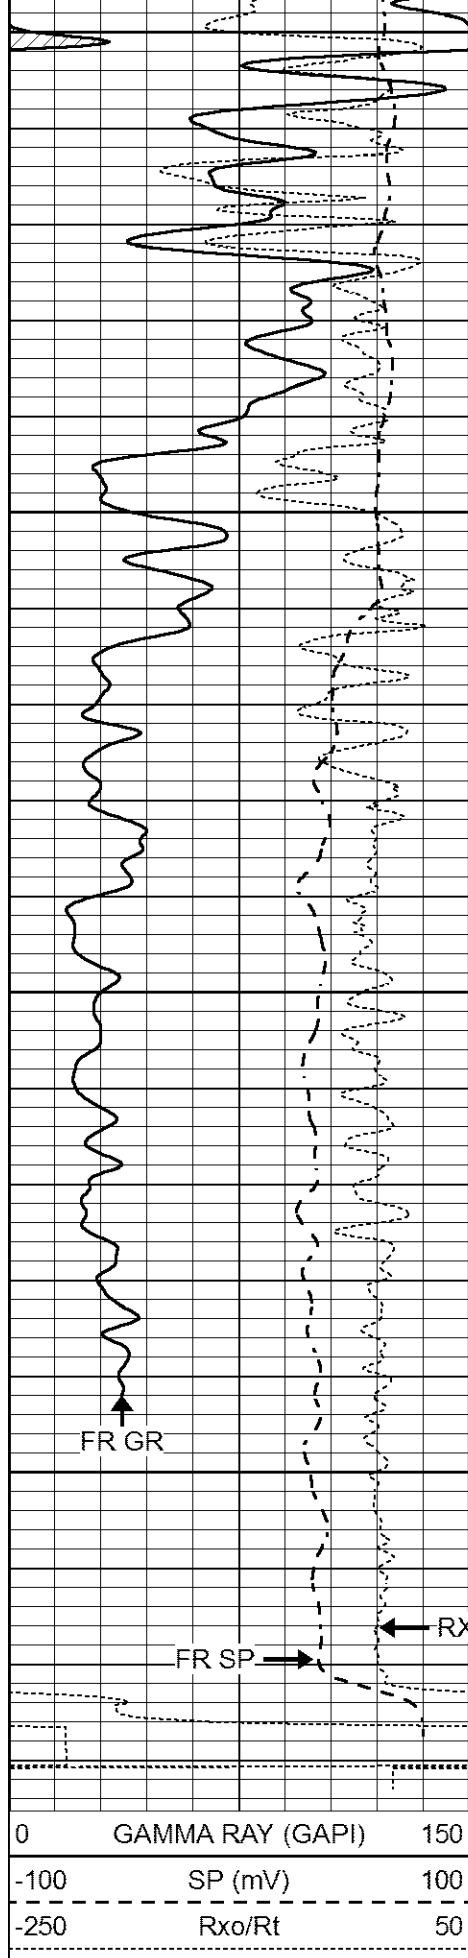


4350

4400

4450

4500

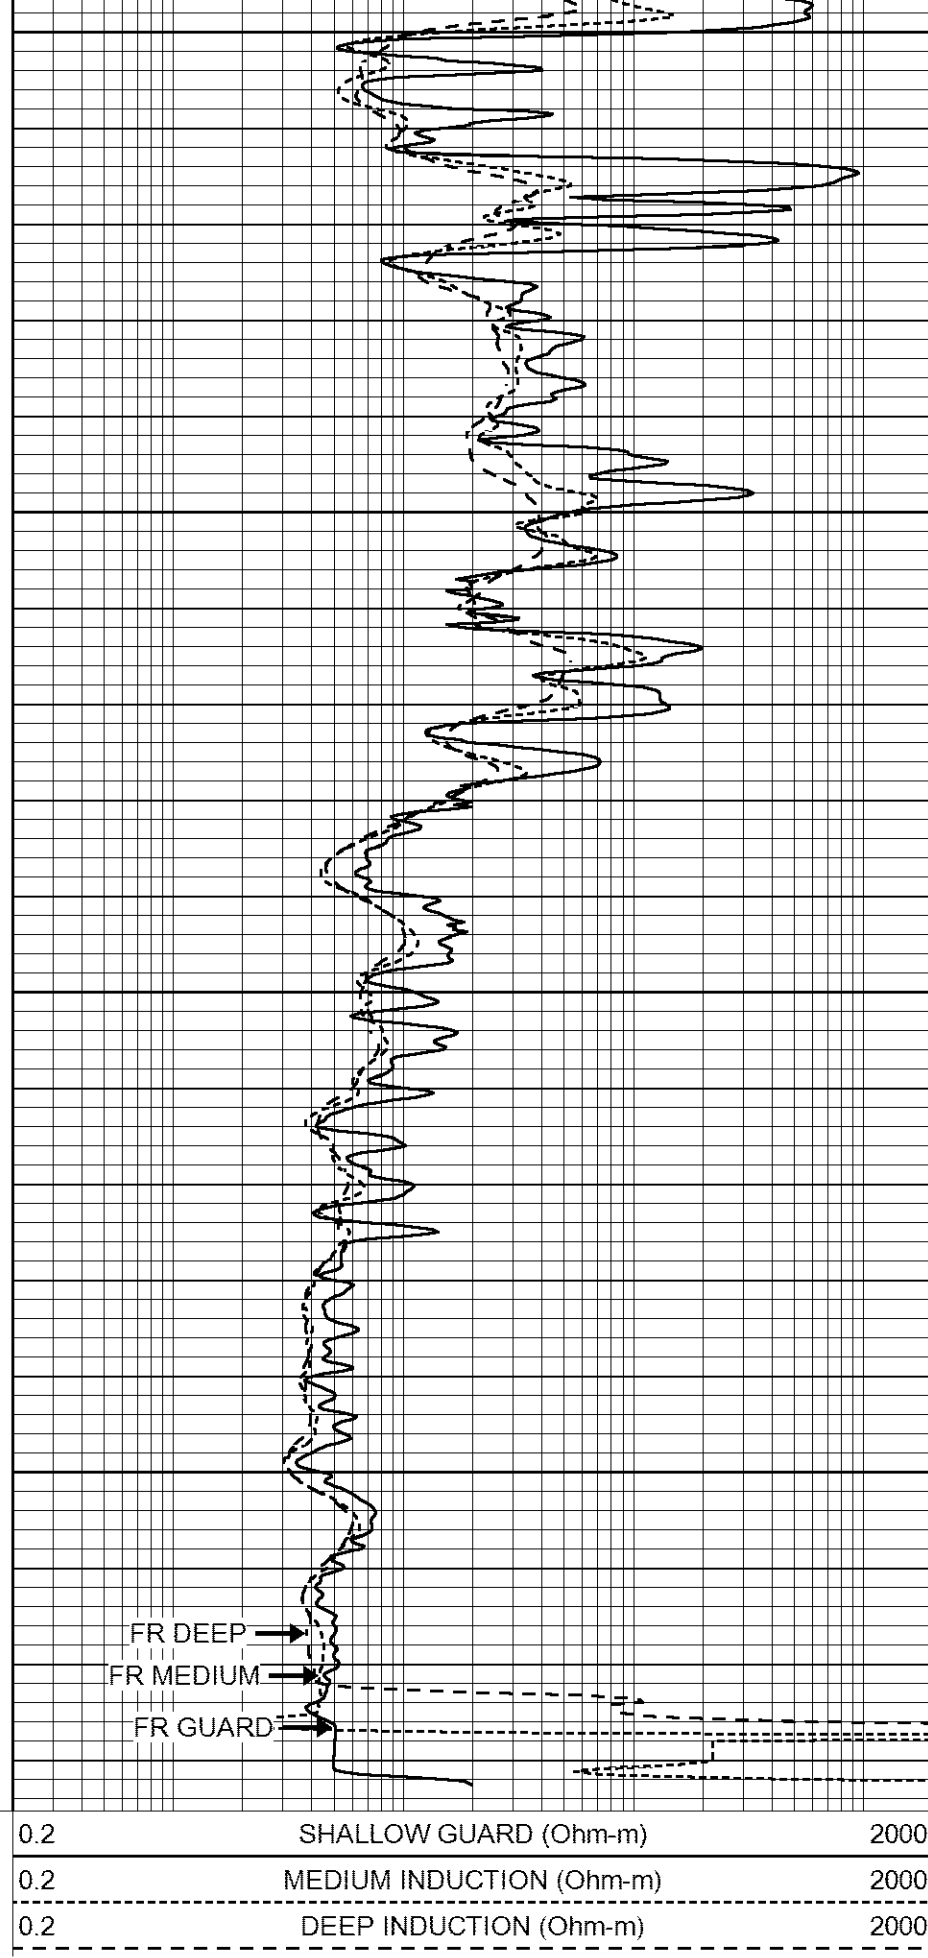


REPEAT SECTION

REPEAT SECTION

Database File 7239ddn.db
 Dataset Pathname pass2RPT
 Presentation Format _dil
 Dataset Creation Wed Oct 26 14:06:53 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

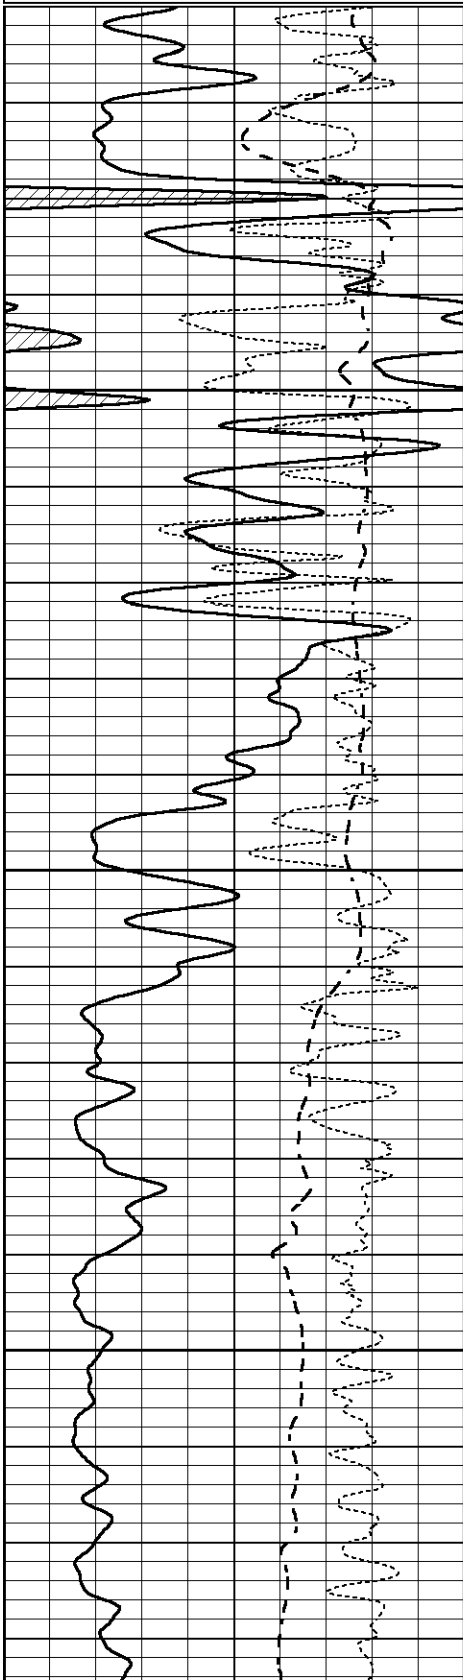


4350

4400

4450

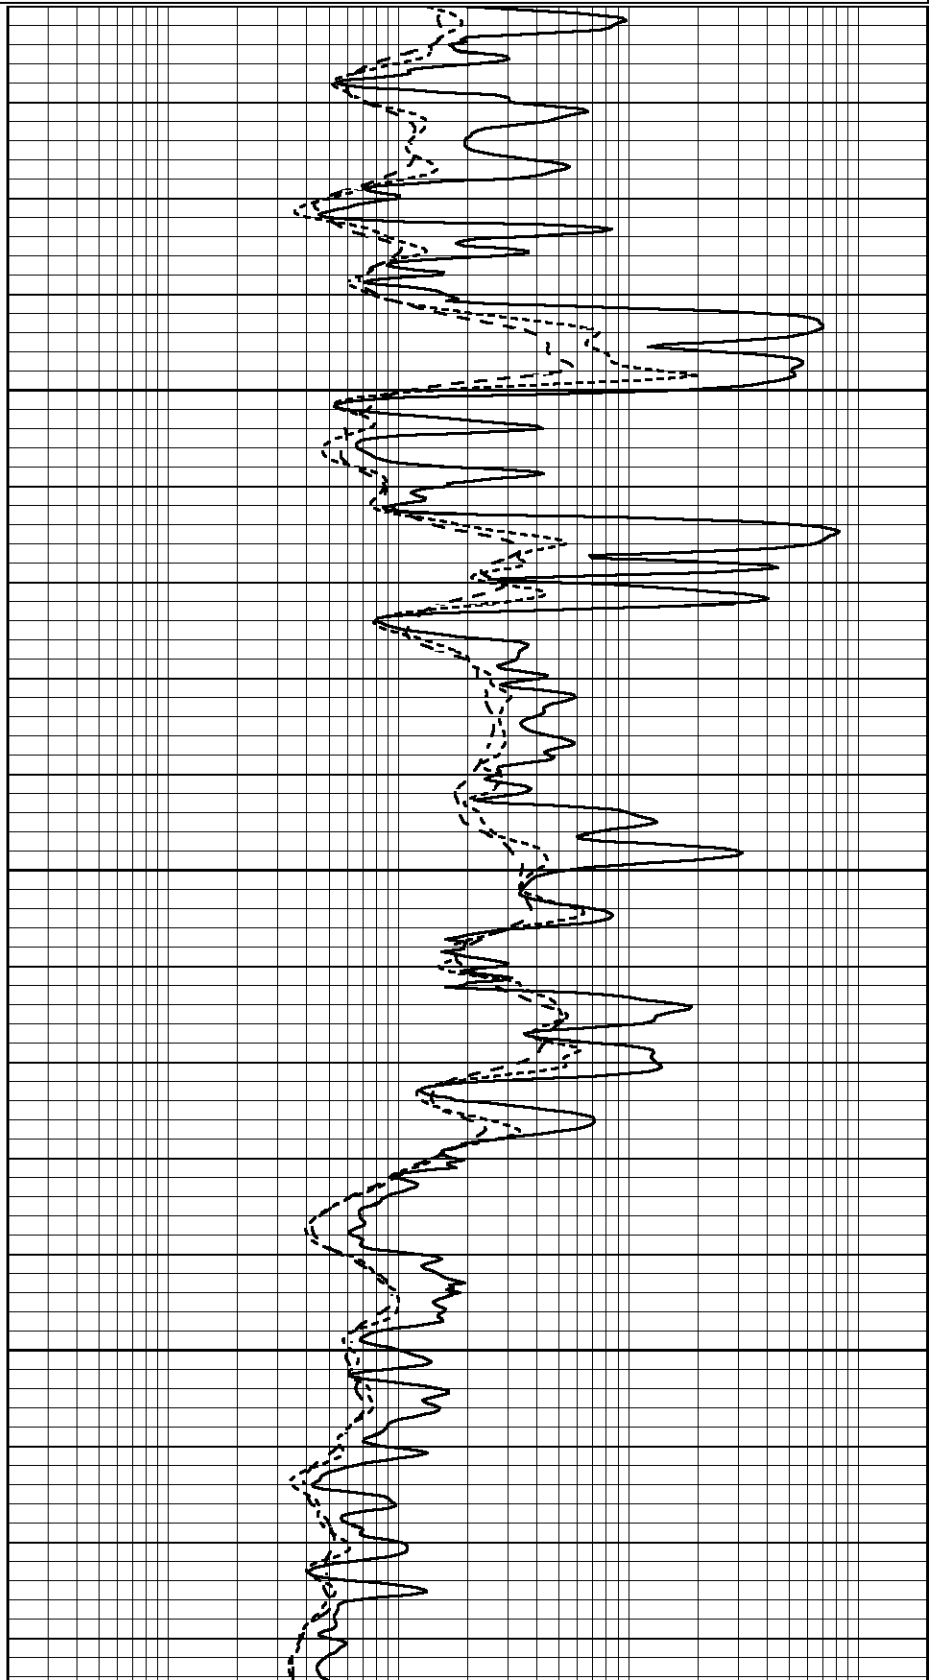

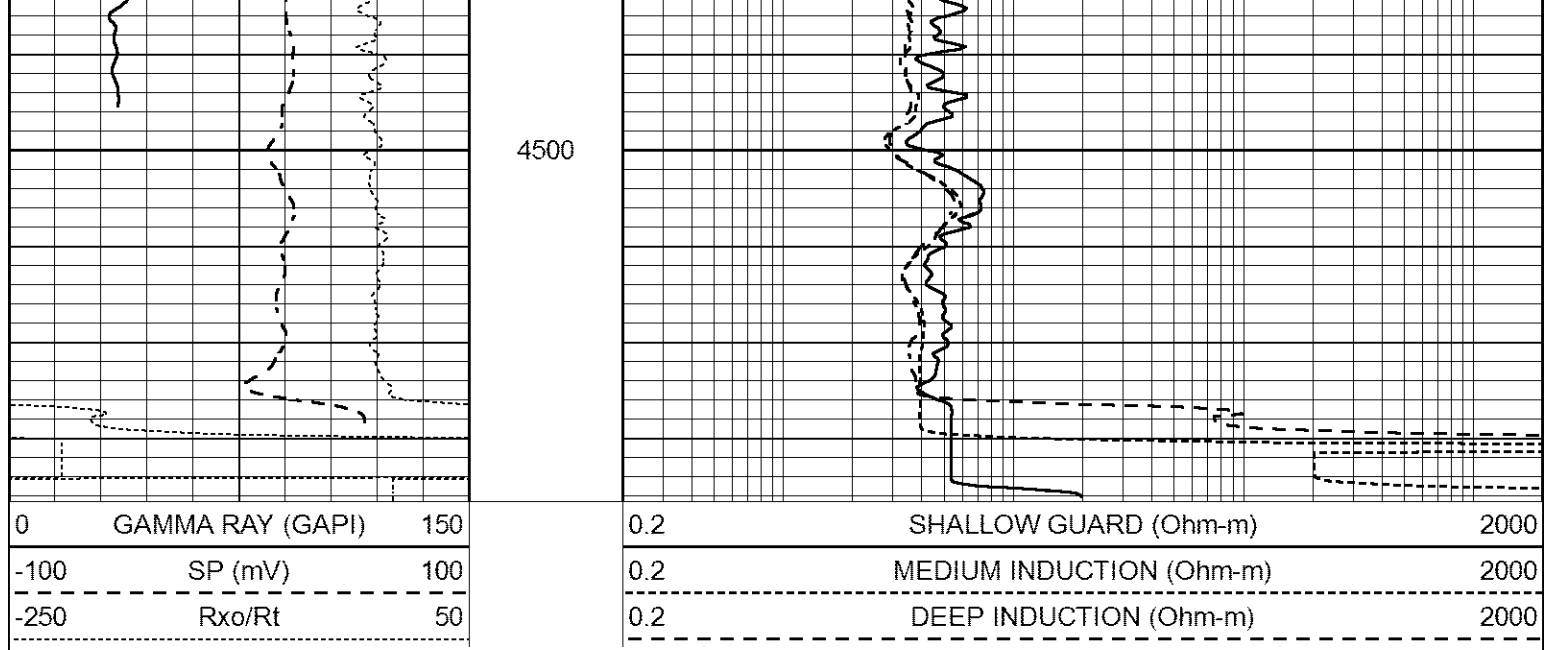

Calibration Report	
Database File	7239ddn.db
Dataset Pathname	pass3M
Dataset Creation	Wed Oct 26 15:08:49 2022

Dual Induction Calibration Report

Serial-Model:	FW1410-55-Probe
Surface Cal Performed:	Thu Jun 30 01:48:00 2022
Downhole Cal Performed:	Tue Feb 19 11:44:24 2019
After Survey Verification Performed:	Tue Feb 19 11:44:27 2019

Surface Calibration								
Loop:	Readings			References			Results	
	Air	Loop		Air	Loop		m	b
Deep	0.011	0.656	V	1.000	400.000	mmho/m	600.000	-3.000
Medium	-0.000	0.731	V	1.000	464.000	mmho/m	580.000	-10.500
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.007	0.649	V	0.000	400.000	mmho/m	623.784	-4.595
Medium	0.004	0.743	V	0.000	464.000	mmho/m	627.284	-2.251

Downhole Calibration								
	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	-0.824	395.917	mmho/m	-0.976	397.550	mmho/m	1.004	-0.149
Medium	3.565	471.327	mmho/m	3.468	471.590	mmho/m	1.001	-0.099
LL3		7.503	V		1500.000	Ohm-m		
		0.001	V		20.000	Ohm-m		
		-7.481	V		3745.000	mmho-m		

After Survey Verification								
	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	-0.824	395.917	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	3.565	471.327	mmho/m	1.000	0.000
LL3		0.000	Ohm-m		1500.000	Ohm-m		
		0.000	Ohm-m		20.000	Ohm-m		

0.000 mmho-m

3745.000 mmho-m

Litho Density Calibration Report

Serial: 140704

Model: V4_10P

Source Number: 74GBq-19

Master Calibration

Performed: Tue Oct 25 14:02:07 2022

	Background	Aluminum	Magnesium		
Window 1	501.98	5377.33	23235.87	cps	
Window 2	38.66	1167.13	5462.52	cps	
Window 4	219.95	1265.38	5296.65	cps	
Window 5	535.47	7345.58	14269.59	cps	
Window 6	42.48	1172.64	2113.12	cps	
Window 8	252.82	2368.74	4743.90	cps	
Bulk Density	-	2.6020	1.6830	g/cc	
Pe	-	3.0000	2.5070	b/e	
LS Alpha:	: -1.8018	SS Alpha:	: -0.8503	LS CPE:	: 1.2527
LS Beta:	: 116585.8005	SS Beta:	: 19984.2984	SS CPE:	: 1.5732

Before Survey Background Counts Verification

Performed: Wed Dec 31 18:00:00 1969

Window 1	0.00	cps
Window 2	0.00	cps
Window 4	0.00	cps
Window 5	0.00	cps
Window 6	0.00	cps
Window 8	0.00	cps

After Survey Background Counts Verification

Performed: Wed Dec 31 18:00:00 1969

Window 1	0.00	cps
Window 2	0.00	cps
Window 4	0.00	cps
Window 5	0.00	cps
Window 6	0.00	cps
Window 8	0.00	cps

Lithodensity Caliper Calibration

Performed: Tue Oct 25 14:02:07 2022

Results	Readings	References (in)		Gain	Offset
Low	High	Low	High		
9378.6	12243.0	8.0	14.0	0.0	-11.2

Before Survey Caliper Verification

Performed:

Reference	Reading
_____	_____
Caliper (in)	

After Survey Caliper Verification

Performed:

Reference	Reading
_____	_____
Caliper (in)	

Compensated Neutron Calibration Report			
Serial Number:		080621PMC	
Tool Model:		NABORS	
PRE-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu
POST-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu
Gamma Ray Calibration Report			
Serial Number:	7		
Tool Model:	Probe1		
Performed:	Thu May 26 08:56:46 2022		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.5500	GAPI/cps	