MIDWEST WIRELINE

GAMMA RAY / CALIPER LOG

Company Murfin Drilling Company, Inc.
Well Culwell H #3-19
Field
County Cheyenne State Kansas
Location: API #: 15-023-21595-00-00
990 FSL & 1980 FEL
SEC 19 TWP 2S RGE 37W

Other Services: CNL/CDL, DIL/MEL, BHCS

Elevation: K.B. 3356, D.F., G.L. 3351

Permanent Datum: Ground Level, Elevation 3351
Log Measured From: Kelly Bushing
Drilling Measured From: Kelly Bushing

Company	Murfin Drilling Company, Inc.
Well	Culwell H #3-19
Field	
County	Cheyenne
State	Kansas

Date	1/14/2023							
Run Number	One							
Type Log	BHV							
Depth Driller	4850							
Depth Logger	4852							
Bottom Logged Interval	4823							
Top Logged Interval	300							
Type Fluid In Hole	Chemical							
Salinity, PPM CL	700							
Density	9.4							
Level	Full							
Max. Rec. Temp. F	125							
Operating Rig Time	5 Hours							
Equipment -- Location	P-108 HAYS							
Recorded By	D. Schmidt							
Witnessed By	Robert Hendrix							

Borehole Record

Run No.	Bit	From	To
One	12.25	0	307
Two	7.875	307	TD

Casing Record

Size	Wgt.	From	To
8.625	23	0	307

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and Midwest Wireline LLC cannot and does not guarantee the accuracy or correctness of any interpretation, and Midwest Wireline LLC will not be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees.

Comments

N/A DENOTES NOT AVAILABLE OR NON-APPLICABLE.

Bird City,
North to R Rd, 2 East, 3 1/3 North,
West into

Log Measured From: Kelly Bushing 5 Ft. Above Permanent Datum

THANK YOU FOR USING MIDWEST WIRELINE LLC
785-625-3858

Your Midwest Wireline Crew	This Log Record Was Witnessed By
Engineer: D. Schmidt	Primary Witness: Robert Hendrix
Operator:	Secondary Witness:
Operator:	Secondary Witness:
Operator:	Secondary Witness:

Sensor	Offset (ft)	Schematic	Description	Length (ft)	O.D. (in)	Weight (lb

Sensor	Offset (ft)	Schematic	Description	Length (ft)	O.D. (in)	Weight (lb
GR	40.33		GR-M&W (103)	3.00	3.50	50.00
CNLSC	37.23		CNT-M&W (210)	5.00	3.50	100.00
CNSSC	36.48					
			CDL-M&W (303-03)	8.50	4.00	250.00
LSD	28.18					
DCAL	28.17					
SSD	27.68					
			ML-PSI STKBL ML (402)	7.58	4.00	65.00
MCAL	19.58					
MI	19.58					
MN	19.58					
RLL3F	15.50					
RLL3	15.50					
			DIL-M&W (505 HT)	18.25	3.50	220.00
CILD	8.33					
CILM	4.50					
SP	0.20					

Dataset: murfin_culwell h 3-19.db: field/well/stkml/pass4.12
Total length: 42.33 ft
Total weight: 685.00 lb
O.D.: 4.00 in

Log Variables

DatabaseC:\ProgramData\Warrior\Data\murfin_culwell h 3-19.db
Dataset field/well/stkml/pass4.12/_vars_

Top - Bottom

A	BOREID in	BOTTEMP degF	CASEOD in	CASETHCK in	FLUIDDEN g/cc	M	MATRXDEN g/cc
1	7.875	125	5.5	0	1	2	2.71

NPORSEL	PERFS	SNDERR mmho/m	SNDERRM mmho/m	SPSHIFT mV	SRFTEMP degF	SZCOR	TDEPTH ft
Limestone	No	0	0	340	30	Off	4852

Variable Description

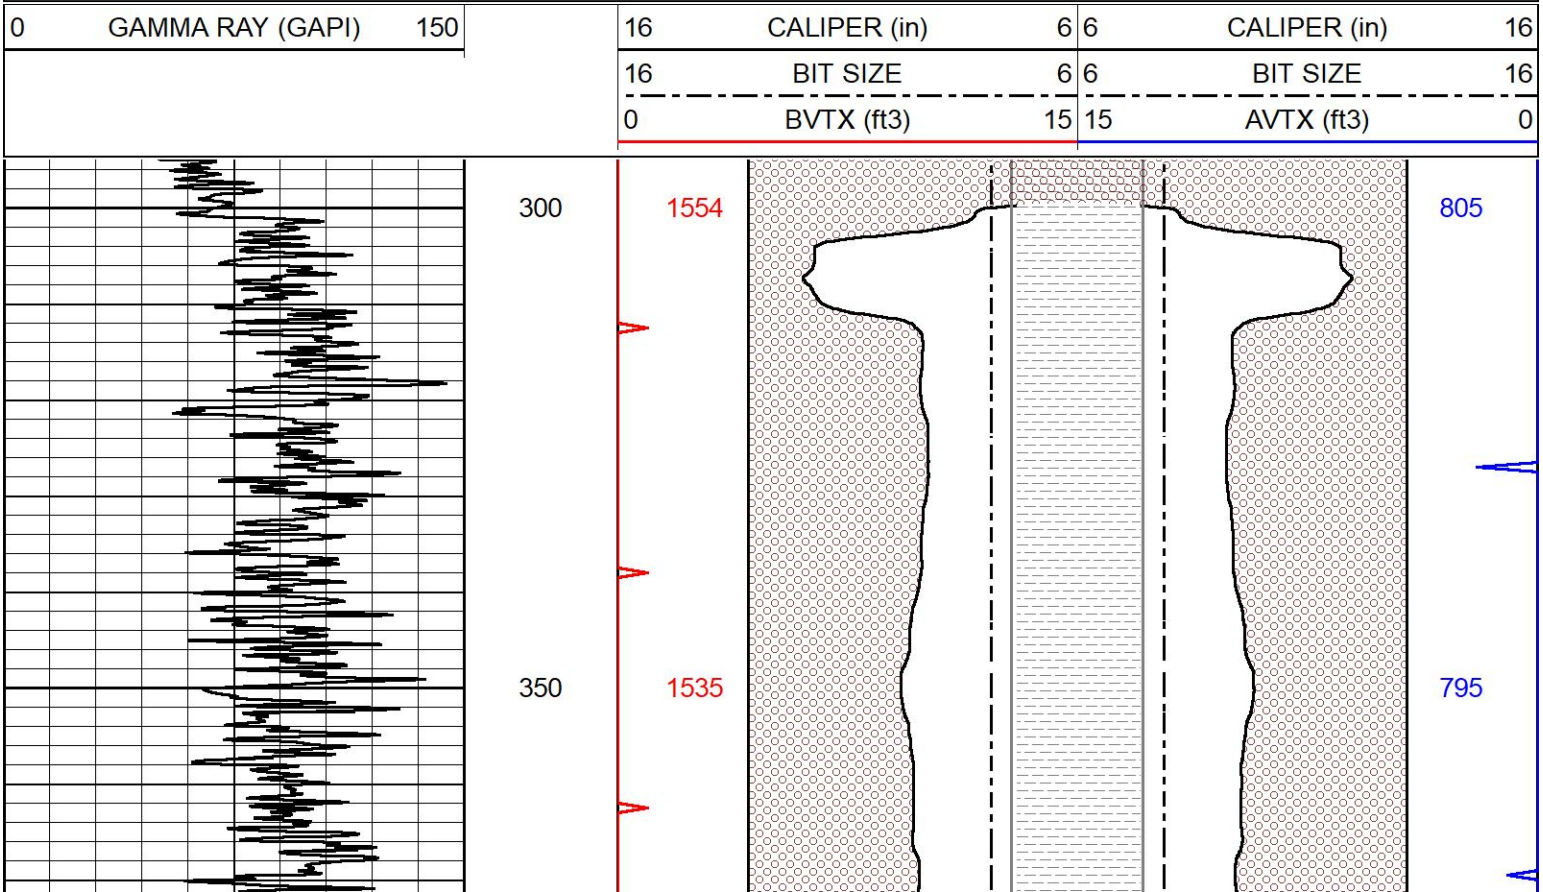
A : Cement Factor (a)
BOREID : Borehole I.D.
BOTTEMP : Bottom Hole Temperature
CASEOD : Casing O.D.
CASETHCK : Casing Thickness
FLUIDDEN : Fluid Density
M : Cement Exp (m)
MATRXDEN : Matrix Density
NPORSEL : Neutron Porosity Curve Select
PERFS : Perforation Flag
SNDERR : Deep Sonde Error Correction
SNDERRM : Medium Sonde Error Correction
SPSHIFT : S.P. Baseline Offset
SRFTEMP : Surface Temperature
SZCOR : CN Size Cor. ?
TDEPTH : Total Depth

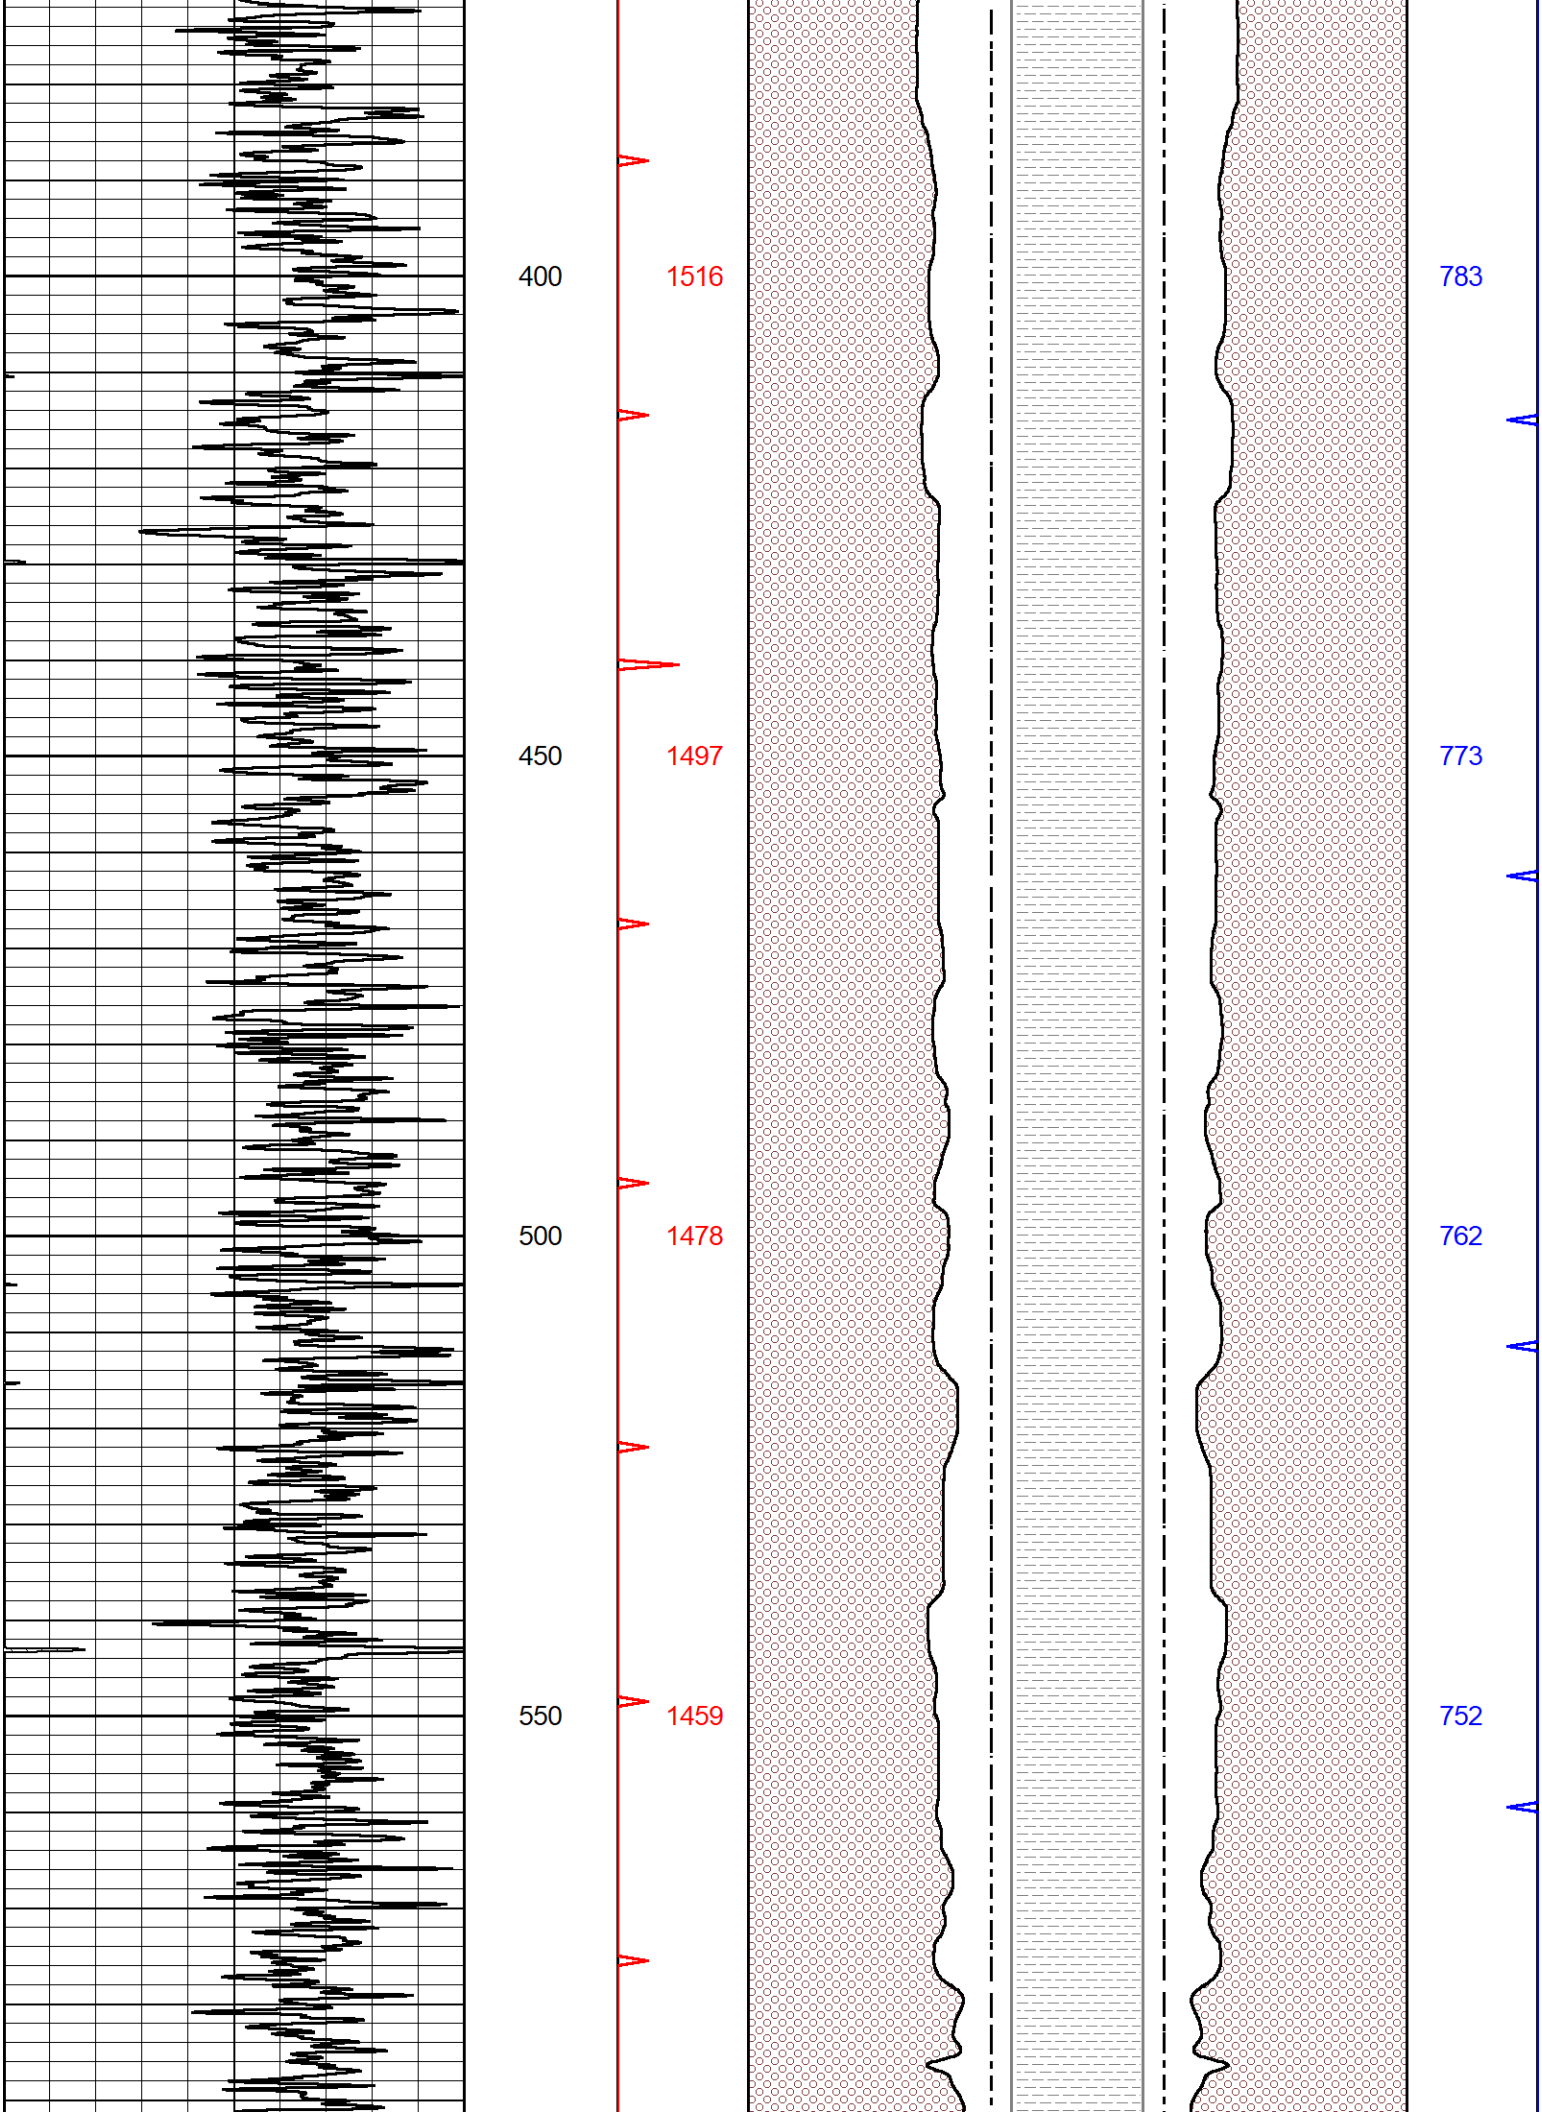
MIDWEST WIRELINE

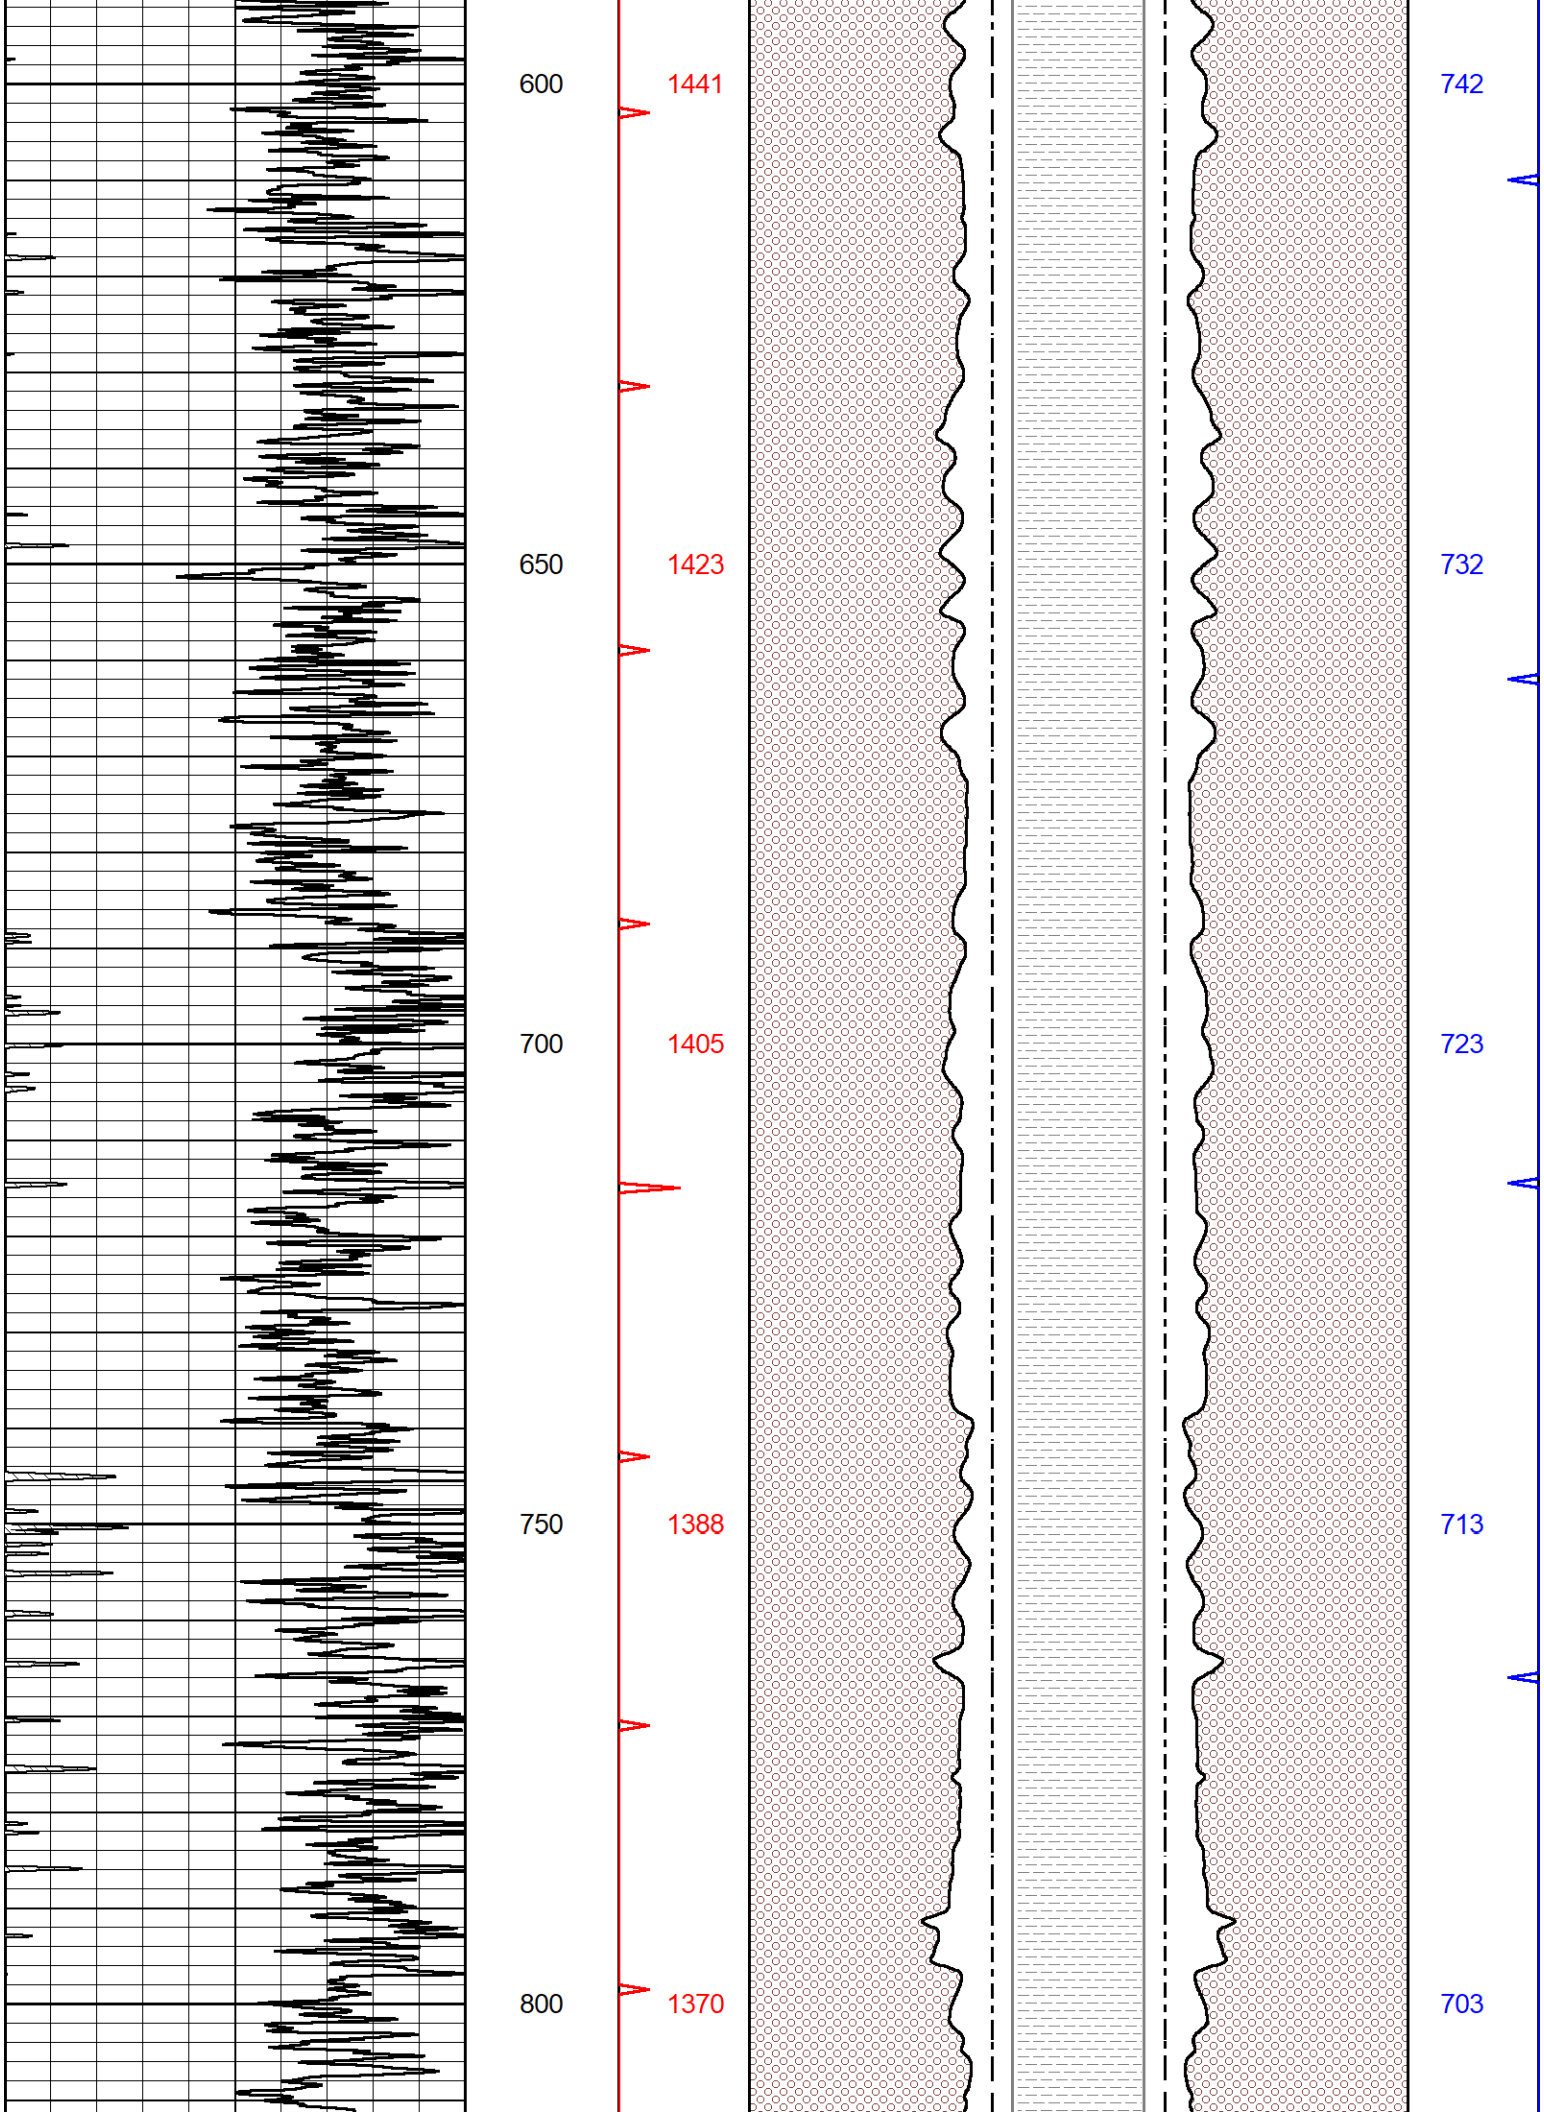
DETAIL SECTION

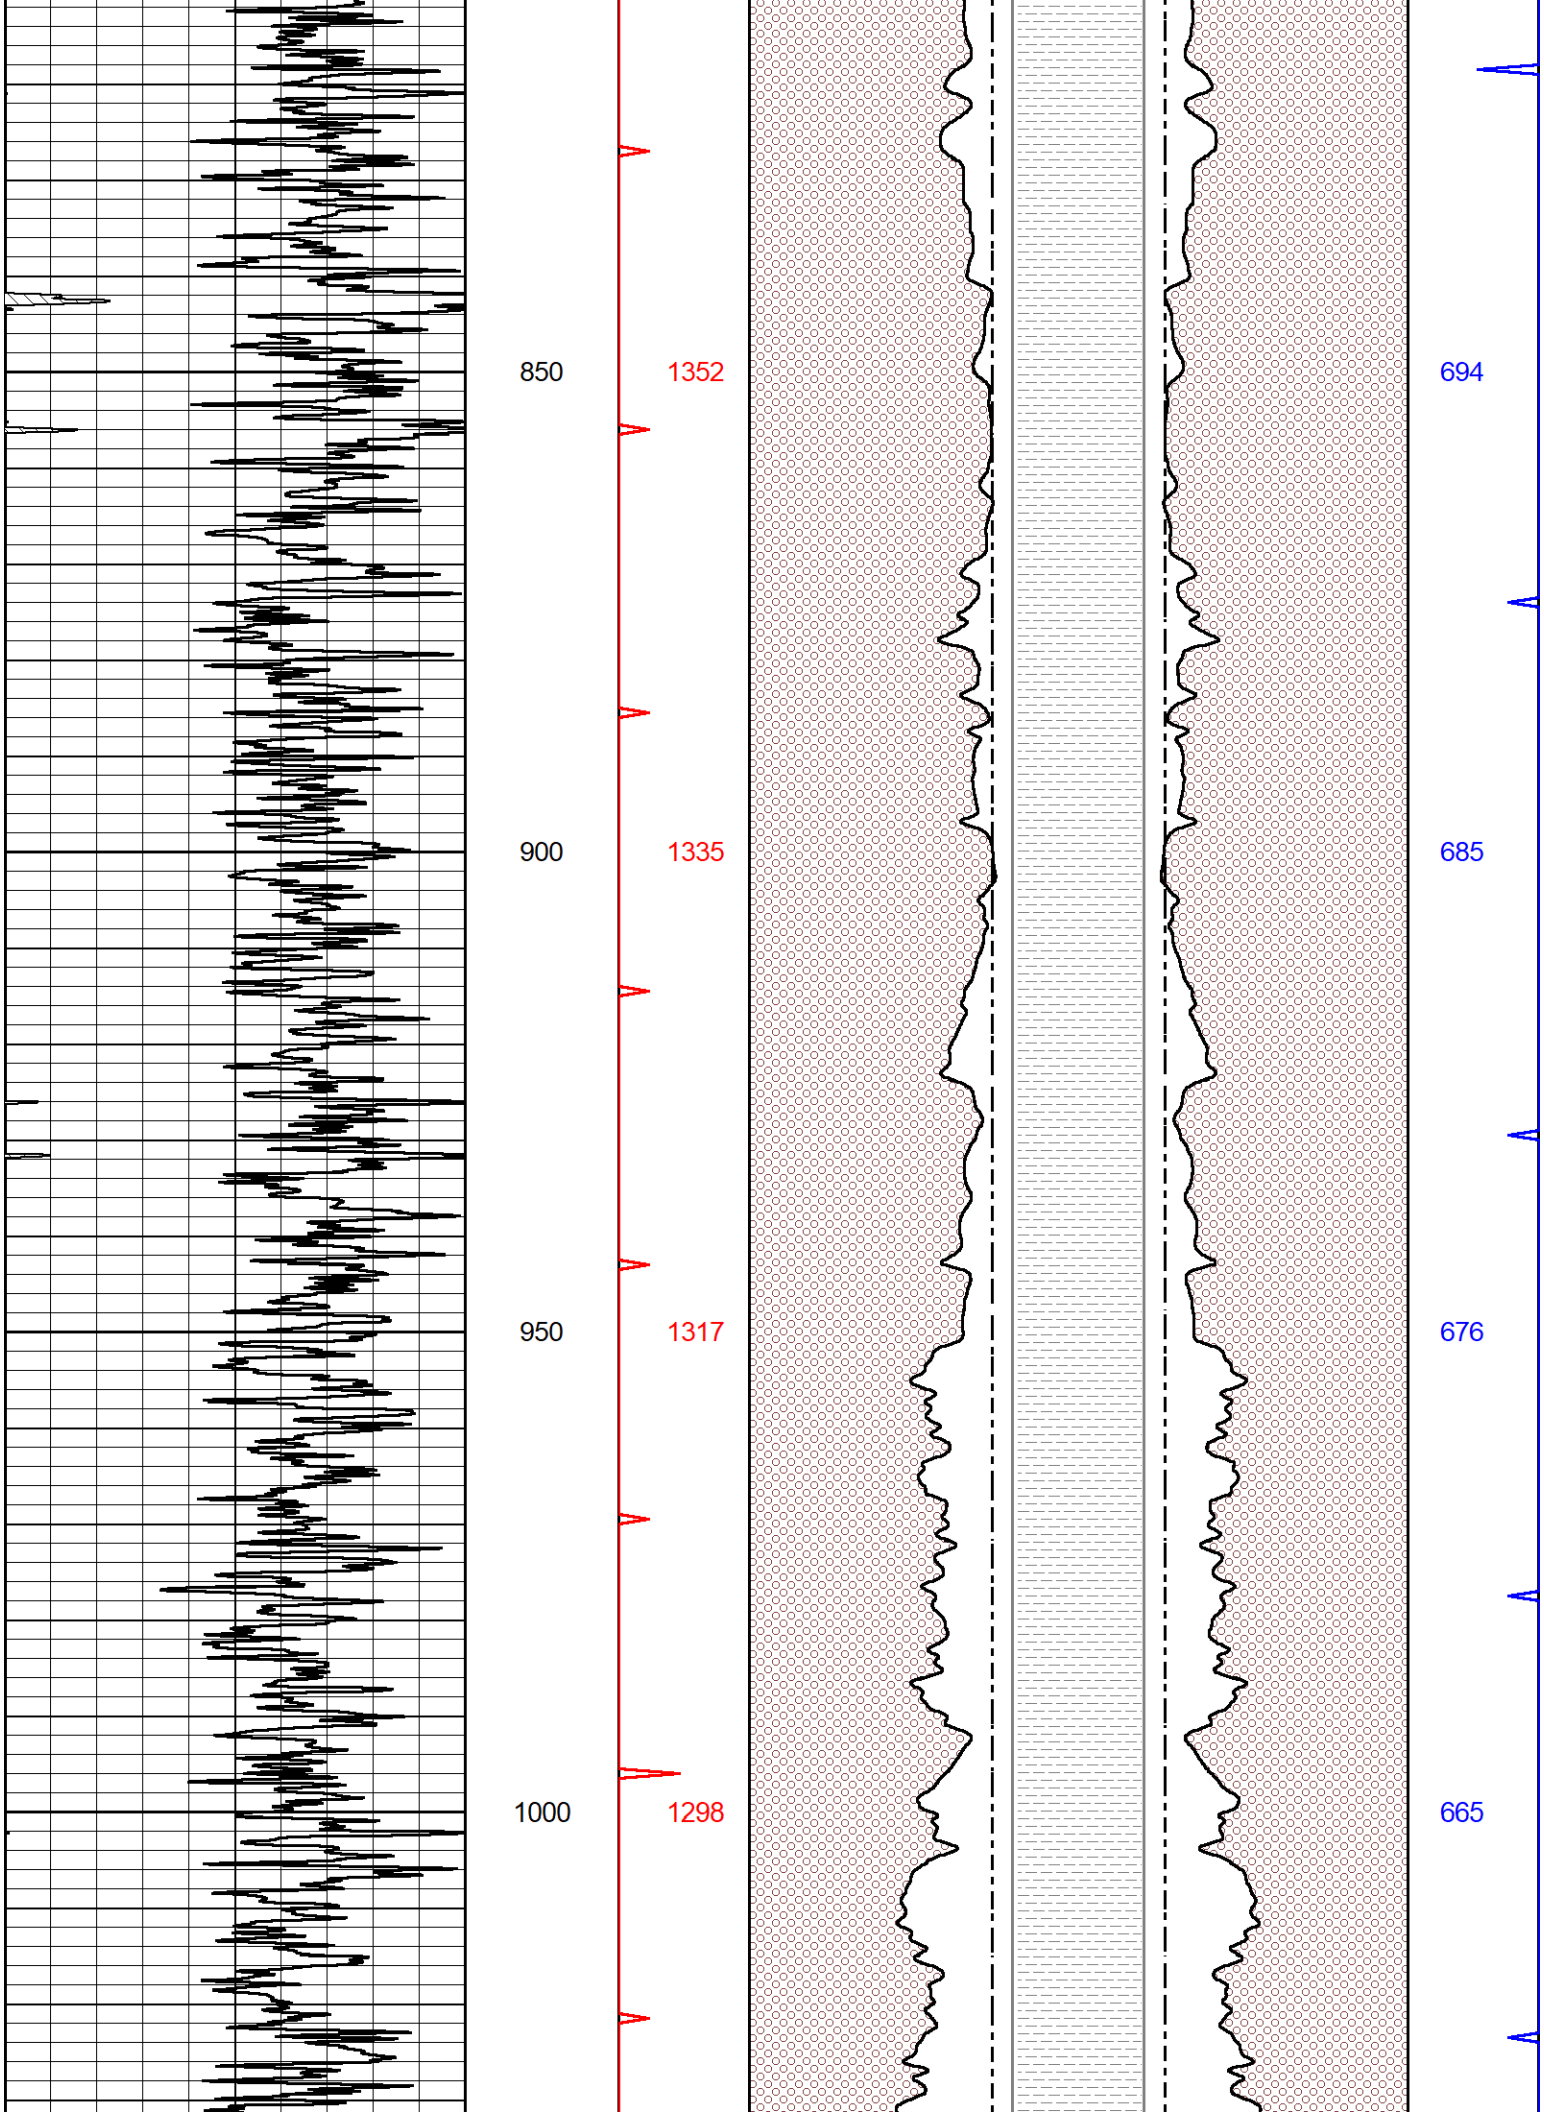
MAIN PASS

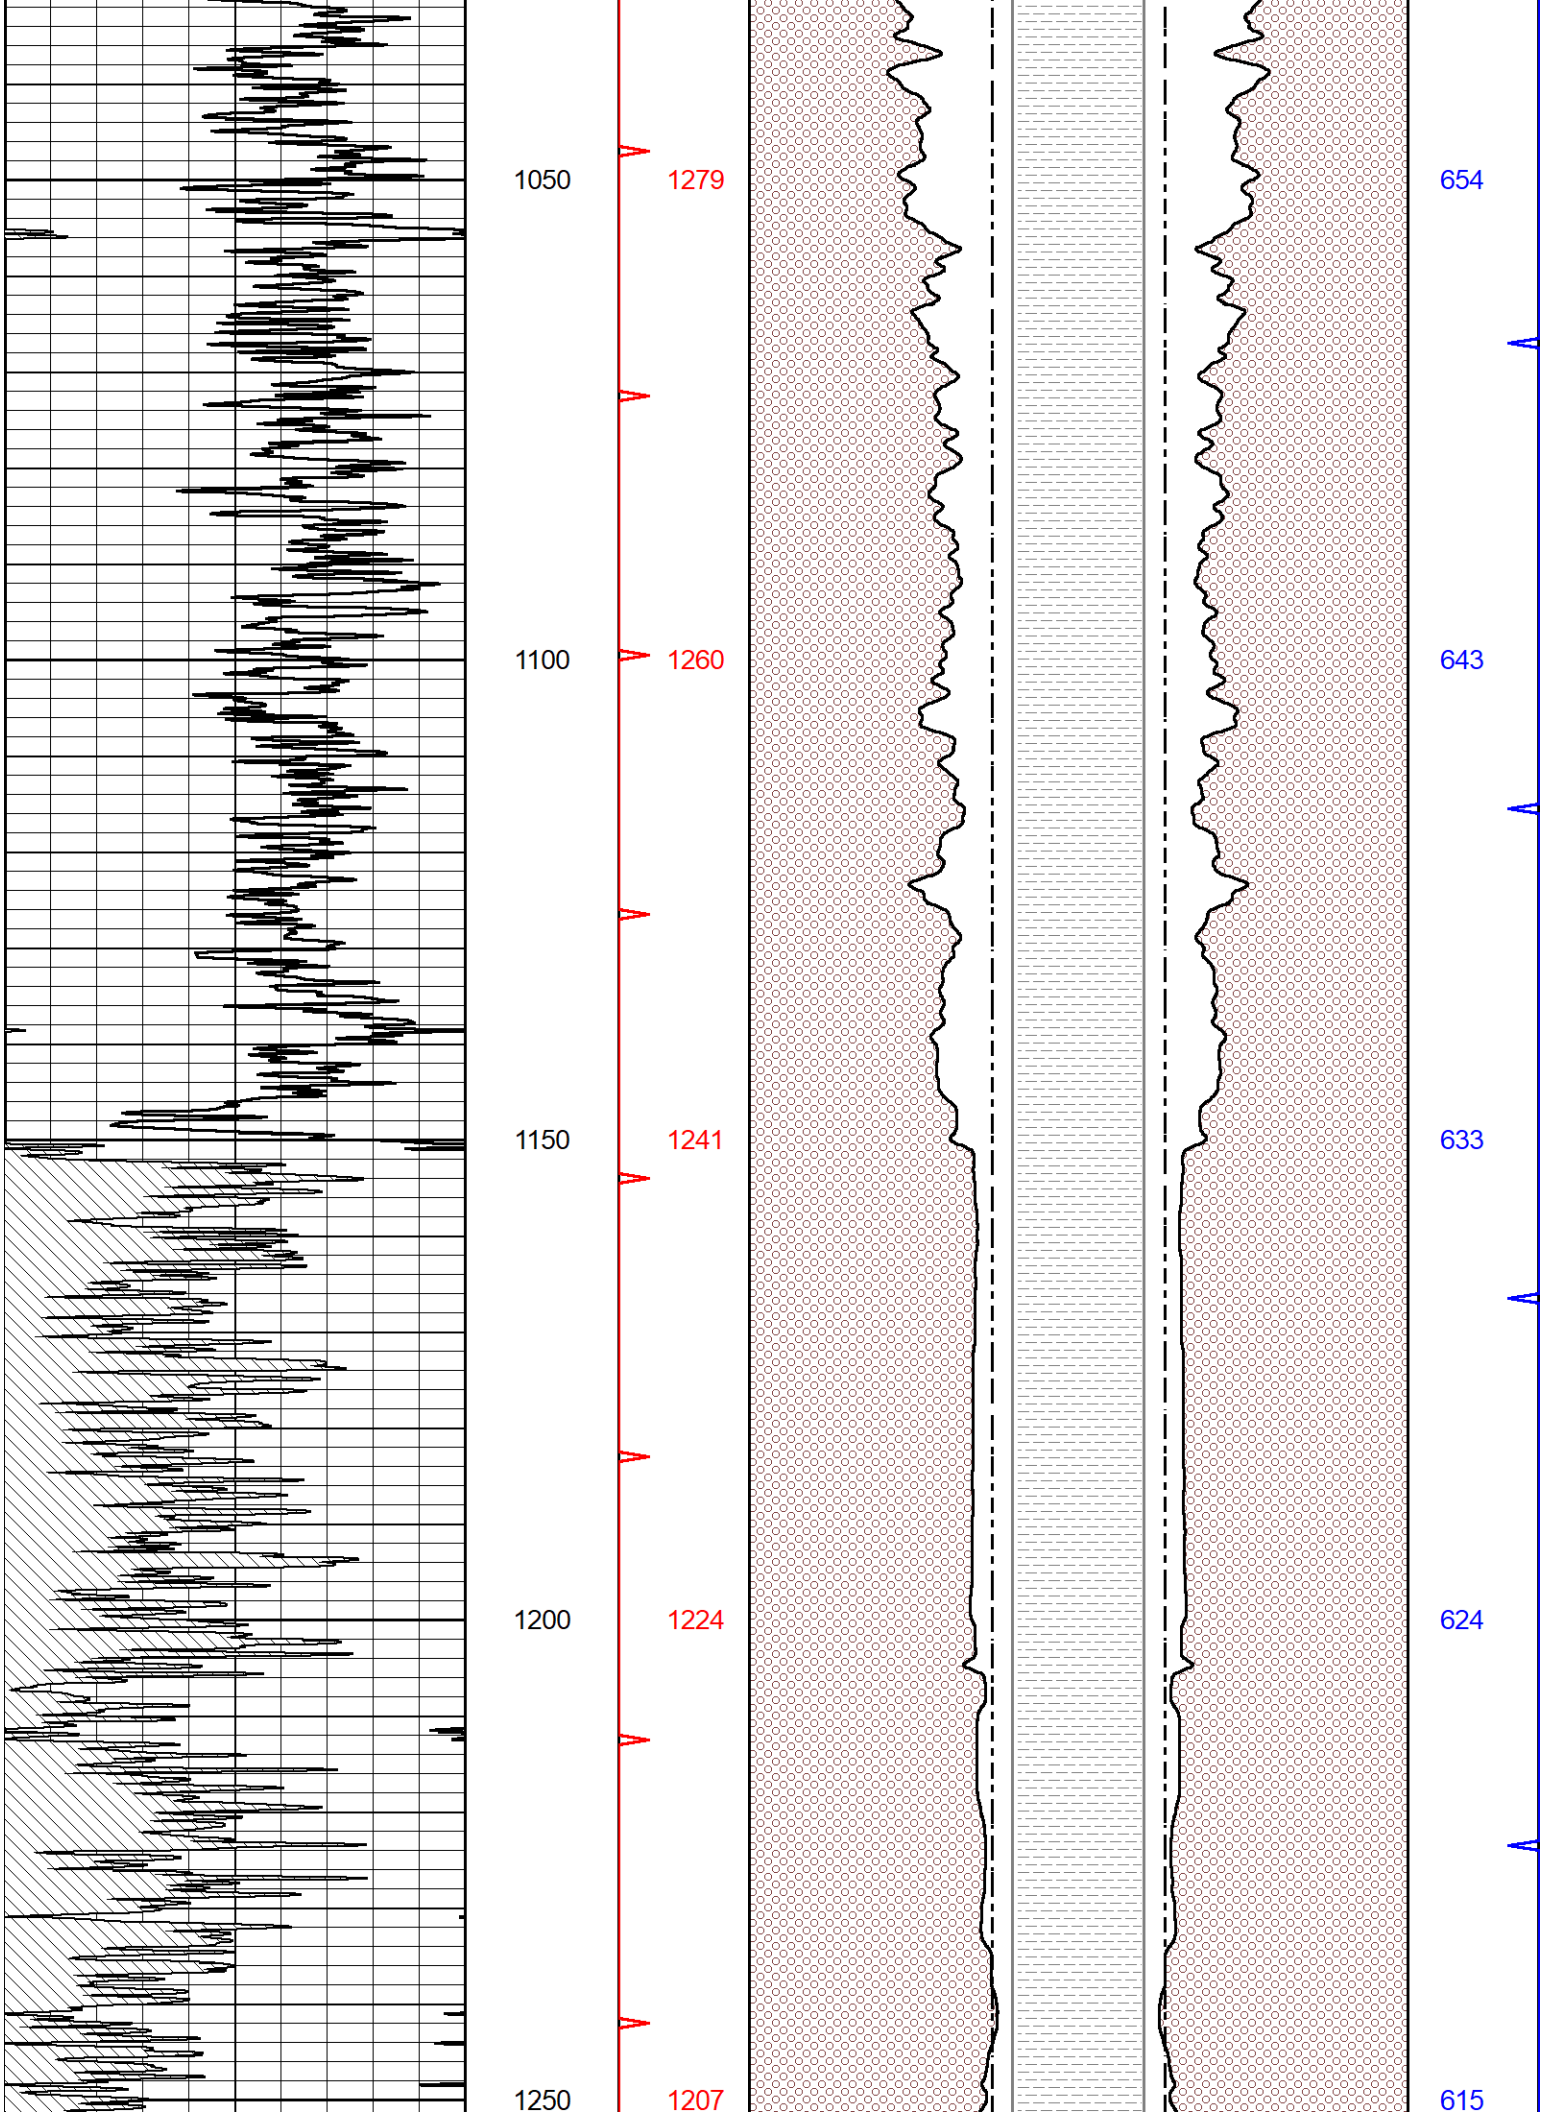
Database File	murfin_culwell h 3-19.db
Dataset Pathname	stkml/pass4.1
Presentation Format	bhv5half
Dataset Creation	Sat Jan 14 23:37:58 2023
Charted by	Depth in Feet scaled 1:240

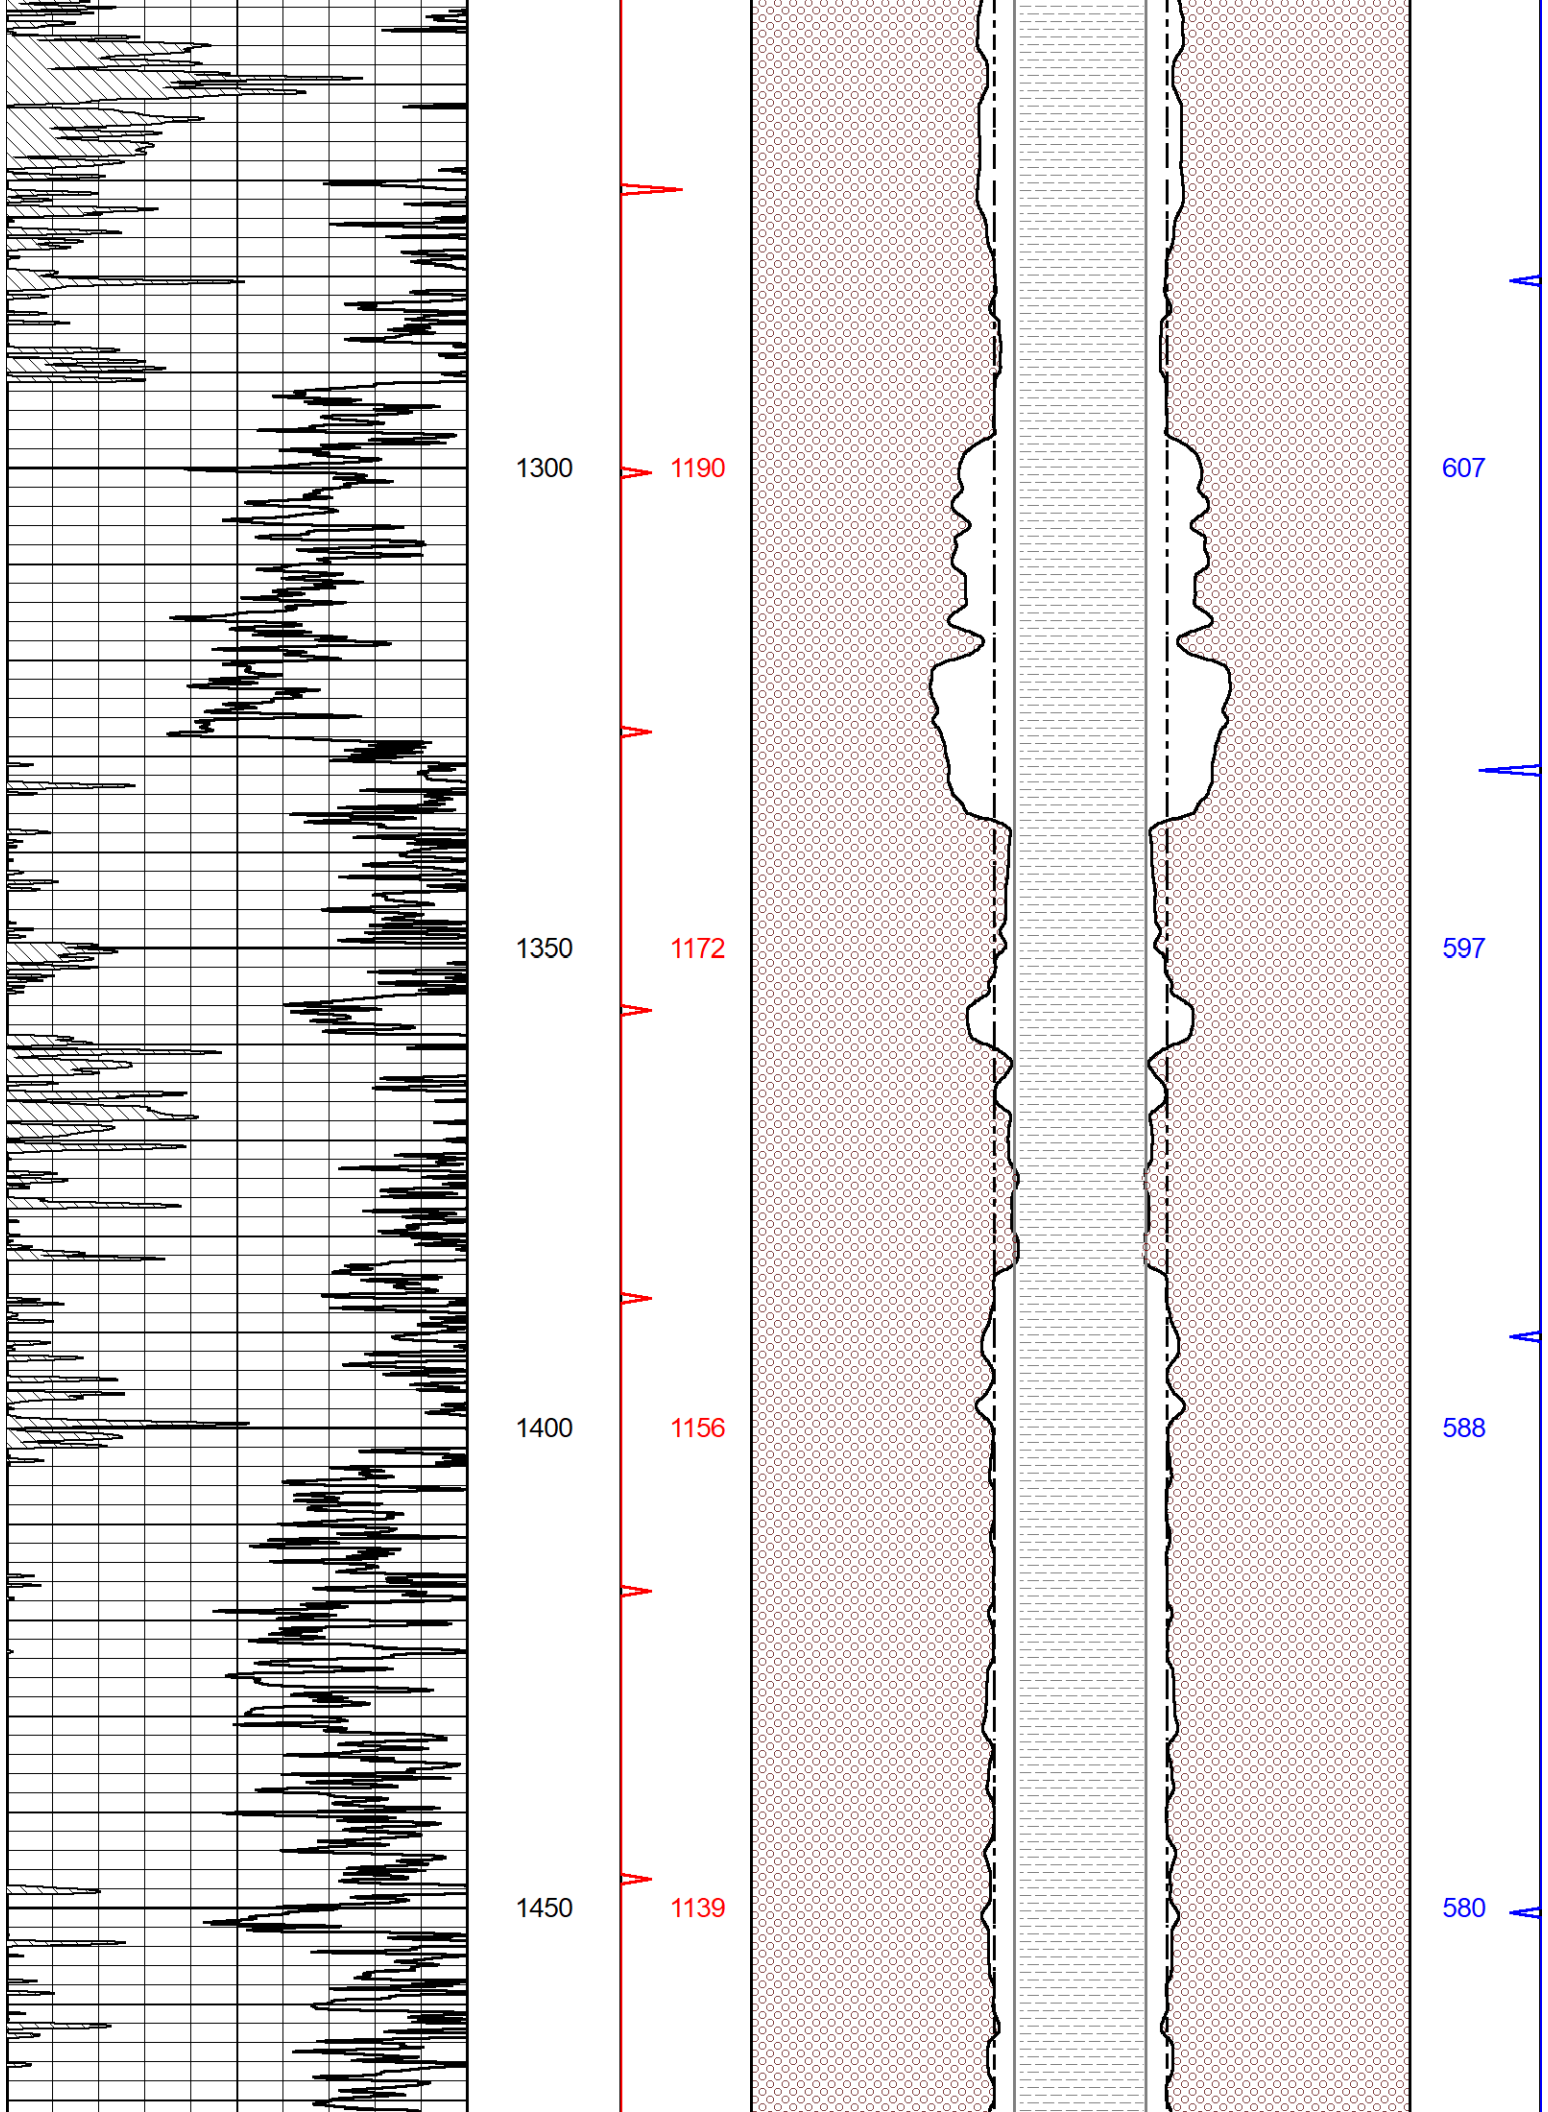


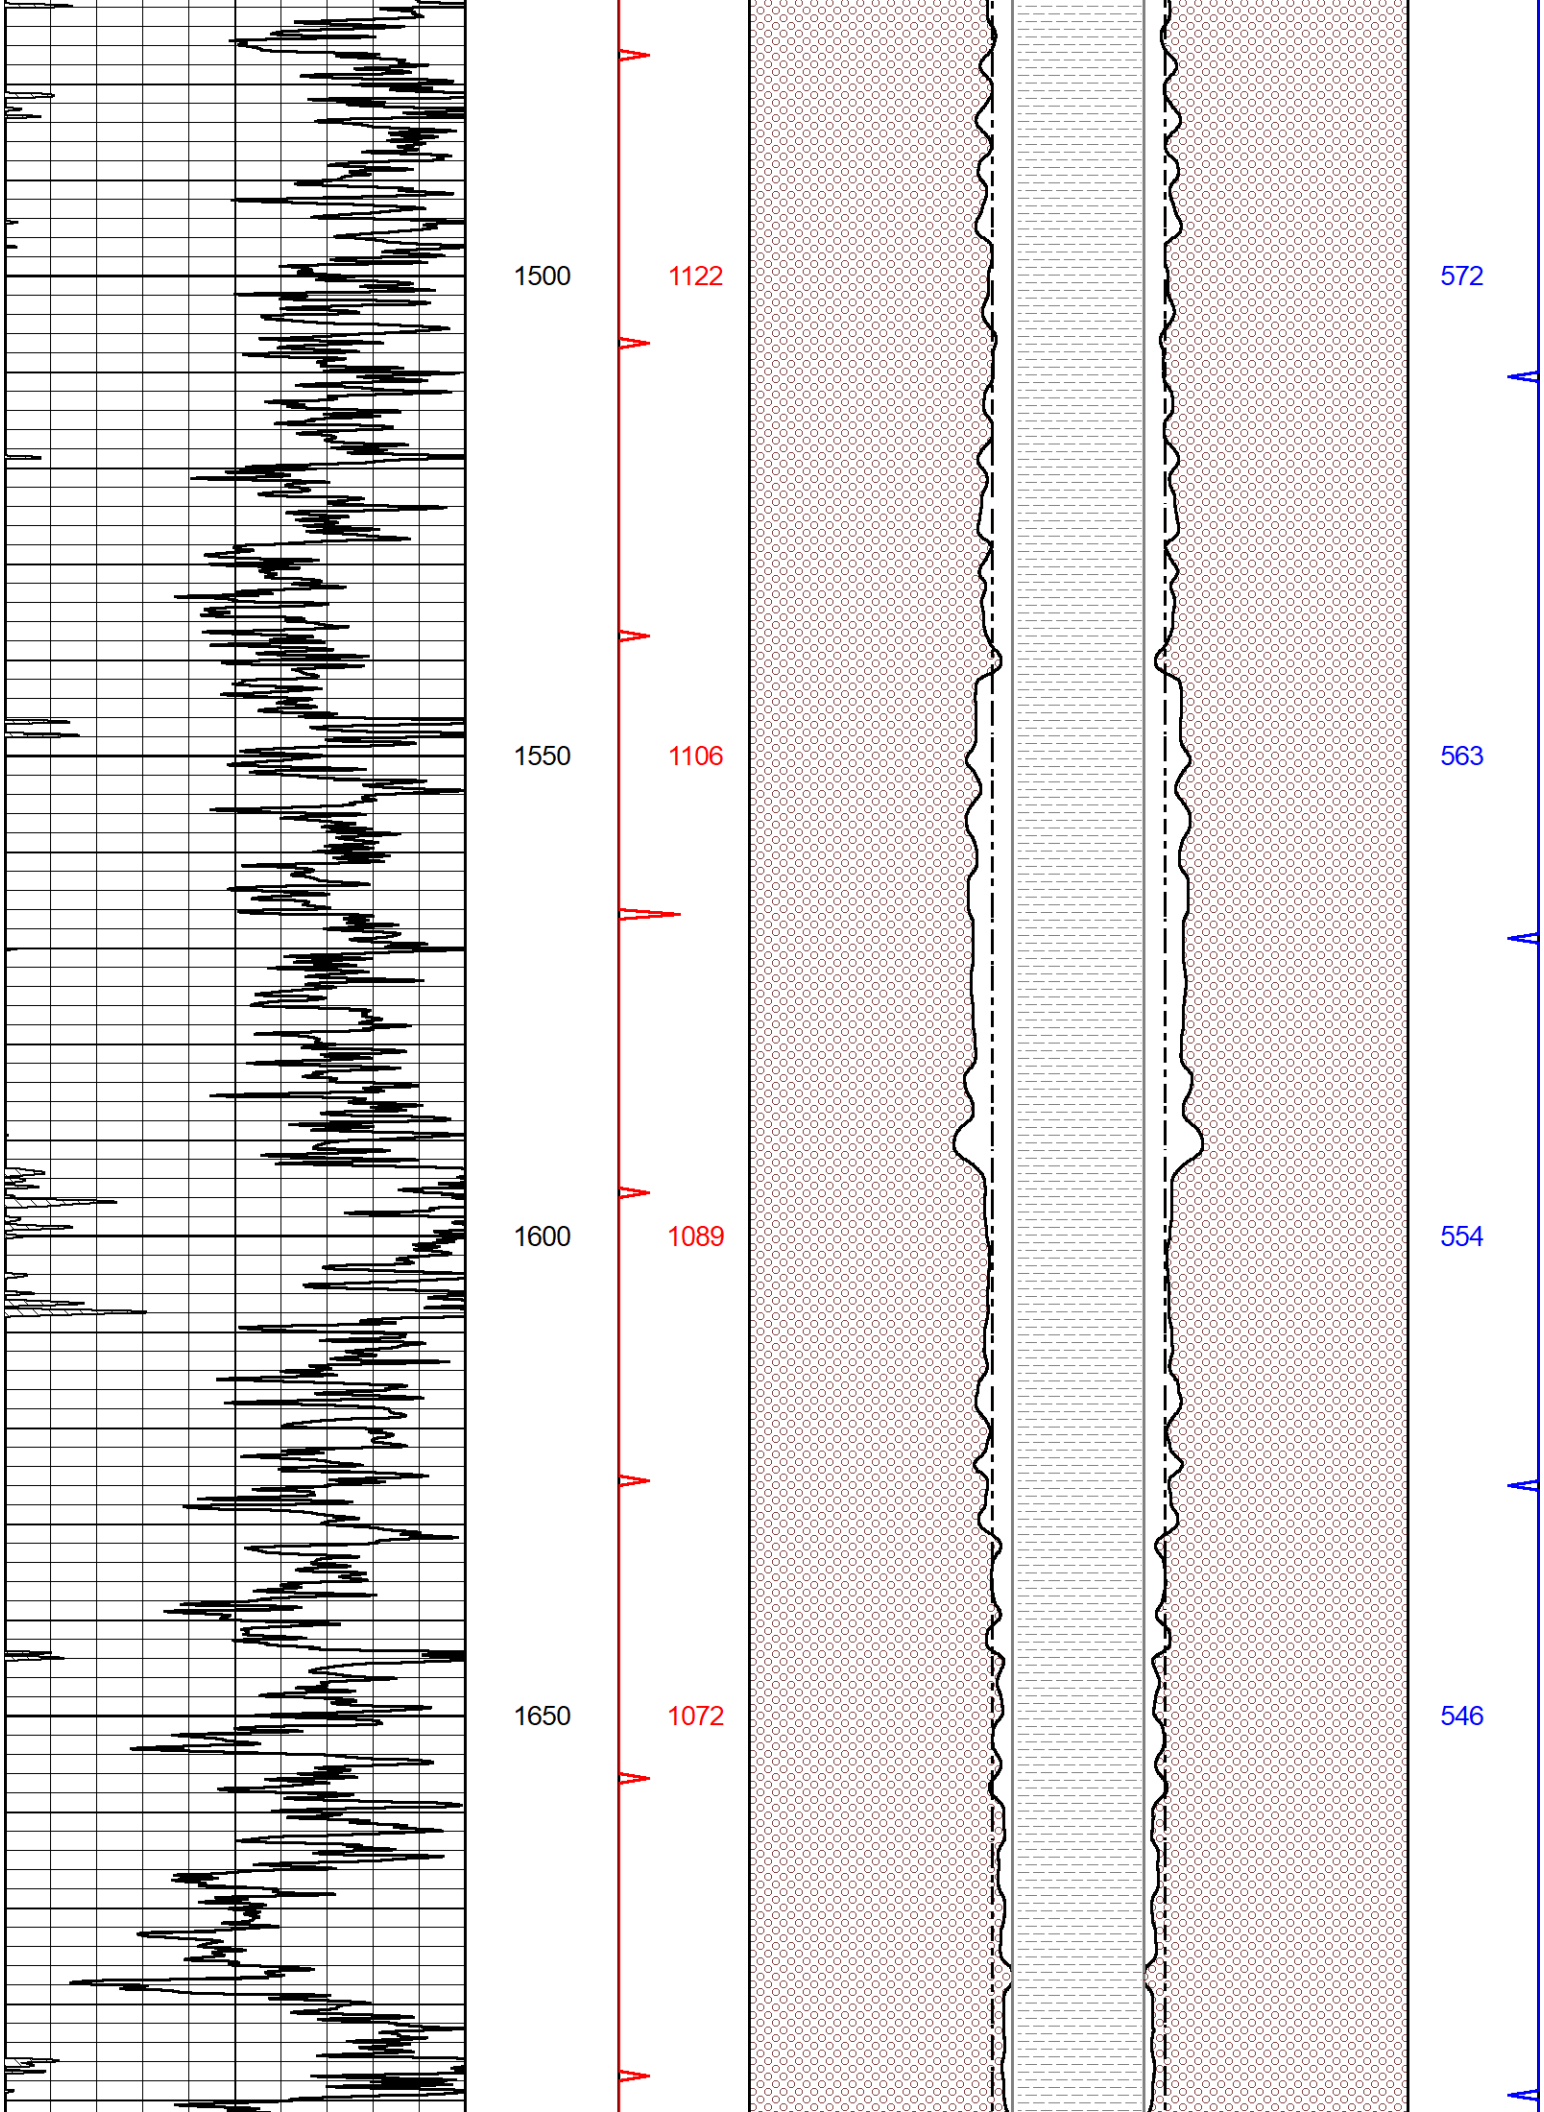

400
1516
783
450
1497
773
500
1478
762
550
1459
752

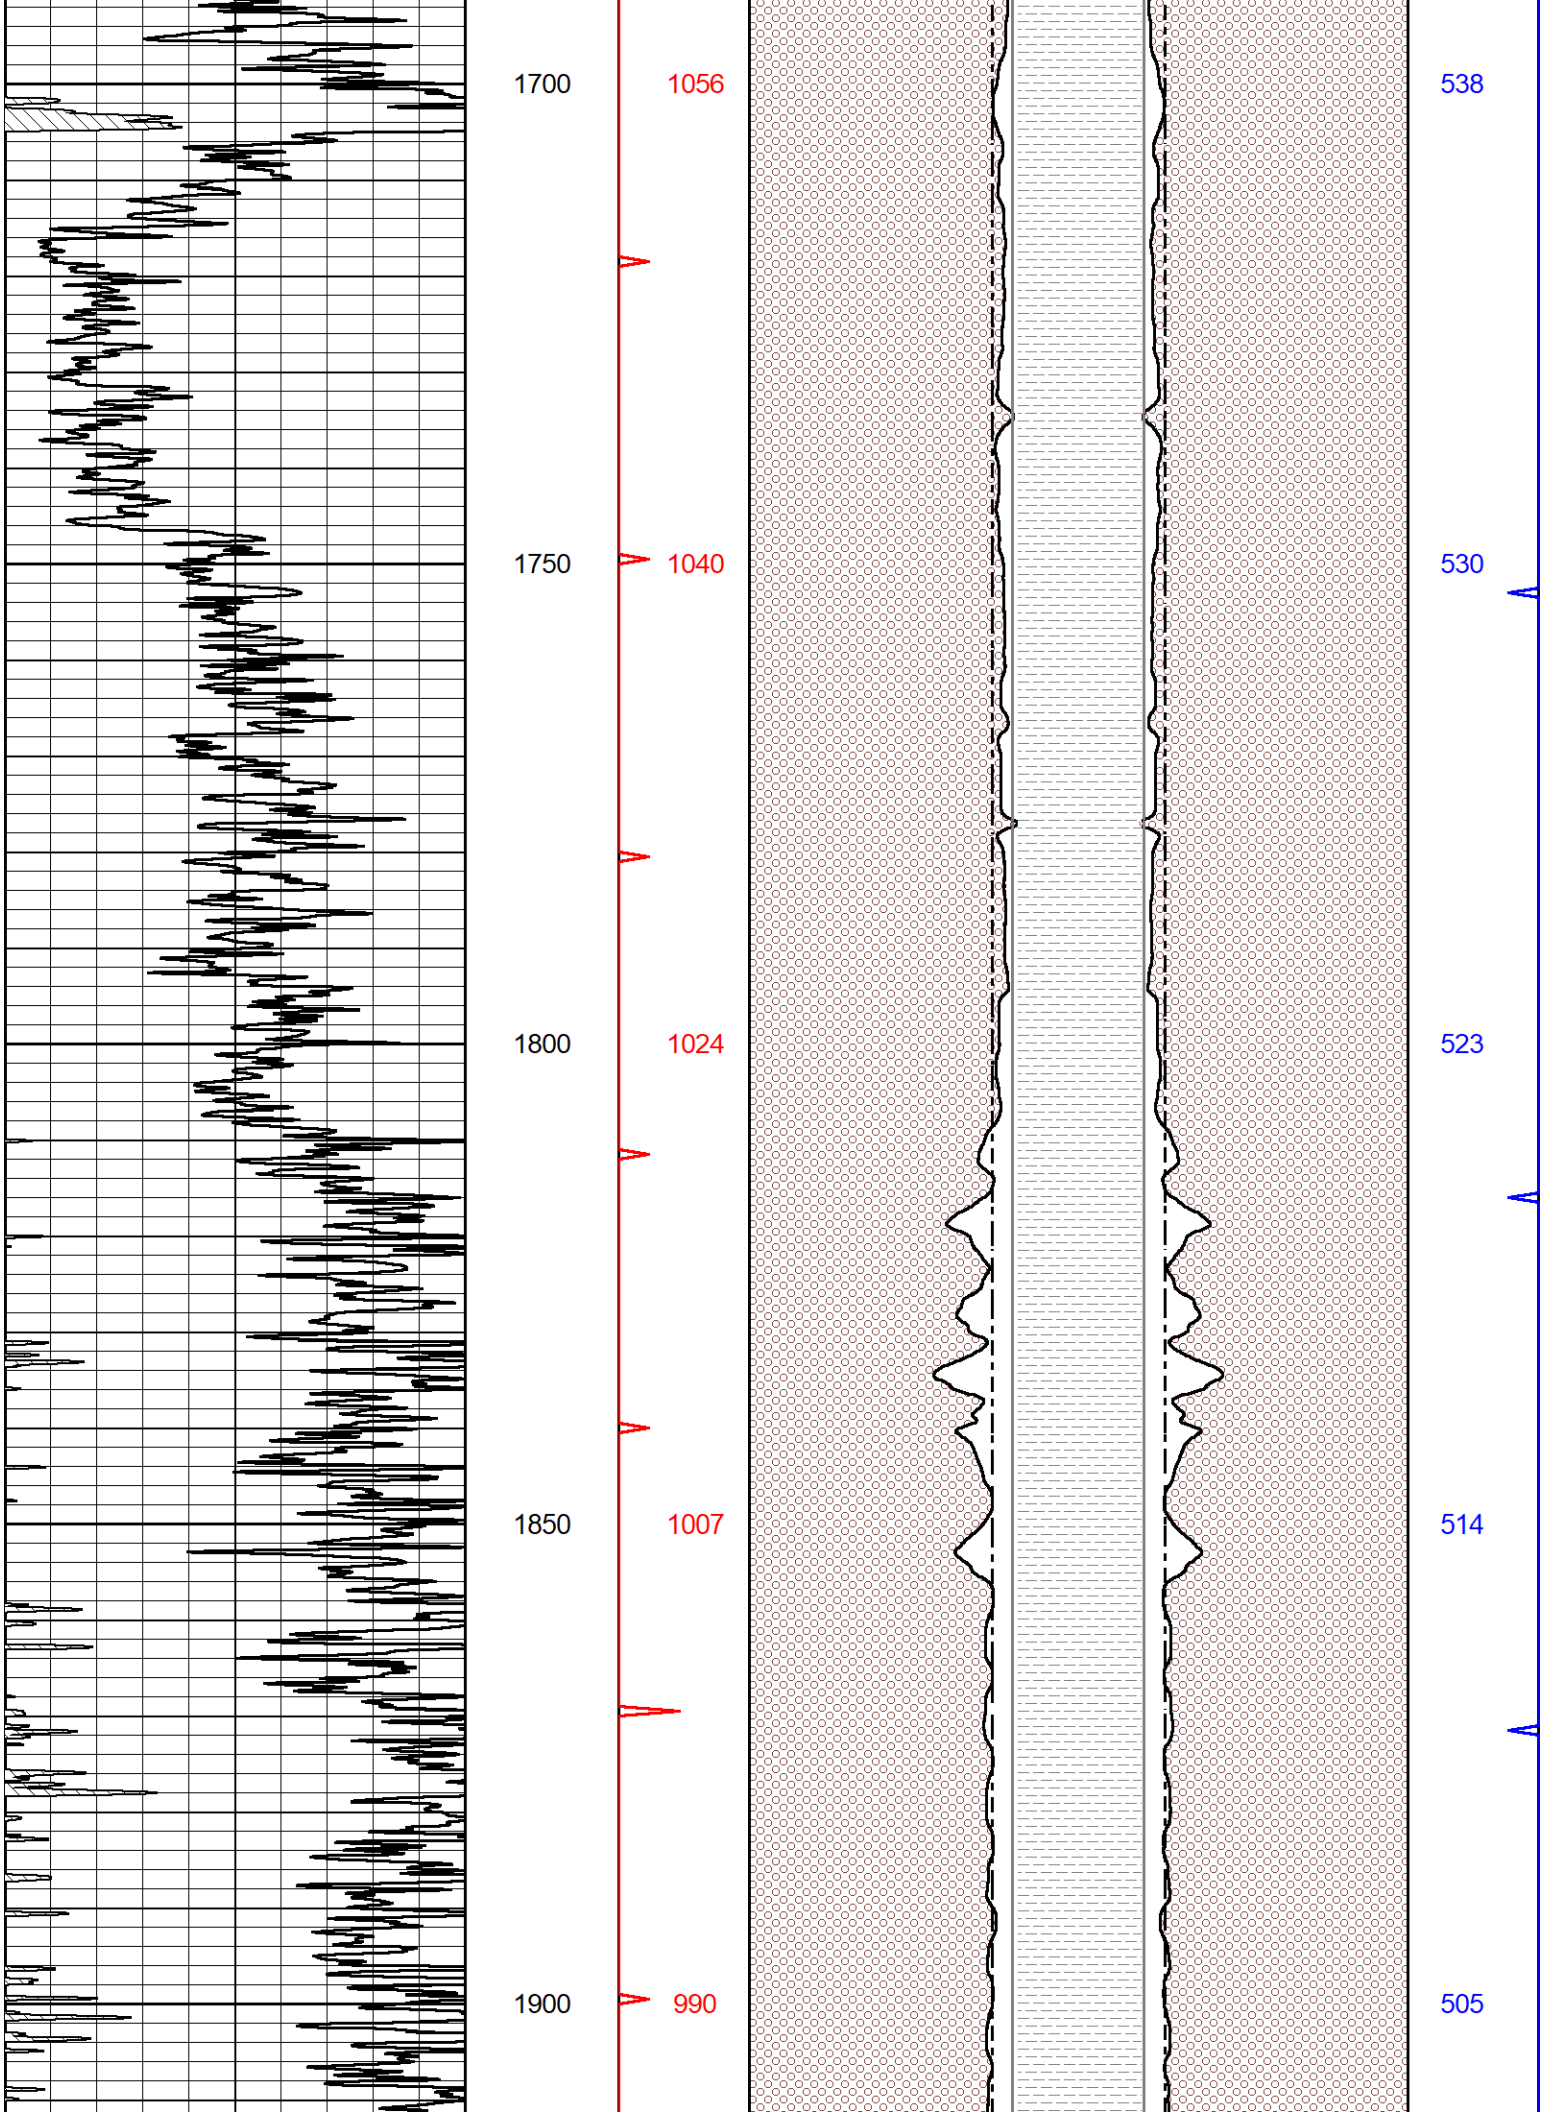

600
1441
742
650
1423
732
700
1405
723
750
1388
713
800
1370
703

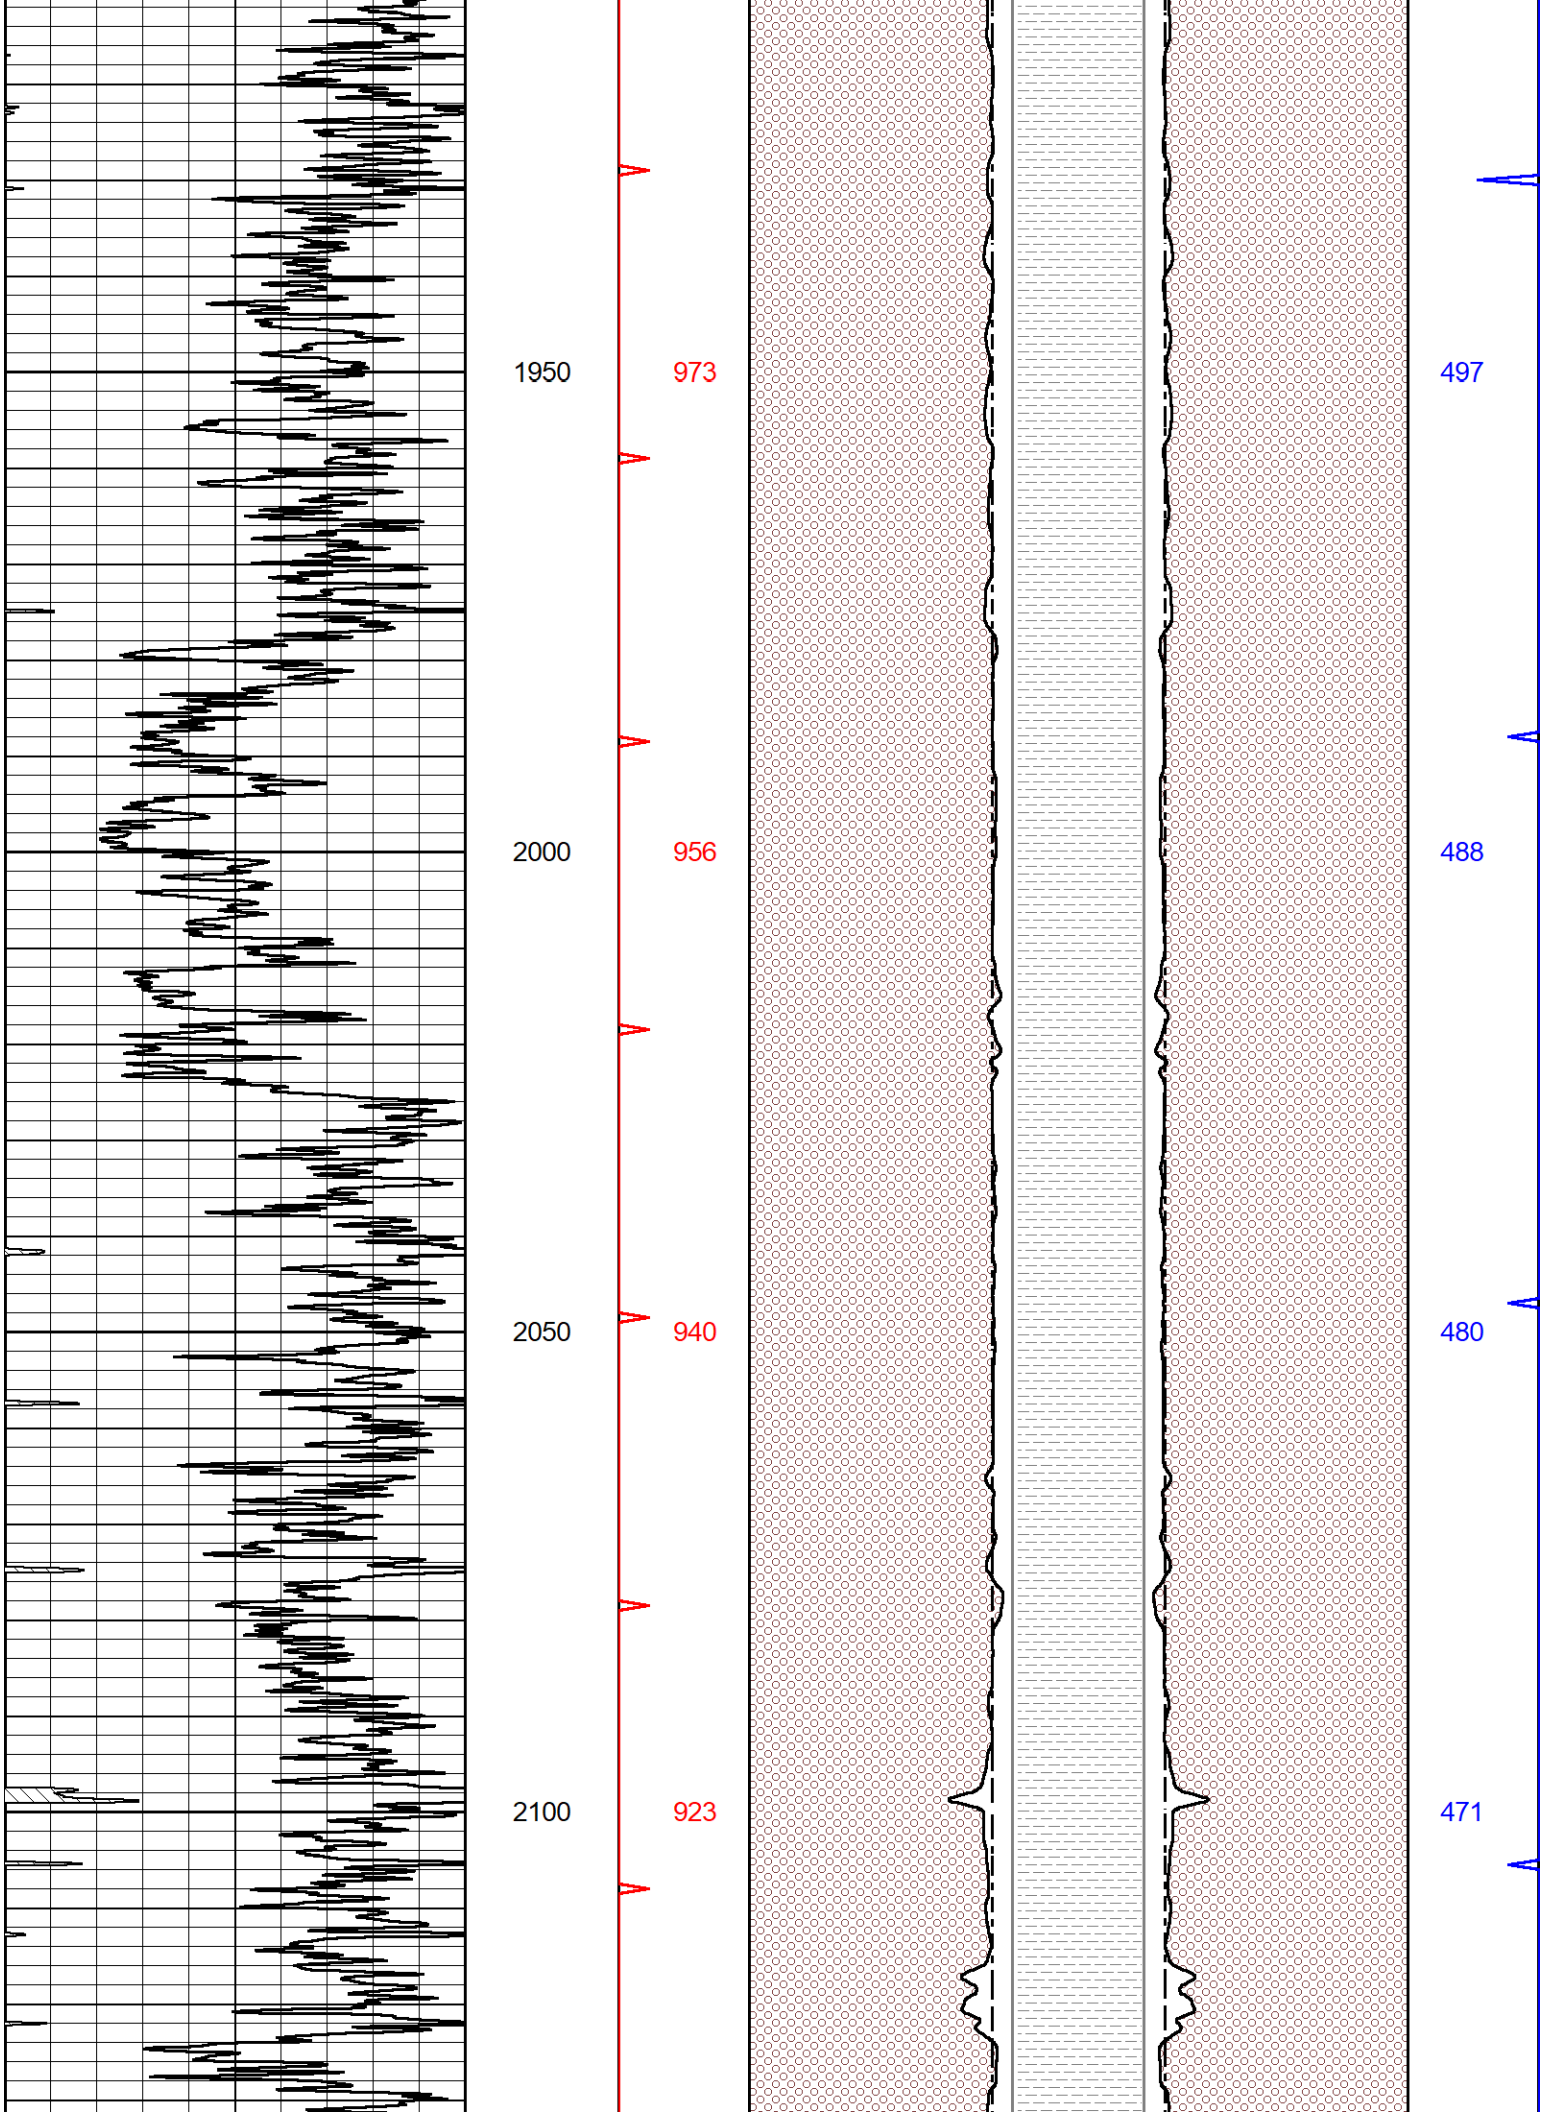

850
1352
694
900
1335
685
950
1317
676
1000
1298
665

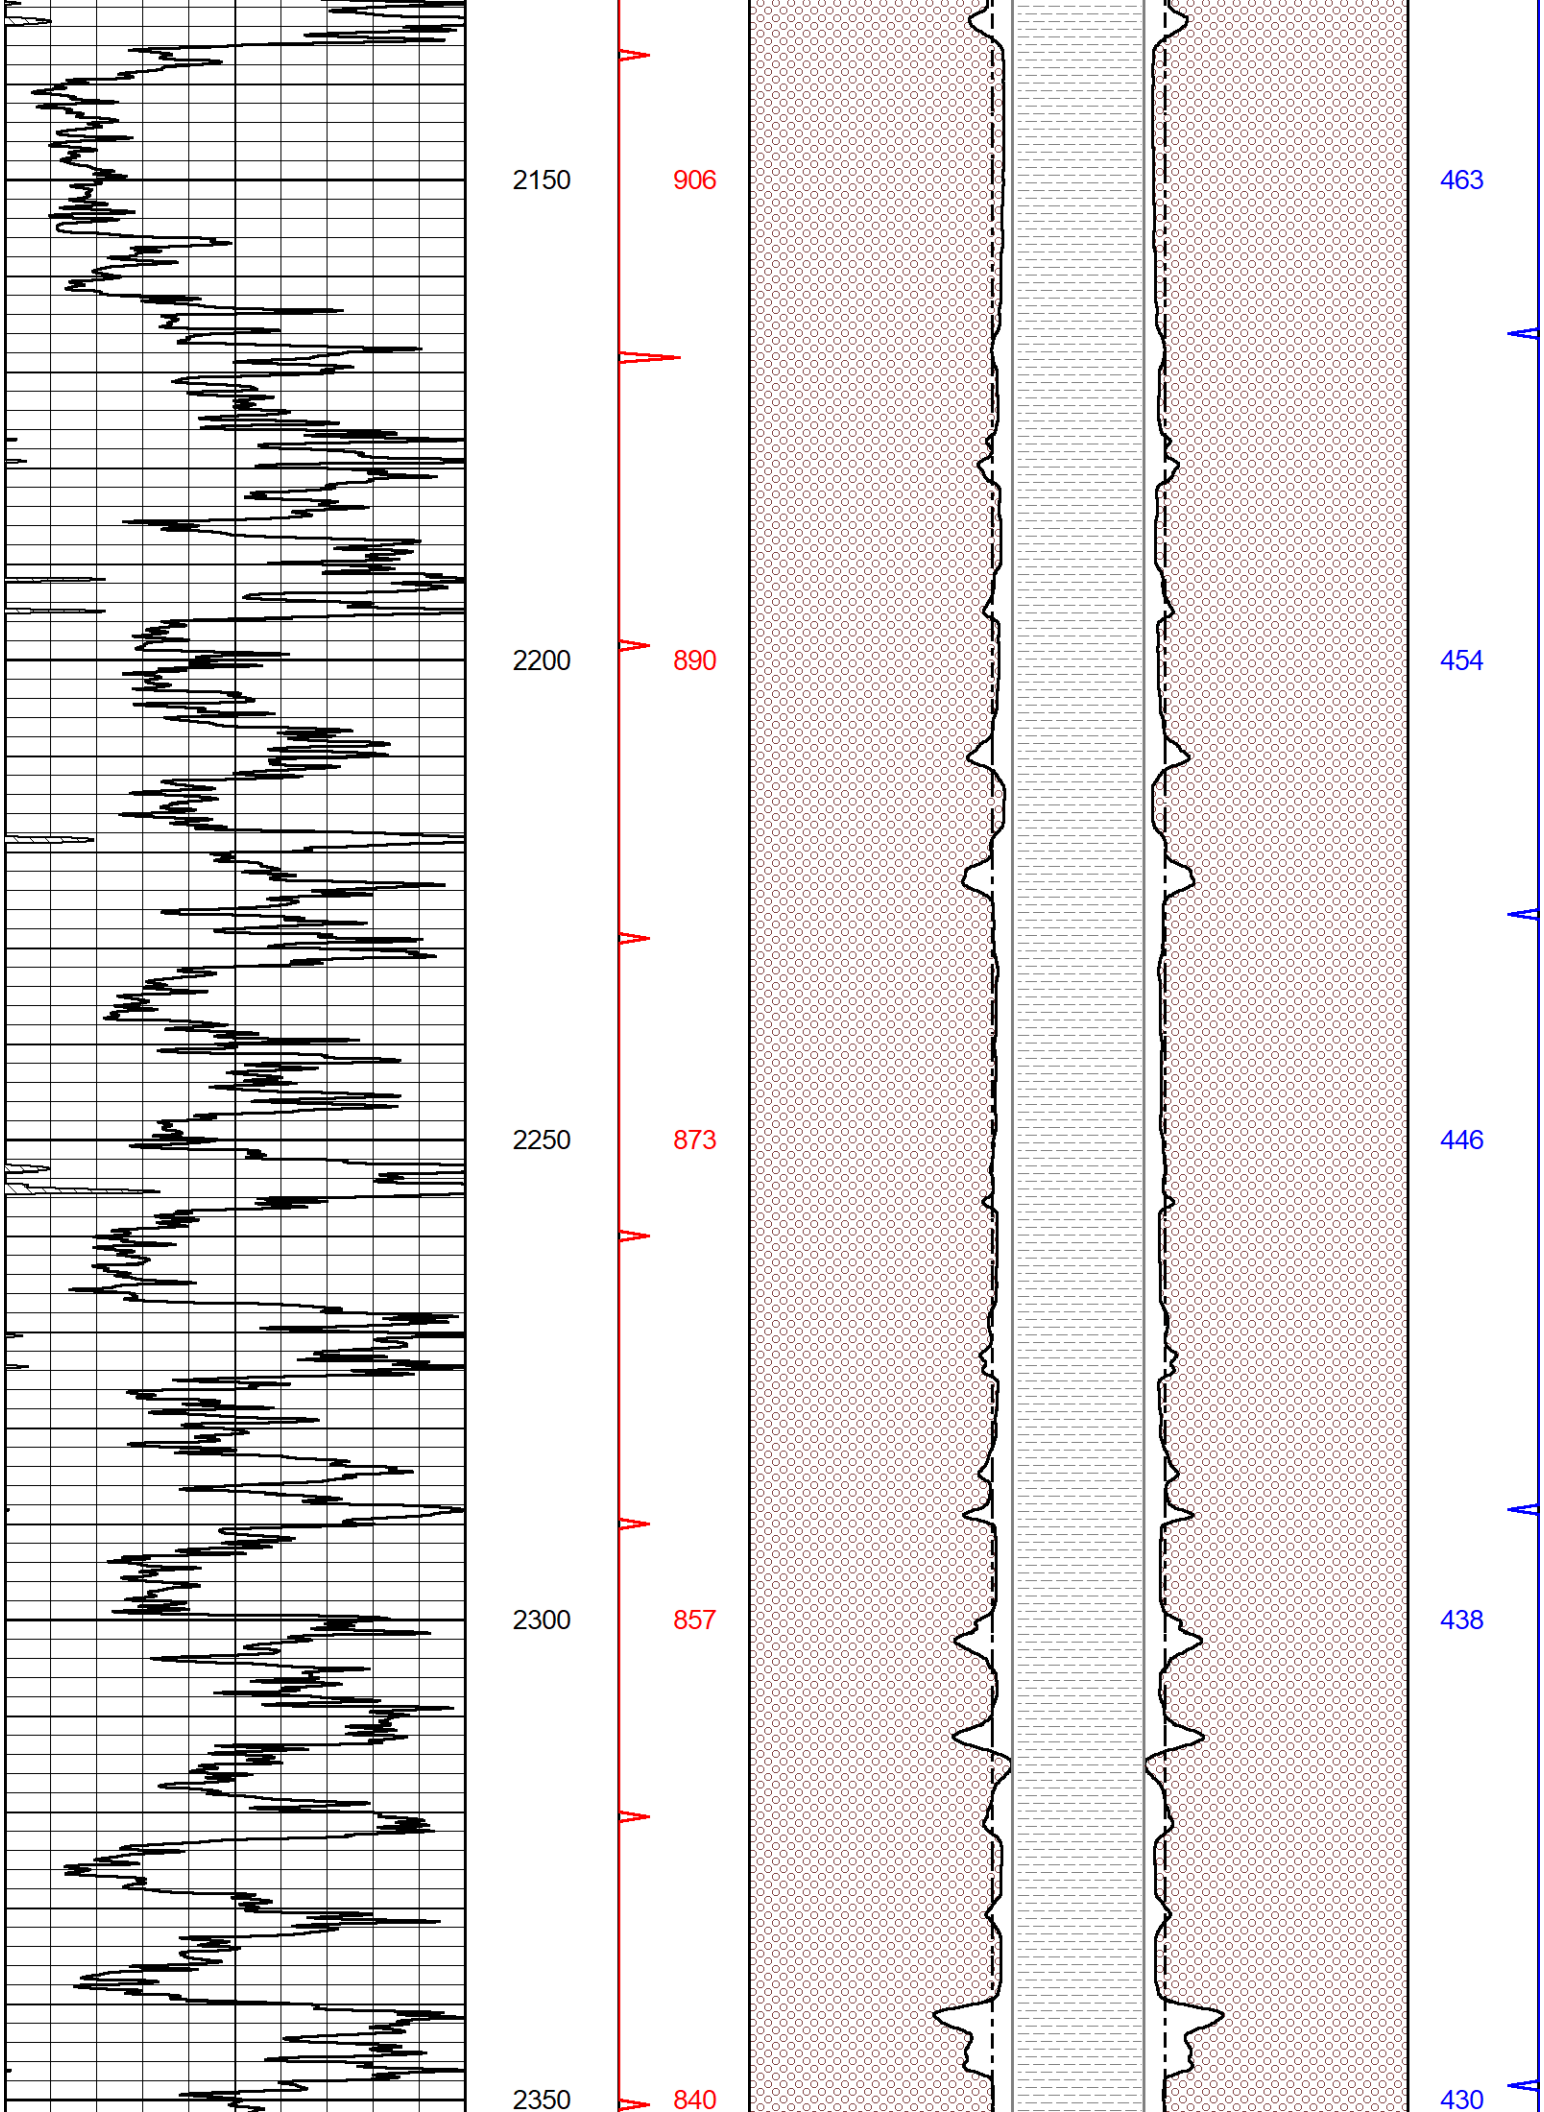

1050
1279
654
1100
1260
643
1150
1241
633
1200
1224
624
1250
1207
615

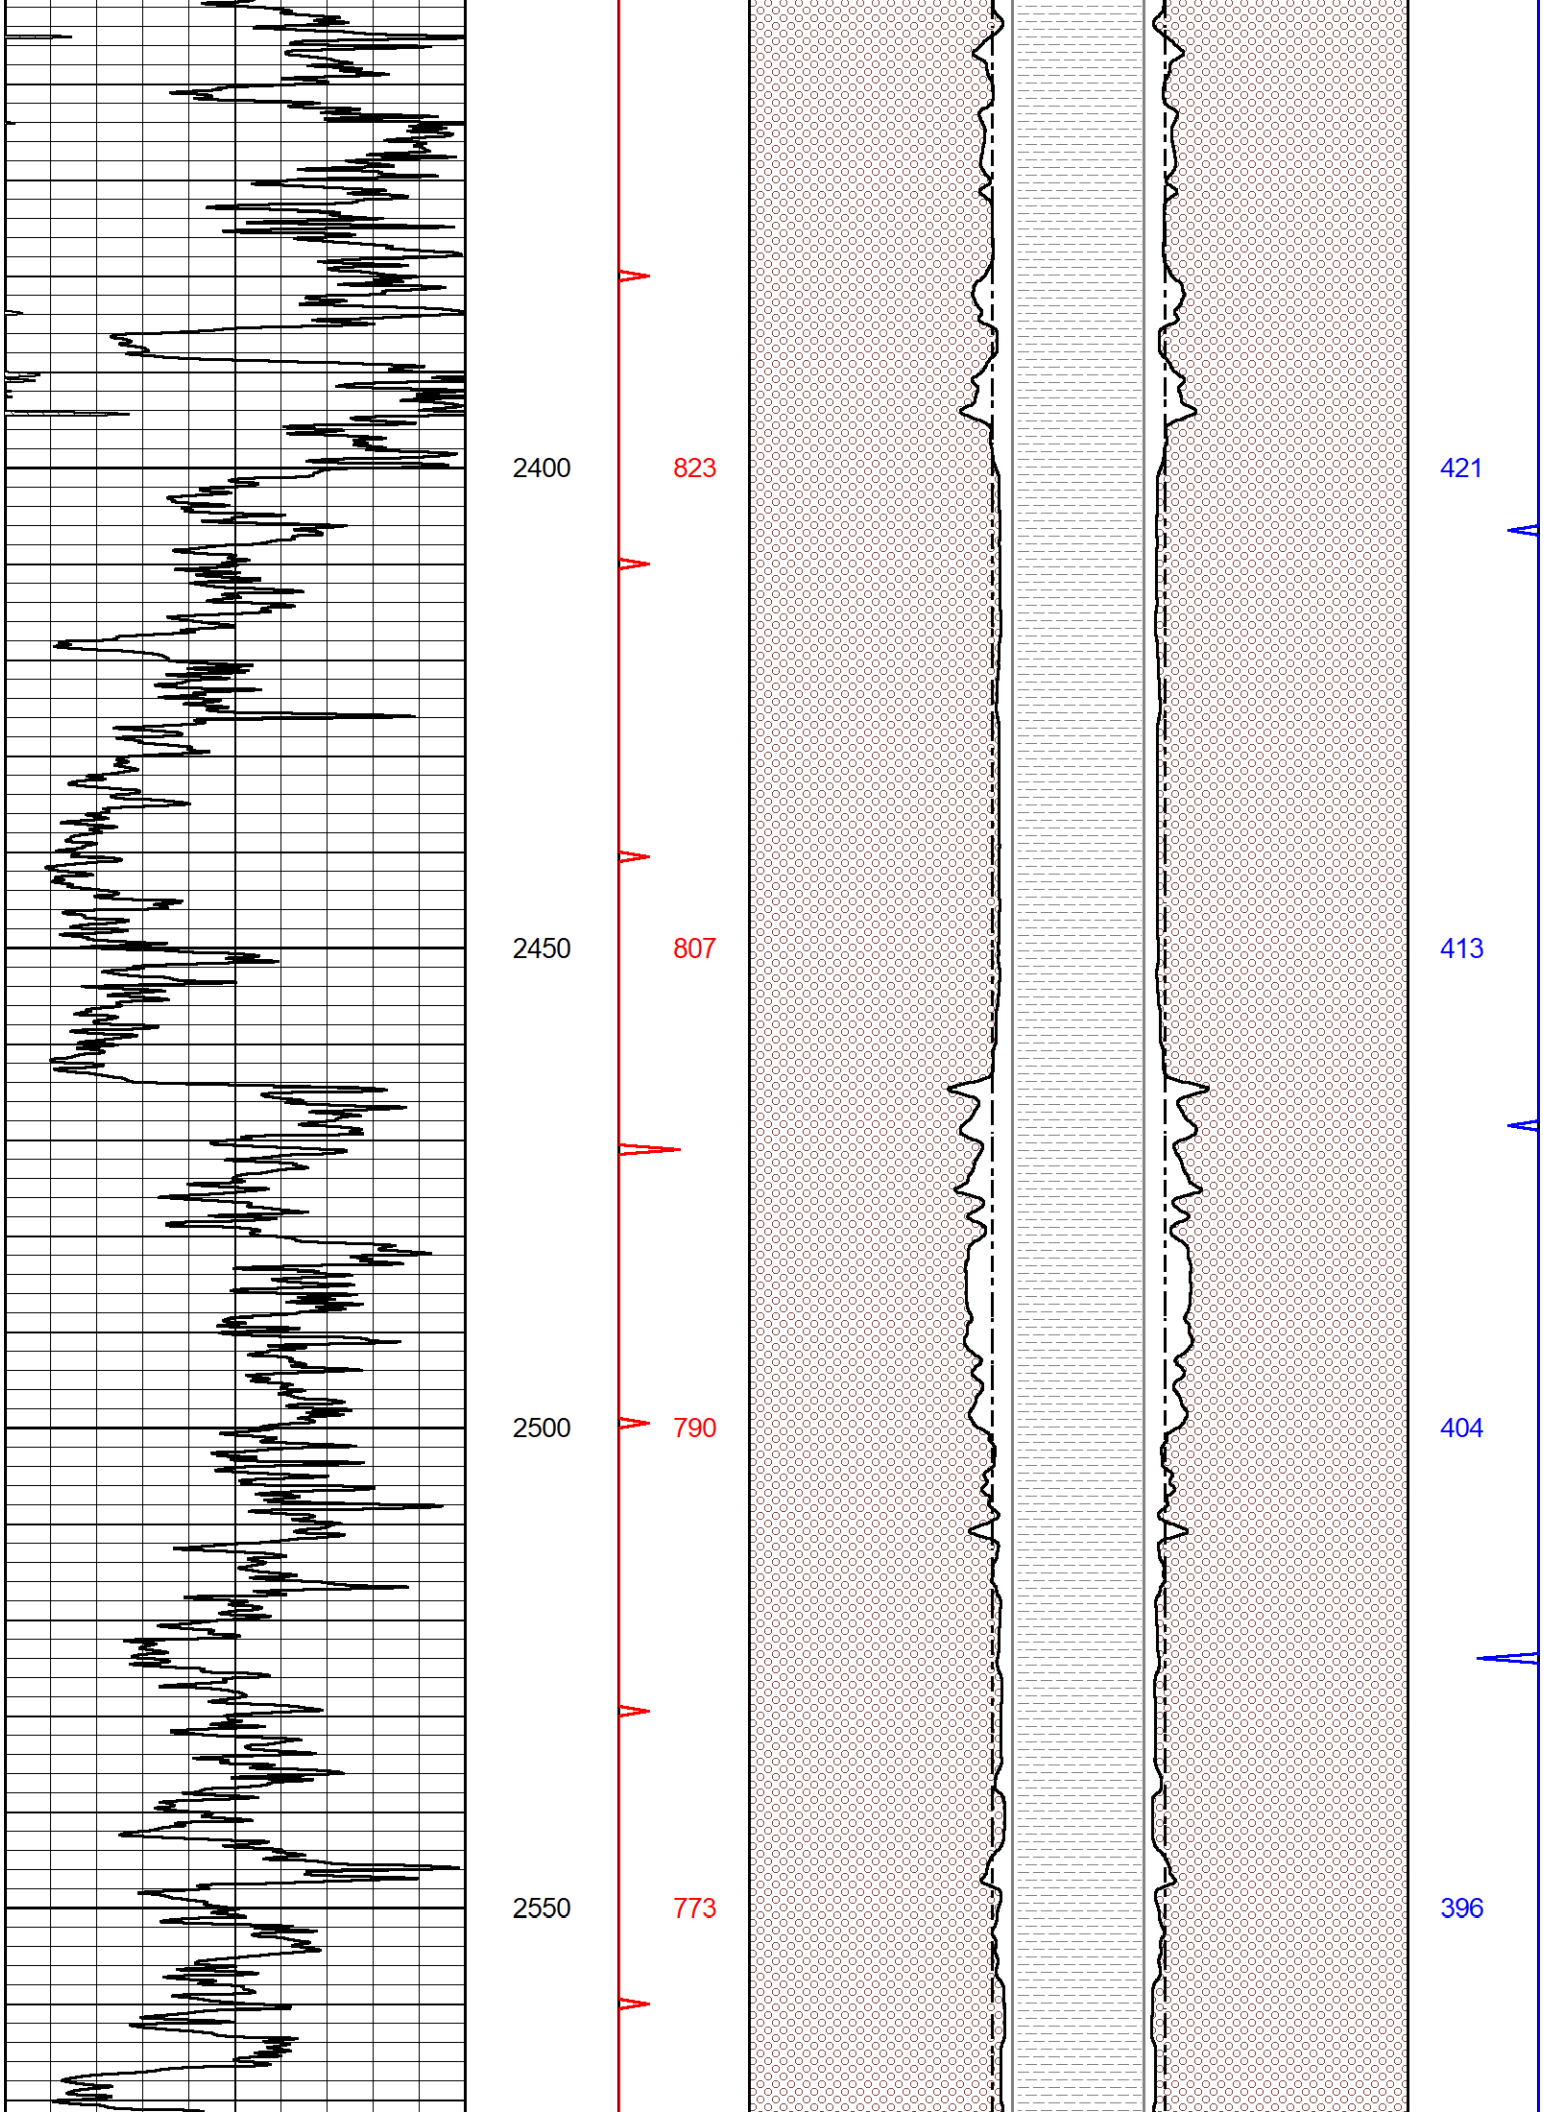

1300
1190
607
1350
1172
597
1400
1156
588
1450
1139
580

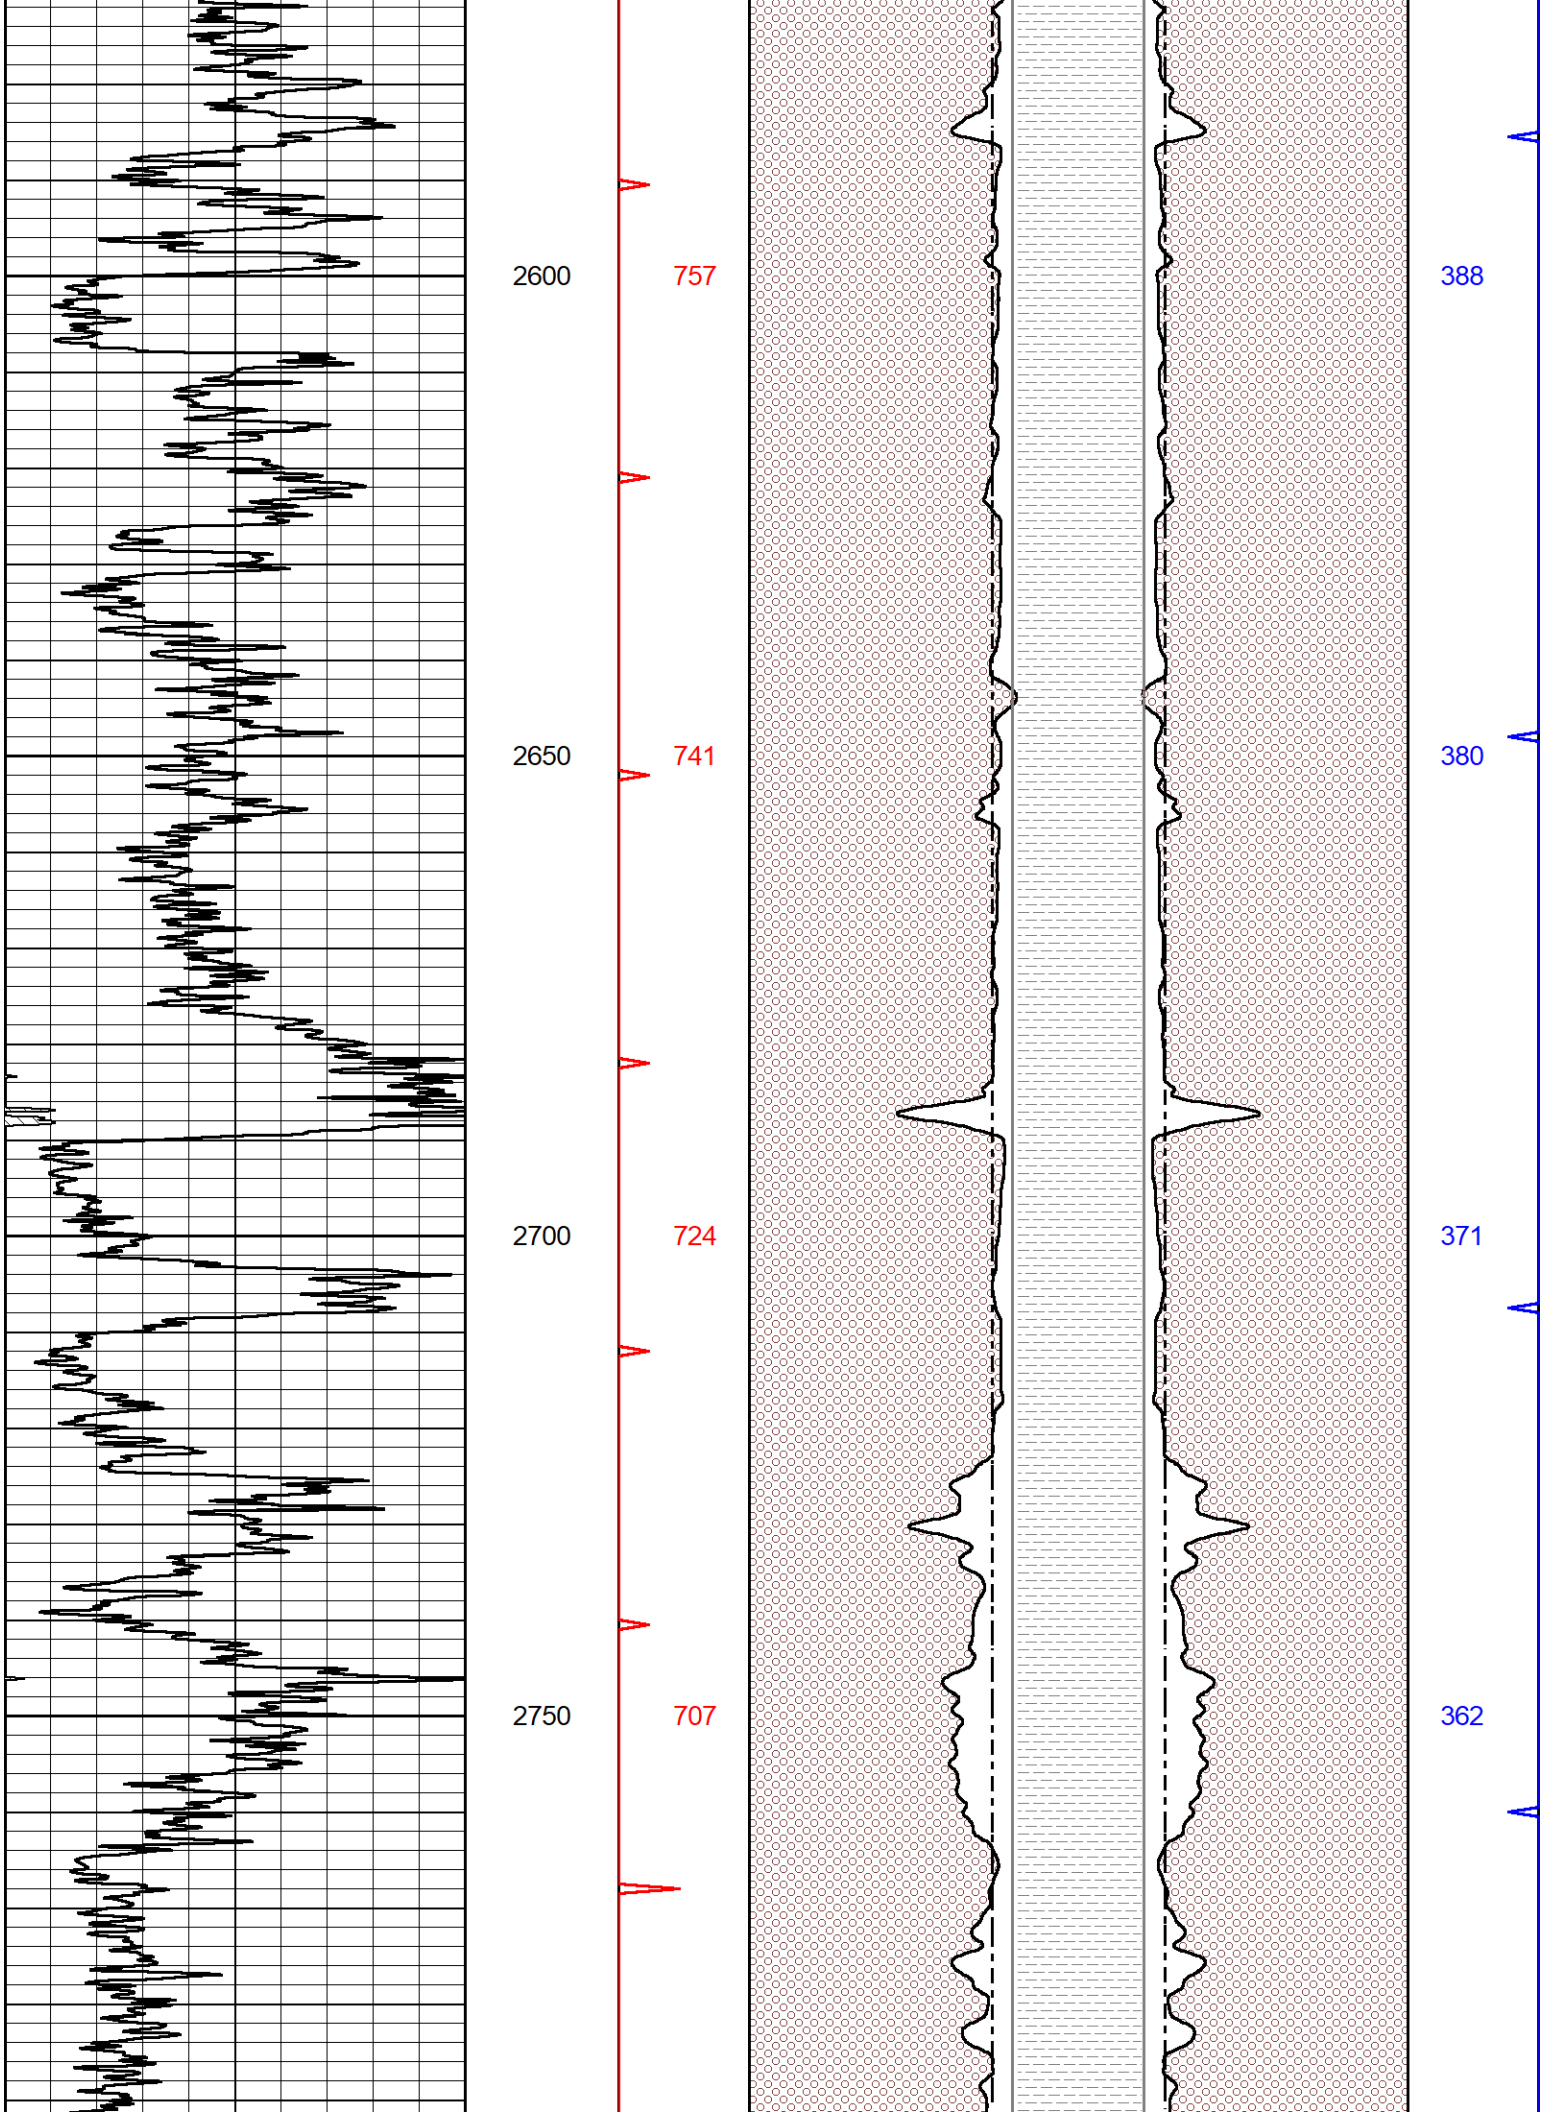

1500
1122
572
1550
1106
563
1600
1089
554
1650
1072
546

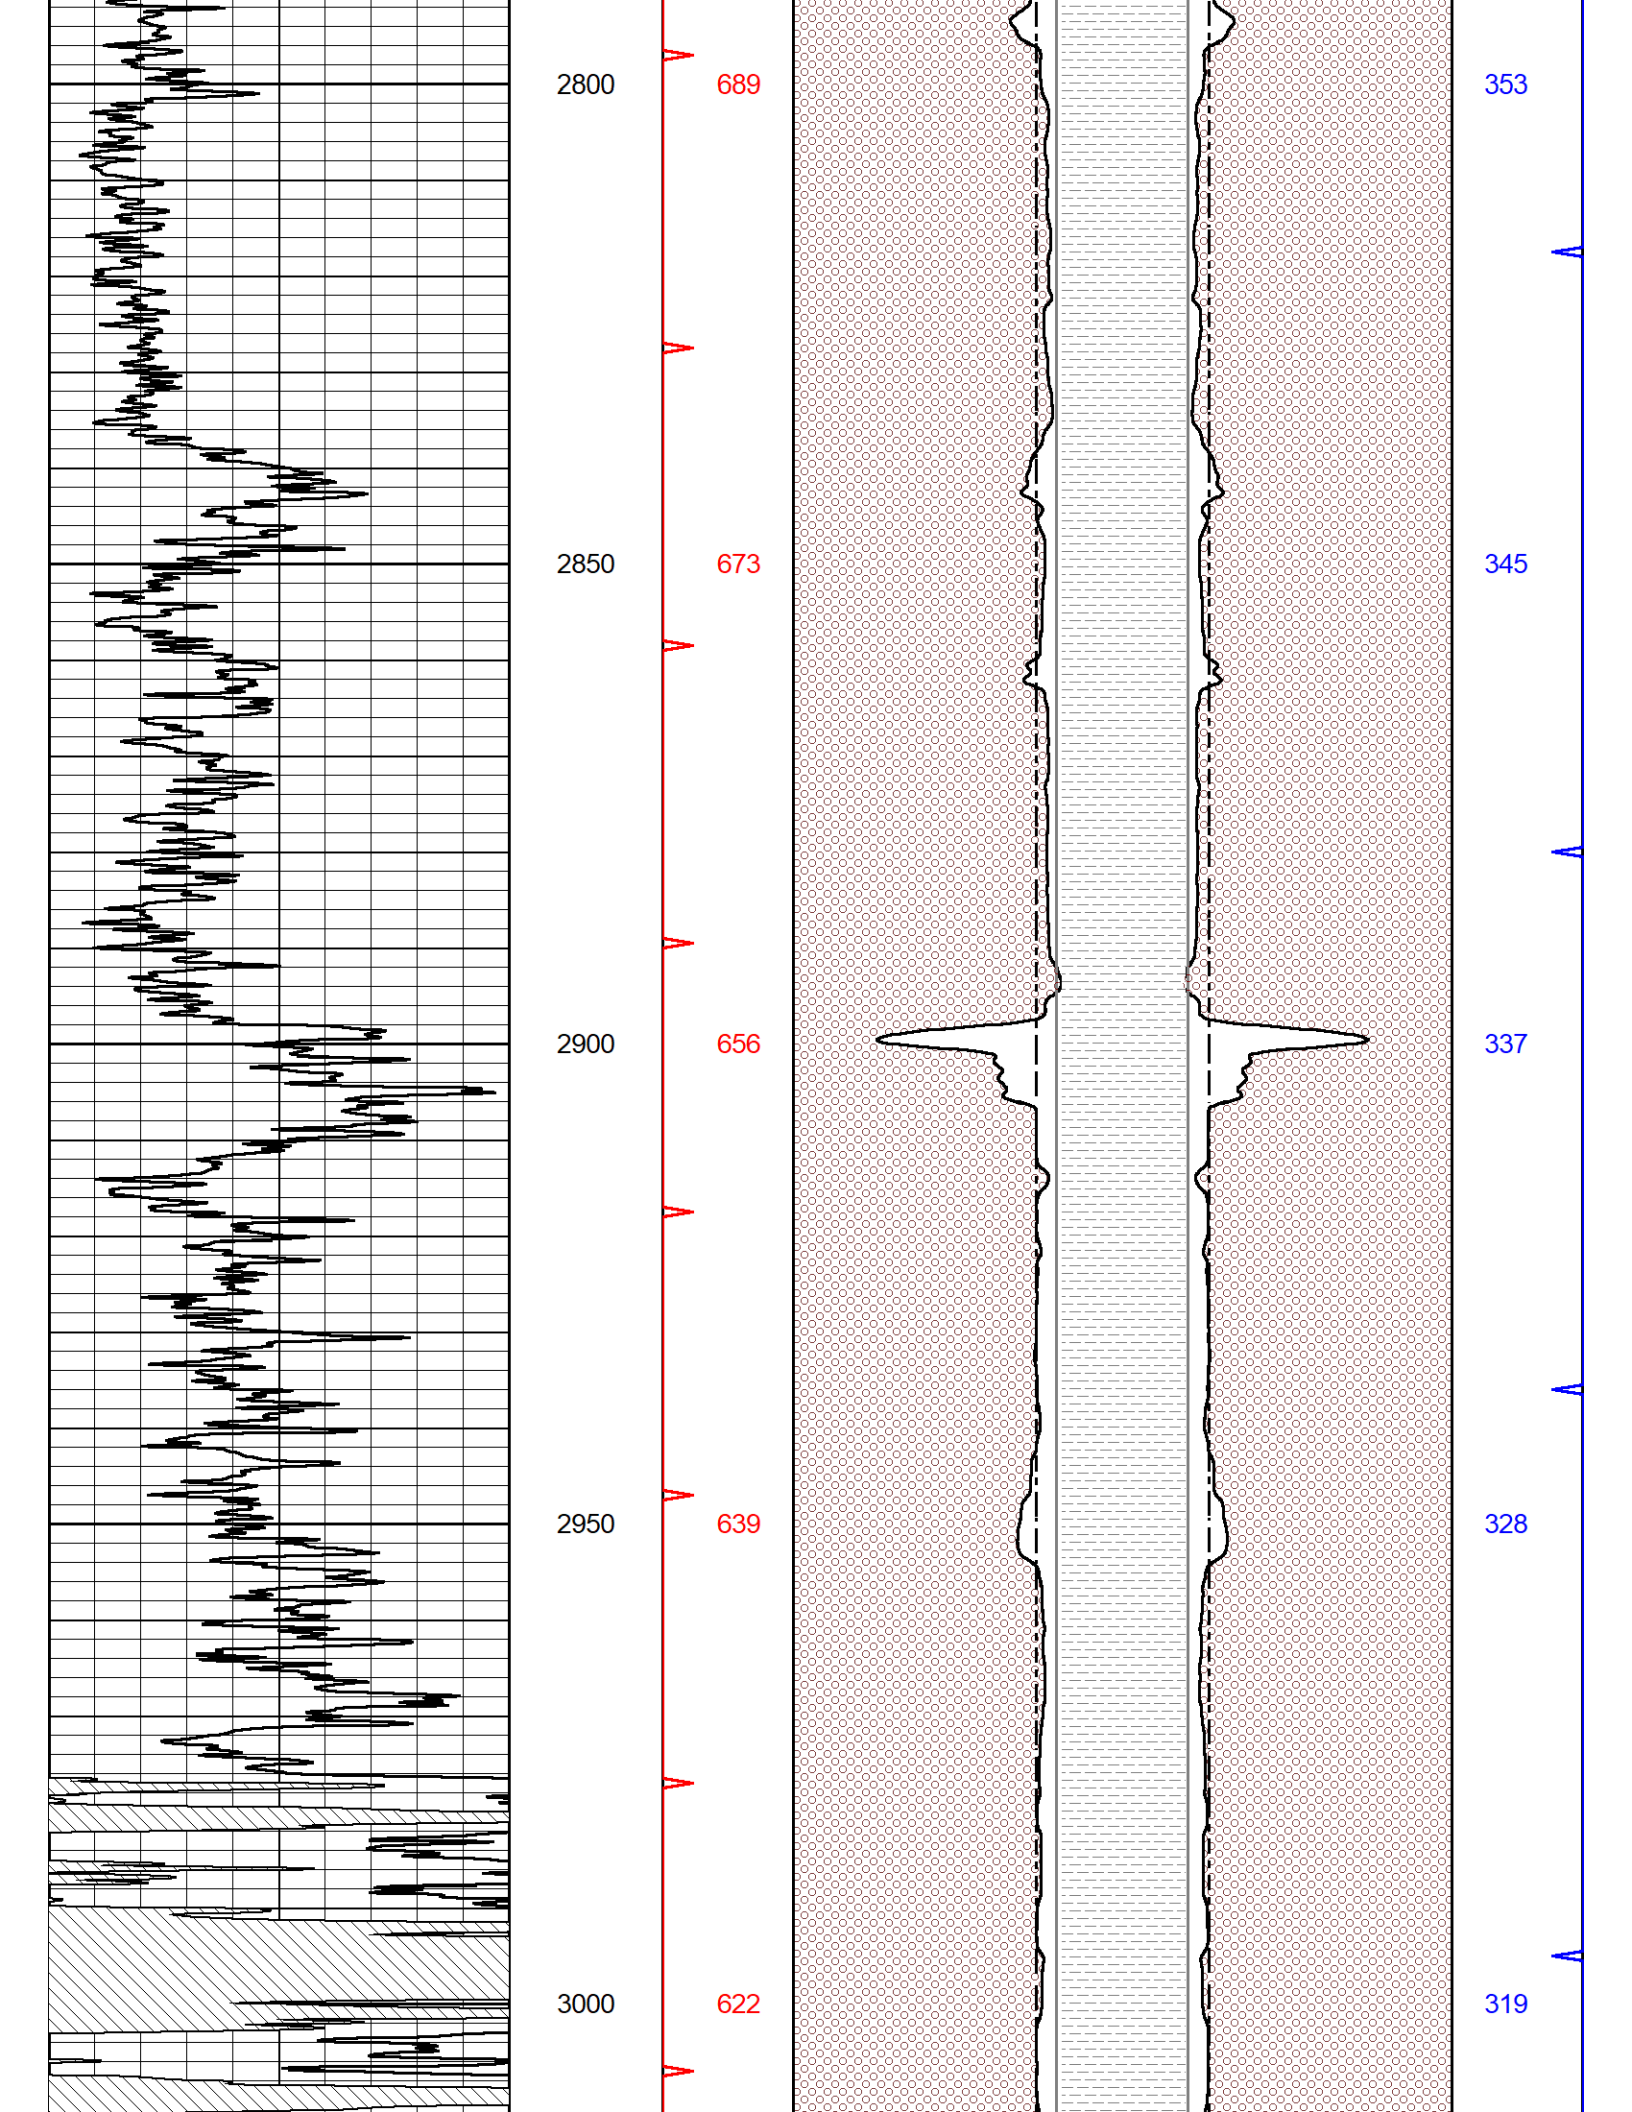

1700
1056
538
1750
1040
530
1800
1024
523
1850
1007
514
1900
990
505

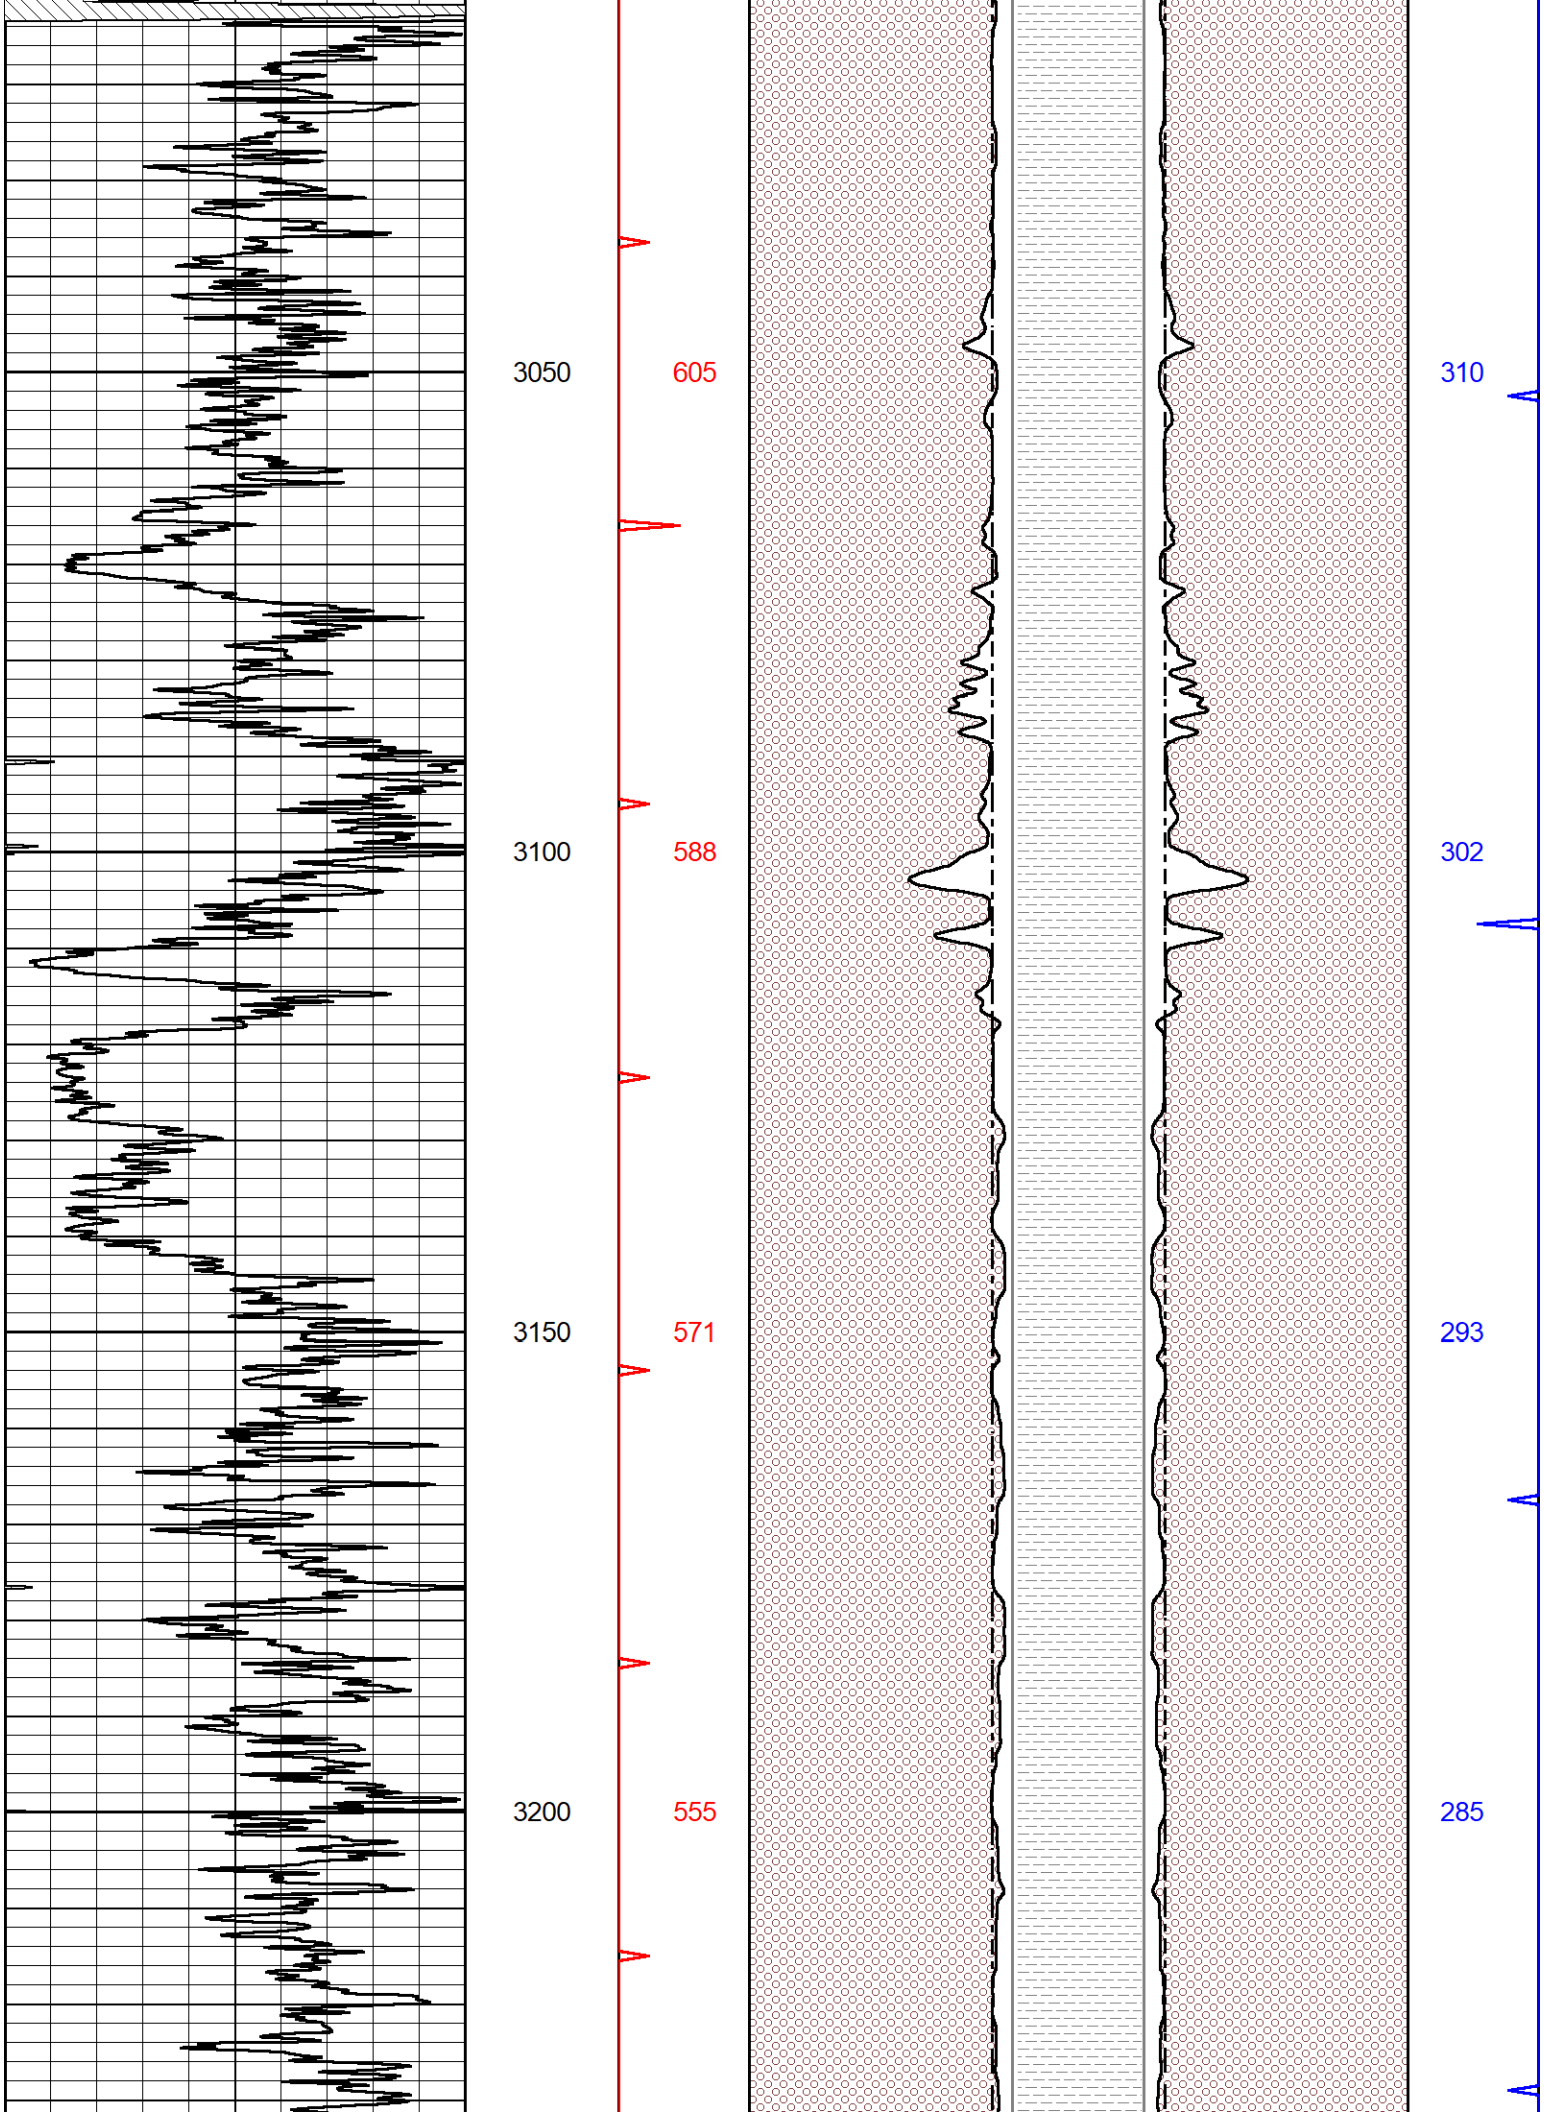

1950
973
497
2000
956
488
2050
940
480
2100
923
471

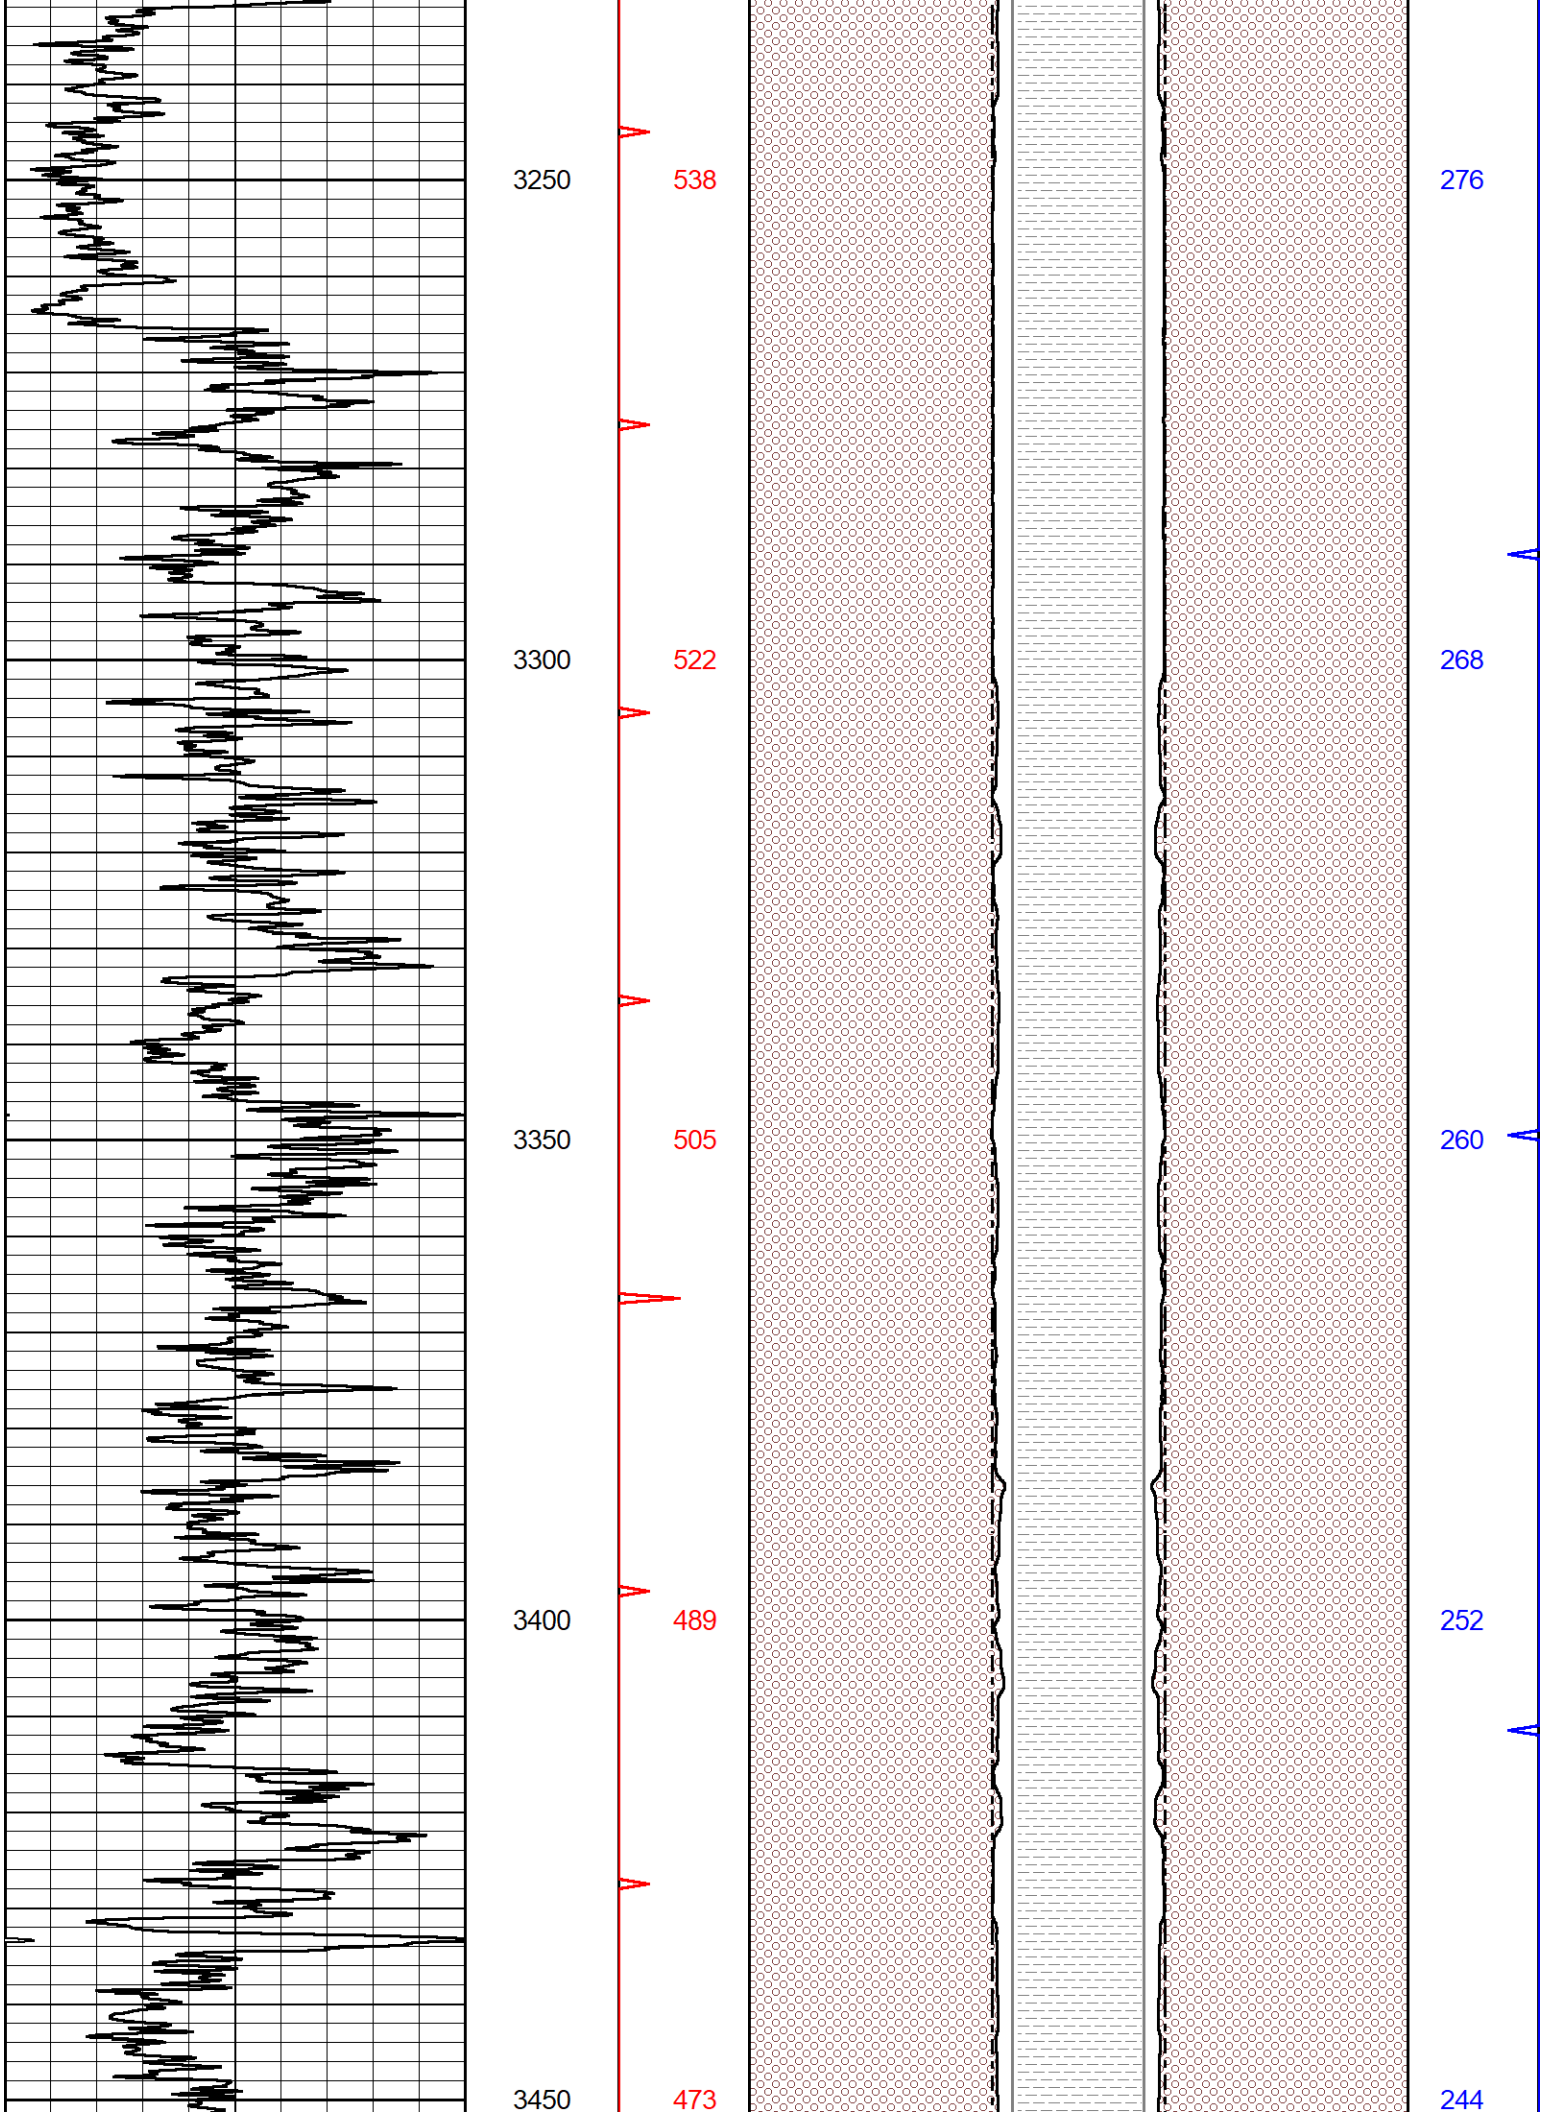

2150
906
463
2200
890
454
2250
873
446
2300
857
438
2350
840
430

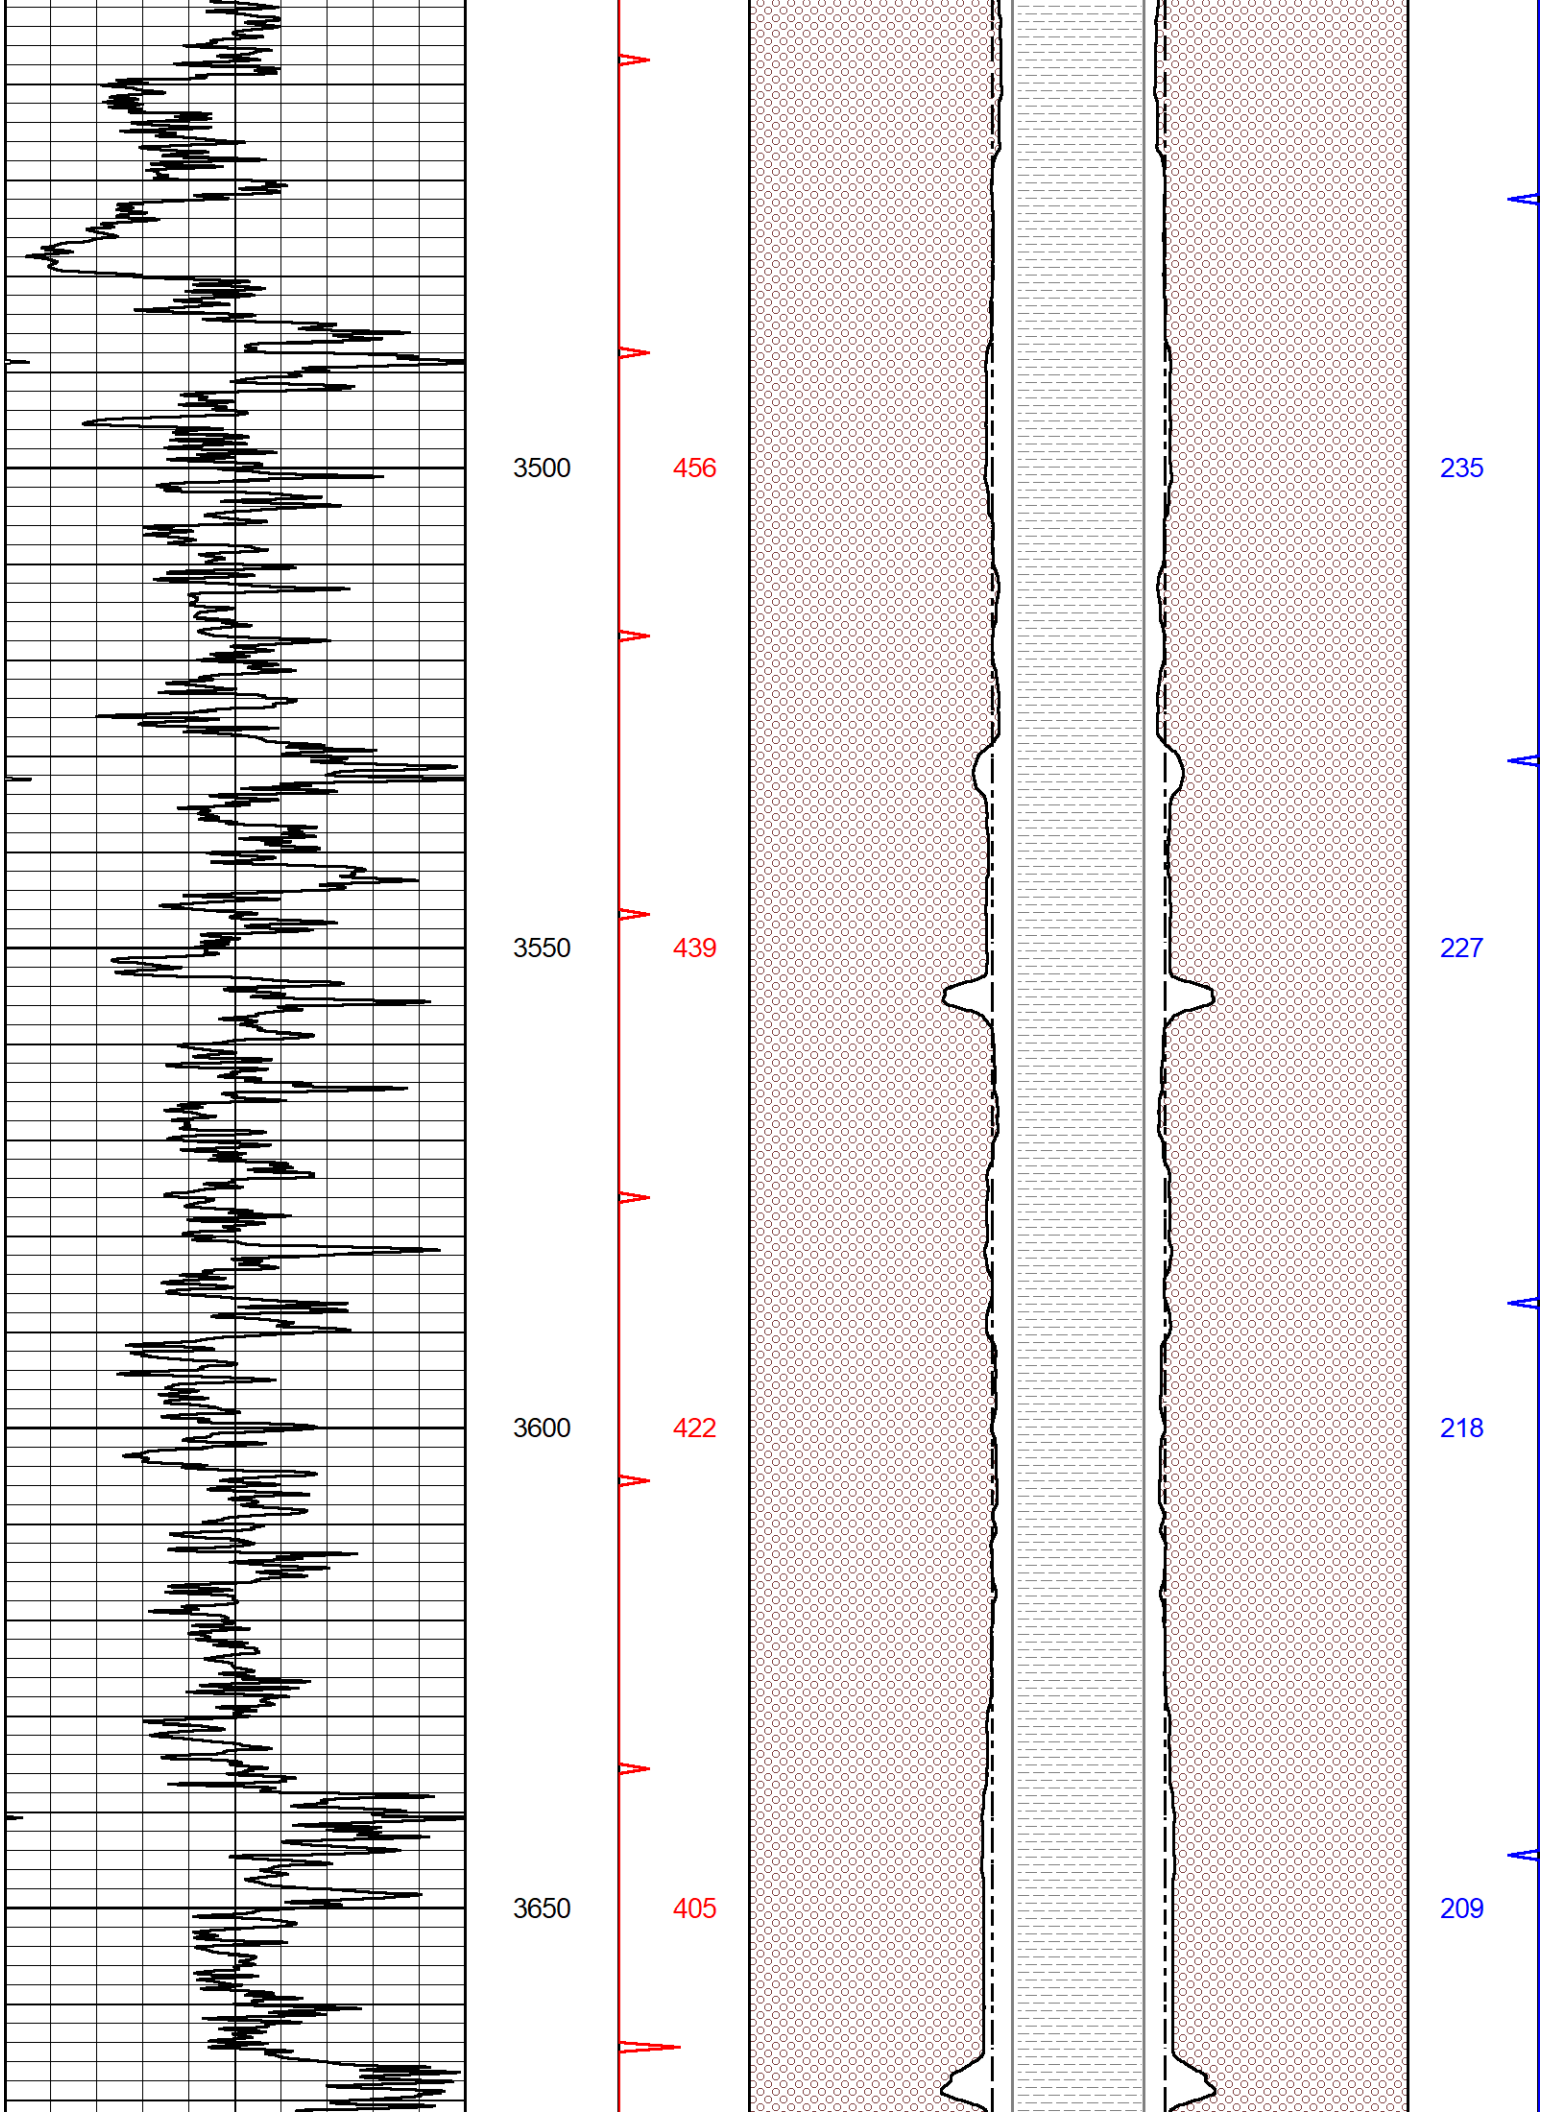

2400
823
421
2450
807
413
2500
790
404
2550
773
396

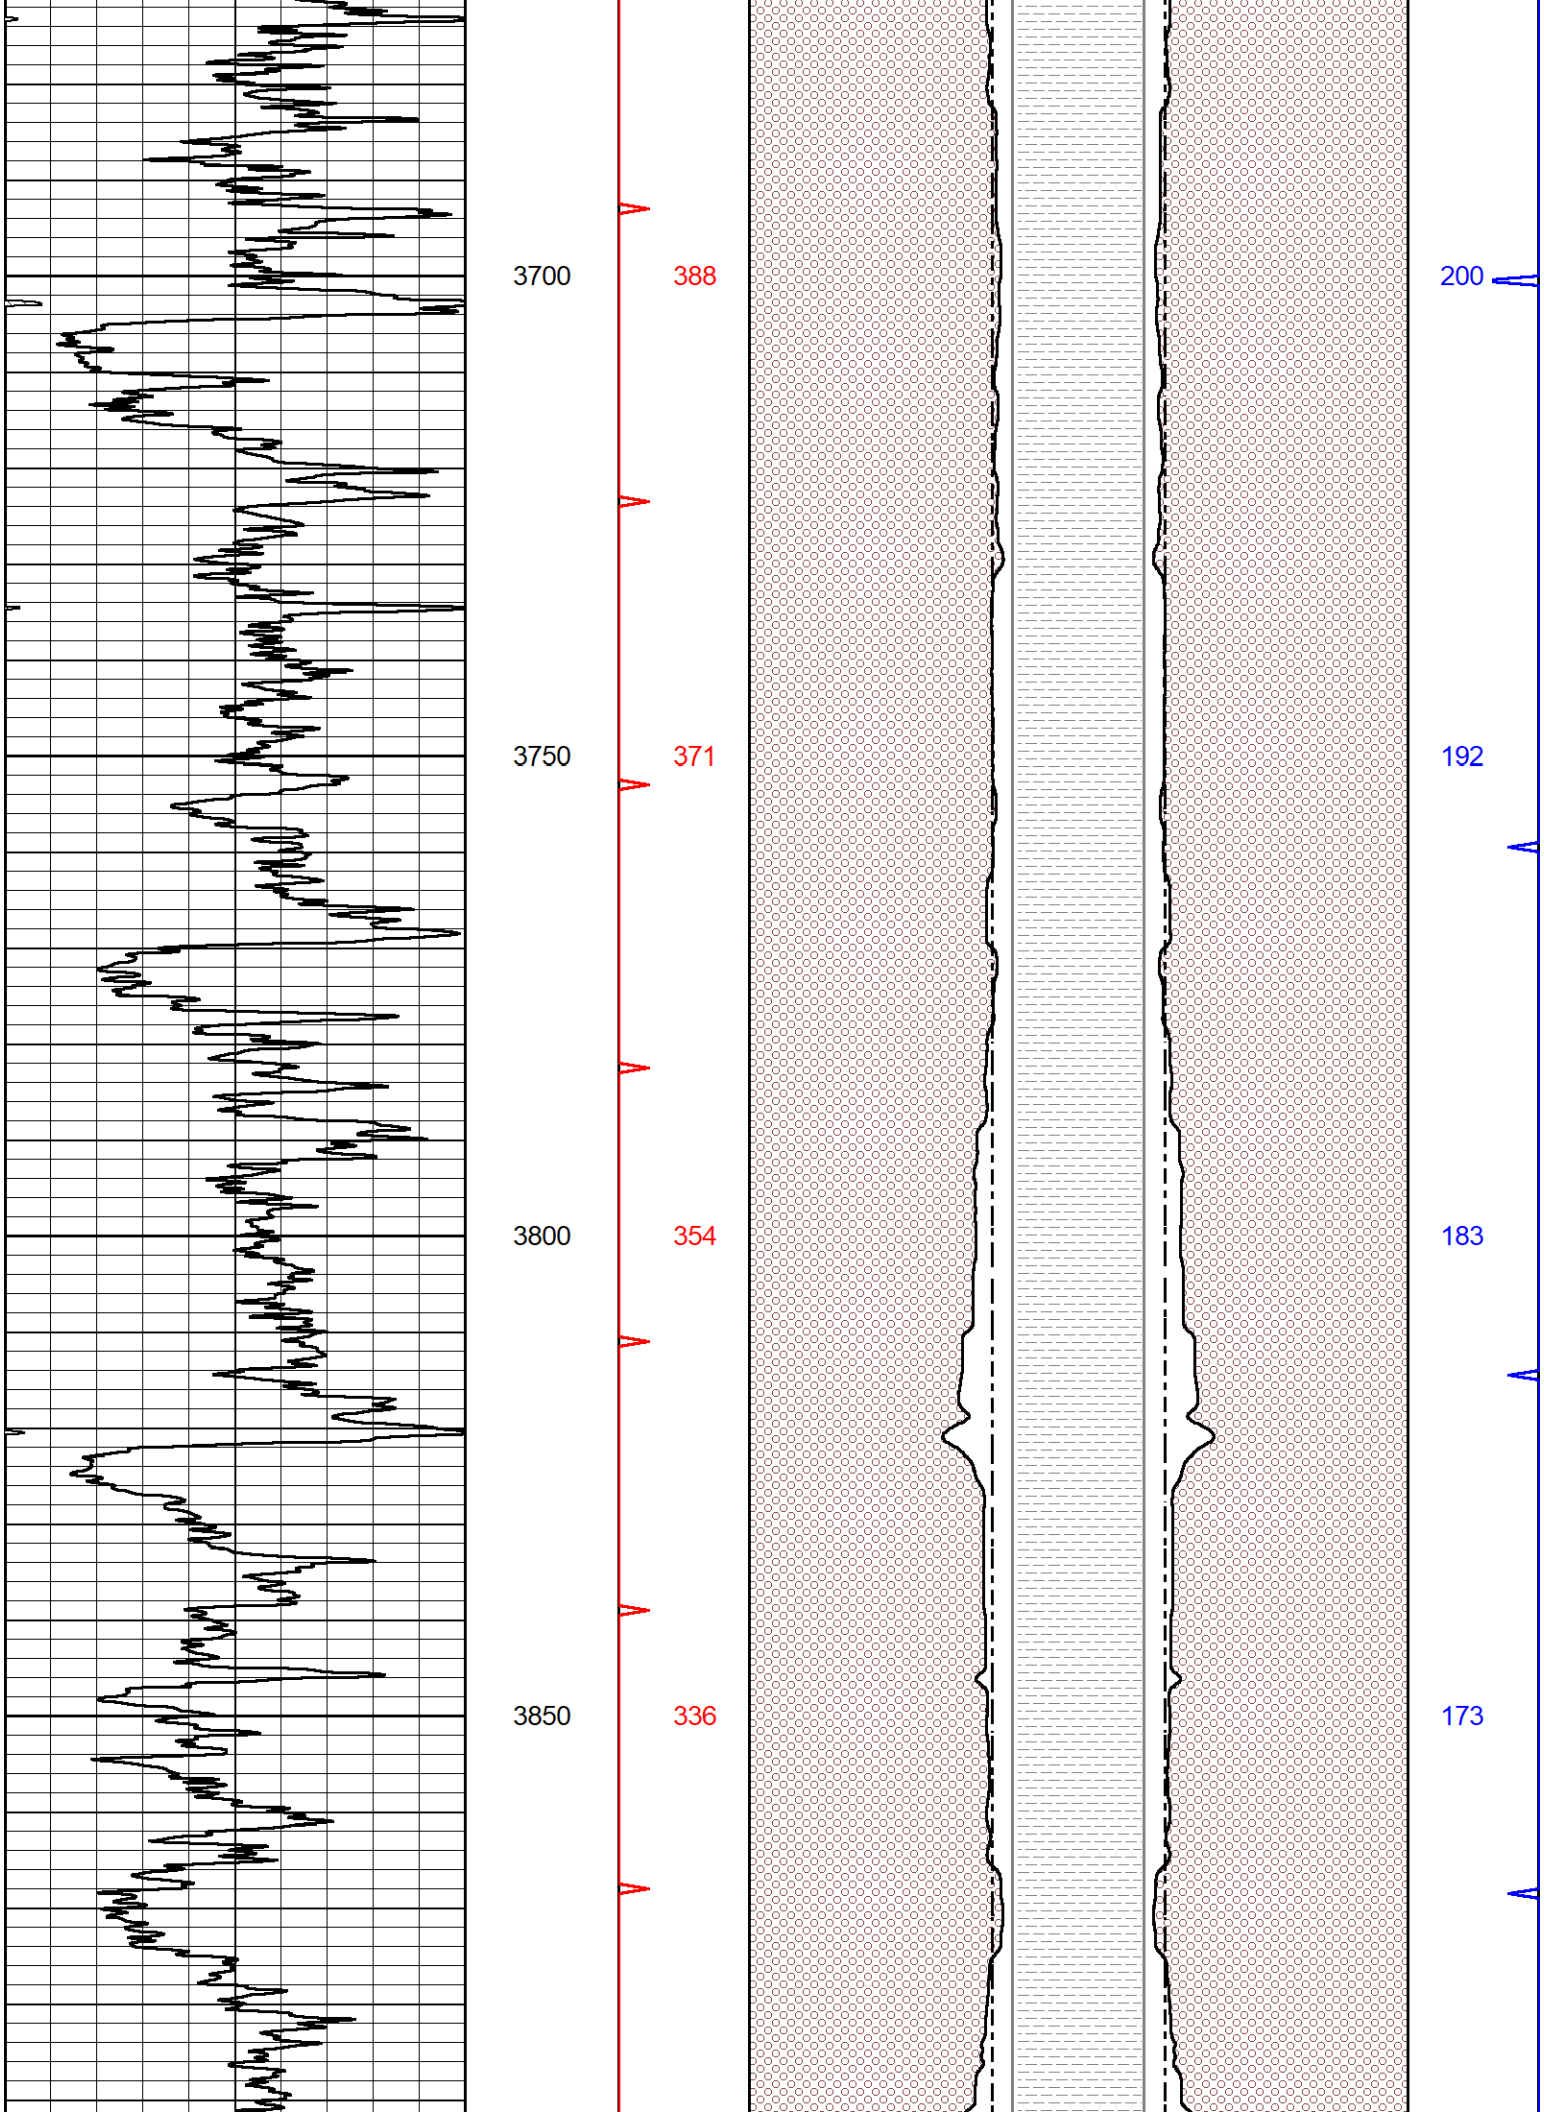

2600
757
388
2650
741
380
2700
724
371
2750
707
362

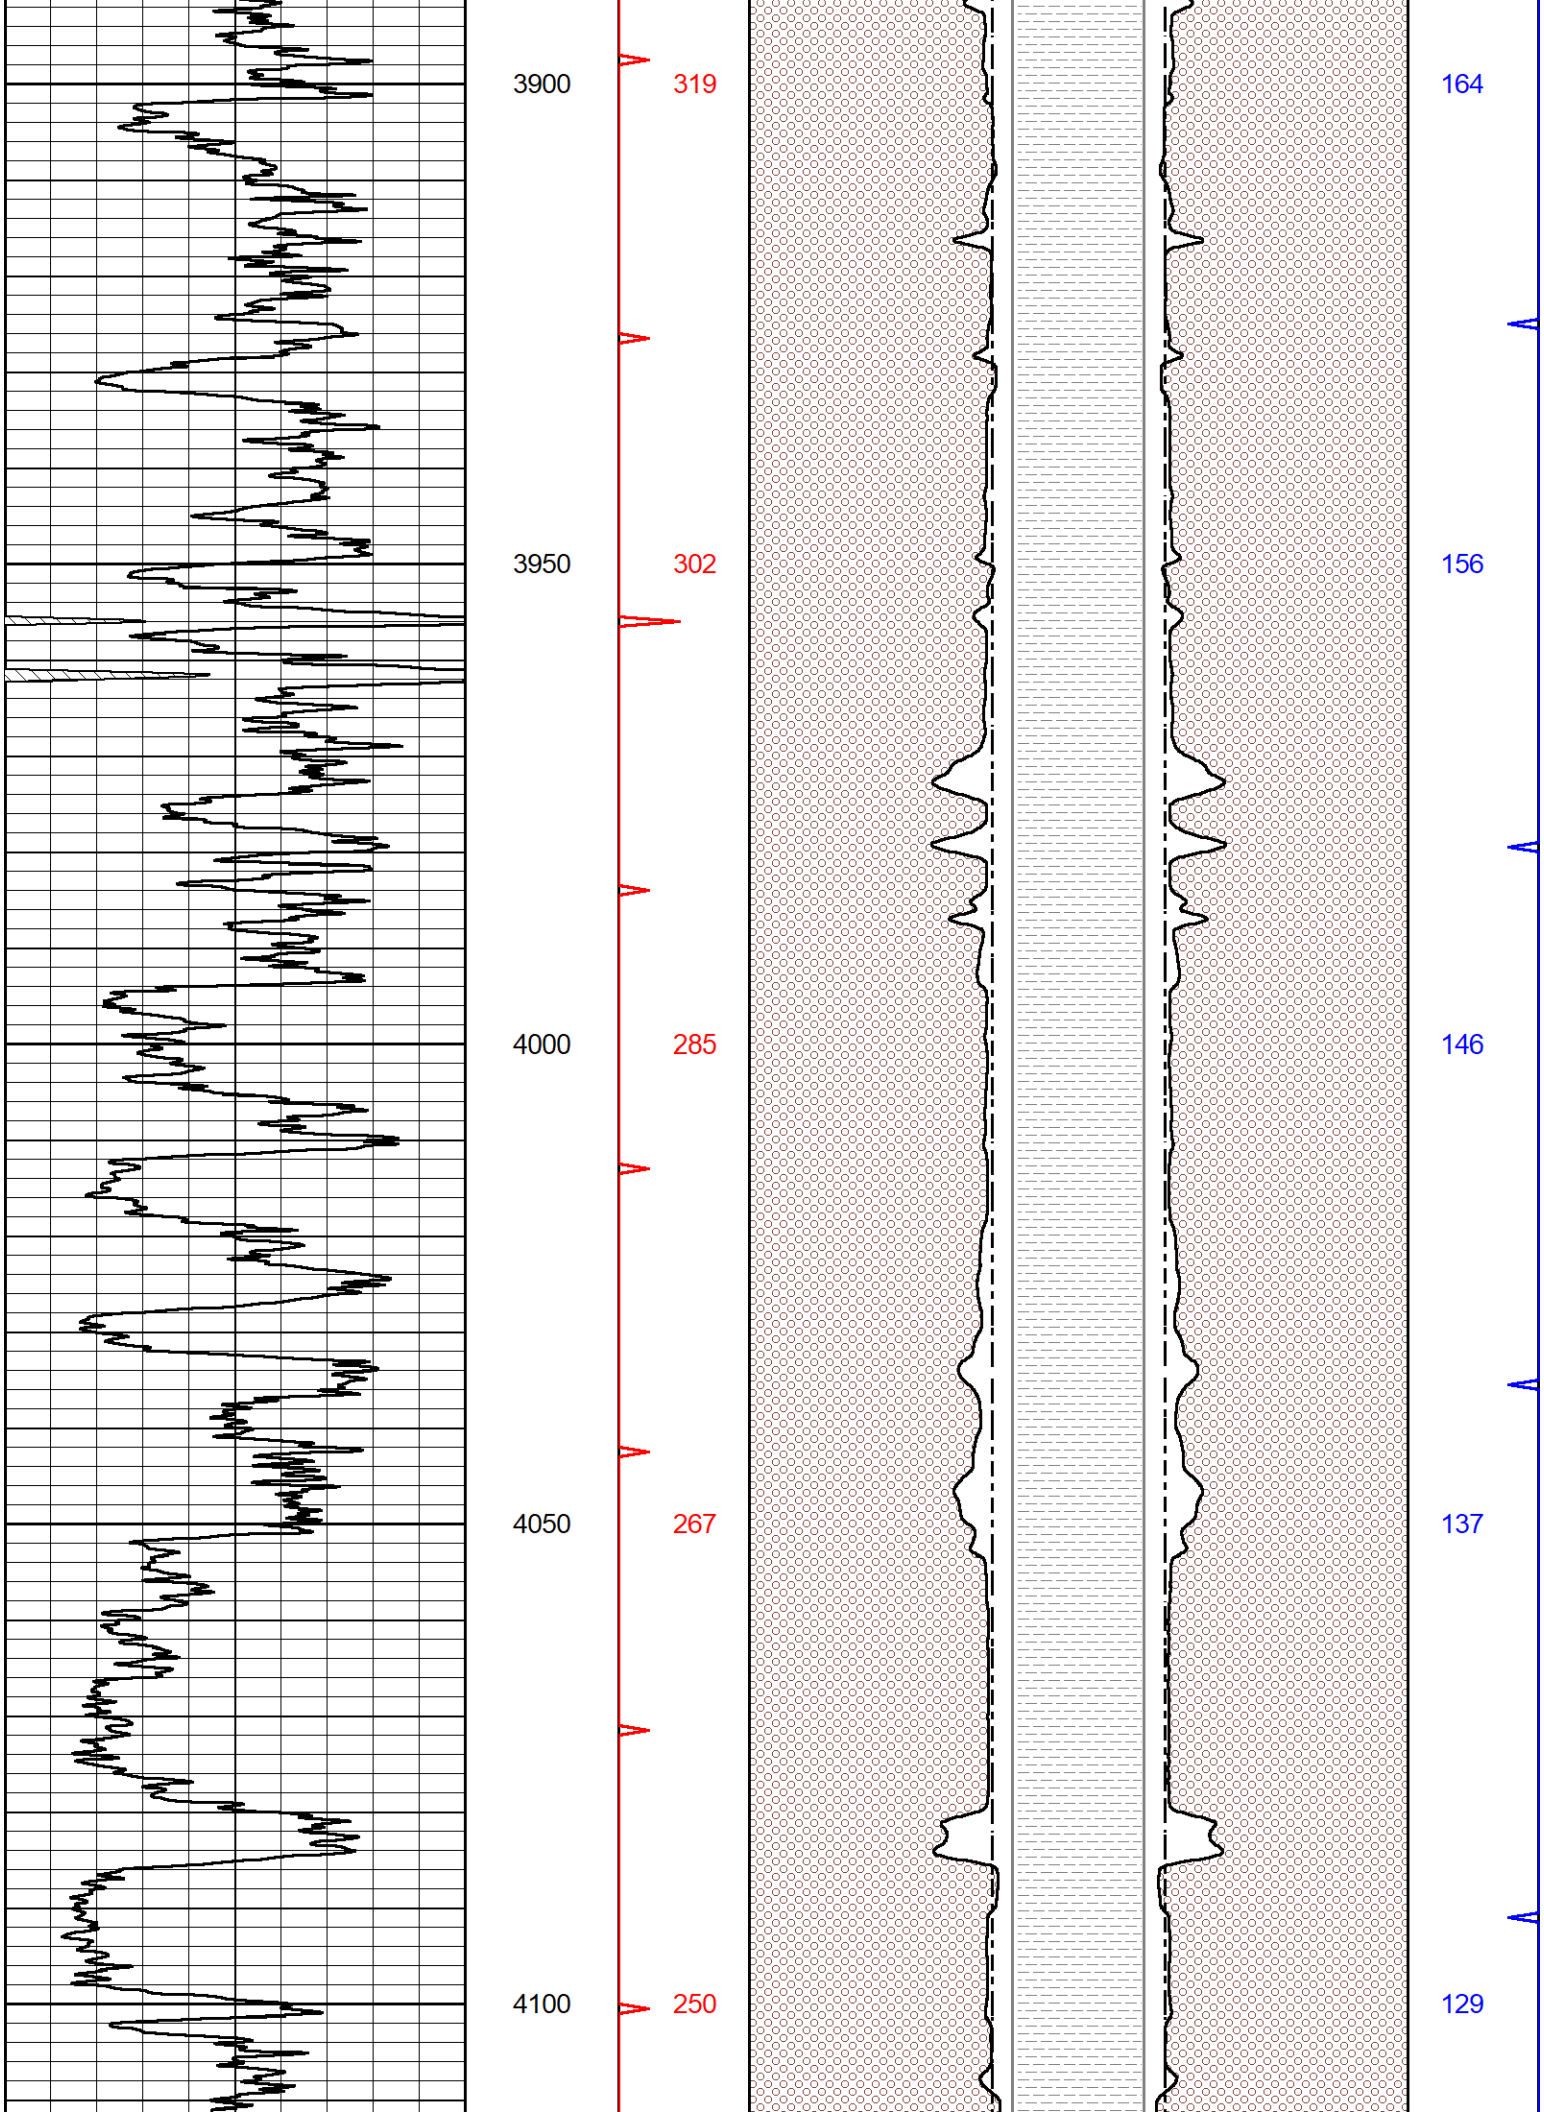

2800
689
353
2850
673
345
2900
656
337
2950
639
328
3000
622
319

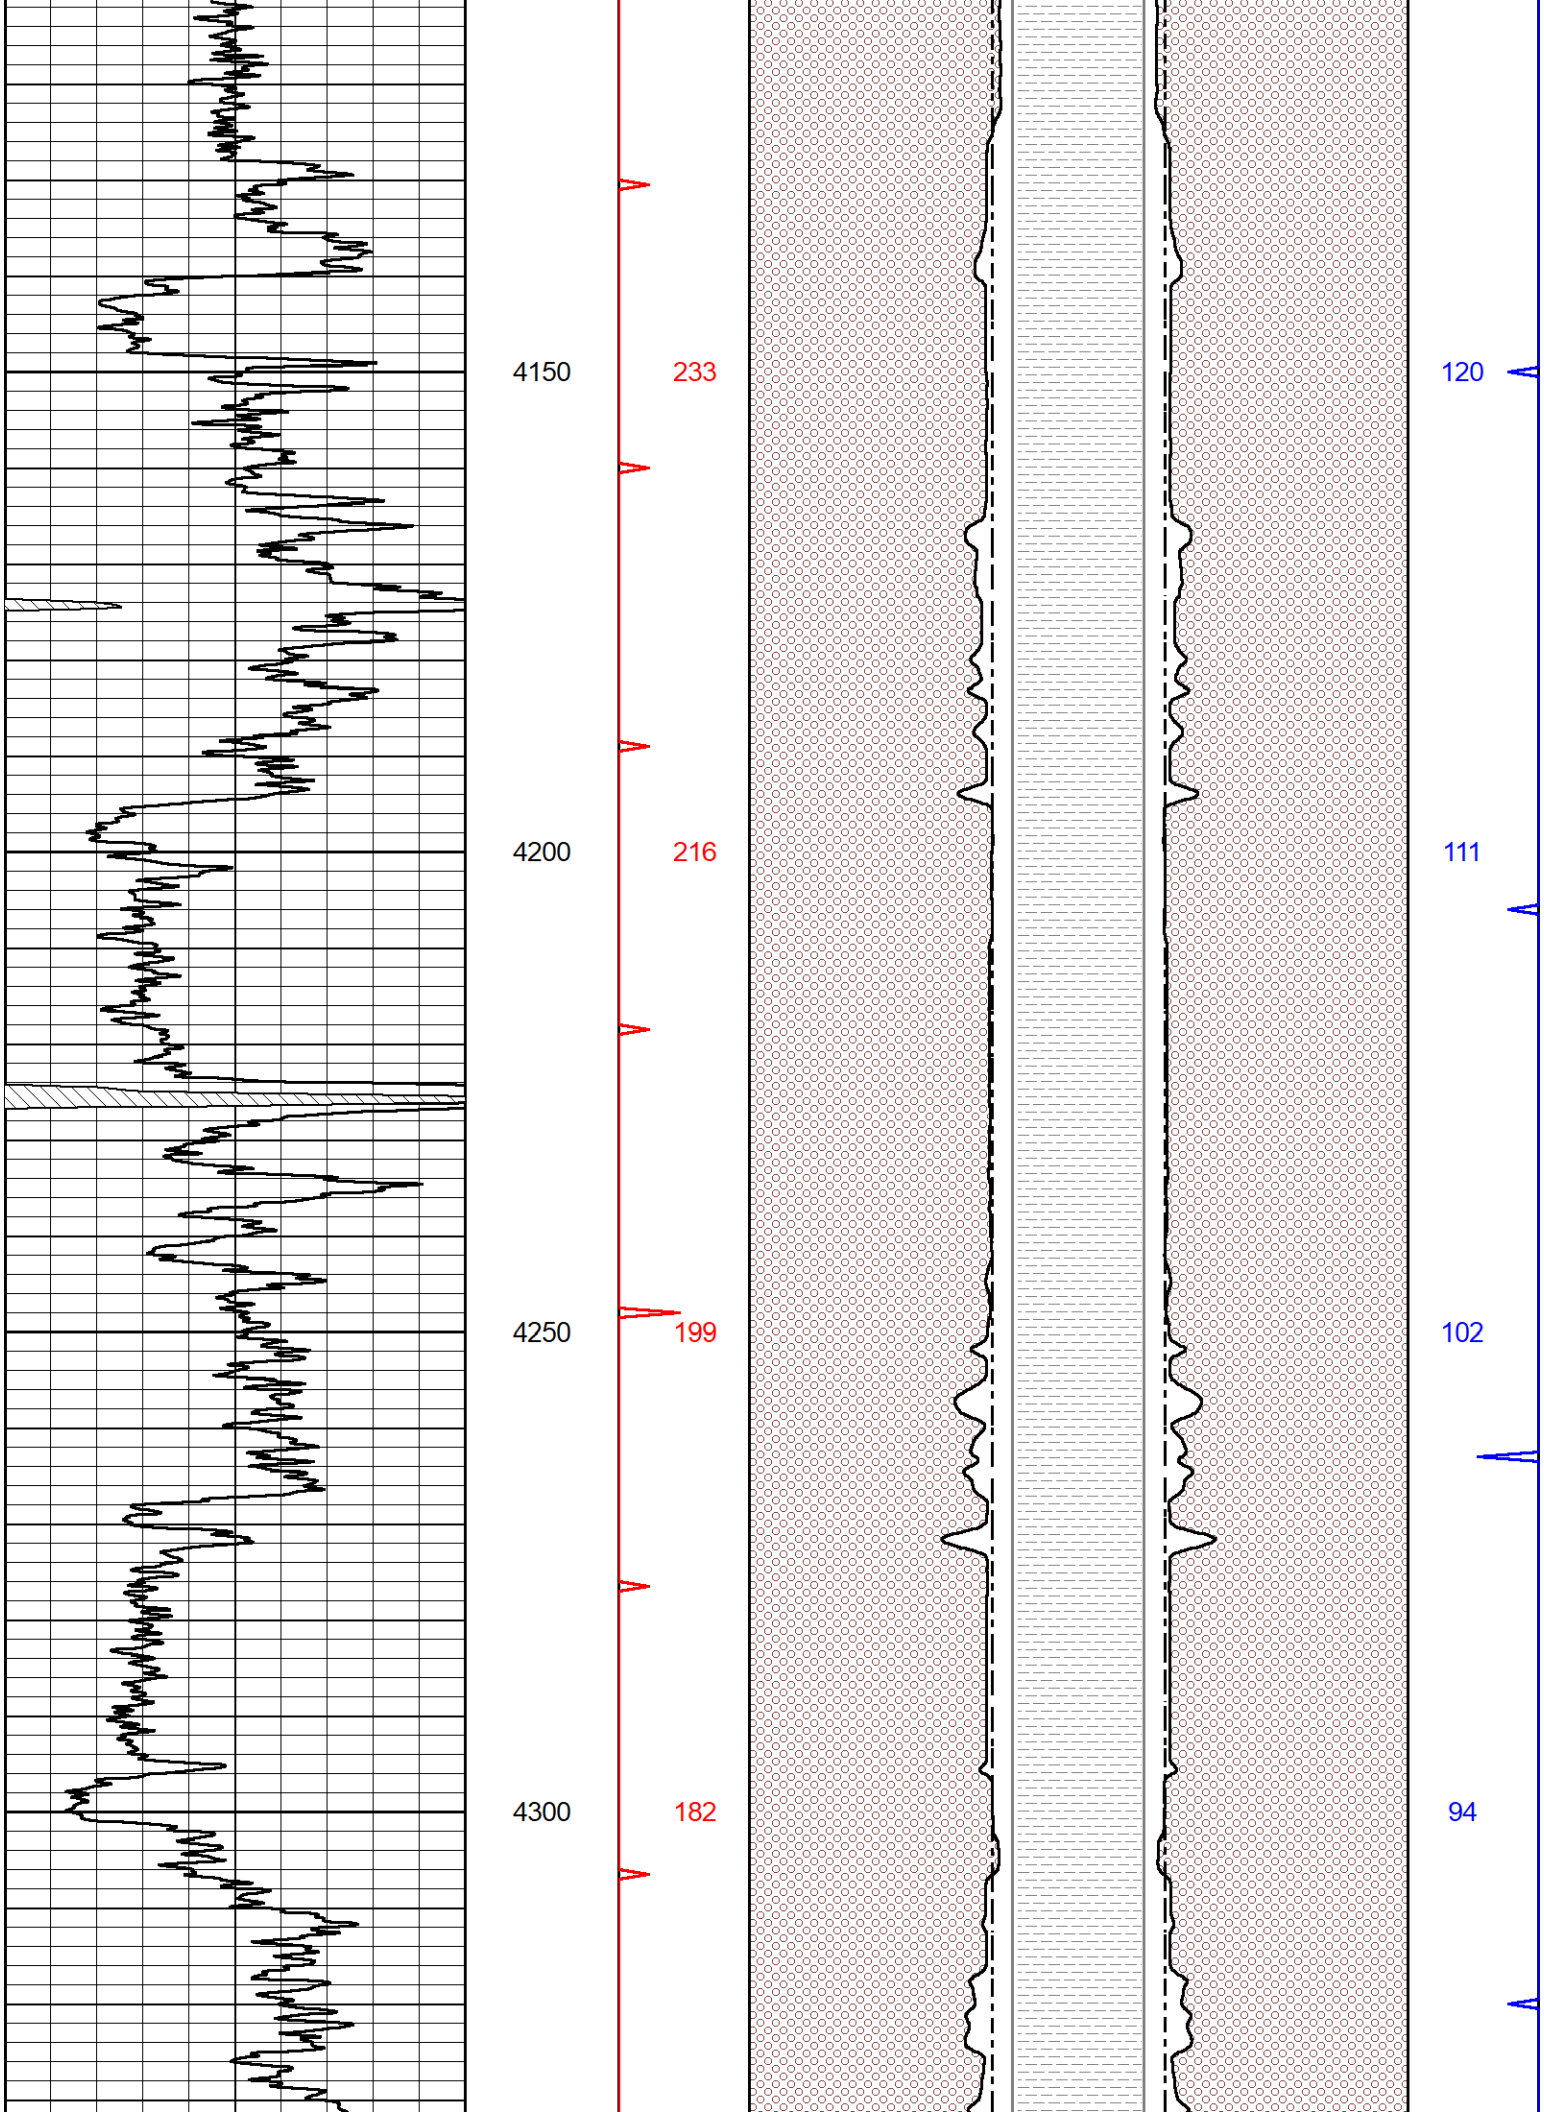

3050
605
310
3100
588
302
3150
571
293
3200
555
285

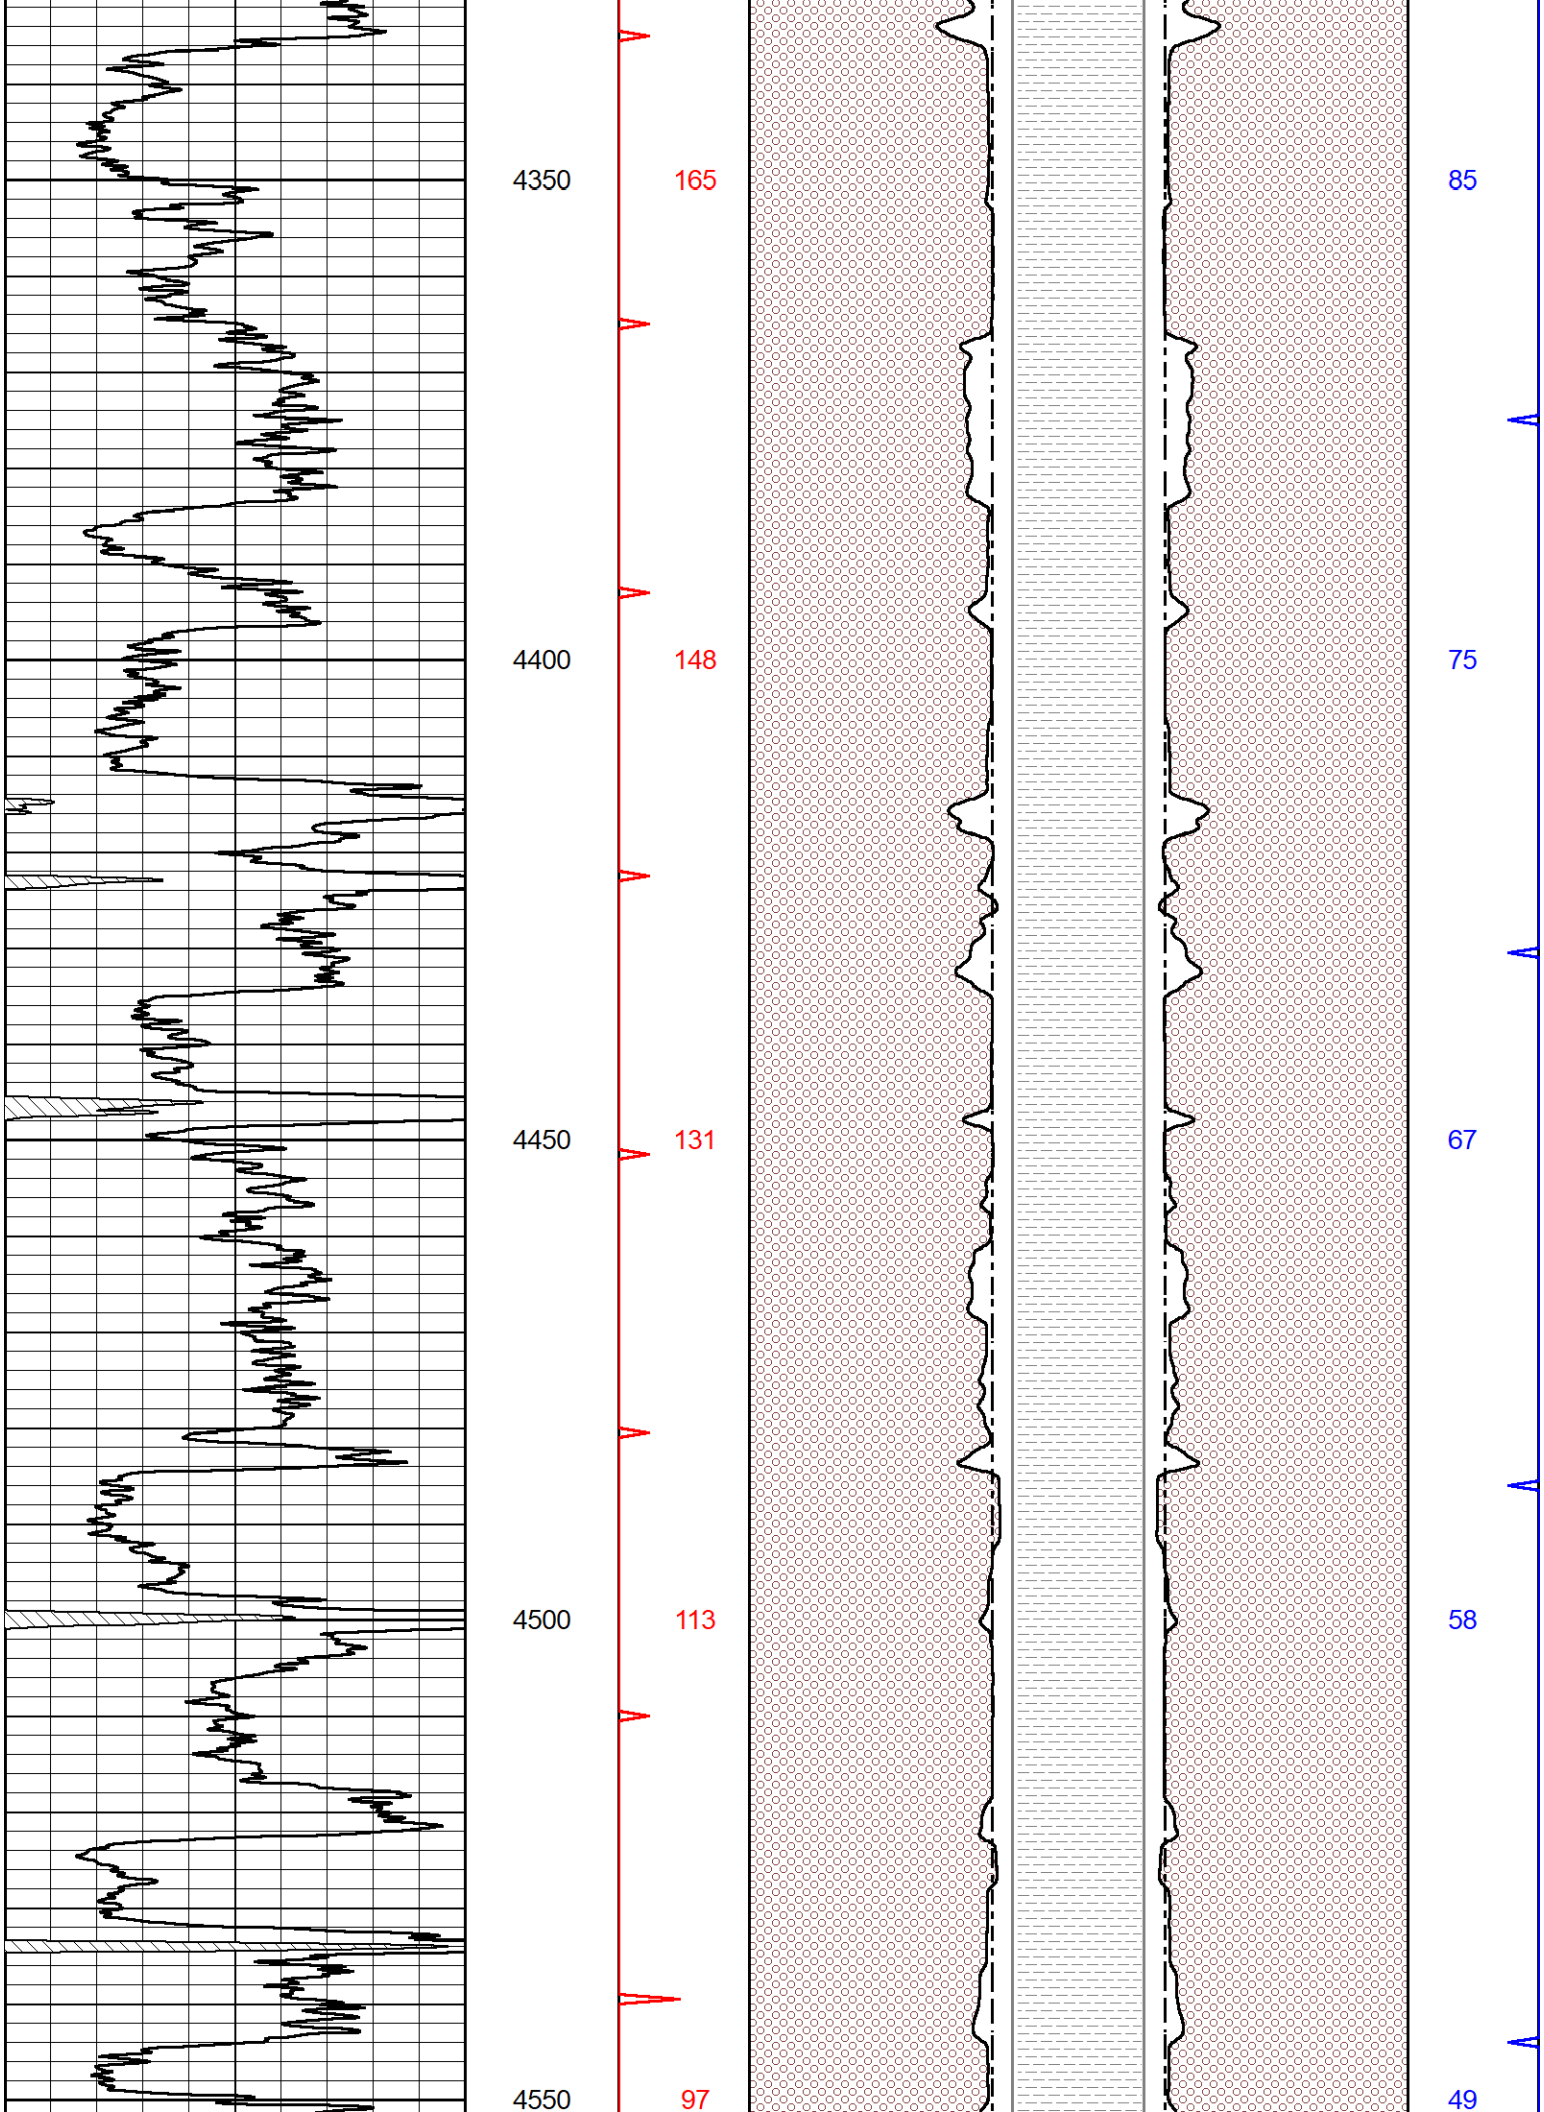

3250
538
276
3300
522
268
3350
505
260
3400
489
252
3450
473
244

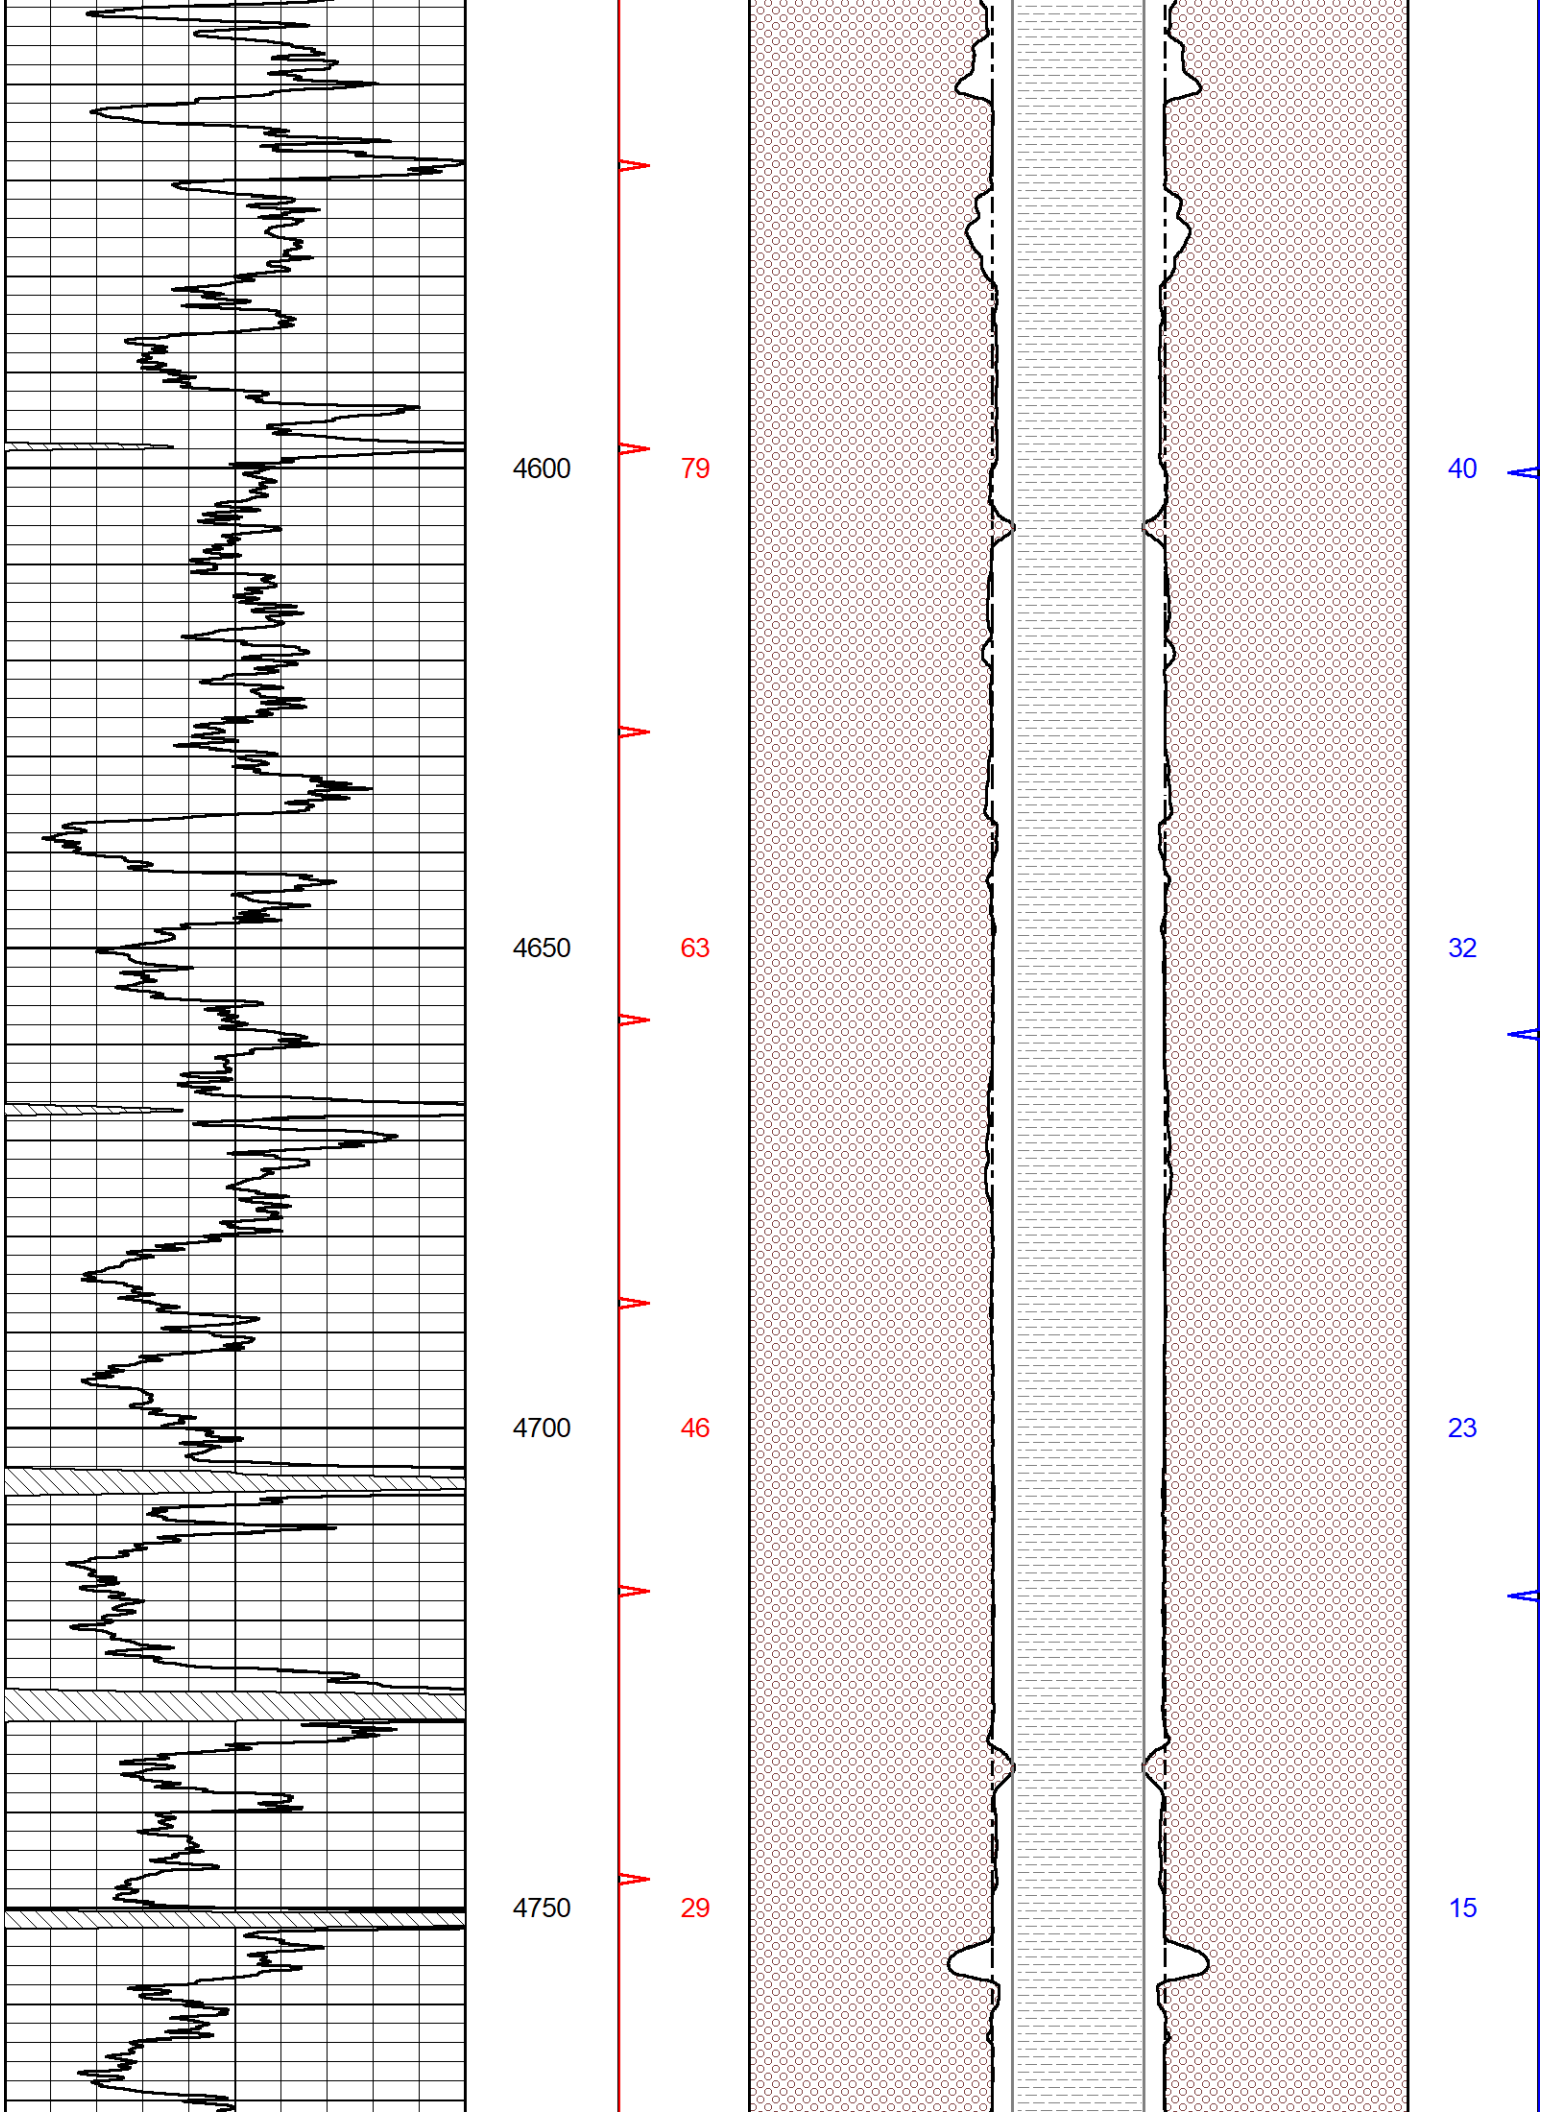

3500
456
235
3550
439
227
3600
422
218
3650
405
209

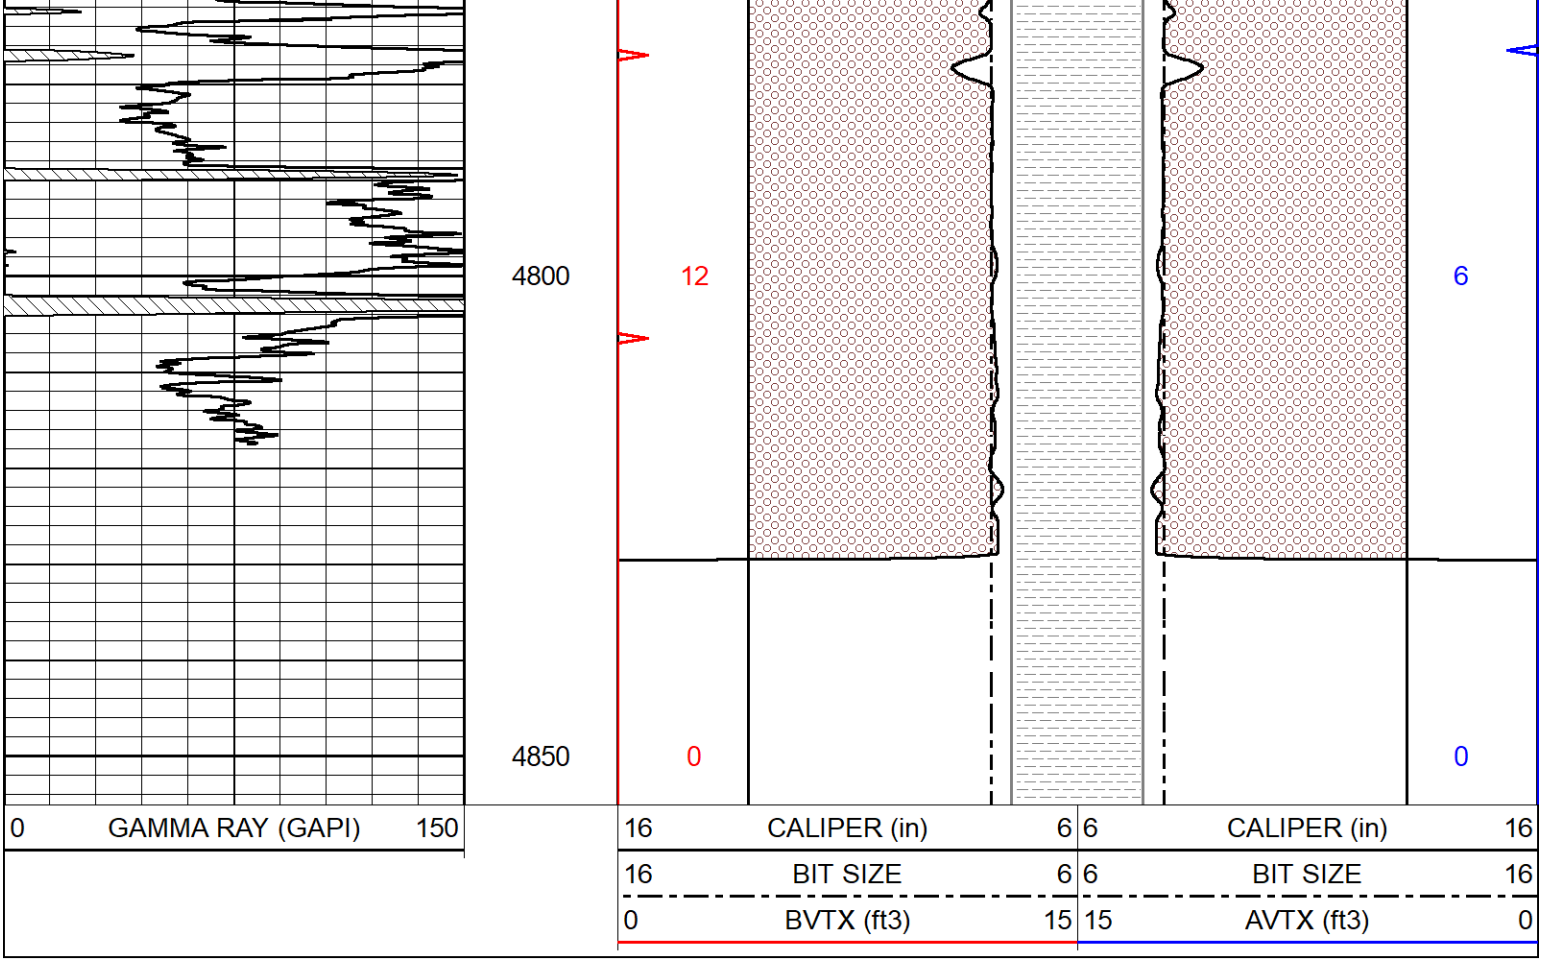

3700
388
200
3750
371
192
3800
354
183
3850
336
173


3900
319
164
3950
302
156
4000
285
146
4050
267
137
4100
250
129


4150
233
120
4200
216
111
4250
199
102
4300
182
94


4350
165
85
4400
148
75
4450
131
67
4500
113
58
4550
97
49


4600
79
40
4650
63
32
4700
46
23
4750
29
15



Calibration Report

Database File	murfin_culwell h 3-19.db
Dataset Pathname	stkml/pass4.12
Dataset Creation	Sat Jan 14 22:52:47 2023

Dual Induction Calibration Report

Serial-Model:	505 HT-M&W
Surface Cal Performed:	Mon Nov 14 06:05:40 2022

	Readings		References			Results	
Loop:	Air	Loop	Air	Loop		m	b
Deep	167.000	835.000	0.000	255.800	mmho/m	0.480	-49.500
Medium	1348.000	1348.000	0.000	255.800	mmho/m	0.390	-33.500

Microlog Calibration Report

Serial-Model:	402-PSI STKBL ML
Performed:	Tue Jan 3 20:52:47 2023

	Readings		References			Results	
	Zero	Cal	Zero	Cal		m	b
Normal	0.0037	0.0043	0.0000	10.0000	Ohm-m	14500.0000	-1.0000
Inverse	0.1208	0.0013	0.0000	10.0000	Ohm-m	13500.0000	-0.5000
Caliper	1.0046	1.1419	5.5000	20.0000	in	50.0000	-44.5500

Compensated Density Calibration Report

Serial-Model:	303-03-M&W

Source #:	21170B
Master Calibration Performed:	Mon Jan 2 03:21:14 2023

Master Calibration

	Density		Far Detector	Near Detector	
Magnesium	1.755	g/cc	3841.78	5151.73	cps
Aluminum	2.640	g/cc	700.98	3068.49	cps

Spine Angle = 73.06 Density/Spine Ratio = 0.498

	Size		Reading
Small Ring	4.00	in	1.17
Large Ring	14.00	in	1.04

Compensated Neutron Calibration Report

Serial-Model:	210-M&W
Source #:	N-1238
Master Calibration Performed:	Fri Dec 3 09:16:24 2021

Master Calibration

Detector	Readings		Target		Normalization
Short Space	6240.00	cps	1000.00	cps	1.6025
Long Space	460.00	cps	1000.00	cps	1.9500

Gamma Ray Calibration Report

Serial Number:	103	
Tool Model:	M&W	
Performed:	Fri Dec 3 12:13:24 2021	
Calibrator Value:	500.0	GAPI
Background Reading:	28.0	cps
Calibrator Reading:	986.0	cps
Sensitivity:	0.5700	GAPI/cps

MIDWEST WIRELINE

Company	Murfin Drilling Company, Inc.
Well	Culwell H 3-19
Field	
County	Cheyenne
State	Kansas