

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-135-24592-00-00  
Spot: W2E2SE Sec/Twnshp/Rge: 16-16S-24W  
1180 feet from S Section Line, 1050 feet from E Section Line  
Lease Name: PFANNENSTIEL Well #: 1  
County: NESS Total Vertical Depth: 4629 feet

Operator License No.: 30742  
Op Name: PALOMINO PETROLEUM, INC.  
Address: 4924 SE 84TH STREET  
NEWTON, KS 67114

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	255		WITH 170 SX CMT

*\$ 150.44*

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 04/24/2007 5:00 AM  
Plug Co. License No.: 33350 Plug Co. Name: SOUTHWIND DRILLING, INC.  
Proposal Rcvd. from: DOUG Company: SOUTHWIND DRILLING, INC. Phone: (620) 564-3800

Proposed Plugging Method: 1ST PLUG AT 1920' WITH 50 SX CMT. 2ND PLUG AT 1200' WITH 80 SX CMT. 3RD PLUG AT 600' WITH 40 SX CMT. 4TH PLUG AT 270' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: MICHAEL MAIER WitnessType: NONE  
Date/Time Plugging Completed: 04/24/2007 7:00 AM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

1ST PLUG AT 1920' WITH 50 SX CMT. 2ND PLUG AT 1200' WITH 80 SX CMT. 3RD PLUG AT 600' WITH 40 SX CMT. 4TH PLUG AT 270' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Perfs:


**INVOICED**

DATE \_\_\_\_\_  
INV. NO. \_\_\_\_\_

Remarks: USED 60/40 POZMIX 6% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

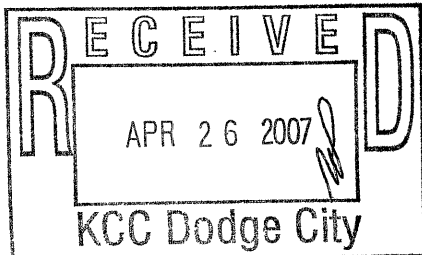

Signed Michael Maier  
(TECHNICIAN)

RECEIVED  
KANSAS CORPORATION COMMISSION  
Form CP-2/3

MAY 02 2007

CONSERVATION DIVISION  
WICHITA, KS