MICRO LOG

Company VINCENT OIL CORPORATION
Well PERKINS #6-3
Field MULBERRY CREEK
County FORD State KANSAS

Company VINCENT OIL CORPORATION
Well PERKINS #6-3
Field MULBERRY CREEK
County FORD
State KANSAS

Location: API # : 15-057-21081-0000
466' FNL & 2166' FWL
SW - NE - NE - NW

SEC 3 TWP 29S RGE 23W

Other Services
CDL/CNL/PE
DIL/SONIC

Elevation
K.B. 2568
D.F. 2566
G.L. 2556

Permanent Datum	GROUND LEVEL Elevation 2556	
Log Measured From	KELLY BUSHING 12' A.G.L.	
Drilling Measured From	KELLY BUSHING	

Date	12/9/22		
Run Number	TWO		
Depth Driller	5380		
Depth Logger	5380		
Bottom Logged Interval	5364		
Top Log Interval	4200		
Casing Driller	8 5/8"@652'		
Casing Logger	652		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES: 6,600 PPM	
Density / Viscosity	9.3/49		
pH / Fluid Loss	11.0/8.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.750@57F		
Rmf @ Meas. Temp	.563@57F		
Rmc @ Meas. Temp	.900@57F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	.334@128F		
Time Circulation Stopped	4.5 HOURS		
Time Logger on Bottom	3:15 A.M.		
Maximum Recorded Temperature	128F		
Equipment Number	8916		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	KEN LeBLANC		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395

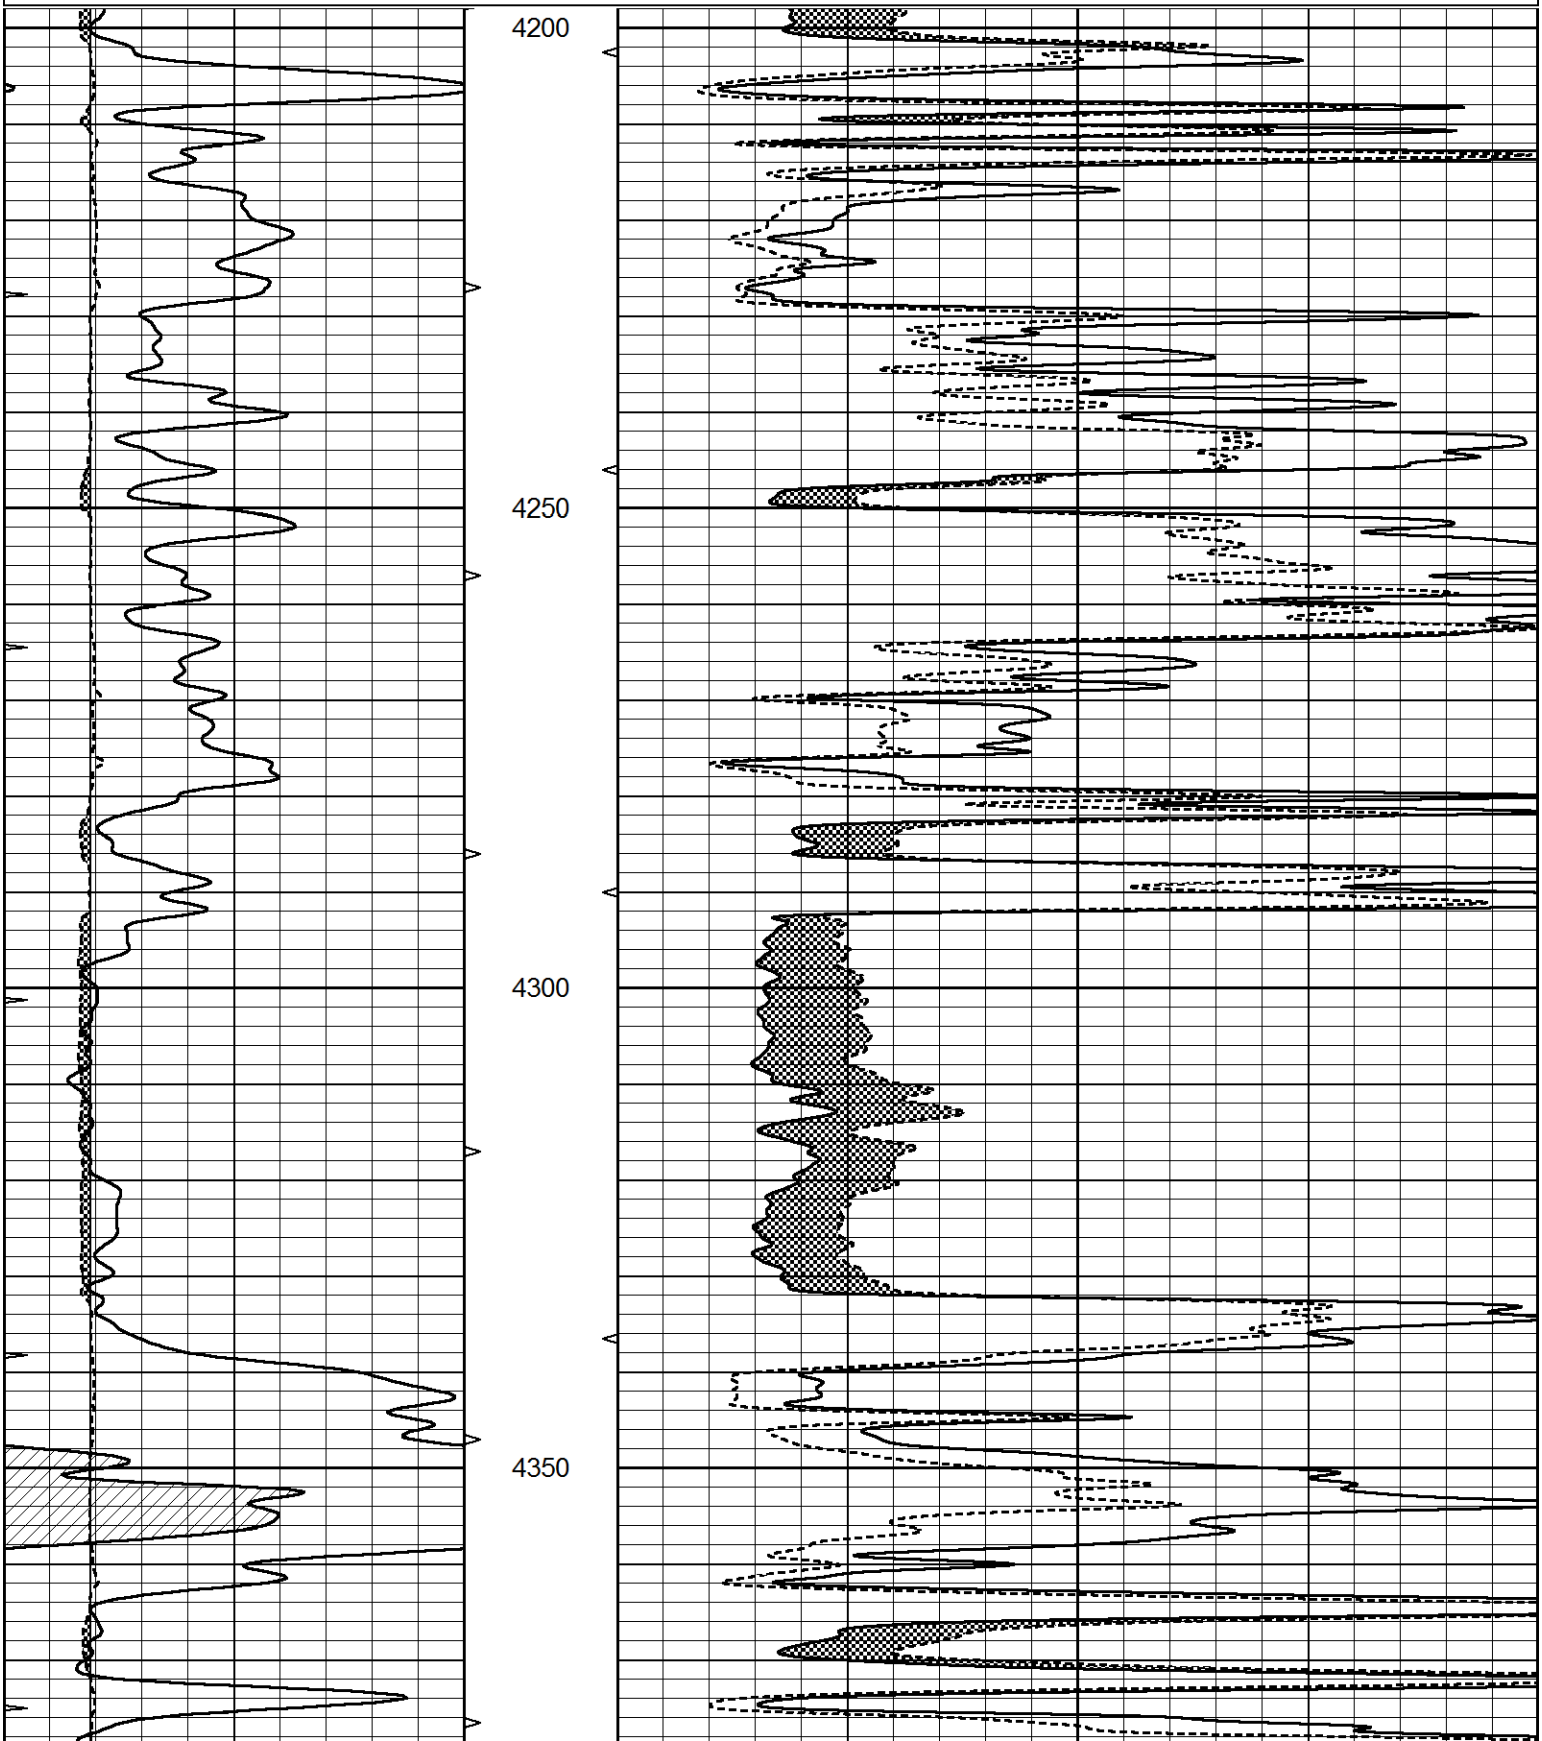
DIRECTIONS:

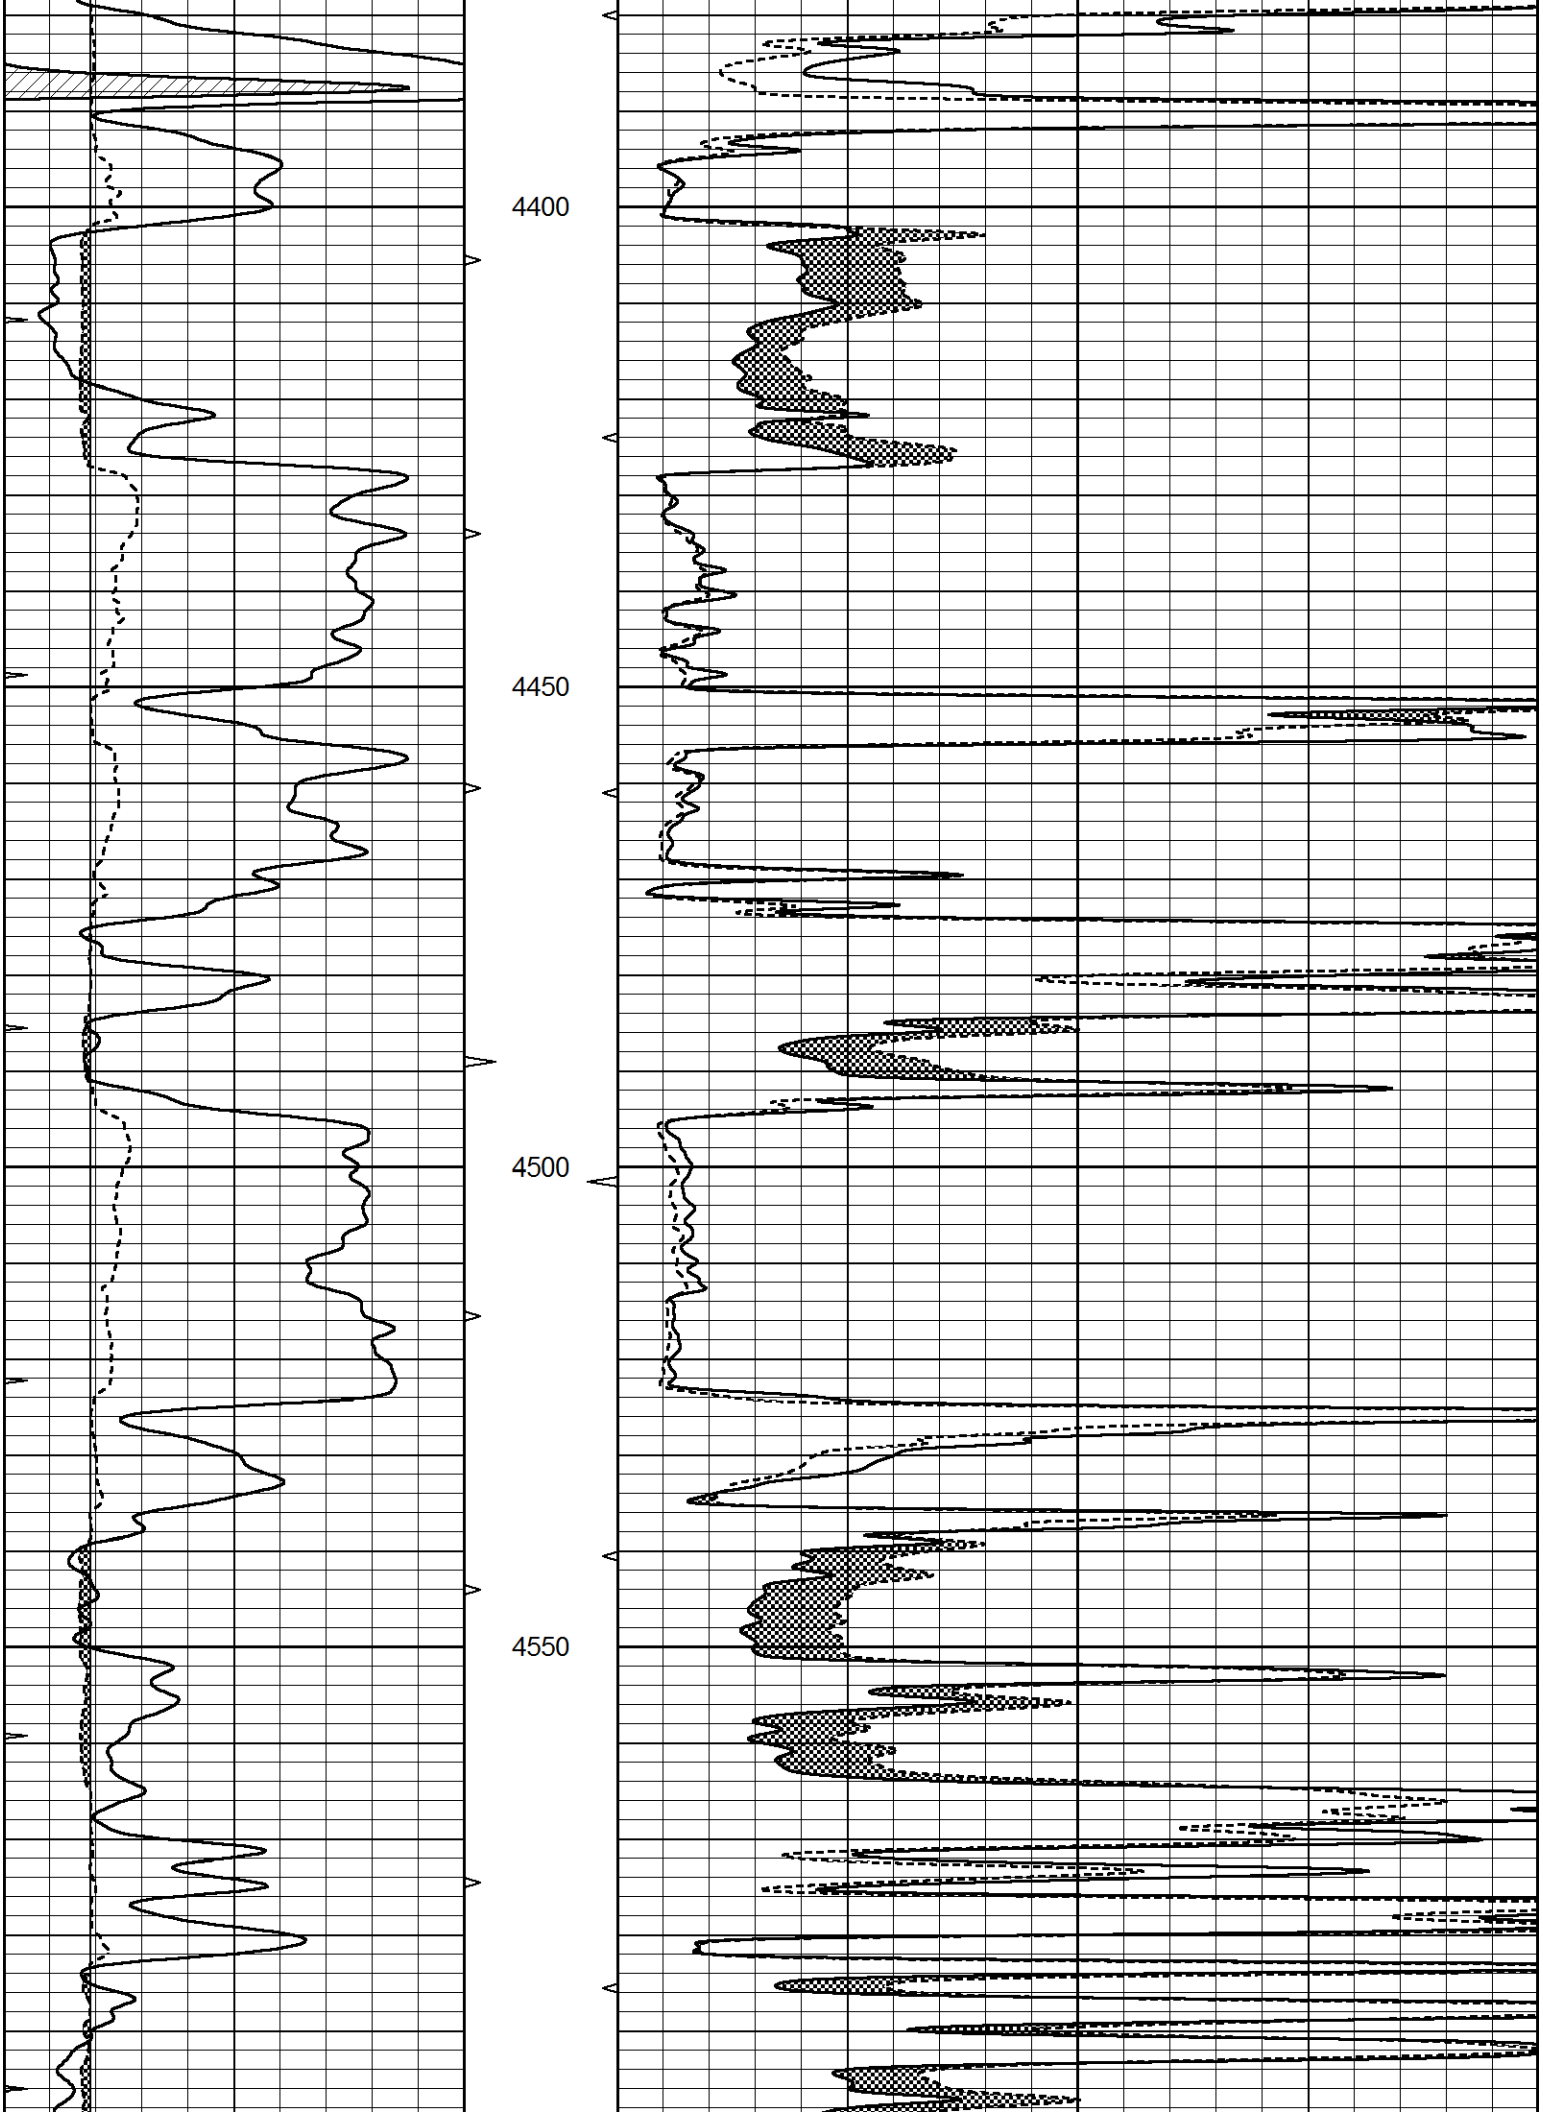
KINGSDOWN, KS.& HWY 54, 2N. ON "RD. 125 TO "WILBURN RD.", 4W., S. INTO AT TANK BATTERY, VEER EAST BEHIND FARM HOUSE

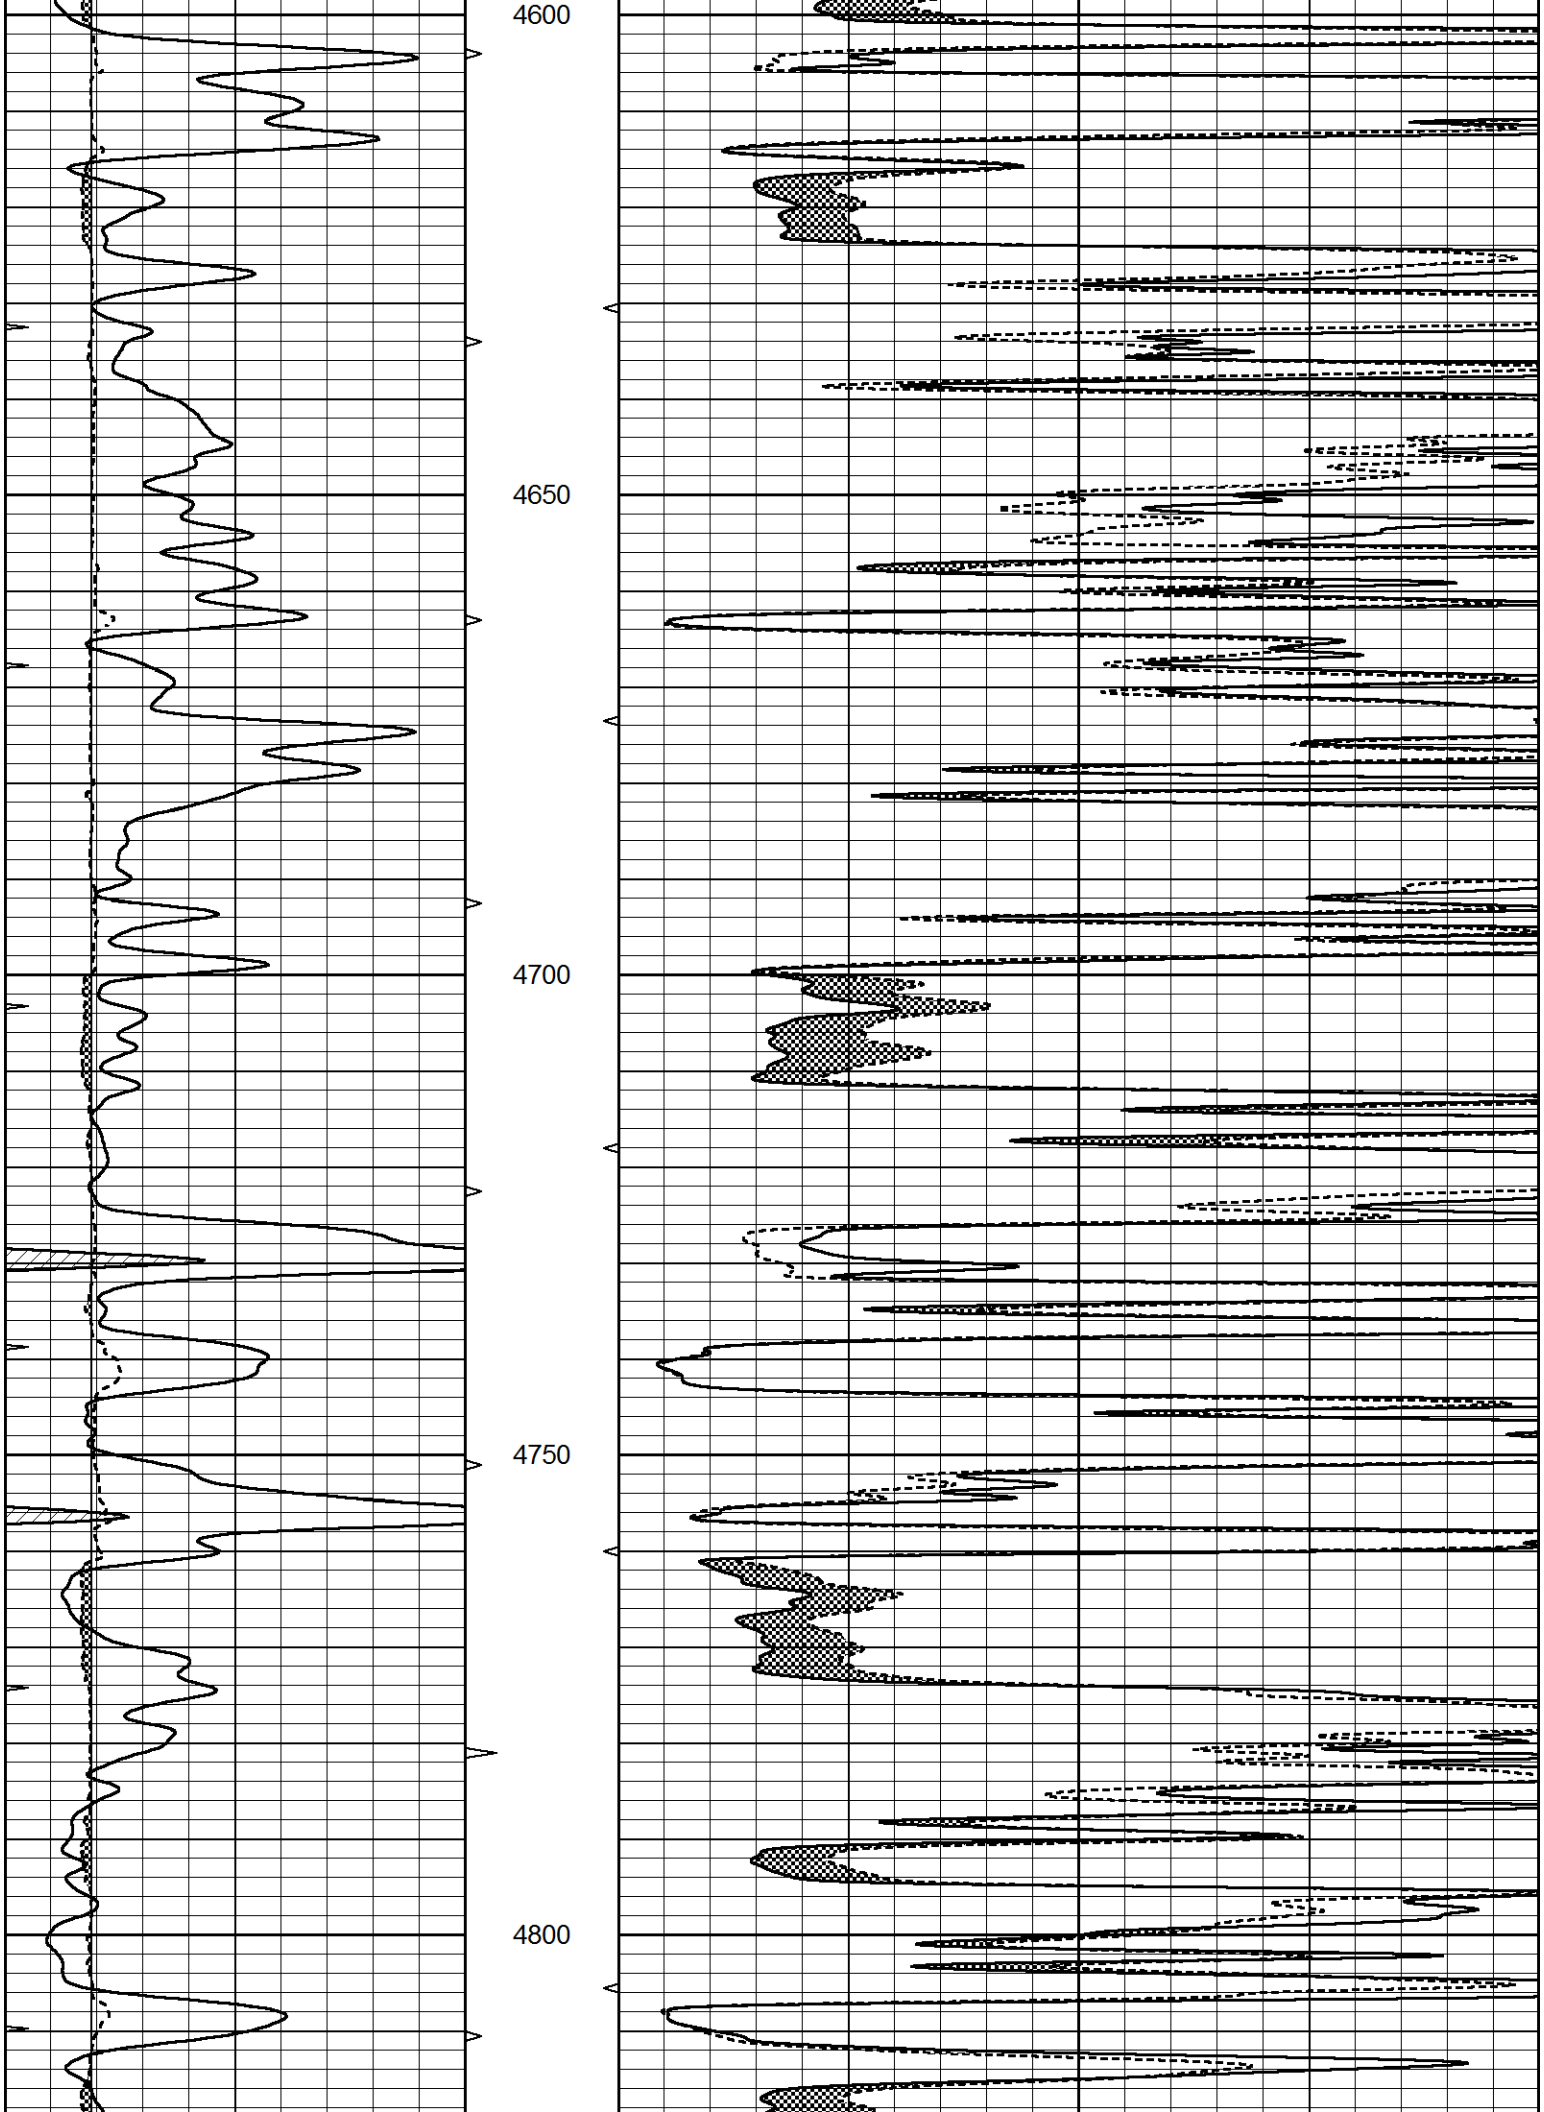
MAIN SECTION

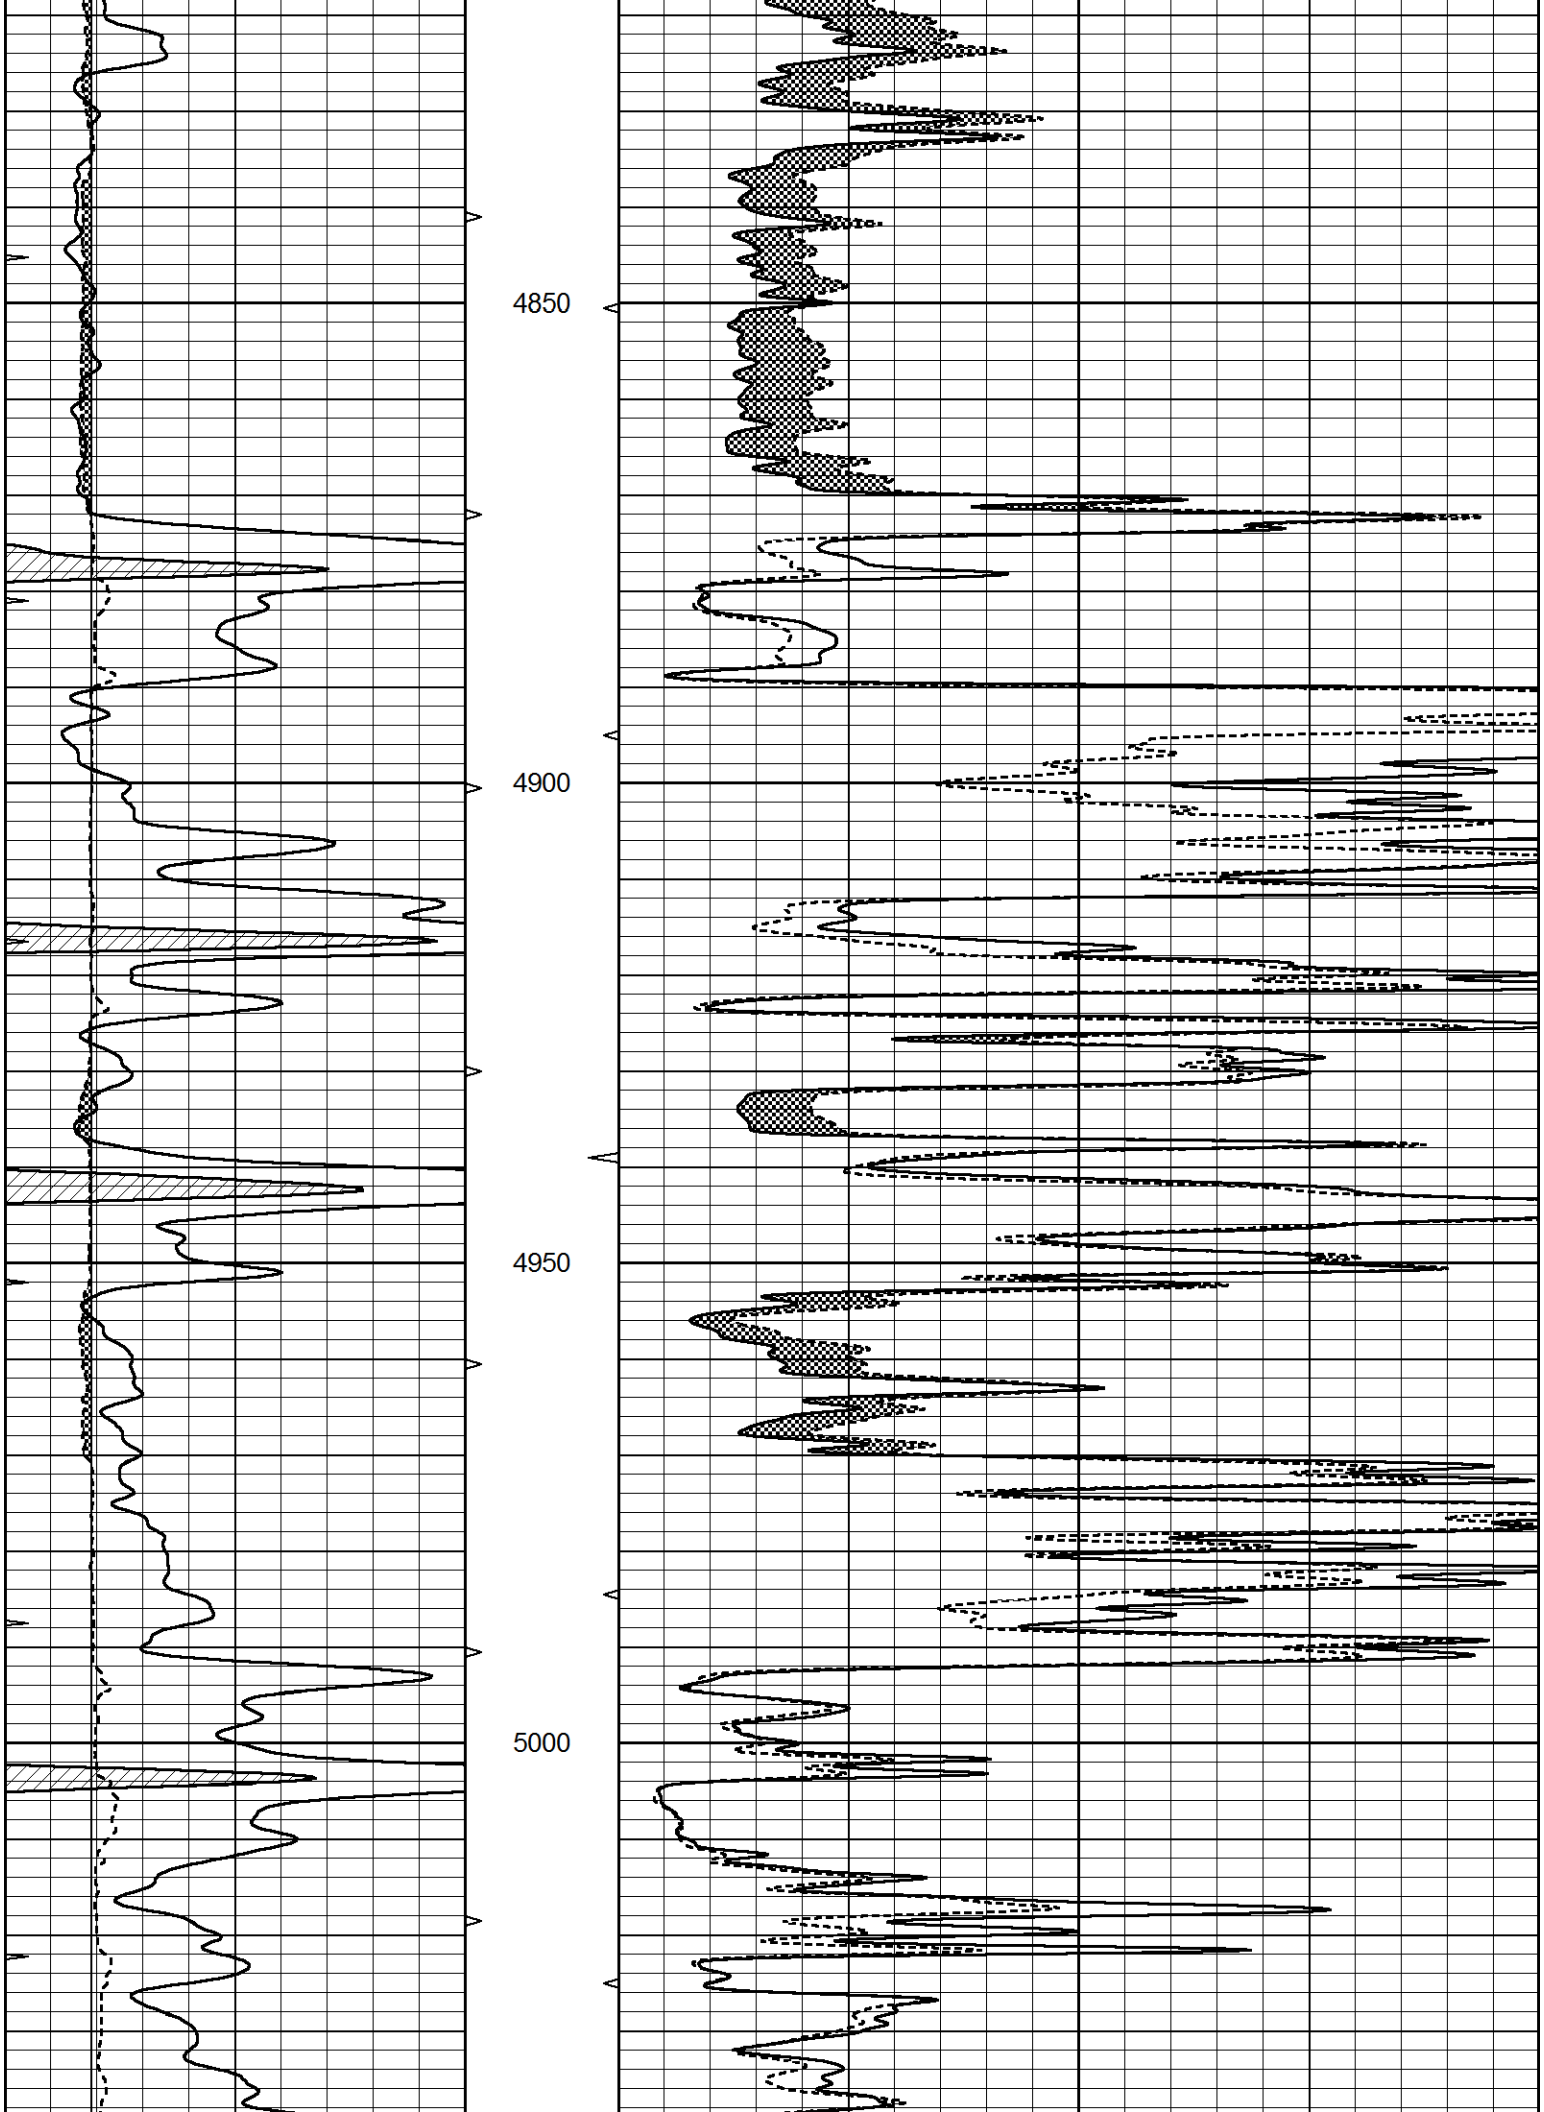
Database File	6813pe.db
Dataset Pathname	pass6.1
Presentation Format	_micro
Dataset Creation	Fri Dec 09 04:54:07 2022
Charted by	Depth in Feet scaled 1:240

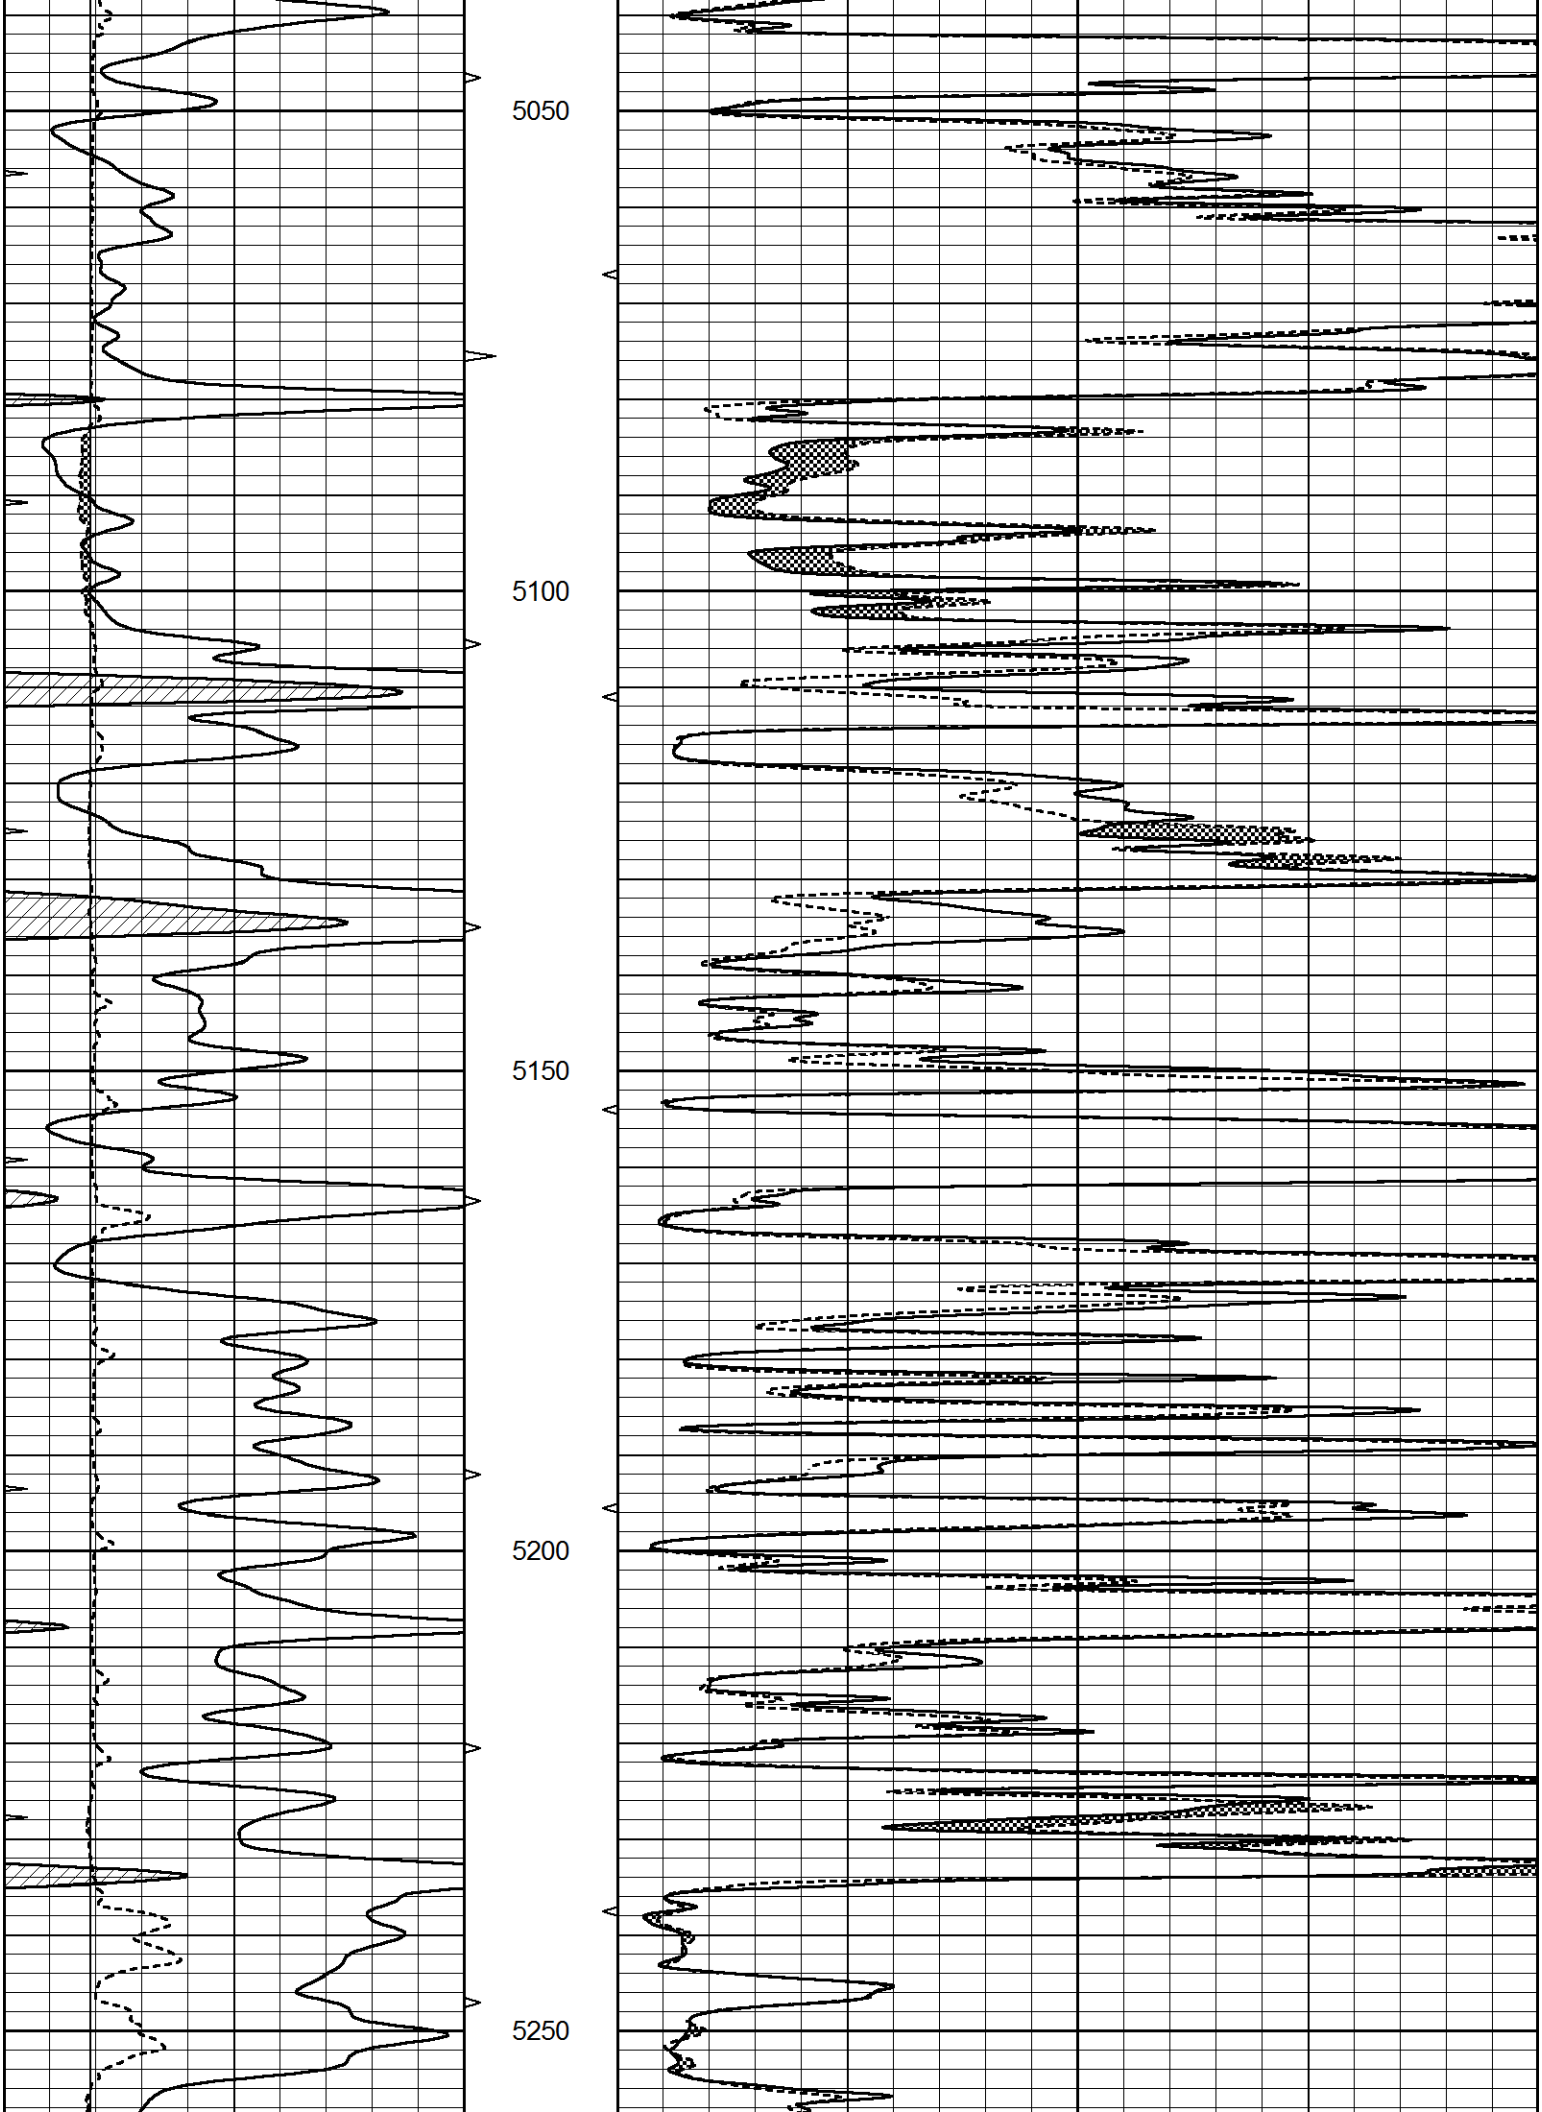
0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m) 40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m) 40
0	MINMK	20	TBHV		
			0 (ft3) 10		

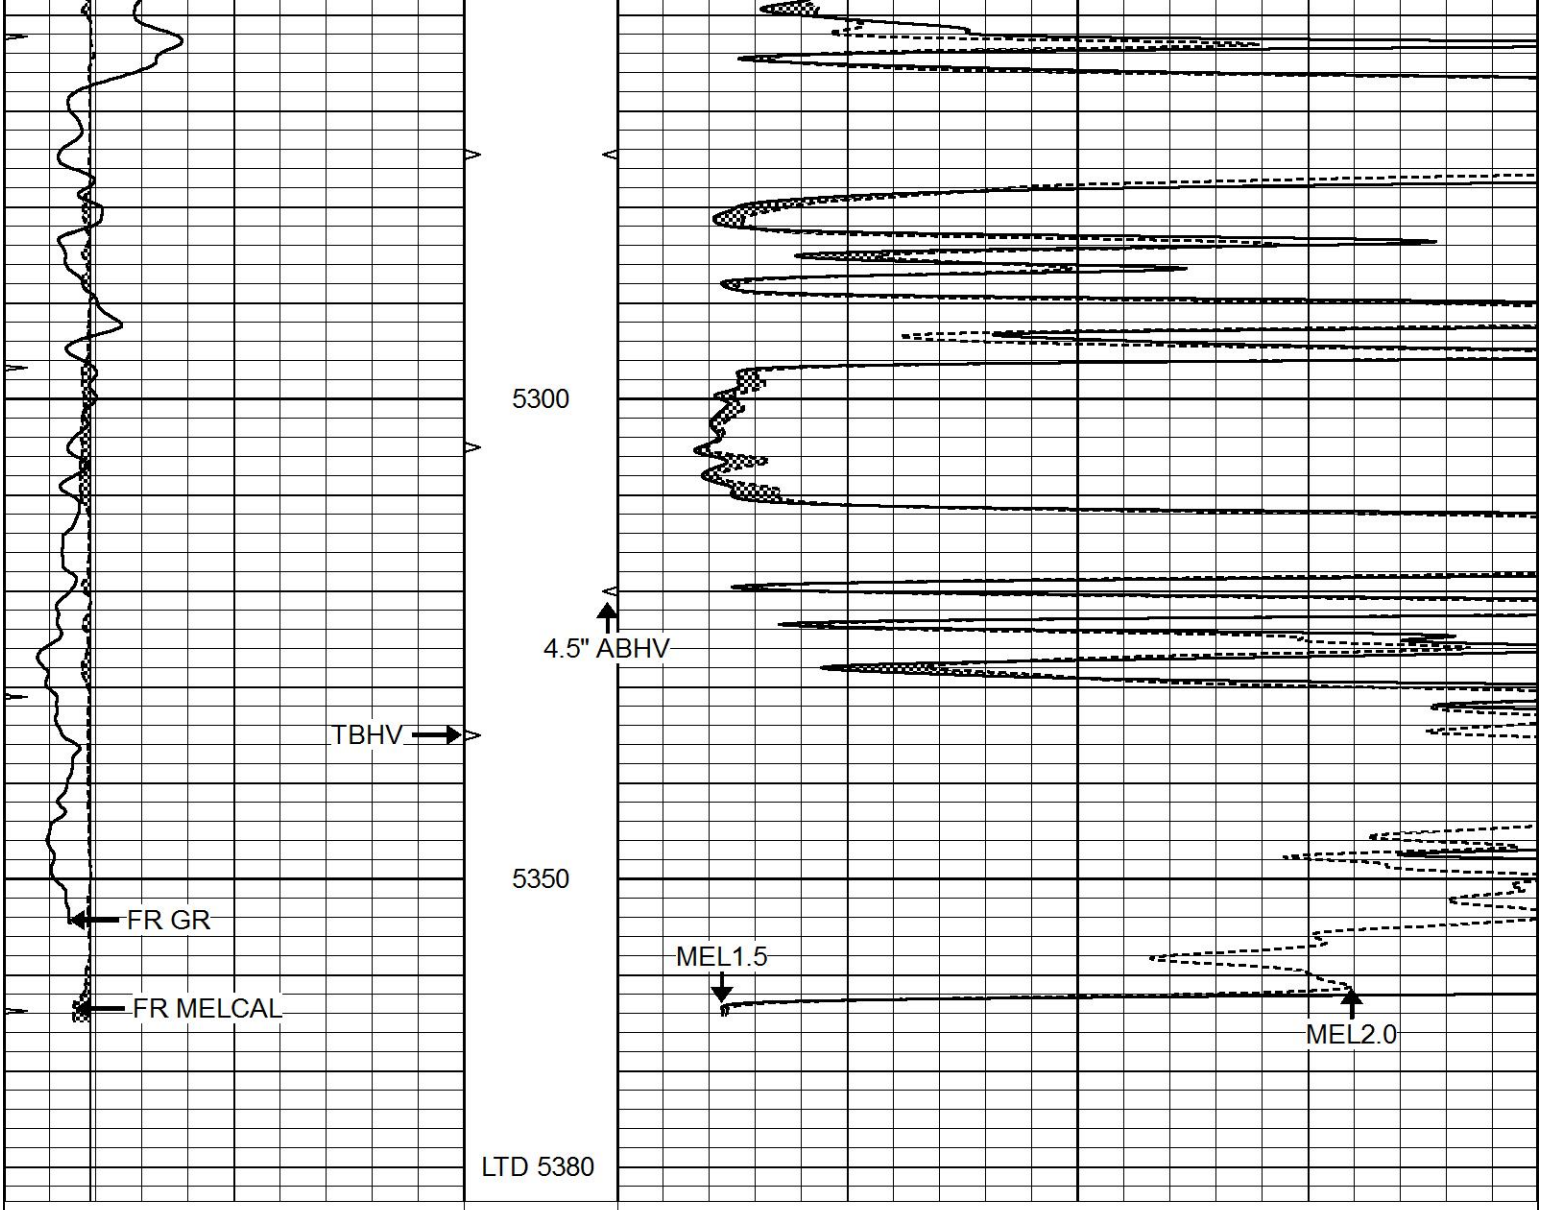



4400
4450
4500
4550


4600
4650
4700
4750
4800


4850
4900
4950
5000


5050
5100
5150
5200
5250




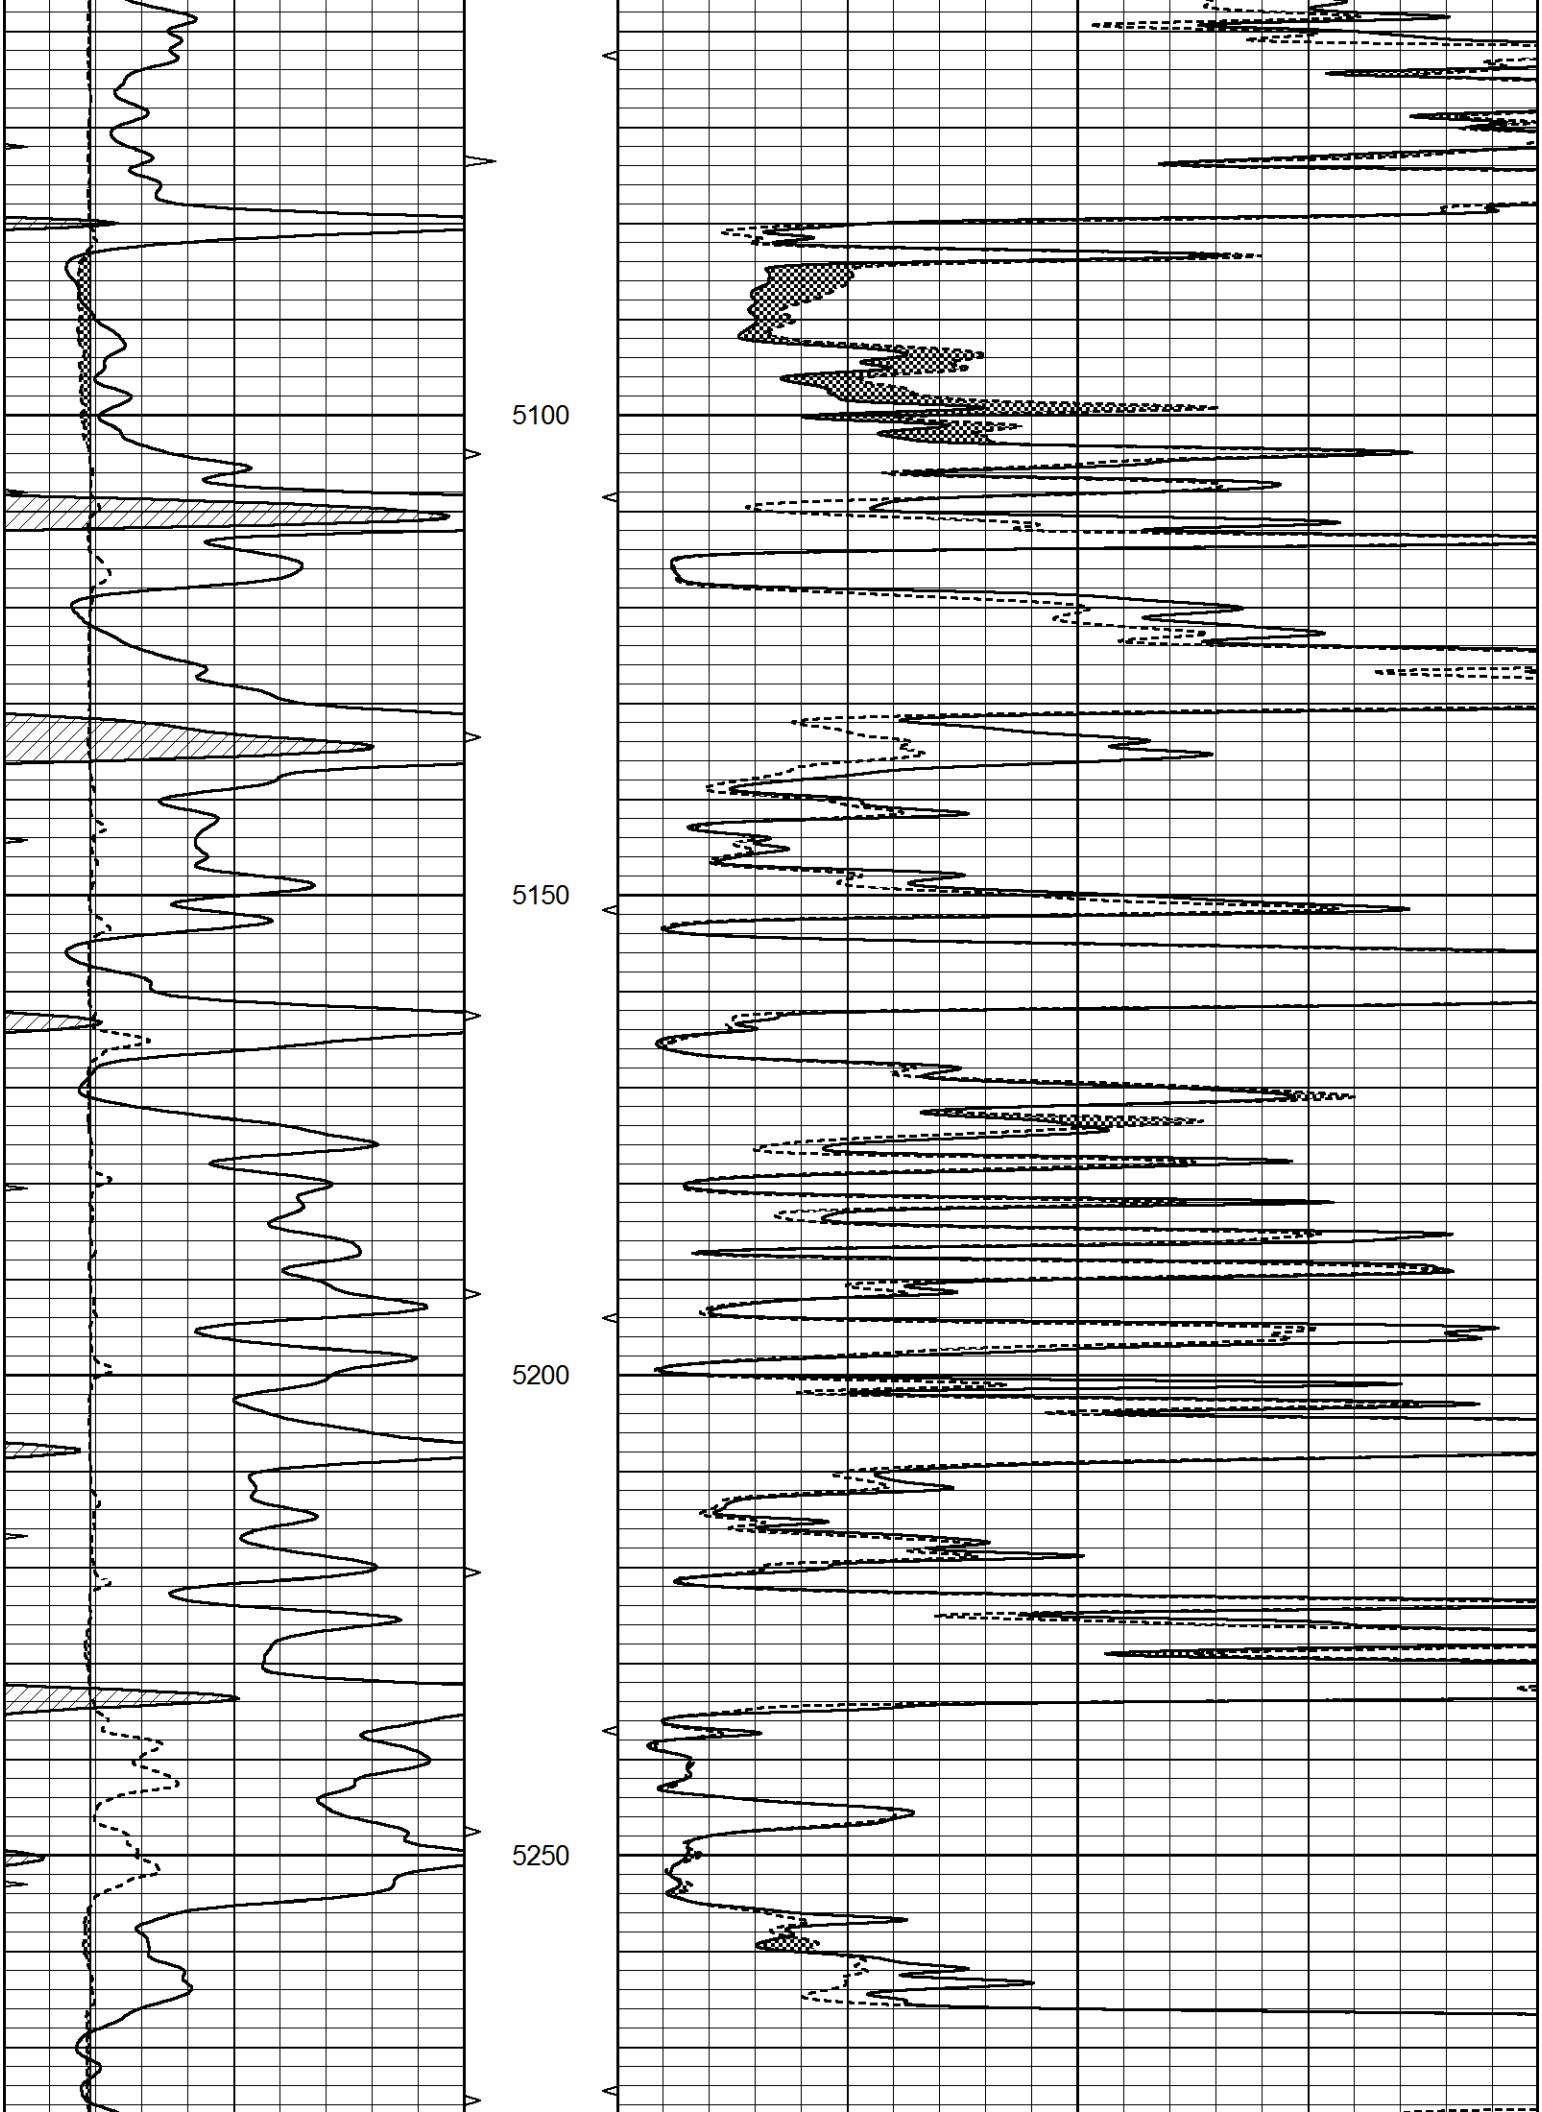
0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m) 40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m) 40
0	MINMK	20	TBHV		
			0 (ft3) 10		

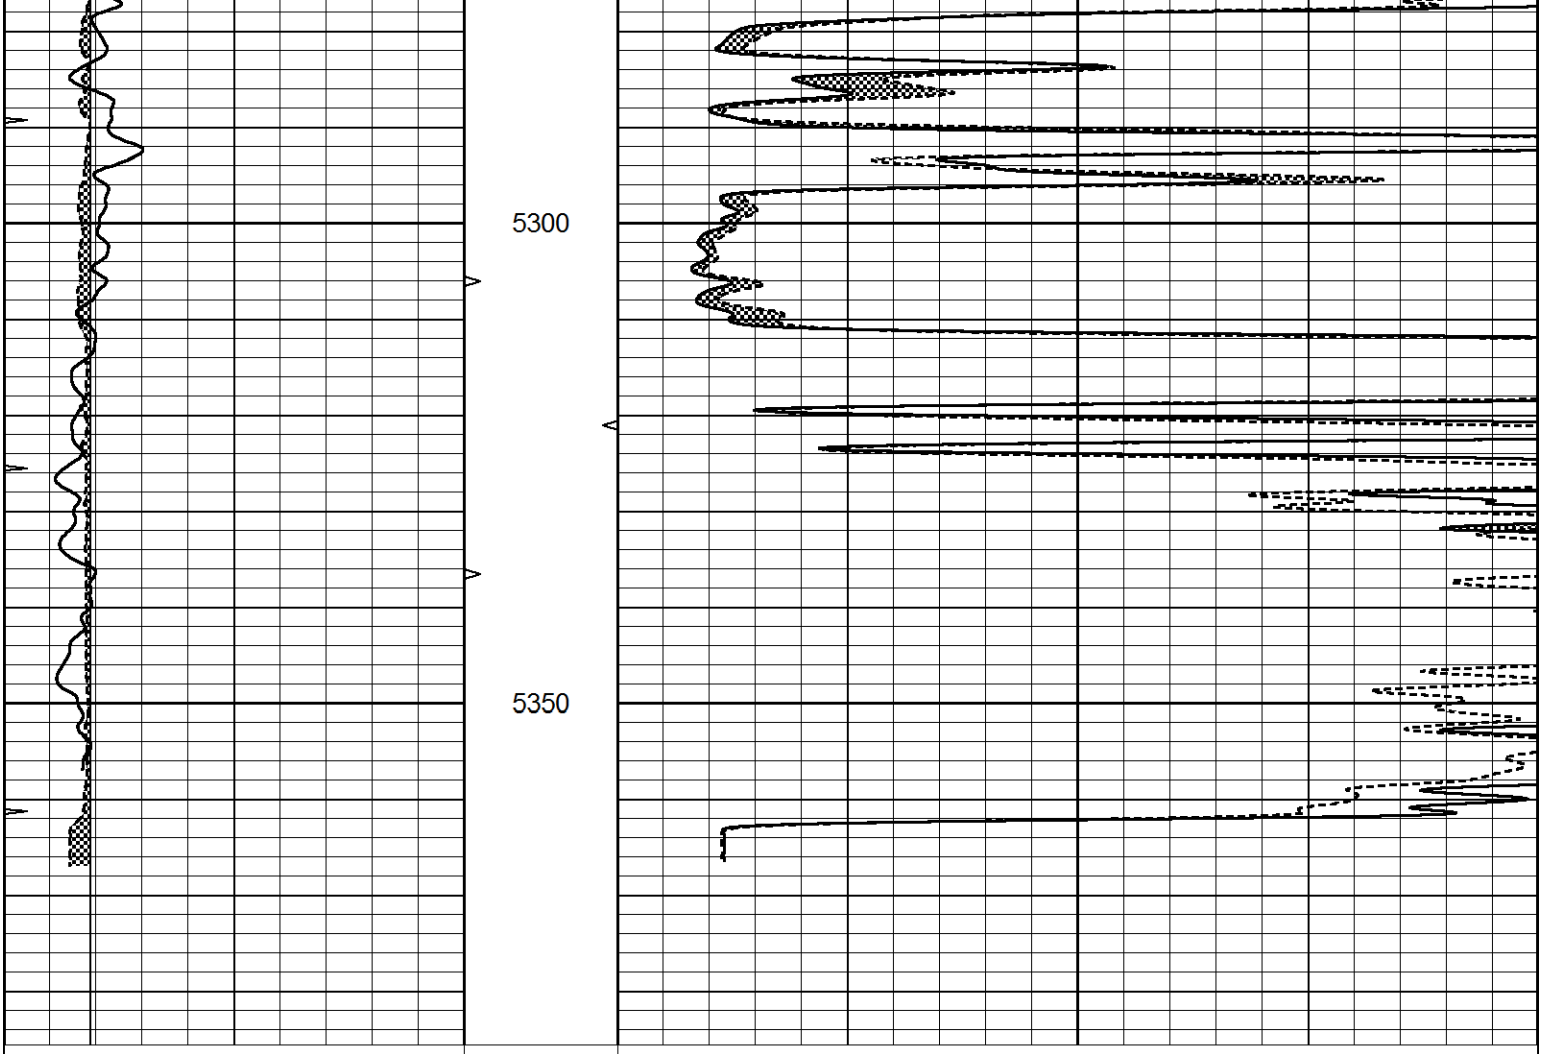
REPEAT SECTION

Database File	6813pe.db
Dataset Pathname	pass5.2
Presentation Format	_micro
Dataset Creation	Fri Dec 09 04:45:34 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m) 40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m) 40
0	MINMK	20	TBHV		
			0 (ft3) 10		




5100
5150
5200
5250



Calibration Report

Database File	6813pe.db
Dataset Pathname	pass6.1
Dataset Creation	Fri Dec 09 04:54:07 2022

MICRO Calibration Report

Serial Number:	MICRO6	
Tool Model:	PROBE	
Performed:	Sun Dec 04 02:05:56 2022	
Caliper Calibration:	Gain=-2.735	Offset=18.612
	Low Cal	High Cal
References	8.000	16.000
Readings	3.880	0.955
1.5" Calibration:	Gain=40.000	Offset=-0.500
	Low Cal	High Cal
References	0.000	20.000
Readings	0.002	0.624
2" Calibration:	Gain=60.000	Offset=-1.000
	Low Cal	High Cal

References	0.000	20.000
Readings	0.006	0.468

Gamma Ray Calibration Report

Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Wed Dec 07 22:55:29 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.6000	GAPI/cps