



MICRO LOG

Company				PALOMINO PETROLEUM					
Well				CASSABLANCA #1					
Field				UNNAMED					
County				SCOTT		State		KS	
Location:				API # : 15 171 21285				Other Services CDNL DIL	
Permanent Datum				SEC 14		TWP 20S		RGE 34W	
Log Measured From				1098' FSL & 1608' FEL					
Drilling Measured From				KB		KB		Elevation K.B. 3016 D.F. 3014 G.L. 3005	
Date				4/6/22					
Run Number				TWO					
Depth Driller				4920					
Depth Logger				4920					
Bottom Logged Interval				4918					
Top Log Interval				3700					
Casing Driller				8 5/8" @ 228'					
Casing Logger				228					
Bit Size				7 7/8"					
Type Fluid in Hole				Chemical					
Density / Viscosity				9.4/49					
pH / Fluid Loss				10.0/8.0					
Source of Sample				Pit					
Rm @ Meas. Temp				2.1@70degf					
Rmf @ Meas. Temp				1.58@70degf					
Rmc @ Meas. Temp				2.52@70degf					
Source of Rmf / Rmc				Calculated					
Rm @ BHT				1.27@115degf					
Time Circulation Stopped				9:00 P.M.					
Time Logger on Bottom				11:00 PM					
Maximum Recorded Temperature				115degf					
Equipment Number				T605					
Location				Hays, KS					
Recorded By				GUS PFANENSTIEL					
Witnessed By				RYAN SEIB					

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

SCOTT CITY SOUTH TO 40 RD., WEST TO FALCON RD ANOTHER HALF WEST SOUTH INTO.


Thank You for using Gemini Wireline LLC
785-625-1182




MAIN PASS

Database File	ppcassablanca#1oh.db
Dataset Pathname	pass7
Presentation Format	kml
Dataset Creation	Thu Apr 07 01:36:08 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	0	MN 2" (Ohm-m)	20
6	MCAL (in)	16	0	MI 1" (Ohm-m)	20
6	BOREID (in)	16	10000	LTEN (lb)	0
0	MINMK	50			

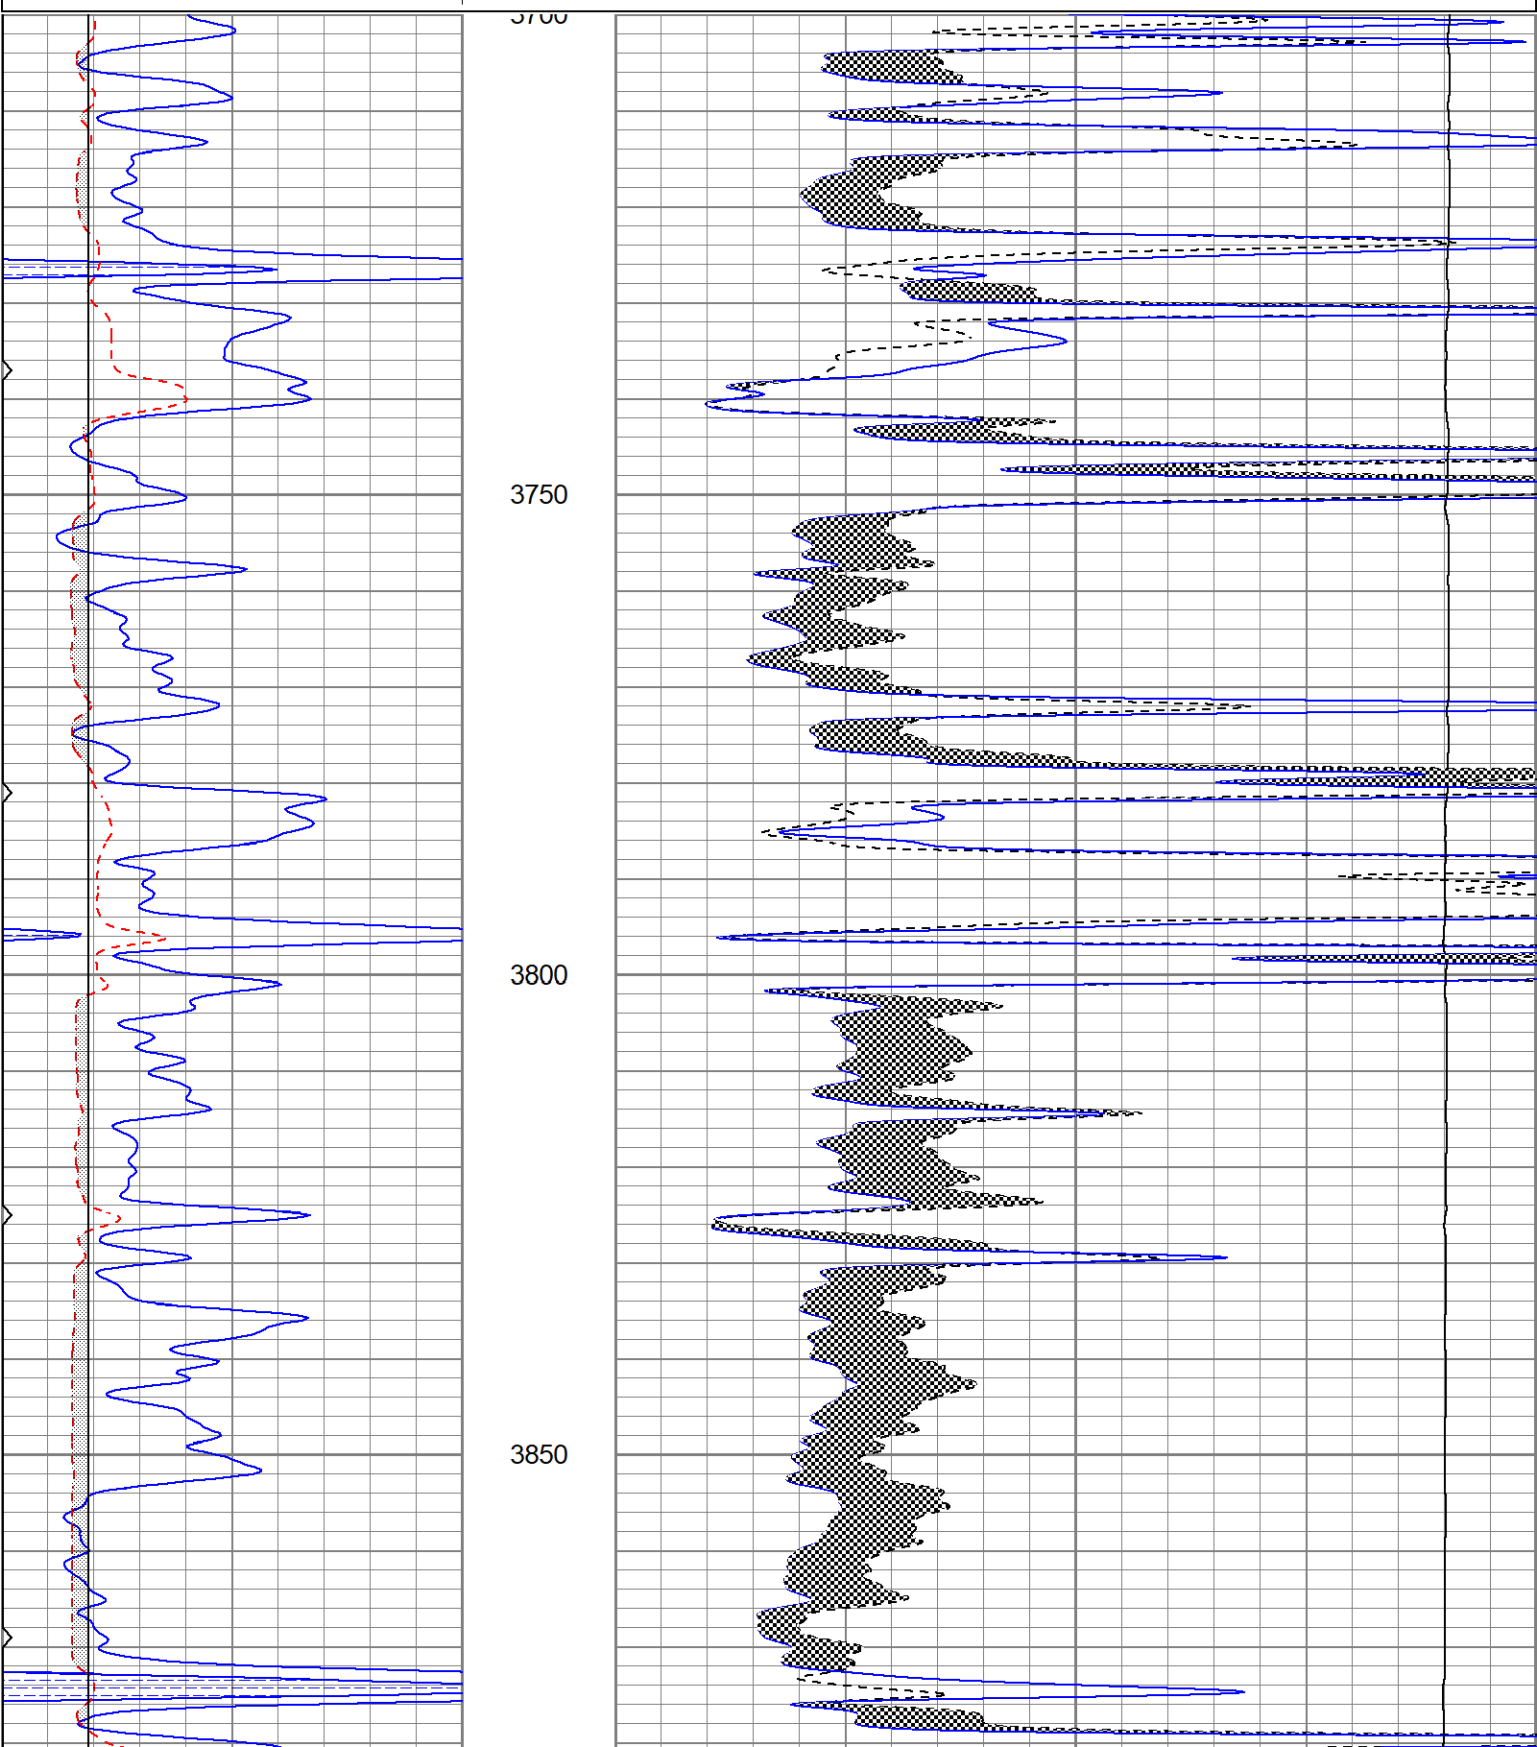

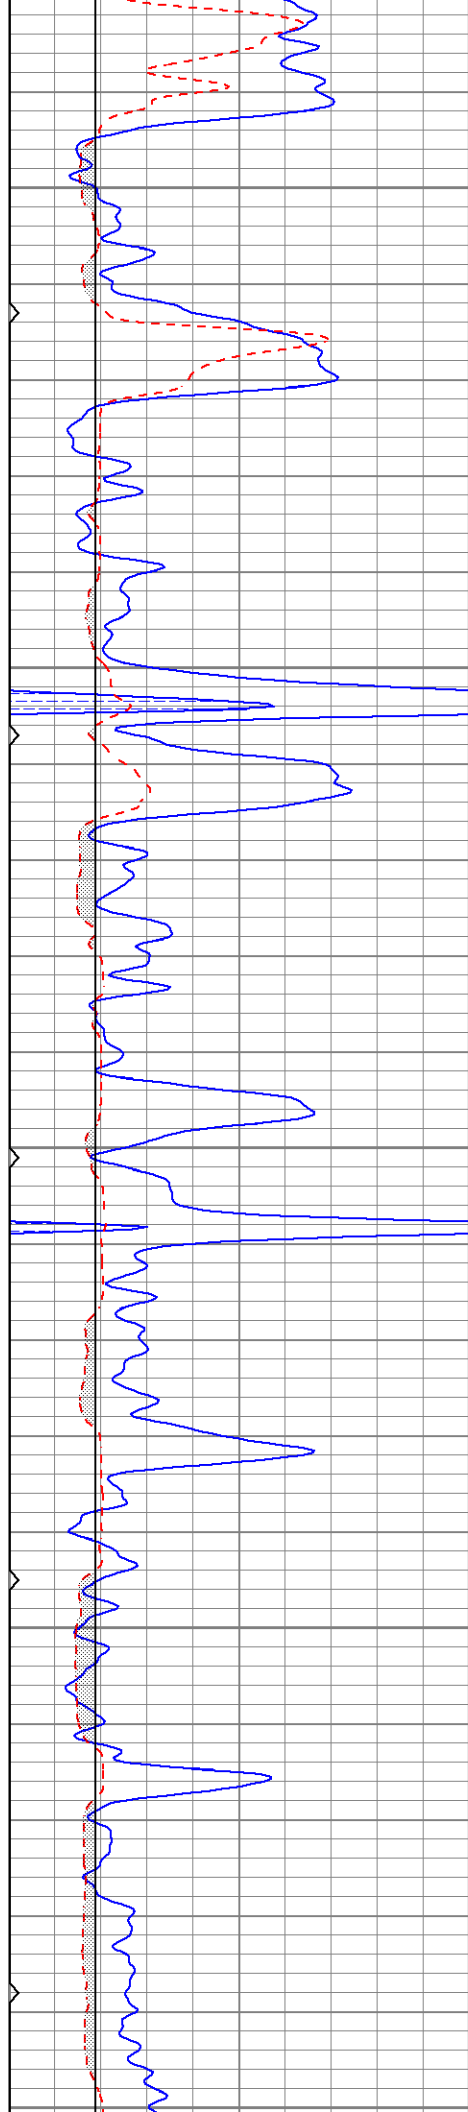


3900


3950

4000

4050

4100

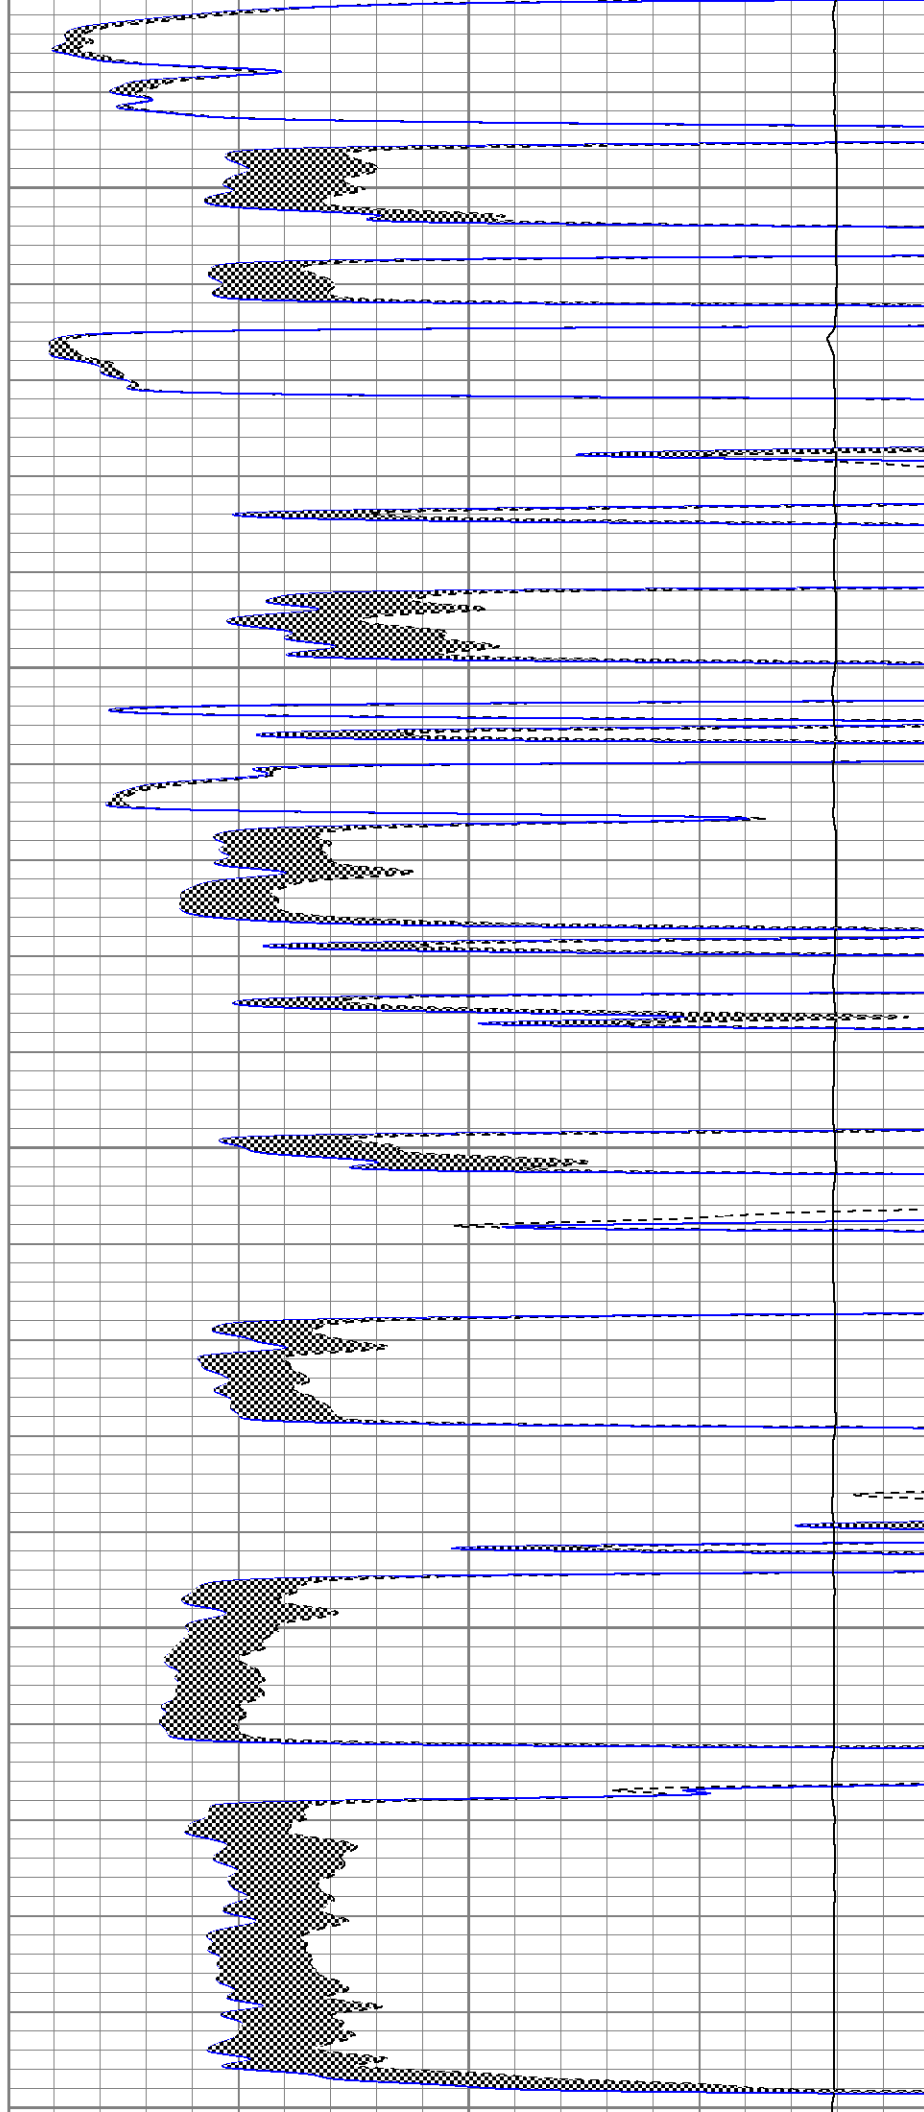

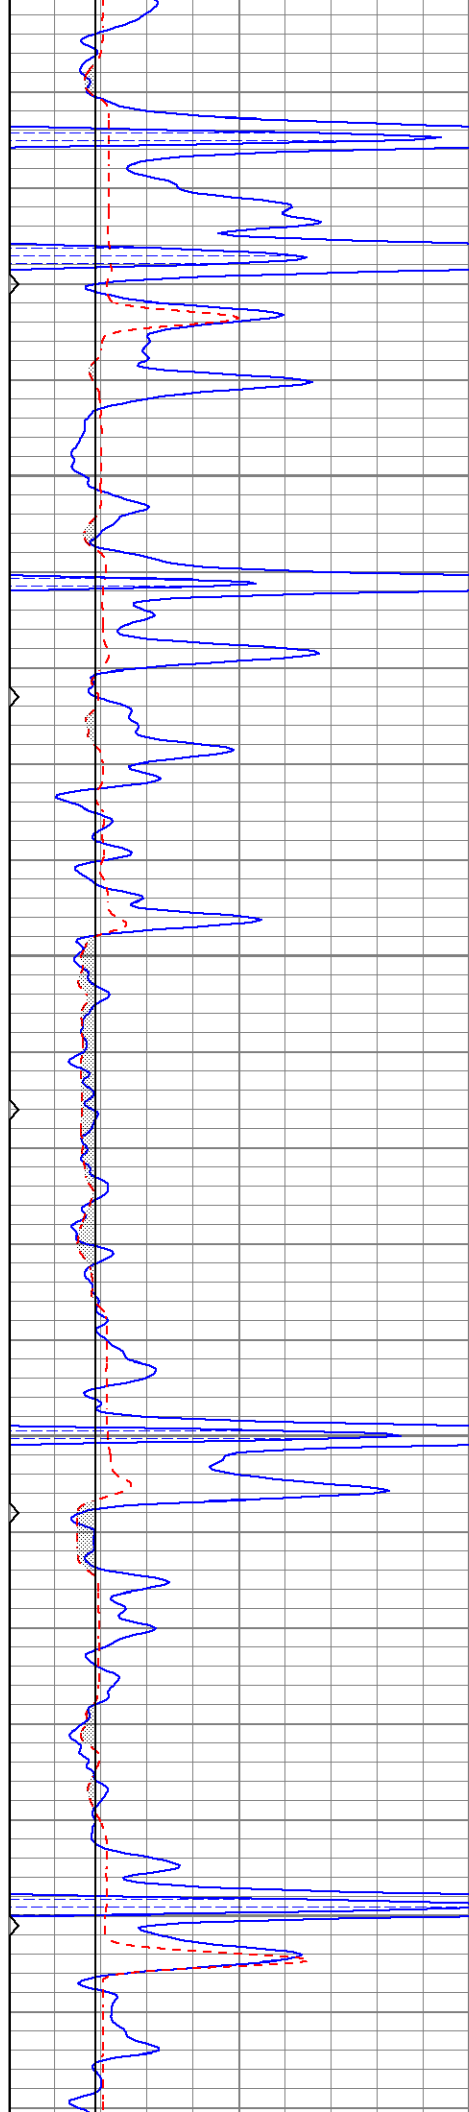


4100


4150

4200

4250

4300

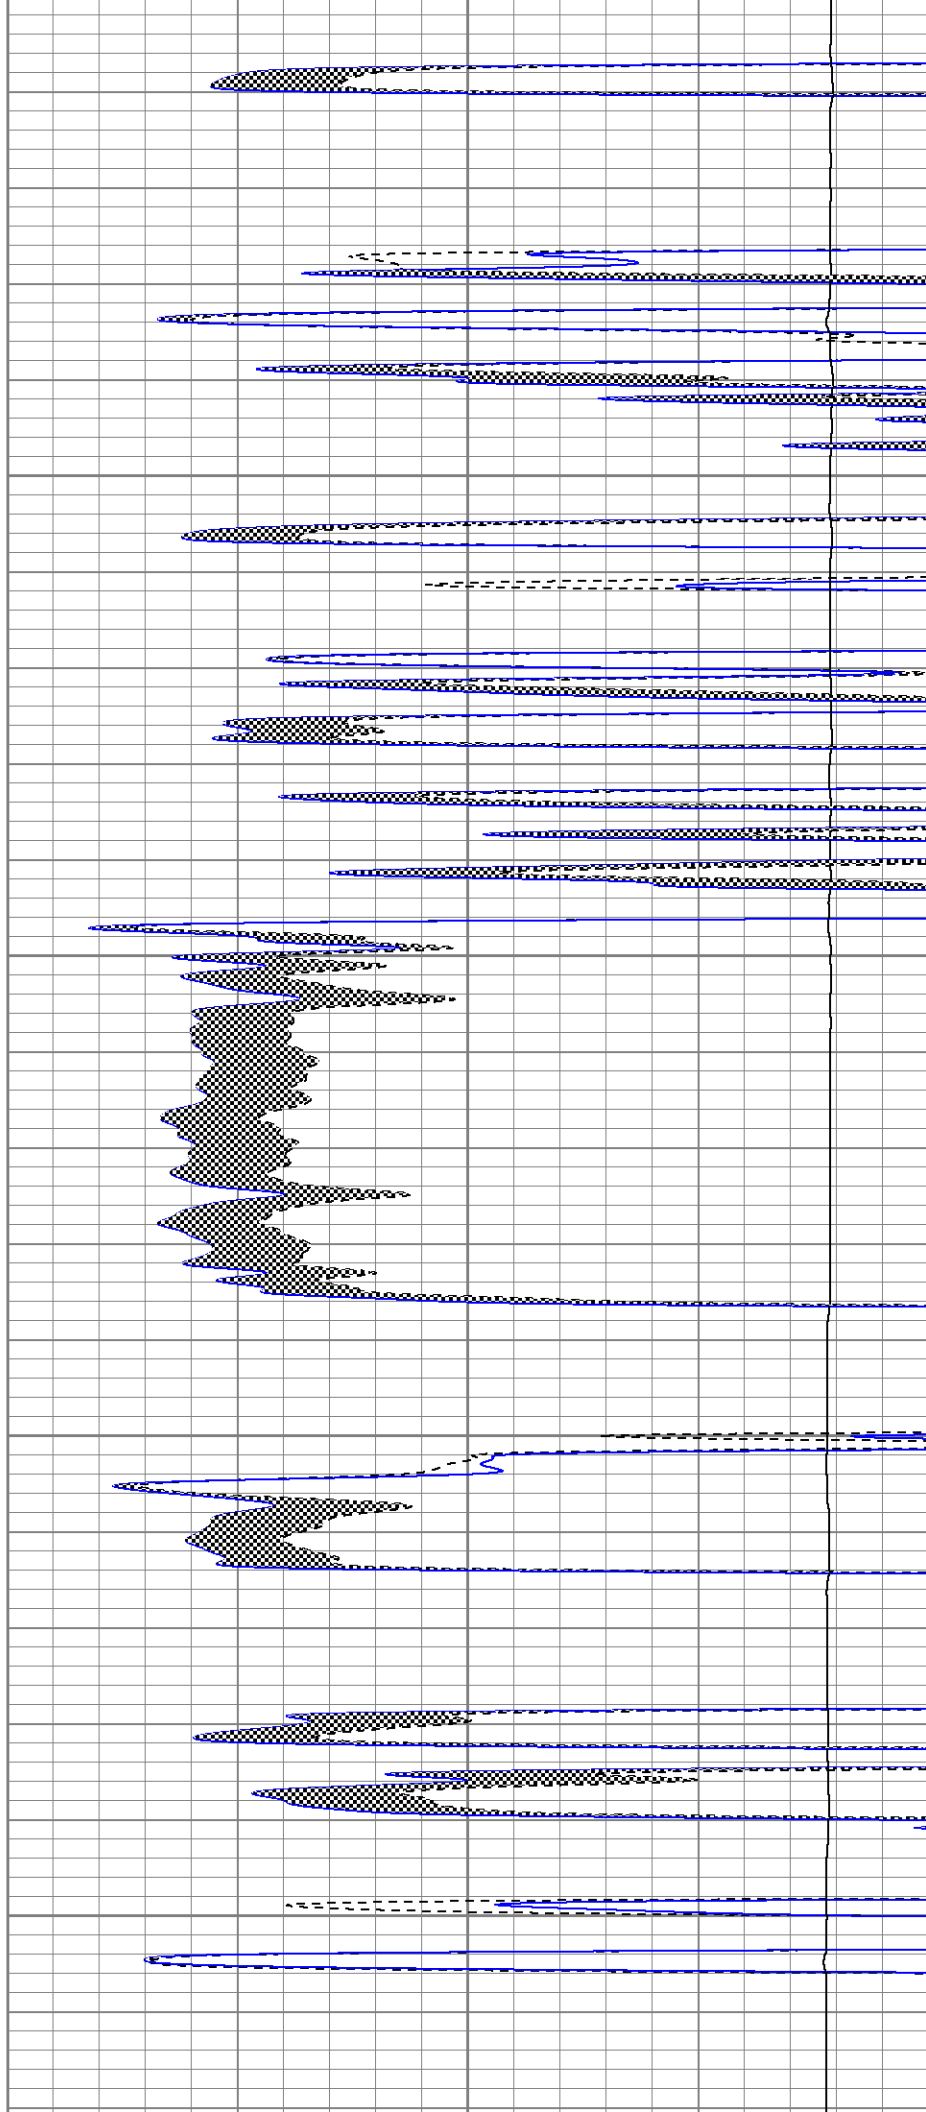

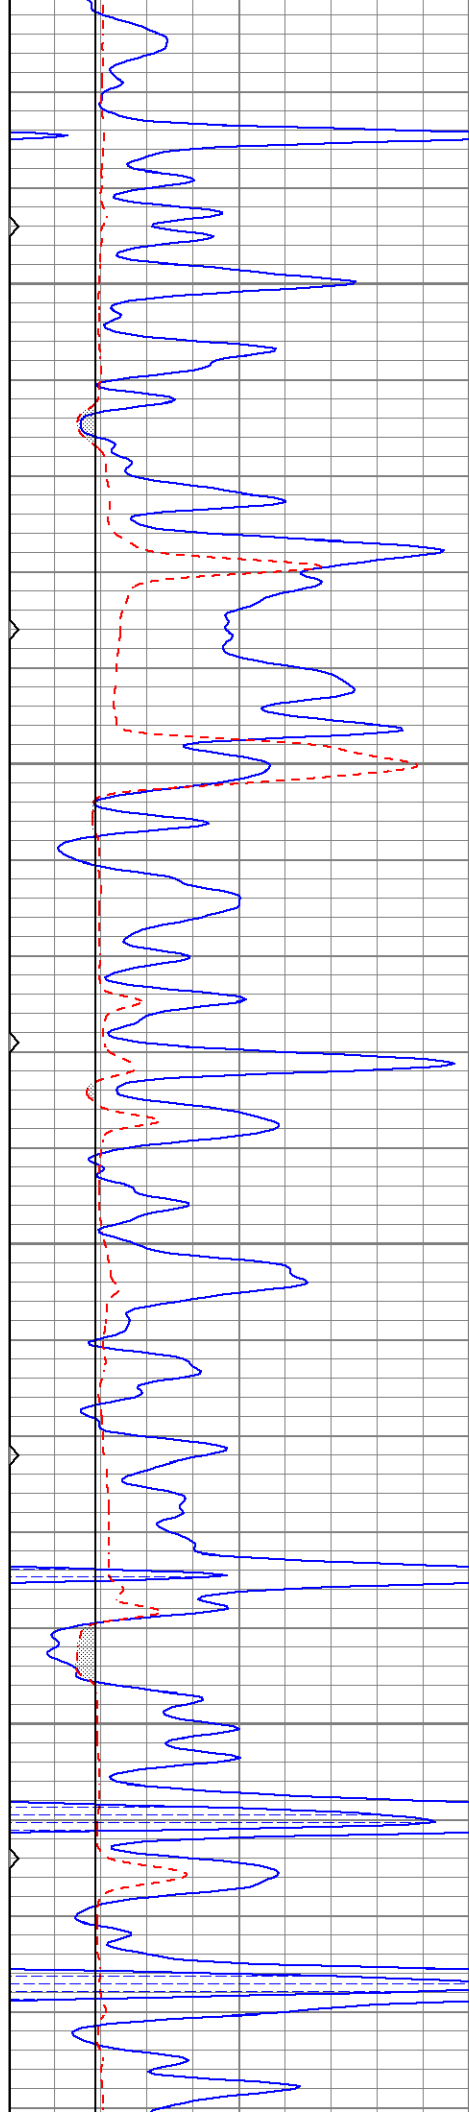



4350

4400

4450

4500

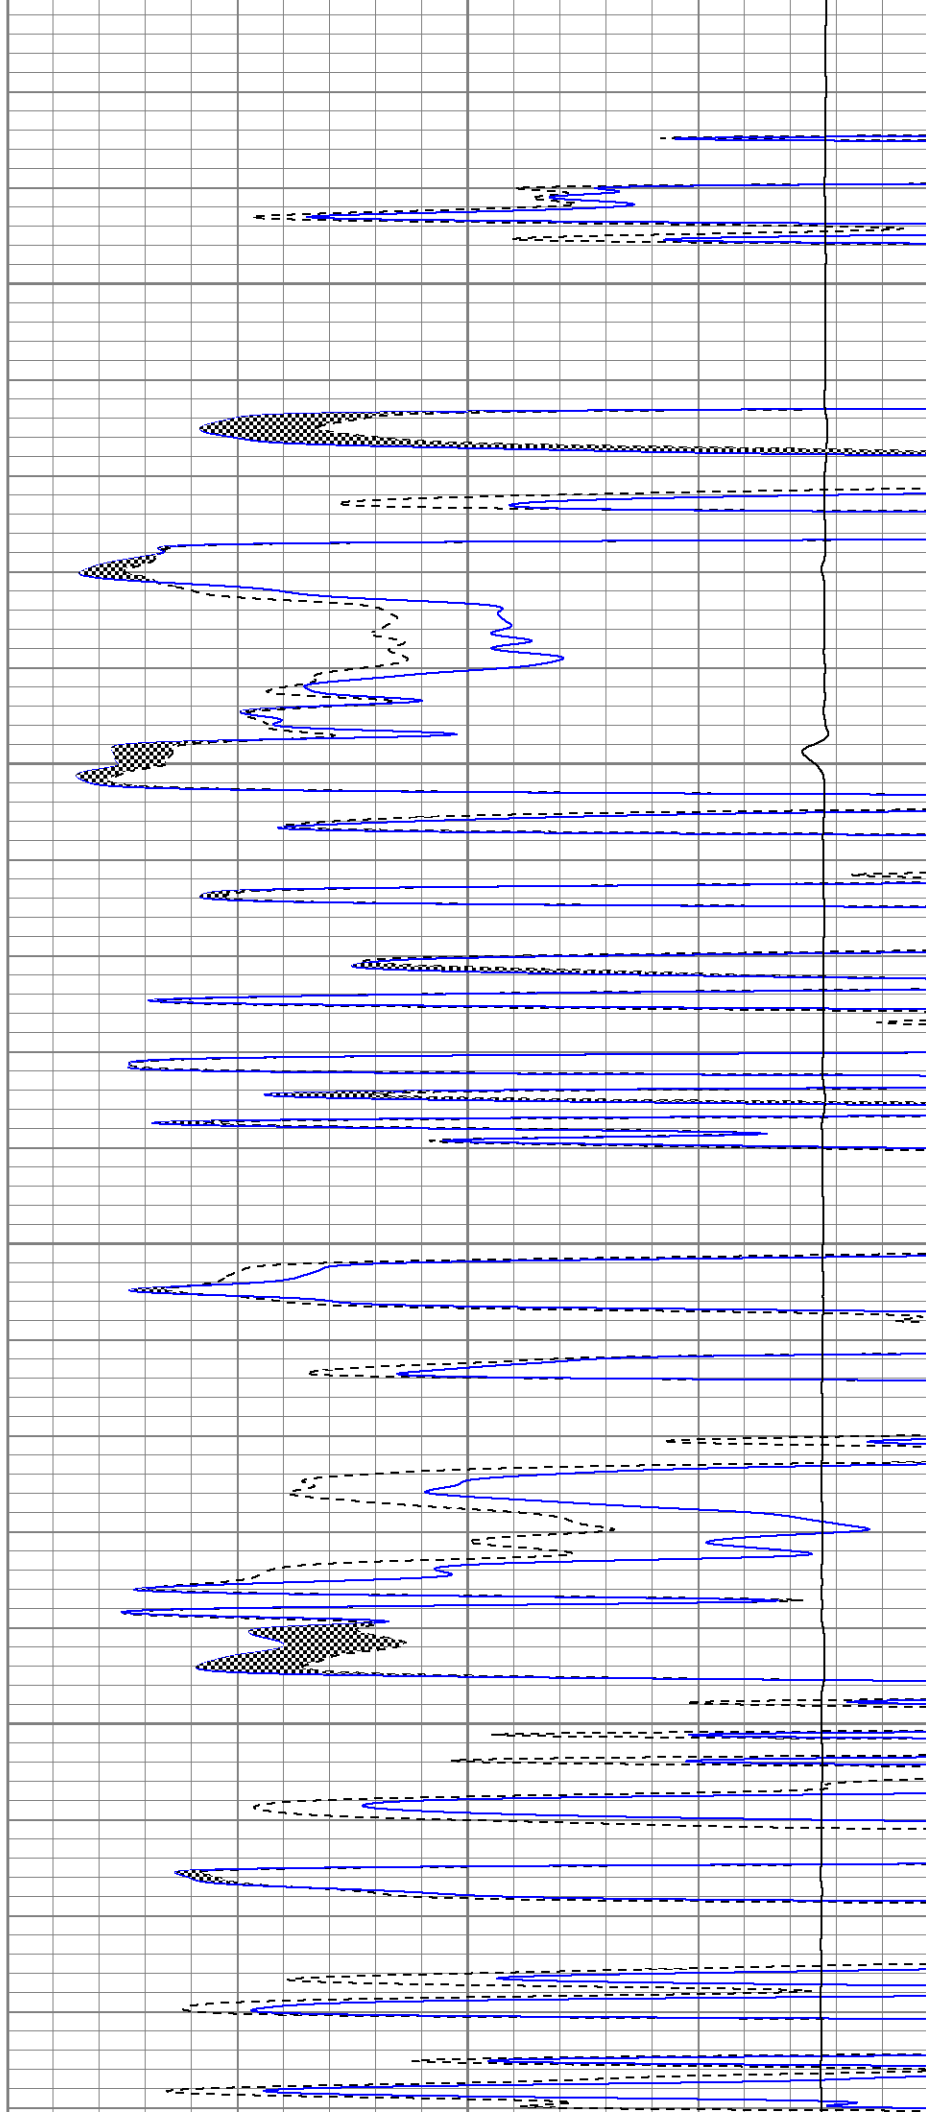

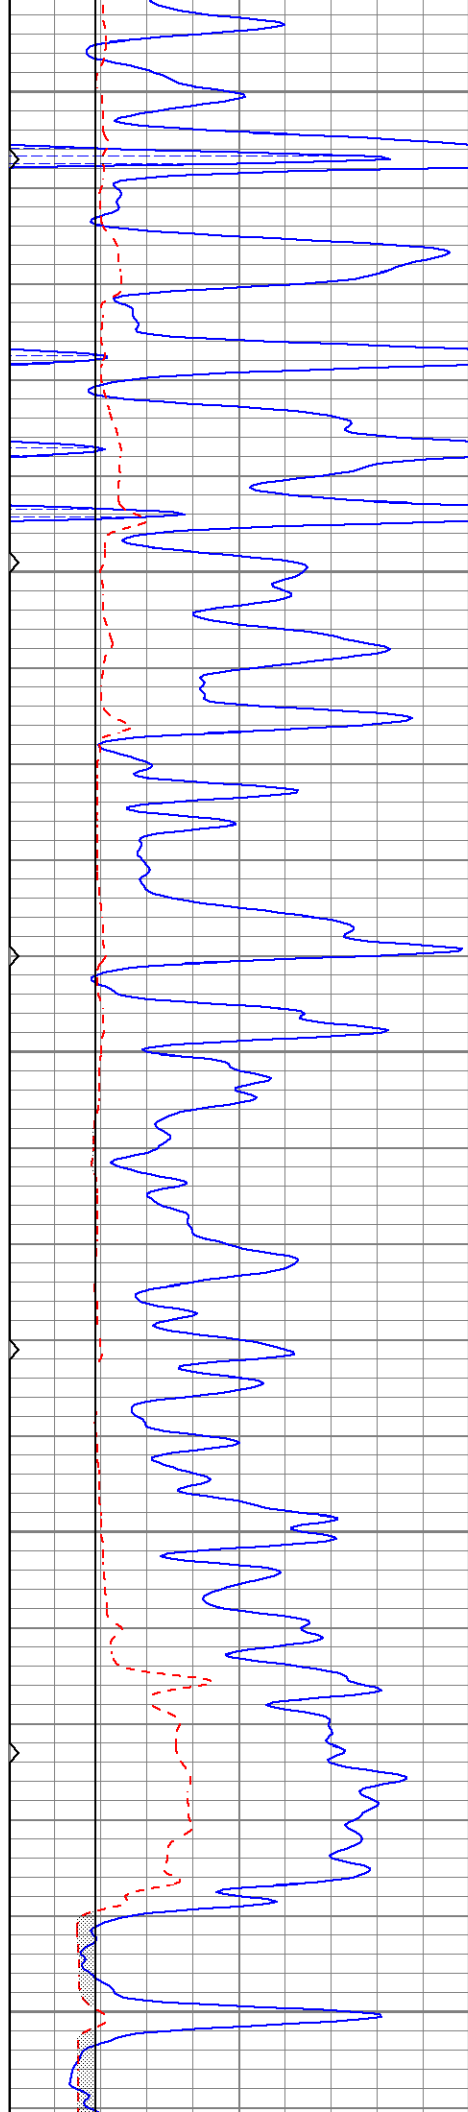


4550


4600

4650

4700

4750

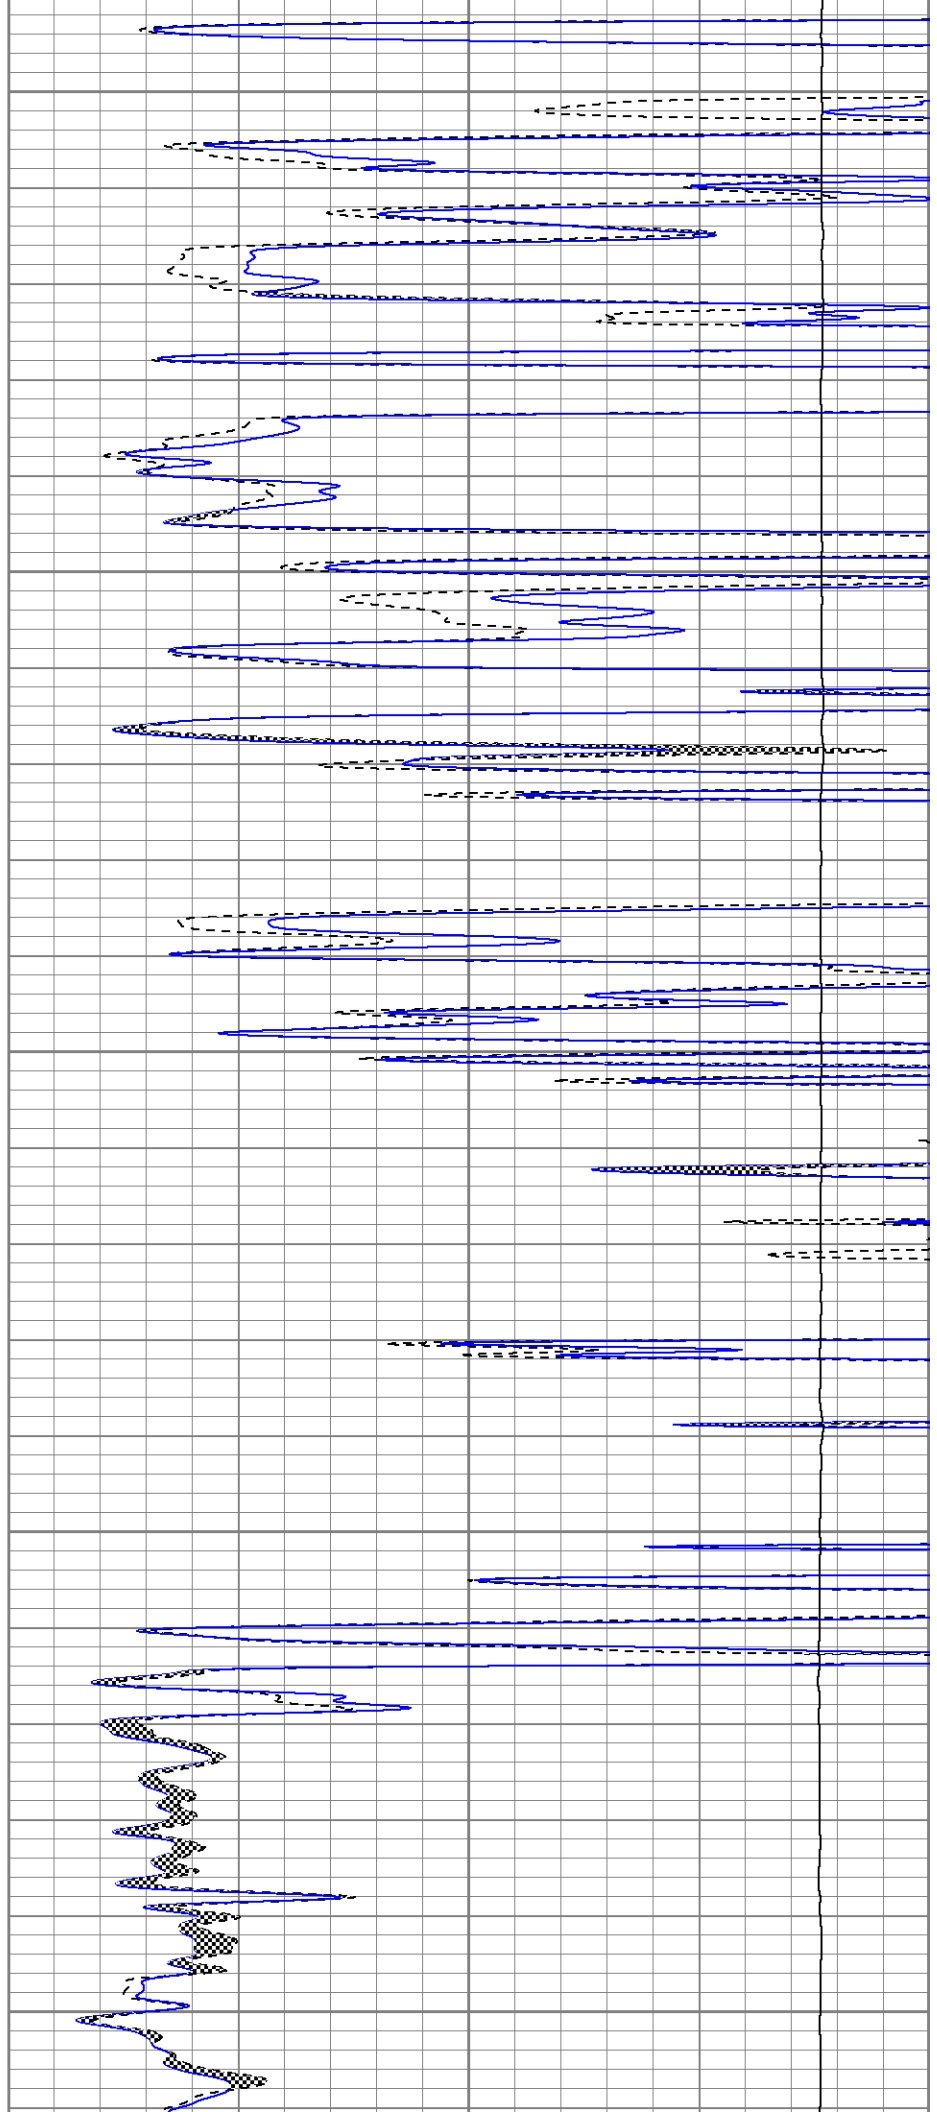

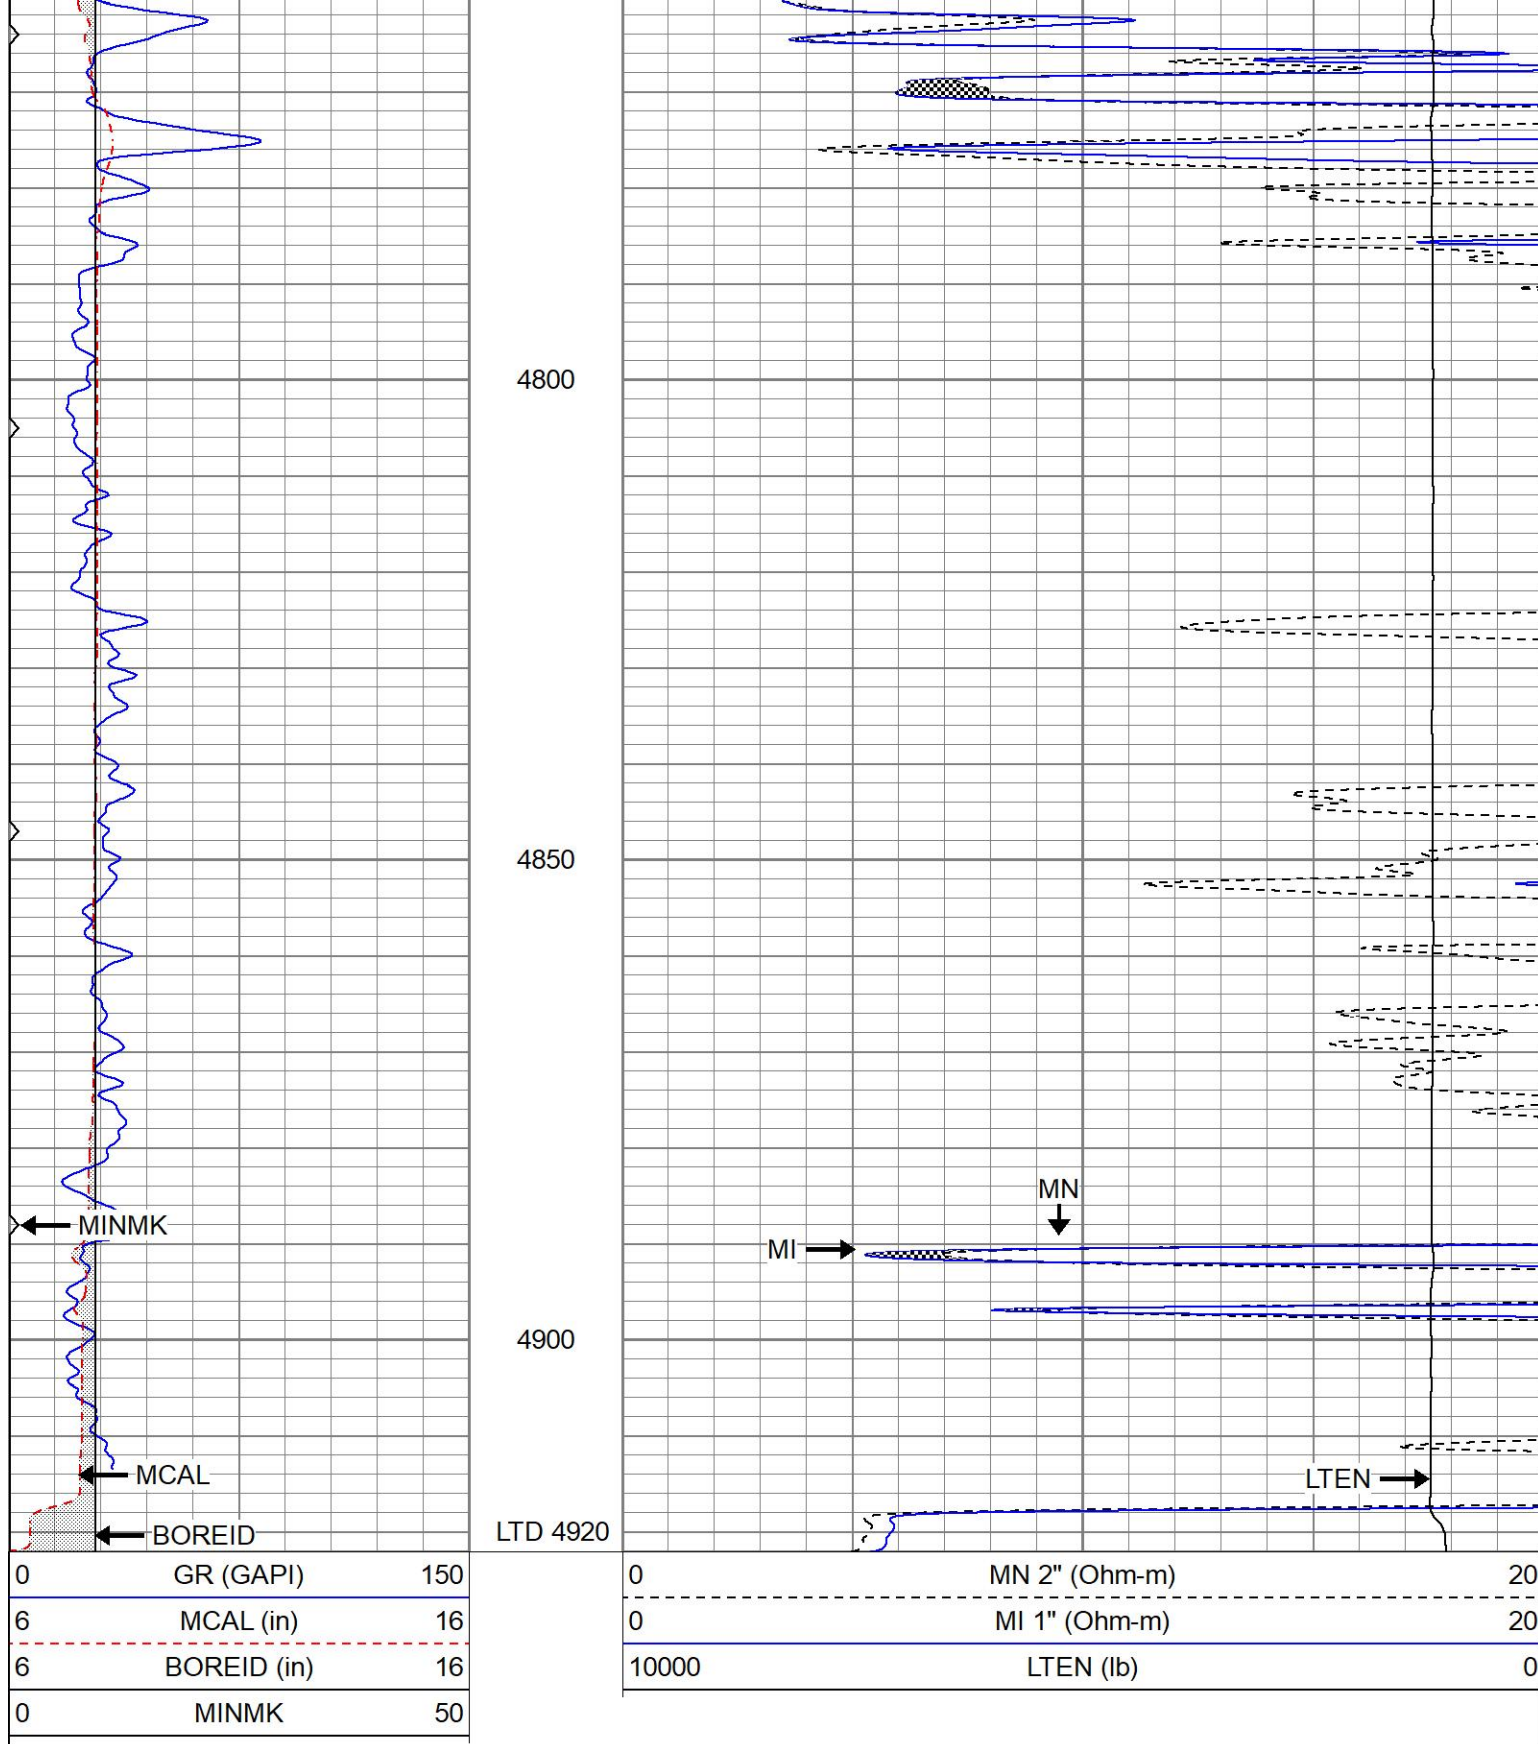



REPEAT SECTION

Database File ppcassablanca#1oh.db
 Dataset Pathname pass6
 Presentation Format kml
 Dataset Creation Thu Apr 07 01:27:15 2022

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

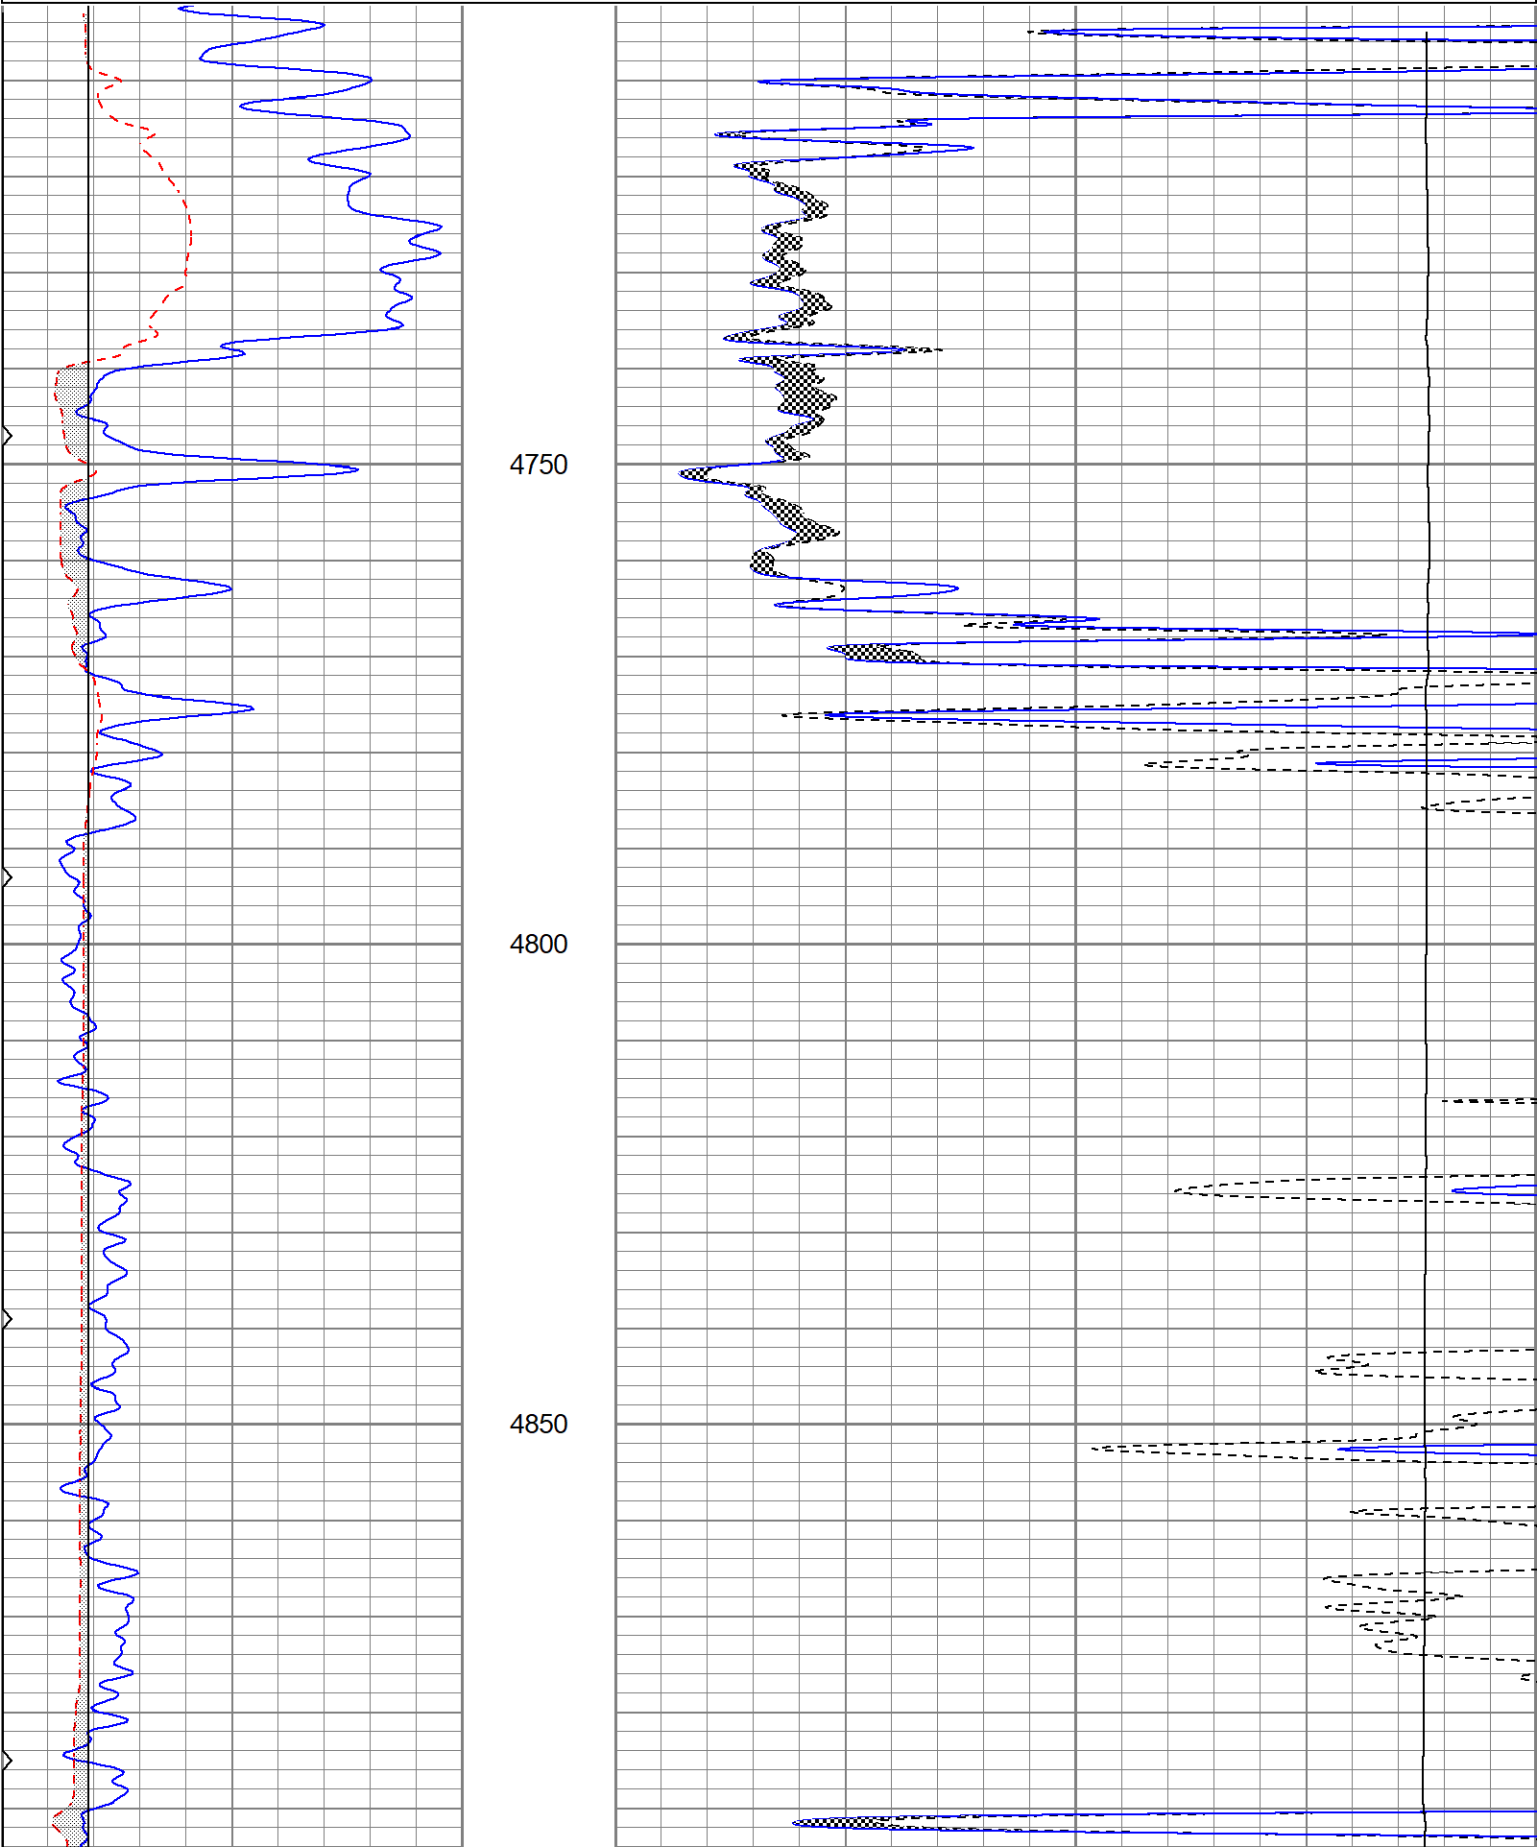

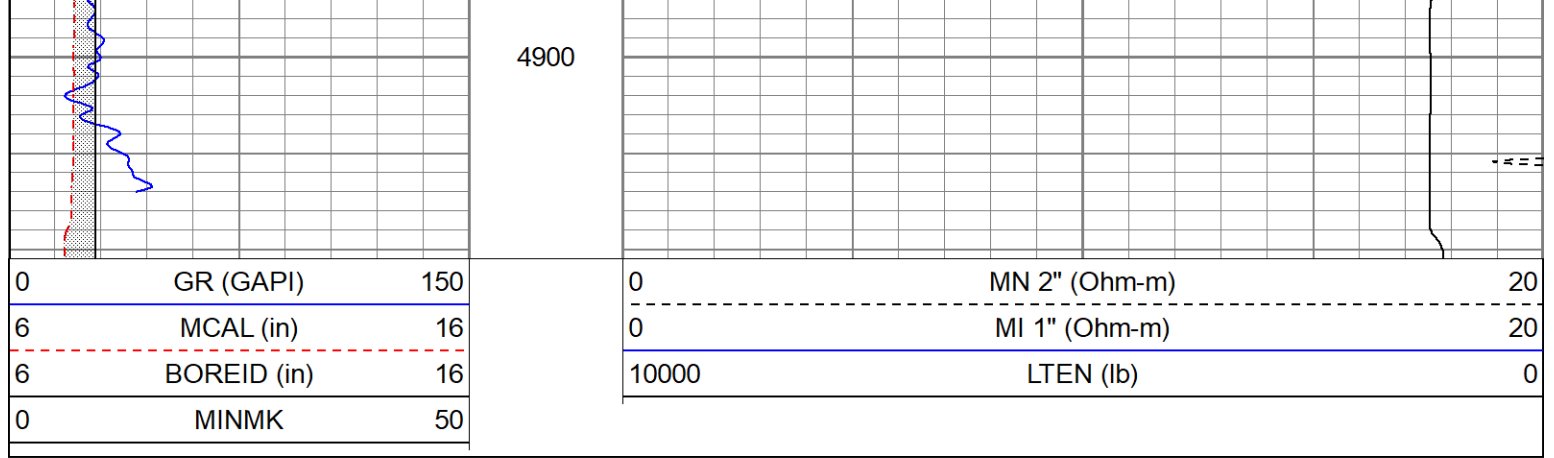

Calibration Report								
Database File	ppcassablanca#1oh.db							
Dataset Pathname	pass6							
Dataset Creation	Thu Apr 07 01:27:45 2022							
Microlog Calibration Report								
Serial-Model:			012-Pengo					
Performed:			Thu Apr 7 01:26:09 2022					
	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0076	0.1006	V	0.0000	10.0000	Ohm-m	107.5171	-0.8124
Inverse	0.0080	0.1270	V	0.0000	10.0000	Ohm-m	84.0356	-0.6717
Caliper	2.7578	4.6384	V	7.9000	14.0000	in	3.2437	-1.0453
Gamma Ray Calibration Report								
Serial Number:			2001					
Tool Model:			OH					
Performed:			Sat Sep 4 22:48:39 2021					
Calibrator Value:			1.0		GAPI			
Background Reading:			0.0		cps			
Calibrator Reading:			1.0		cps			
Sensitivity:			0.8000		GAPI/cps			