



MICRO LOG

Company		SHAKESPEARE OIL COMPANY, INC.	
Well		WGM COMM #1-22	
Field		UNNAMED	
County		WICHITA	
State		KANSAS	
Location:		API # : 15-203-20381-0000 1970' FSL & 2614' FWL NE - SE - NE - SW	
SEC 22 TWP 16S RGE 35W		Other Services CDL/CNL/PE DIL	
Permanent Datum	GROUND LEVEL	Elevation	3195
Log Measured From	KELLY BUSHING 10' A.G.L.		
Drilling Measured From	KELLY BUSHING		
		K.B. 3205 D.F. 3203 G.L. 3195	
Date	4/7/23		
Run Number	TWO		
Depth Driller	4825		
Depth Logger	4826		
Bottom Logged Interval	4824		
Top Log Interval	3700		
Casing Driller	8 5/8"@228'		
Casing Logger	228		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 5,500 PPM	
Density / Viscosity	9.4/56		
pH / Fluid Loss	11.0/8.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.600@64F		
Rmf @ Meas. Temp	.450@64F		
Rmc @ Meas. Temp	.720@64F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.312@123F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	1:15 P.M.		
Maximum Recorded Temperature	123F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	VERN SCHRAG		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-203-20381-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
MARIENTHAL, KS. & HWY 96, 11N. ON "RD. 20" TO "RD. E", 2 1/2E., N. INTO





MAIN SECTION

Database File	7268pe.db
Dataset Pathname	pass6.2
Presentation Format	micro
Dataset Creation	Fri Apr 07 14:35:29 2023
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

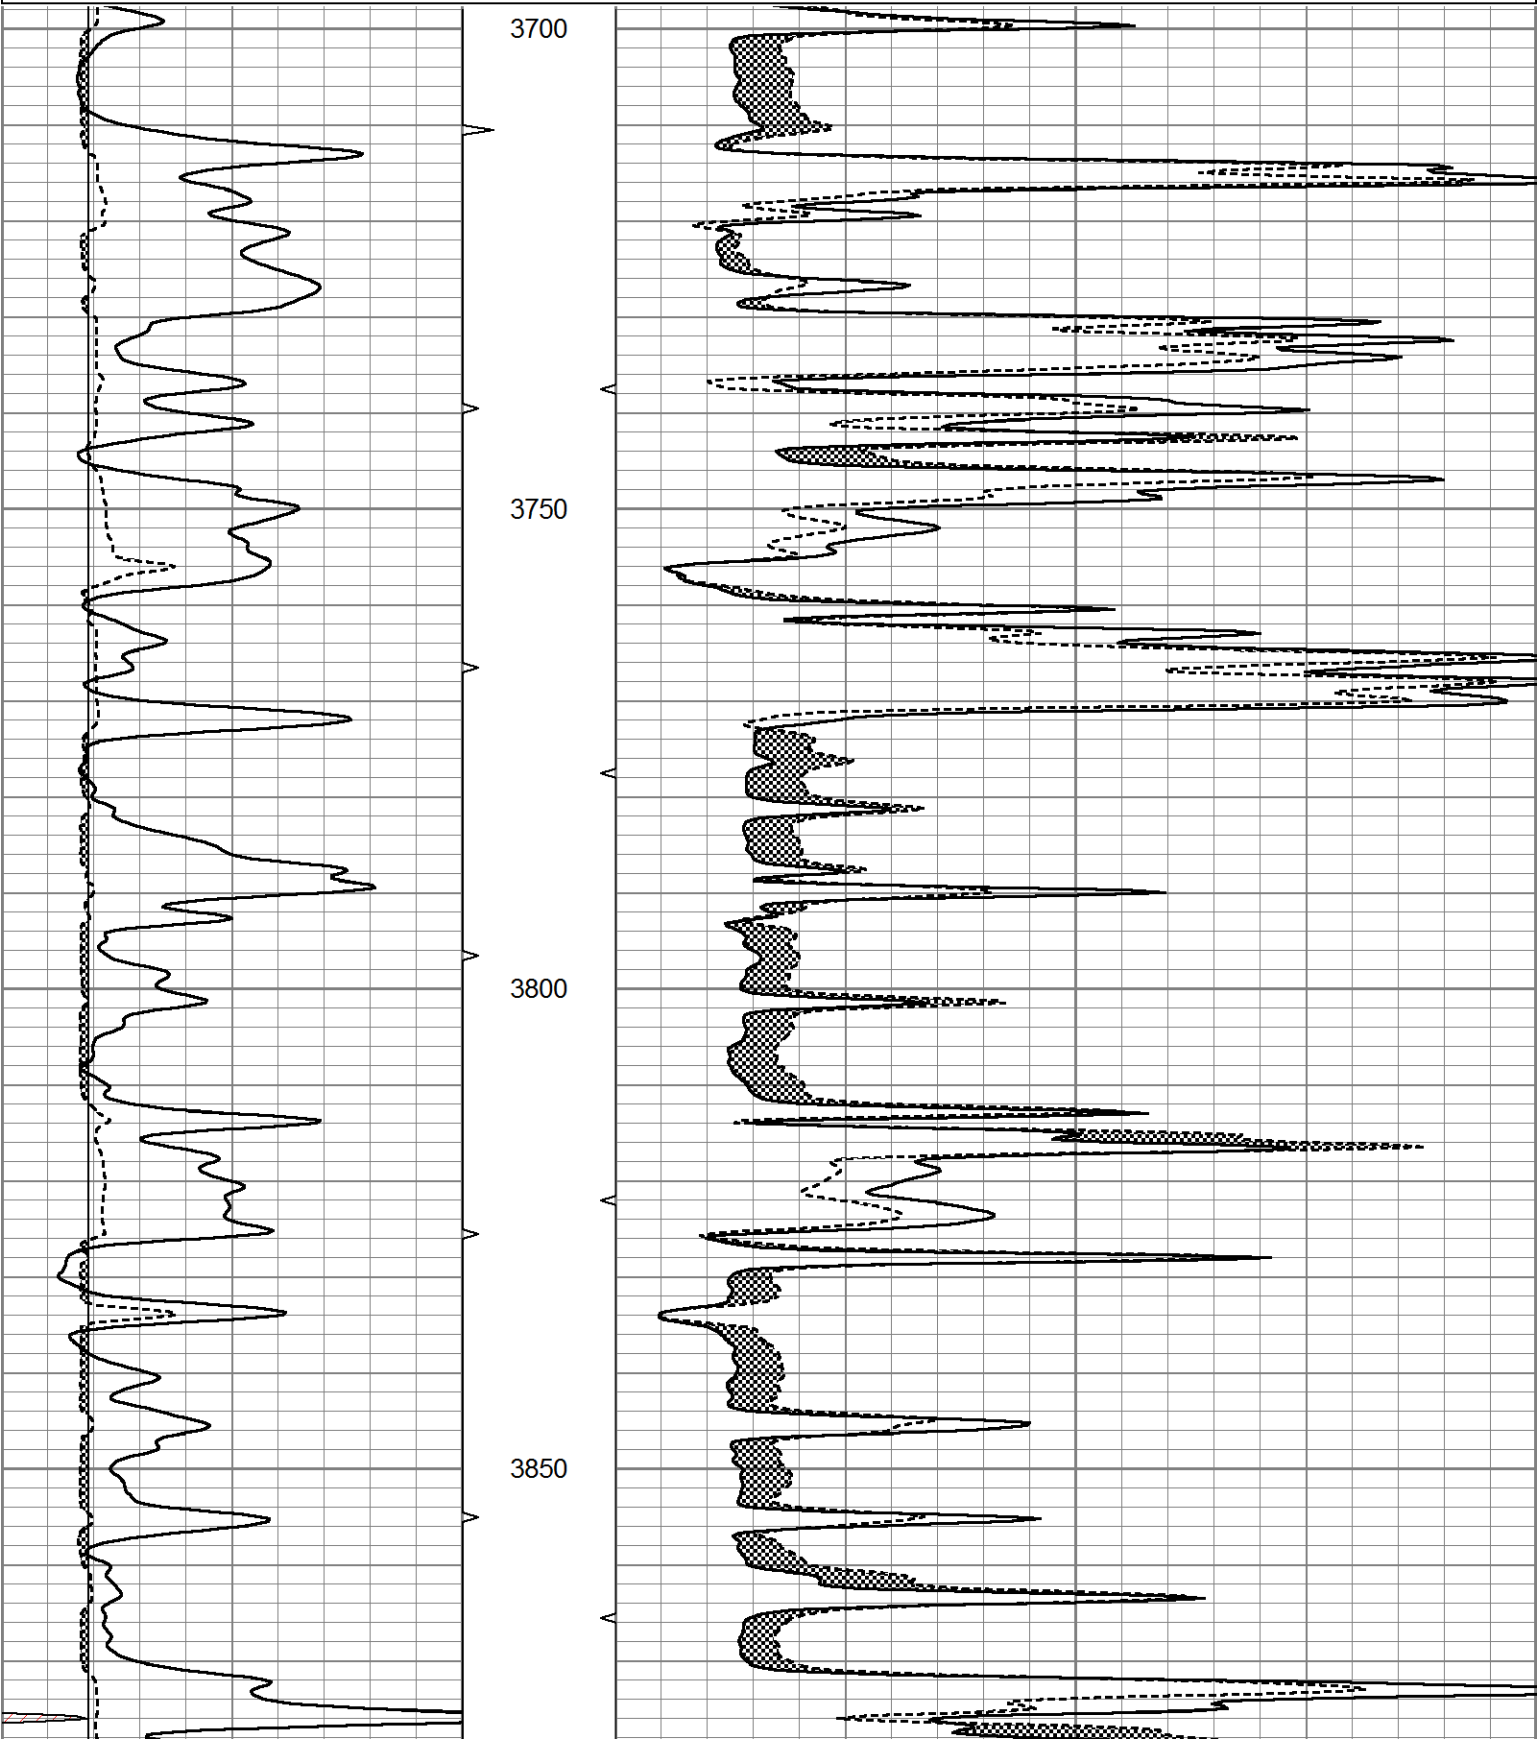

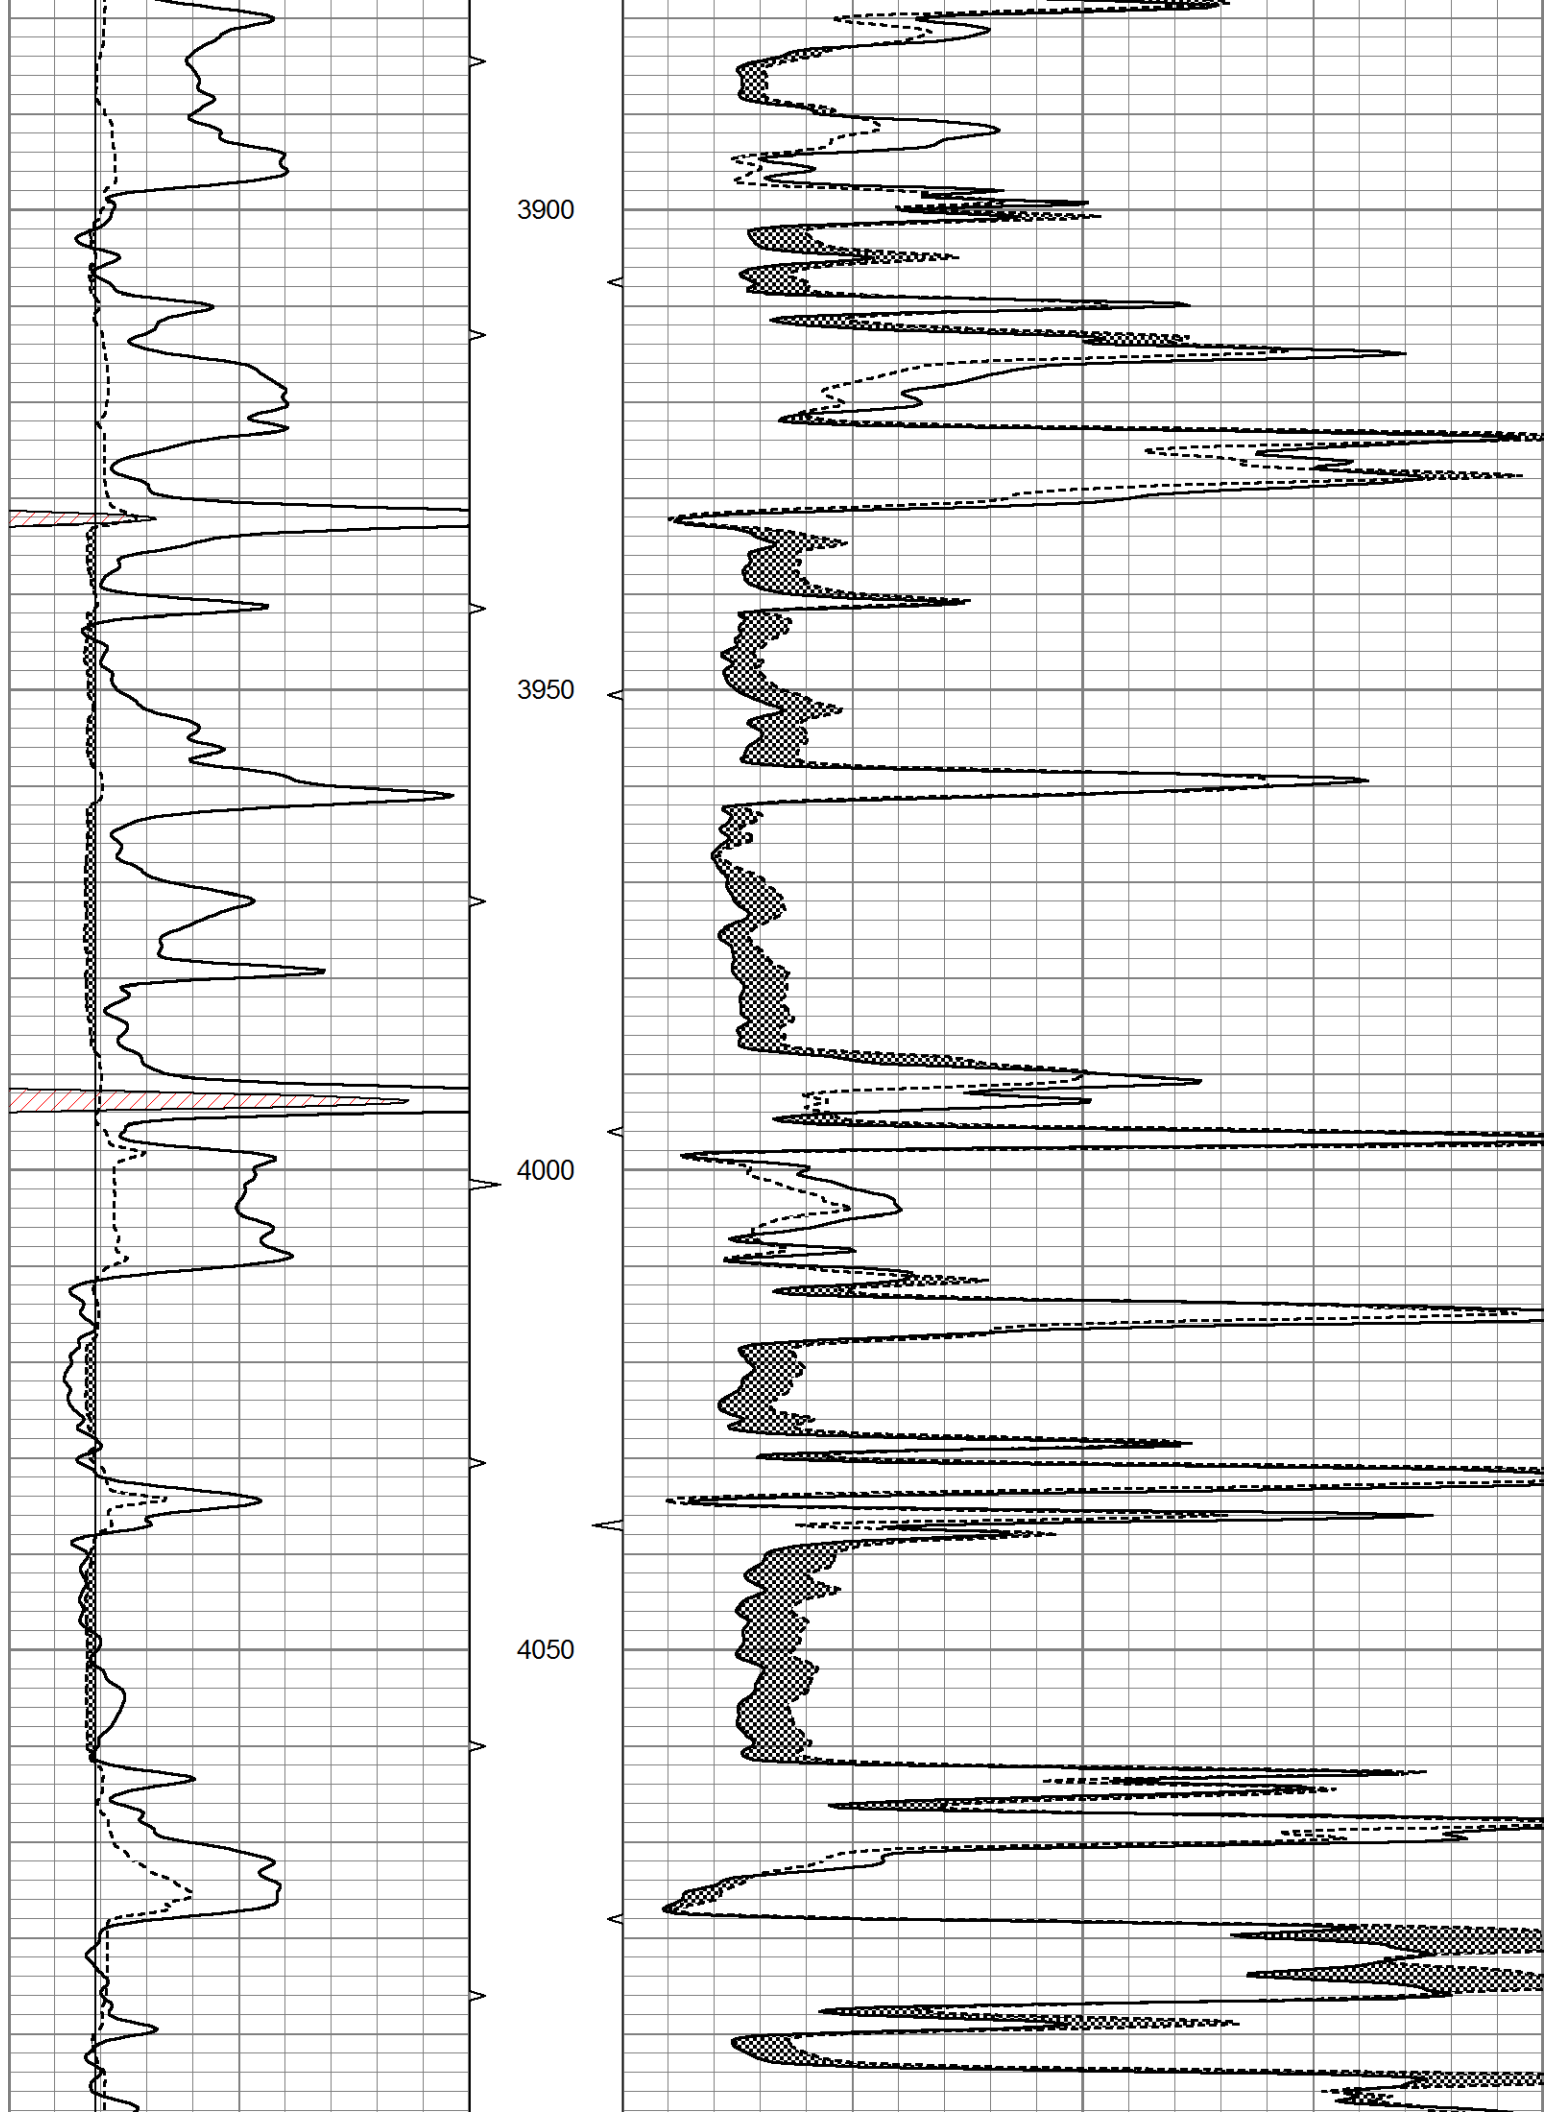

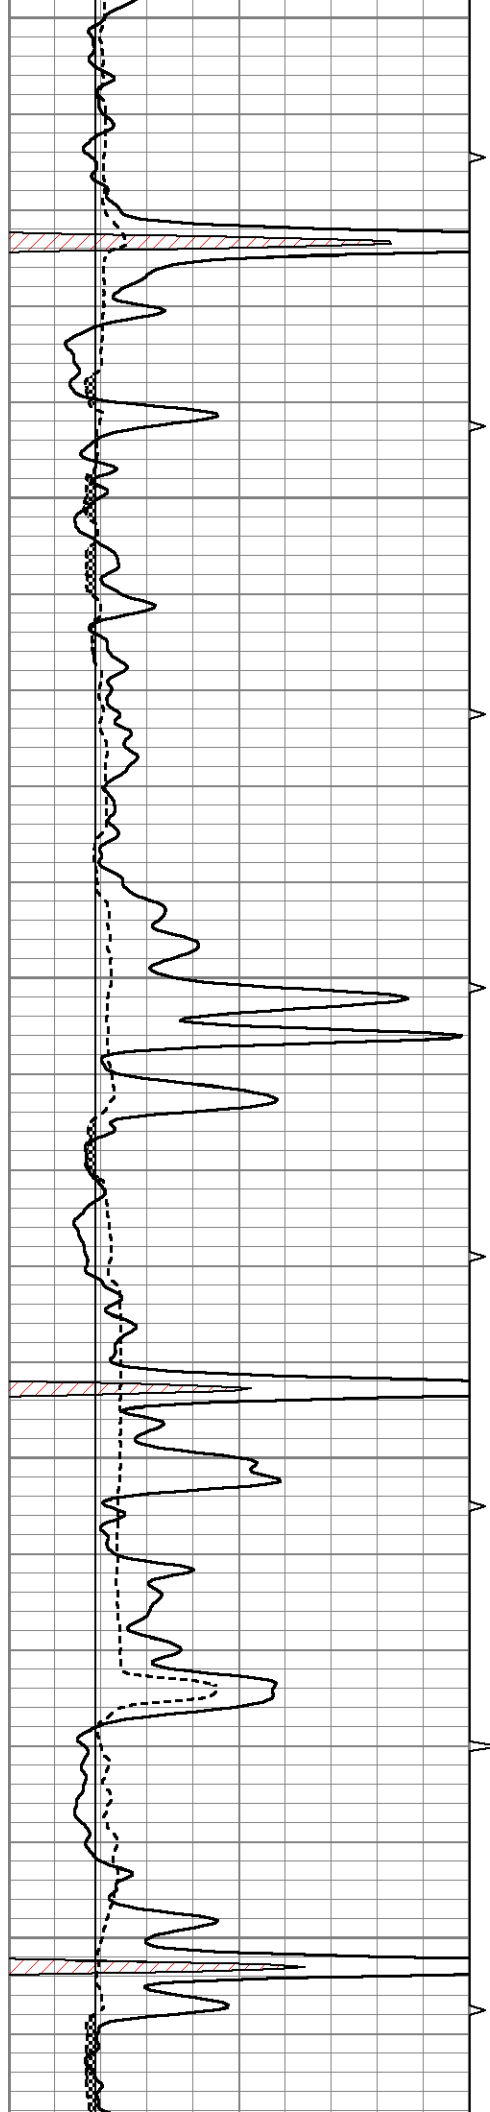


4100


4150


4200


4250

4300

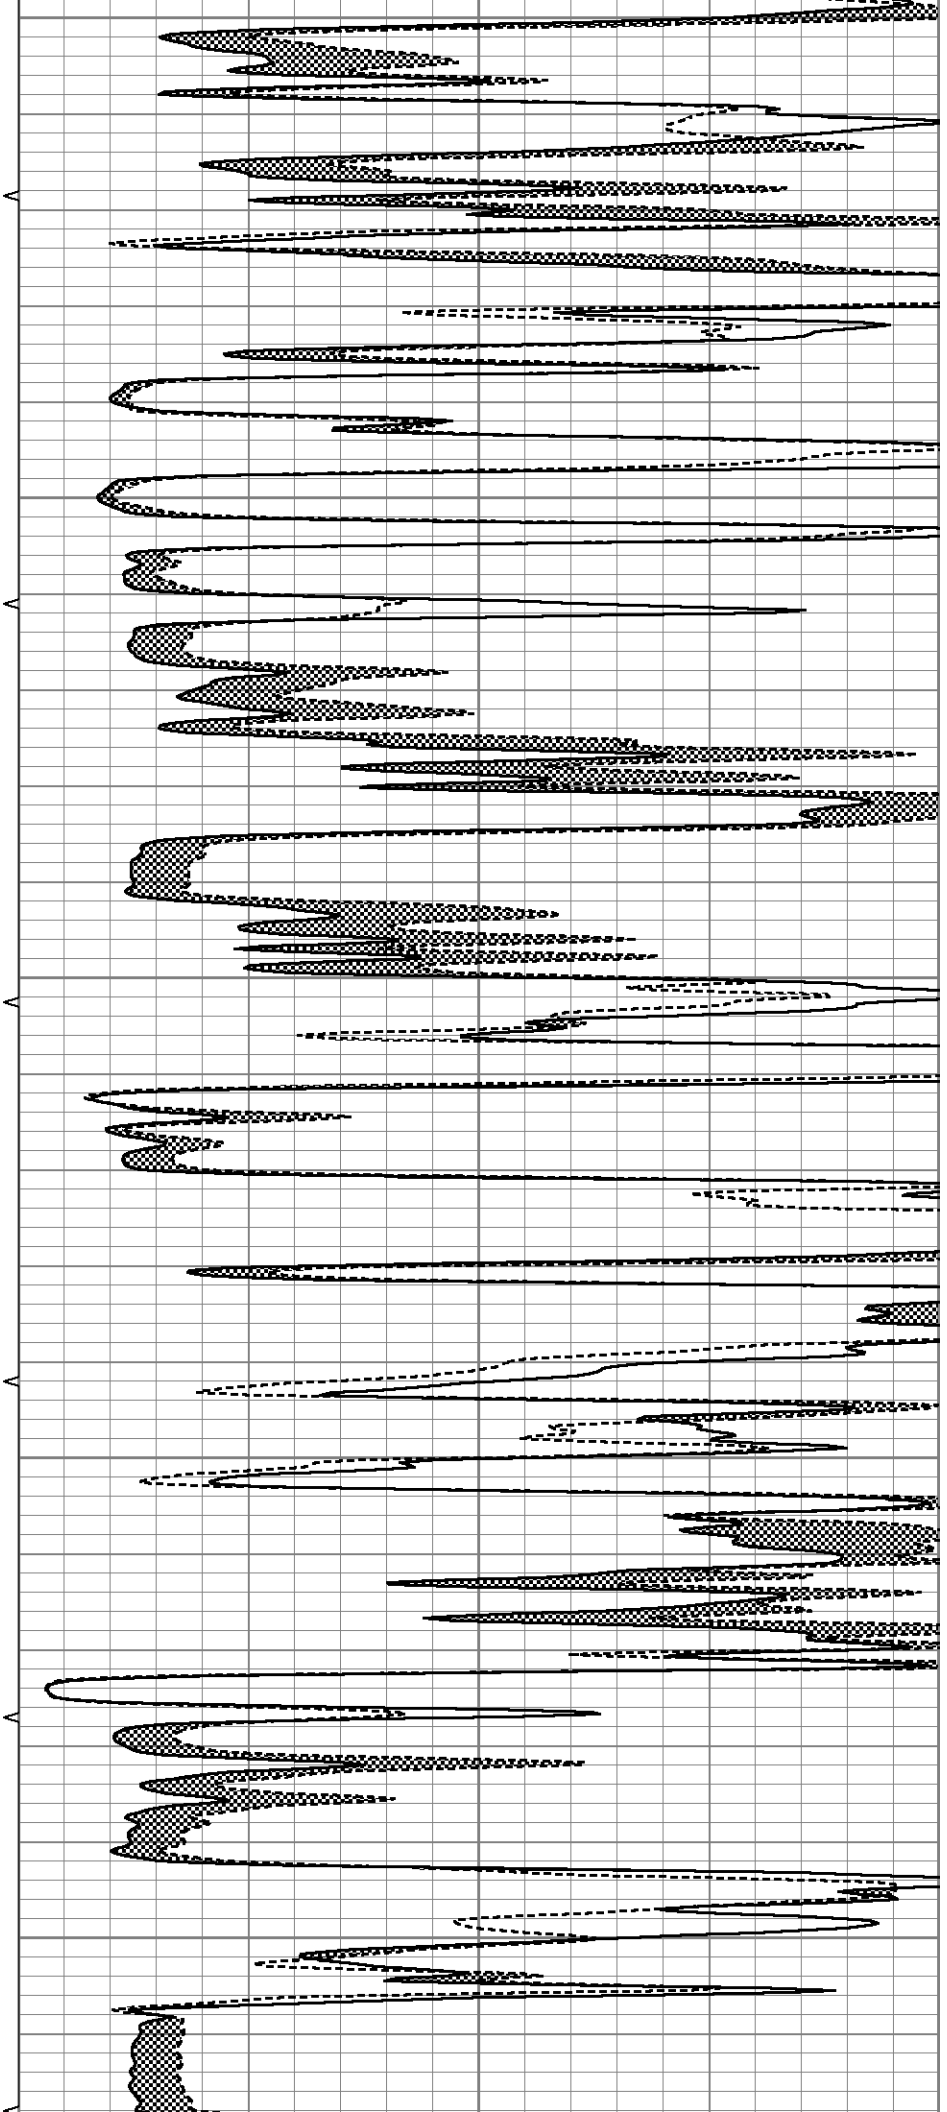

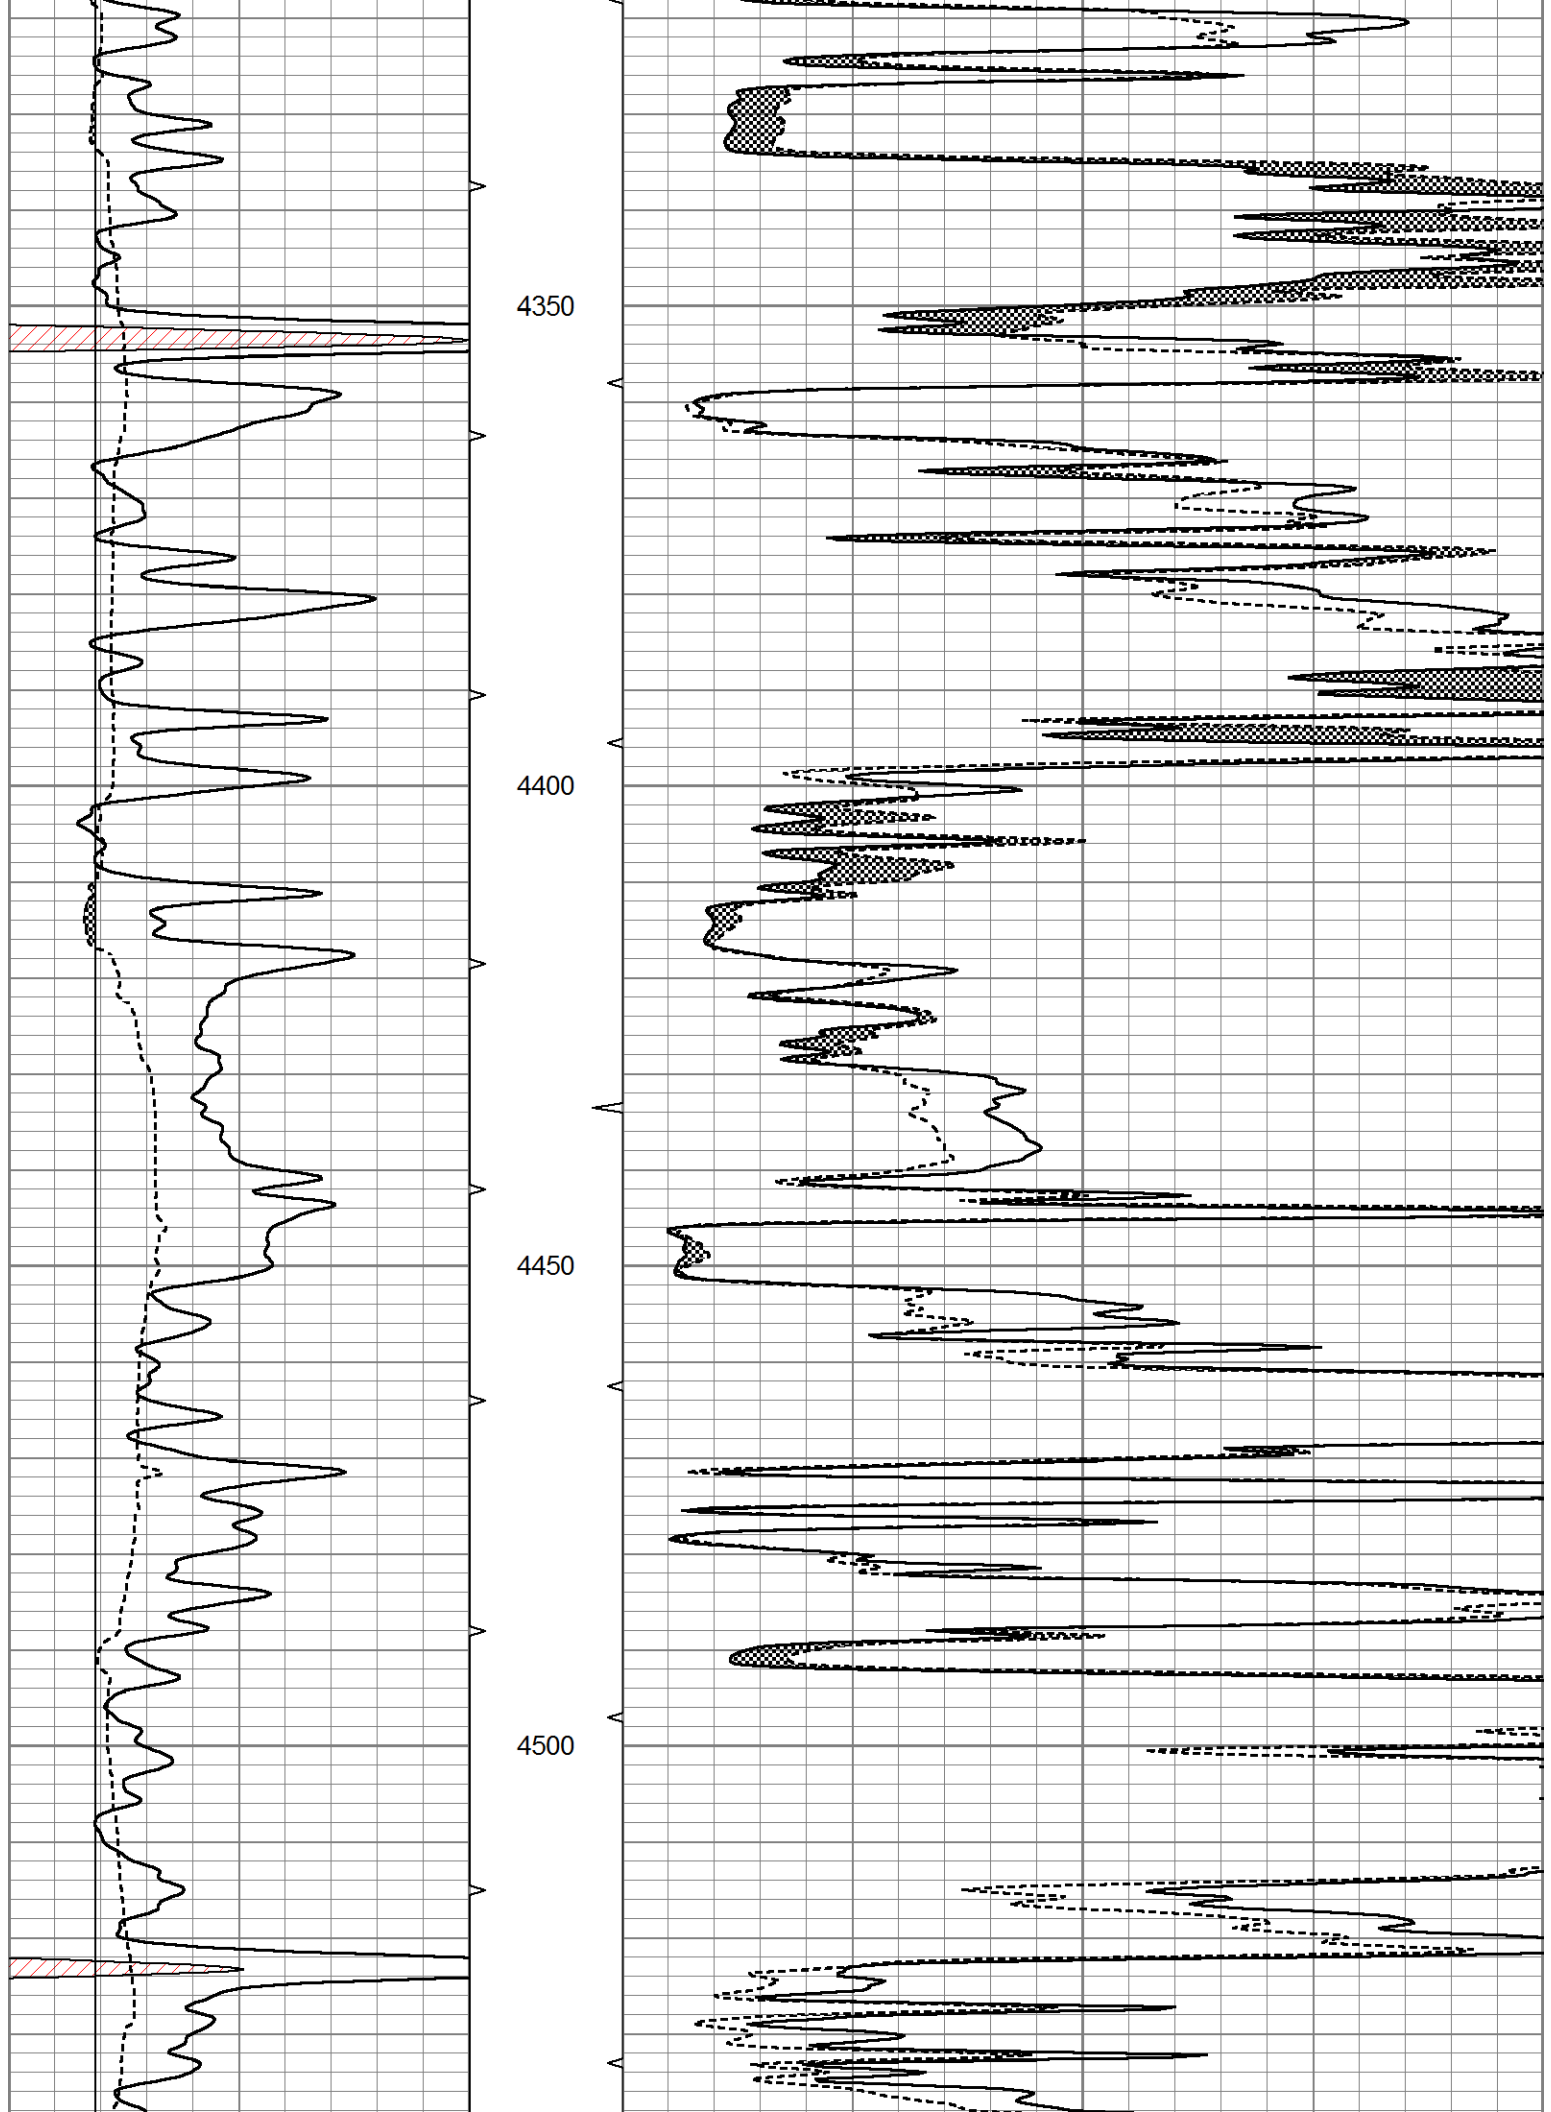

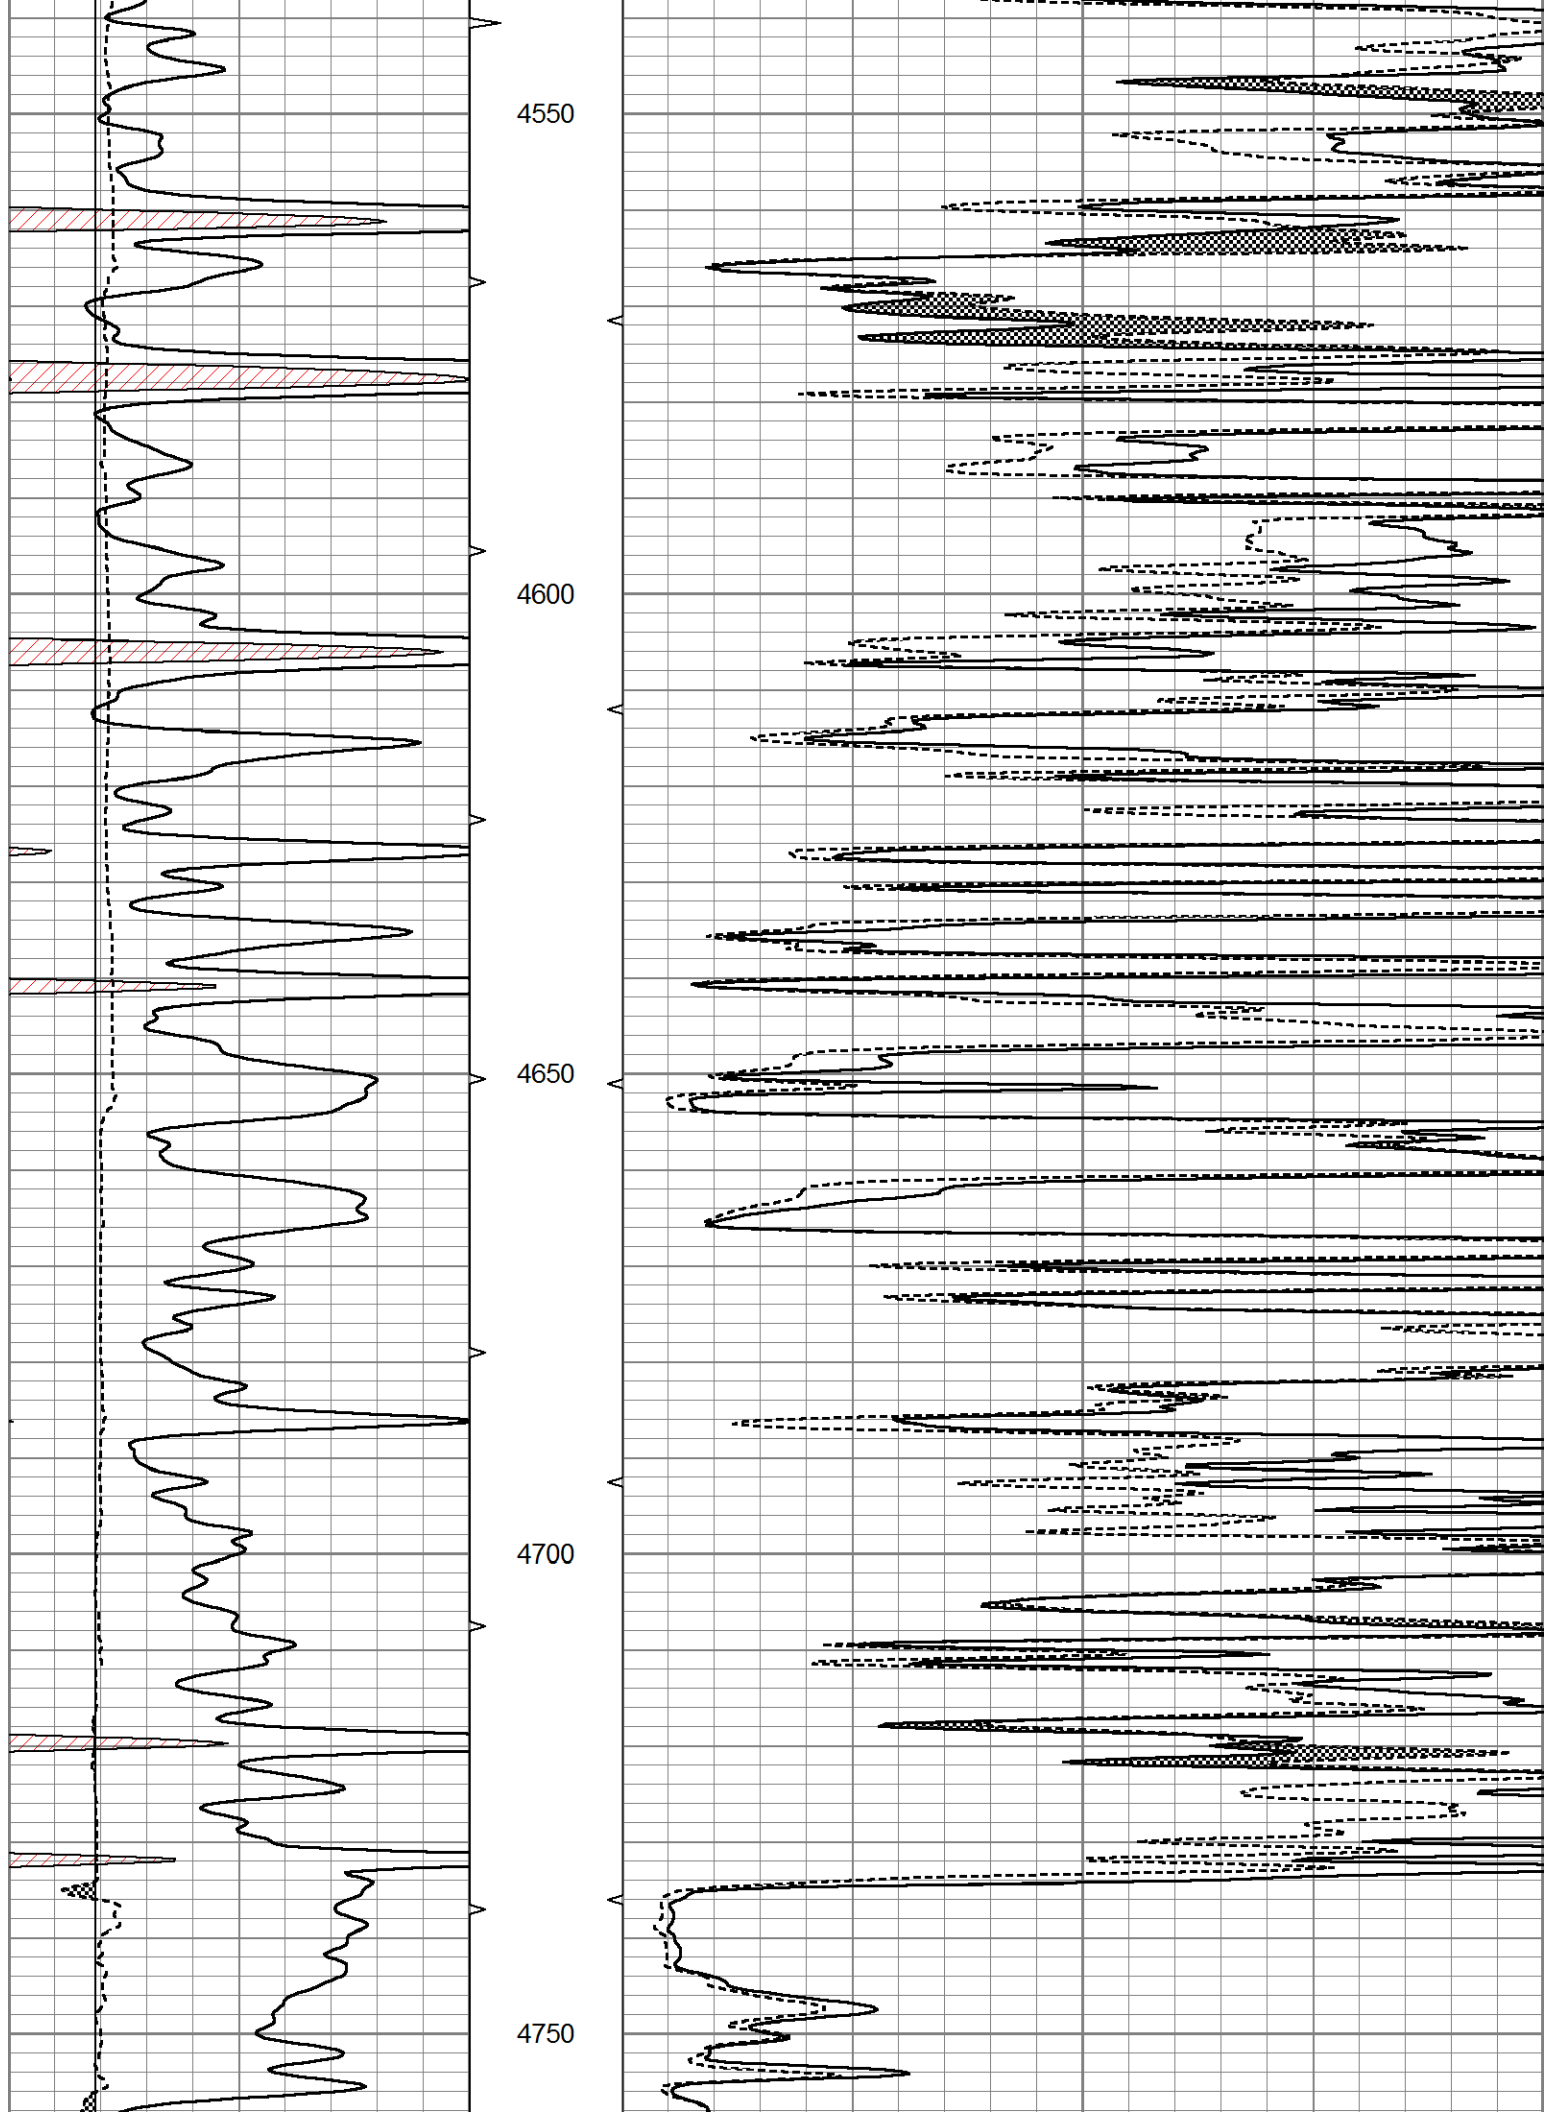


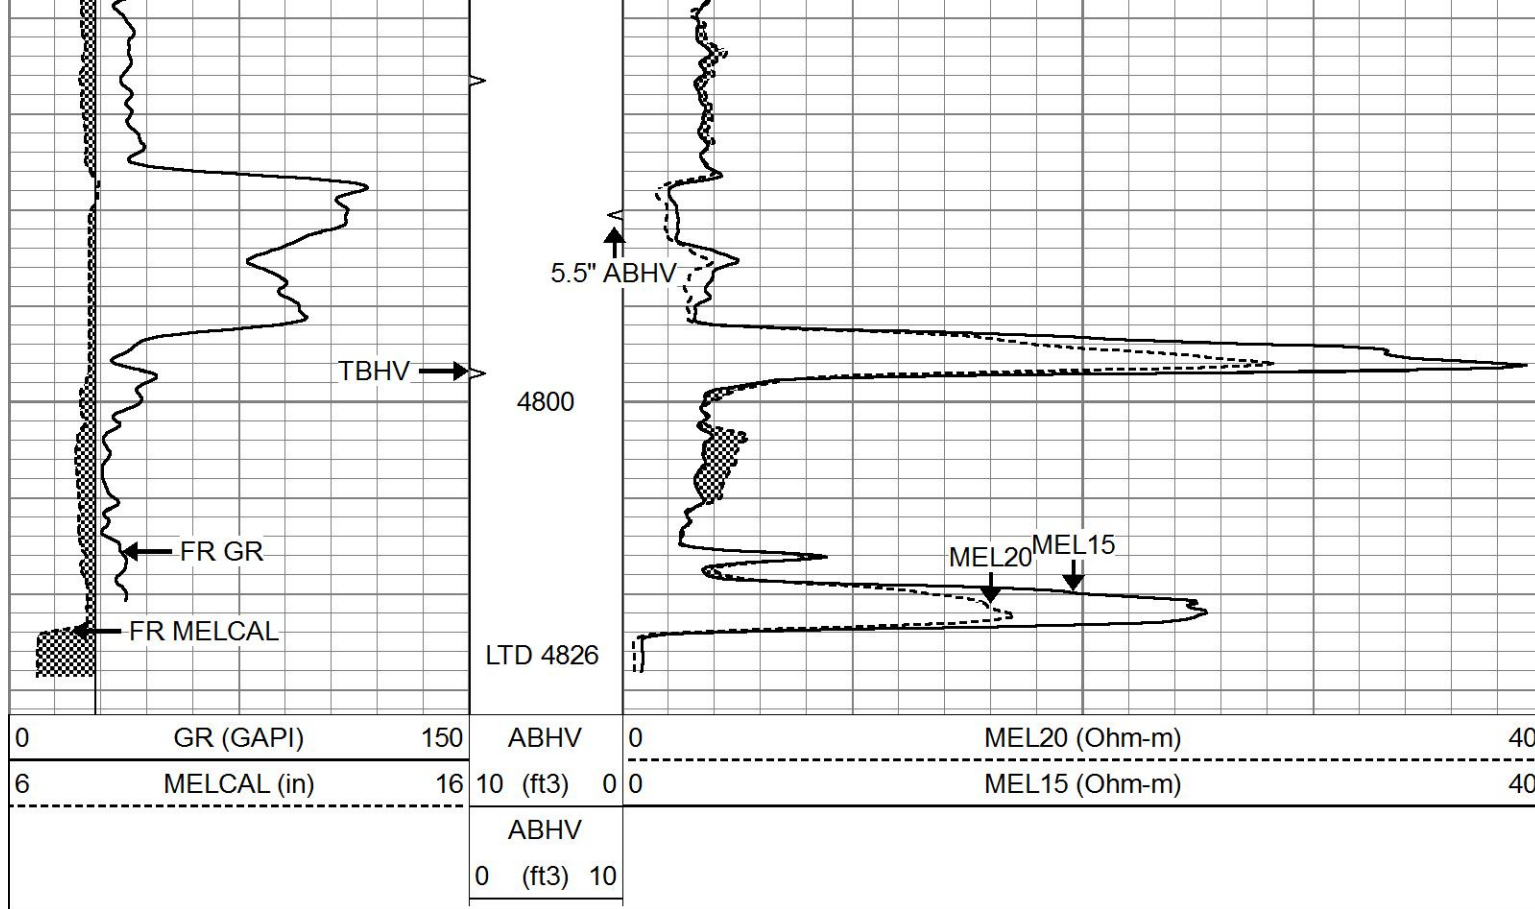


REPEAT SECTION

Database File 7268pe.db
 Dataset Pathname pass5.2
 Presentation Format micro
 Dataset Creation Fri Apr 07 14:40:36 2023
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

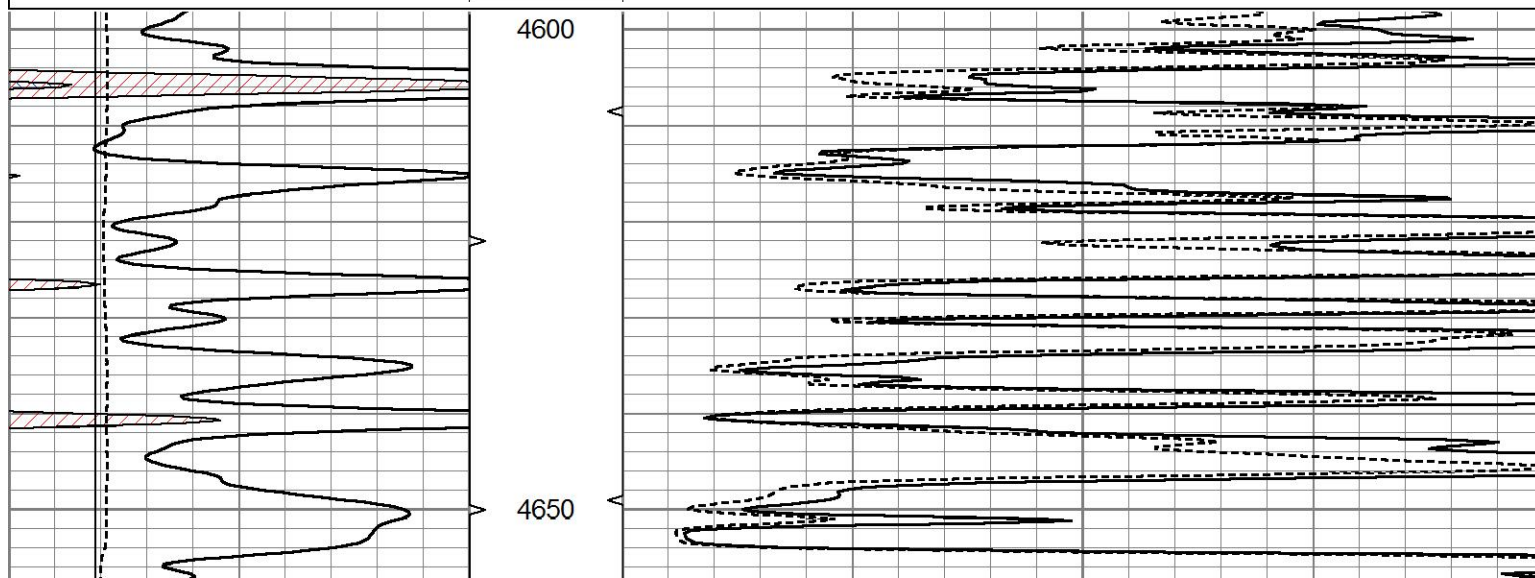

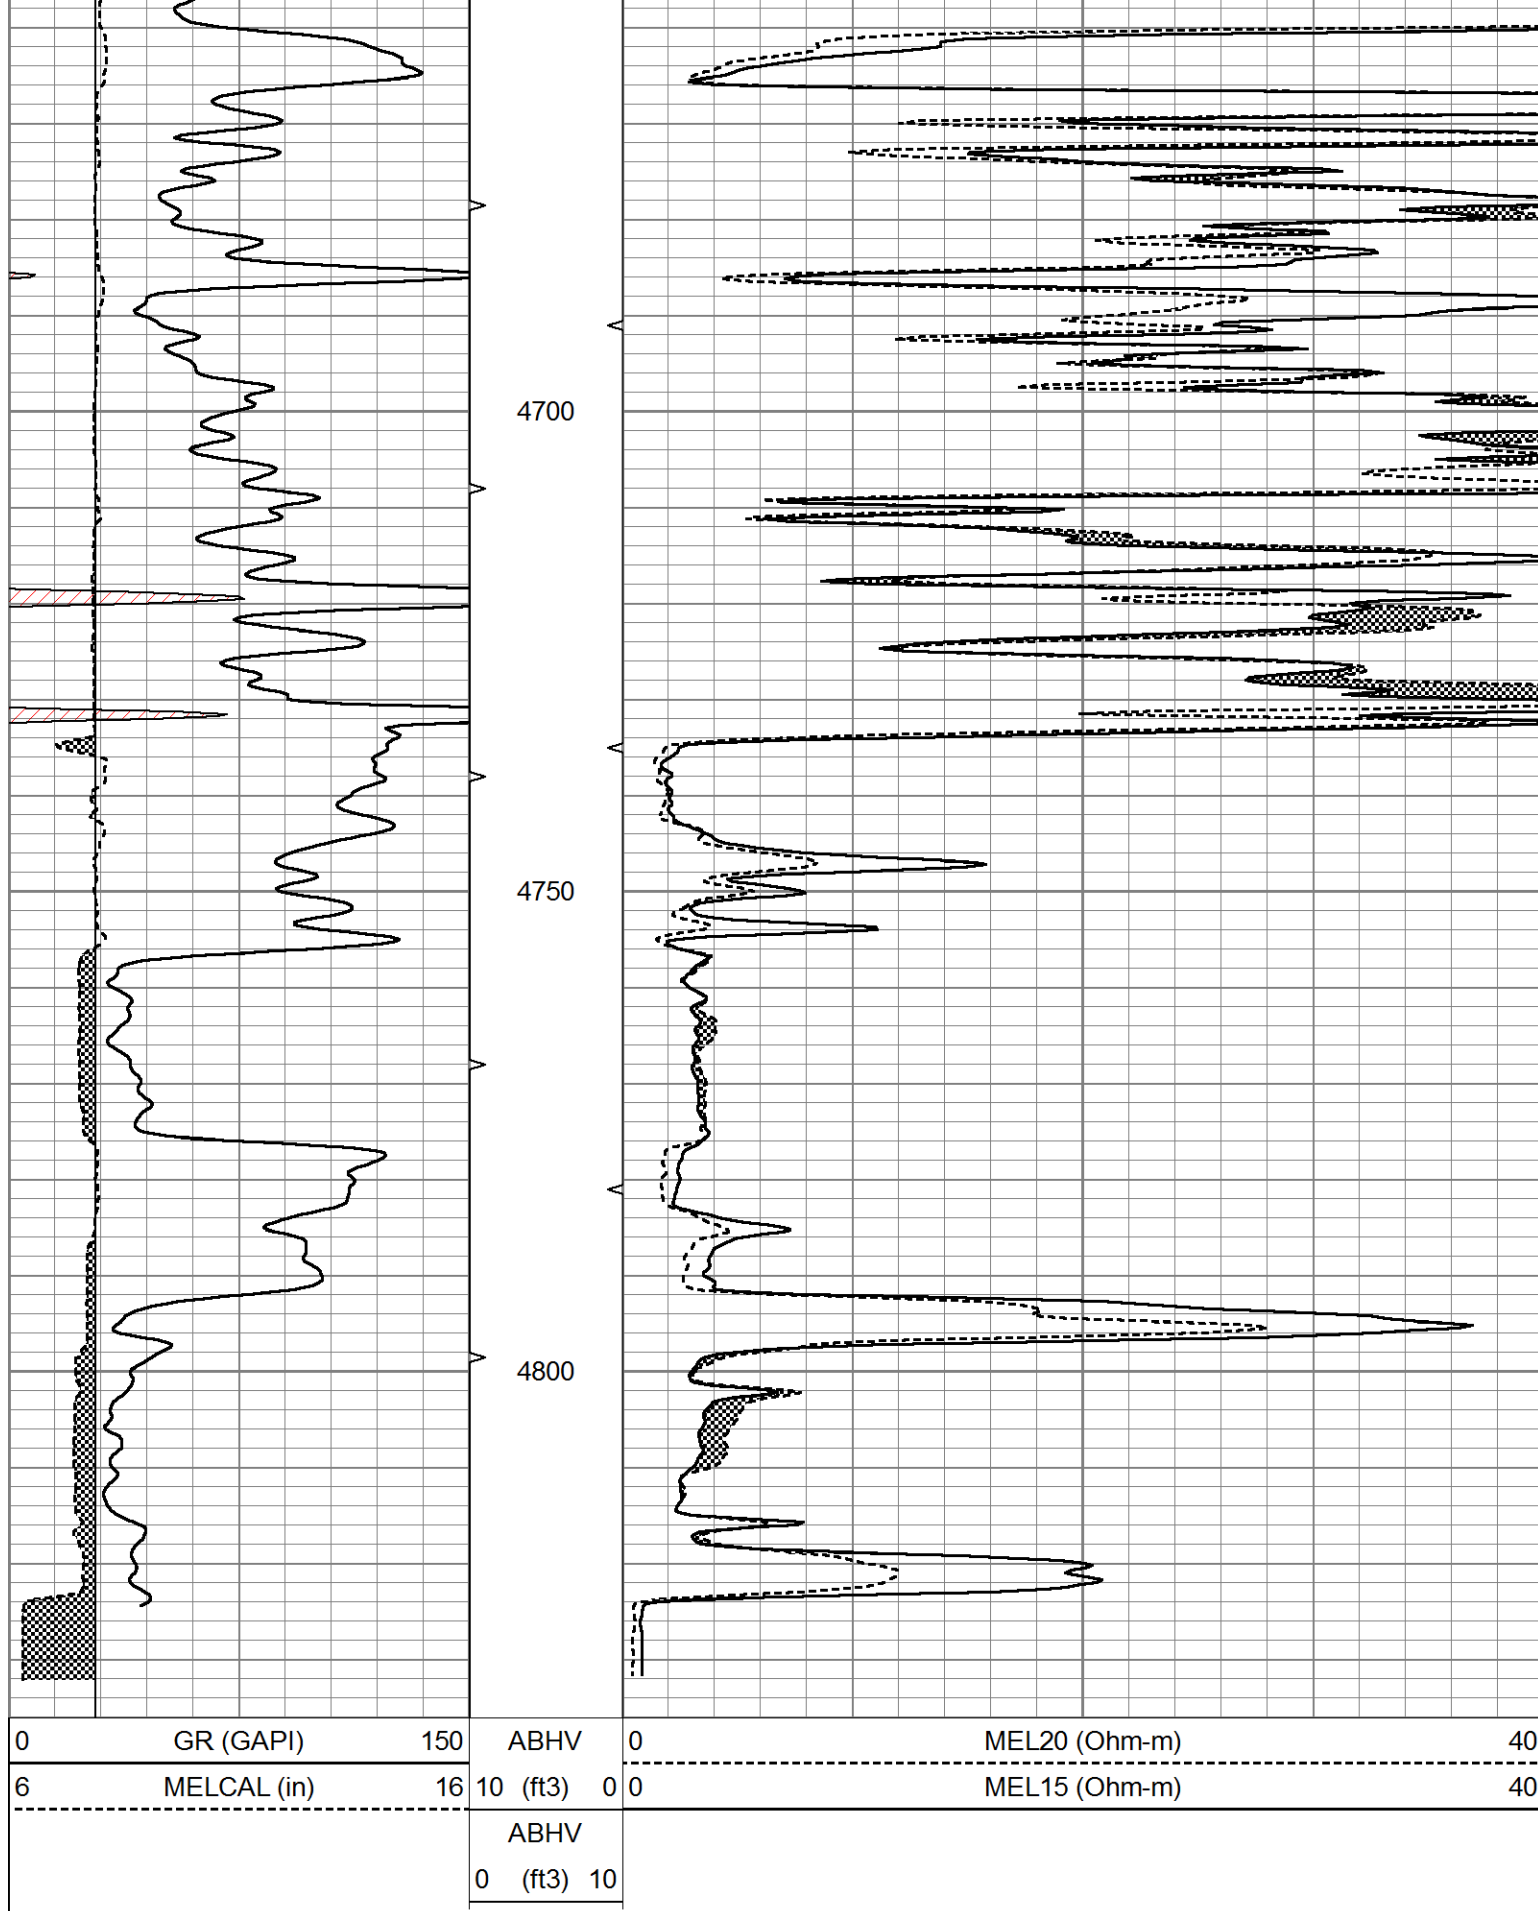

Calibration Report

Database File 7268pe.db
 Dataset Pathname pass6.2
 Dataset Creation Fri Apr 07 14:35:29 2023

MICRO Calibration Report		
Serial Number:	070911	
Tool Model:	ProbeN	
Performed:	Fri Apr 07 09:03:16 2023	
Caliper Calibration:	Gain=5.161	Offset=1.548
References	Low Cal	High Cal
Readings	8.000	16.000
	1.250	2.800
1.5" Calibration:	Gain=35.000	Offset=0.000
References	Low Cal	High Cal
Readings	0.000	20.000
	0.001	1.291
2" Calibration:	Gain=50.000	Offset=-1.000
References	Low Cal	High Cal
Readings	0.000	20.000
	0.003	1.103
Gamma Ray Calibration Report		
Serial Number:	070559	
Tool Model:	OPEN_GR	
Performed:	Thu Nov 03 06:44:54 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2800	GAPI/cps