MICRO LOG

Company TRIPLE CROWN OPERATING LLC
Well DARYL #1-17
Field UNNAMED
County HODGEMAN State KANSAS

Company TRIPLE CROWN OPERATING LLC
Well DARYL #1-17
Field UNNAMED
County HODGEMAN
State KANSAS

Location: API # : 15 083 22026

1670" FNL & 335' FEL

SEC 17 TWP 21S RGE 21W

Other Services

DIL
CDNL

Elevation

K.B. 2159
D.F. 2157
G.L. 2148

Permanent Datum	Ground Level	Elevation 2148
Log Measured From	KB 11' AGL	
Drilling Measured From	KB	

Date	6/6/23		
Run Number	Two		
Depth Driller	4308		
Depth Logger	4300		
Bottom Logged Interval	4298		
Top Log Interval	3400		
Casing Driller	8 5/8"@1321'		
Casing Logger	1321'		
Bit Size	7 7/8"		
Type Fluid in Hole	Chemical		
Density / Viscosity	9.2/49		
pH / Fluid Loss	8.5/14.4		
Source of Sample	Pit		
Rm @ Meas. Temp	1.7@70degf		
Rmf @ Meas. Temp	1.3@70degf		
Rmc @ Meas. Temp	2.0@70degf		
Source of Rmf / Rmc	Calculated		
Rm @ BHT	1.0@114degf		
Time Circulation Stopped	10:30 PM		
Time Logger on Bottom	1:00 AM		
Maximum Recorded Temperature	114degf		
Equipment Number	T-605		
Location	Hays, KS.		
Recorded By	COLBY DREILING		
Witnessed By	SEAN DEENIHAN	SYDNEY SMITH	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

WEST ON HW 96 OUT OF RUSH CENTER TO GG ROAD, THEN 15 AND 1/4 MILES, WEST INTO.

Thanks for using Gemini Wireline LLC


785-625-1182


MAIN PASS


Database File	tcdaryl#1-17oh.db
Dataset Pathname	pass5.1
Presentation Format	kml
Dataset Creation	Wed Jun 07 02:33:34 2023
Charted by	Depth in Feet scaled 1:240


0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50


0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

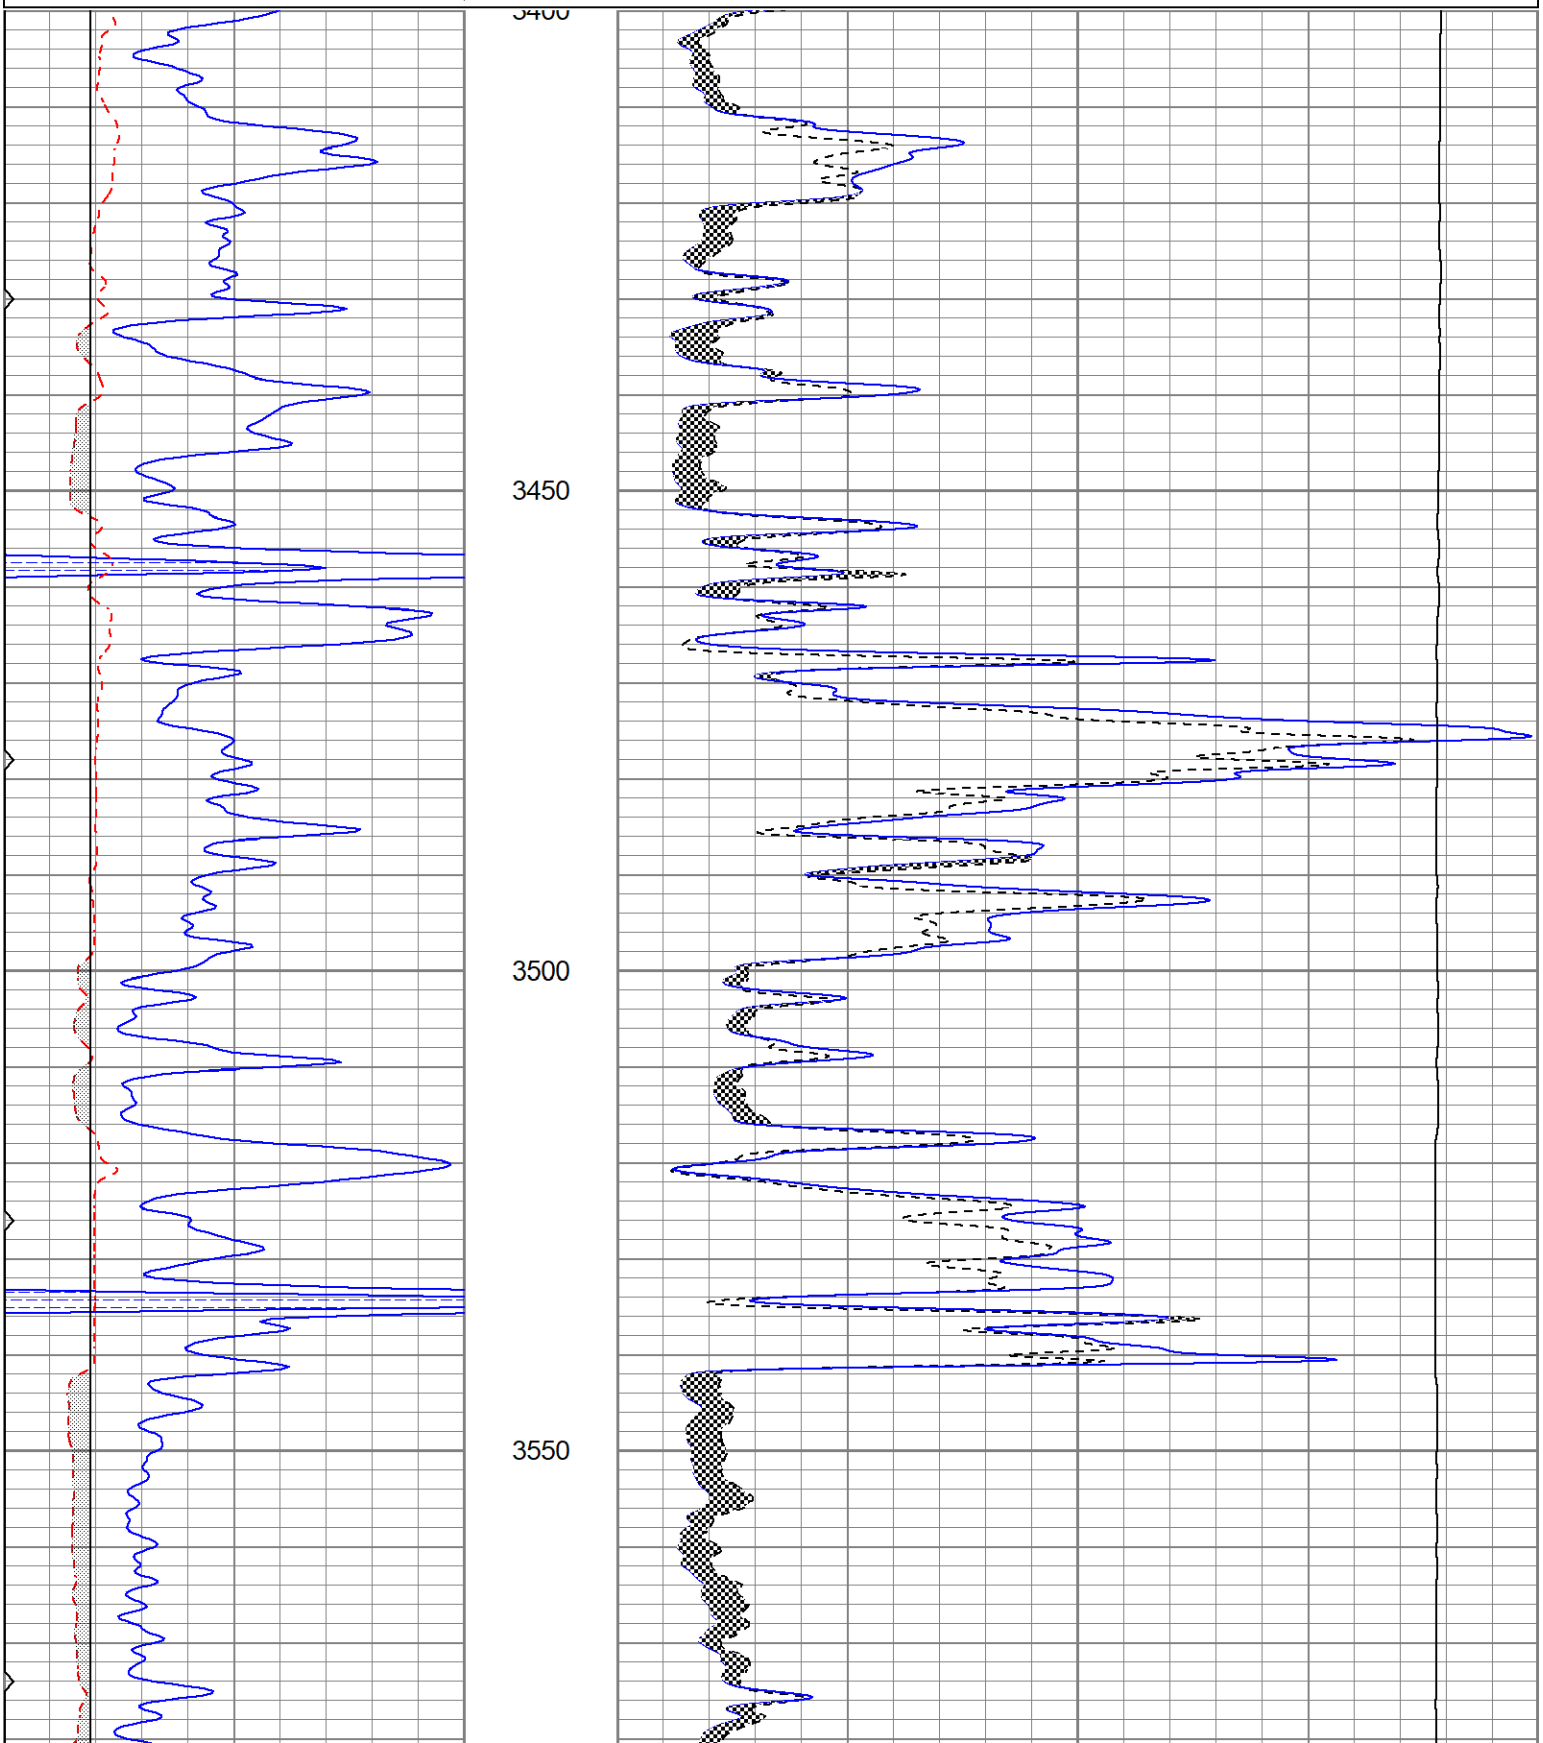

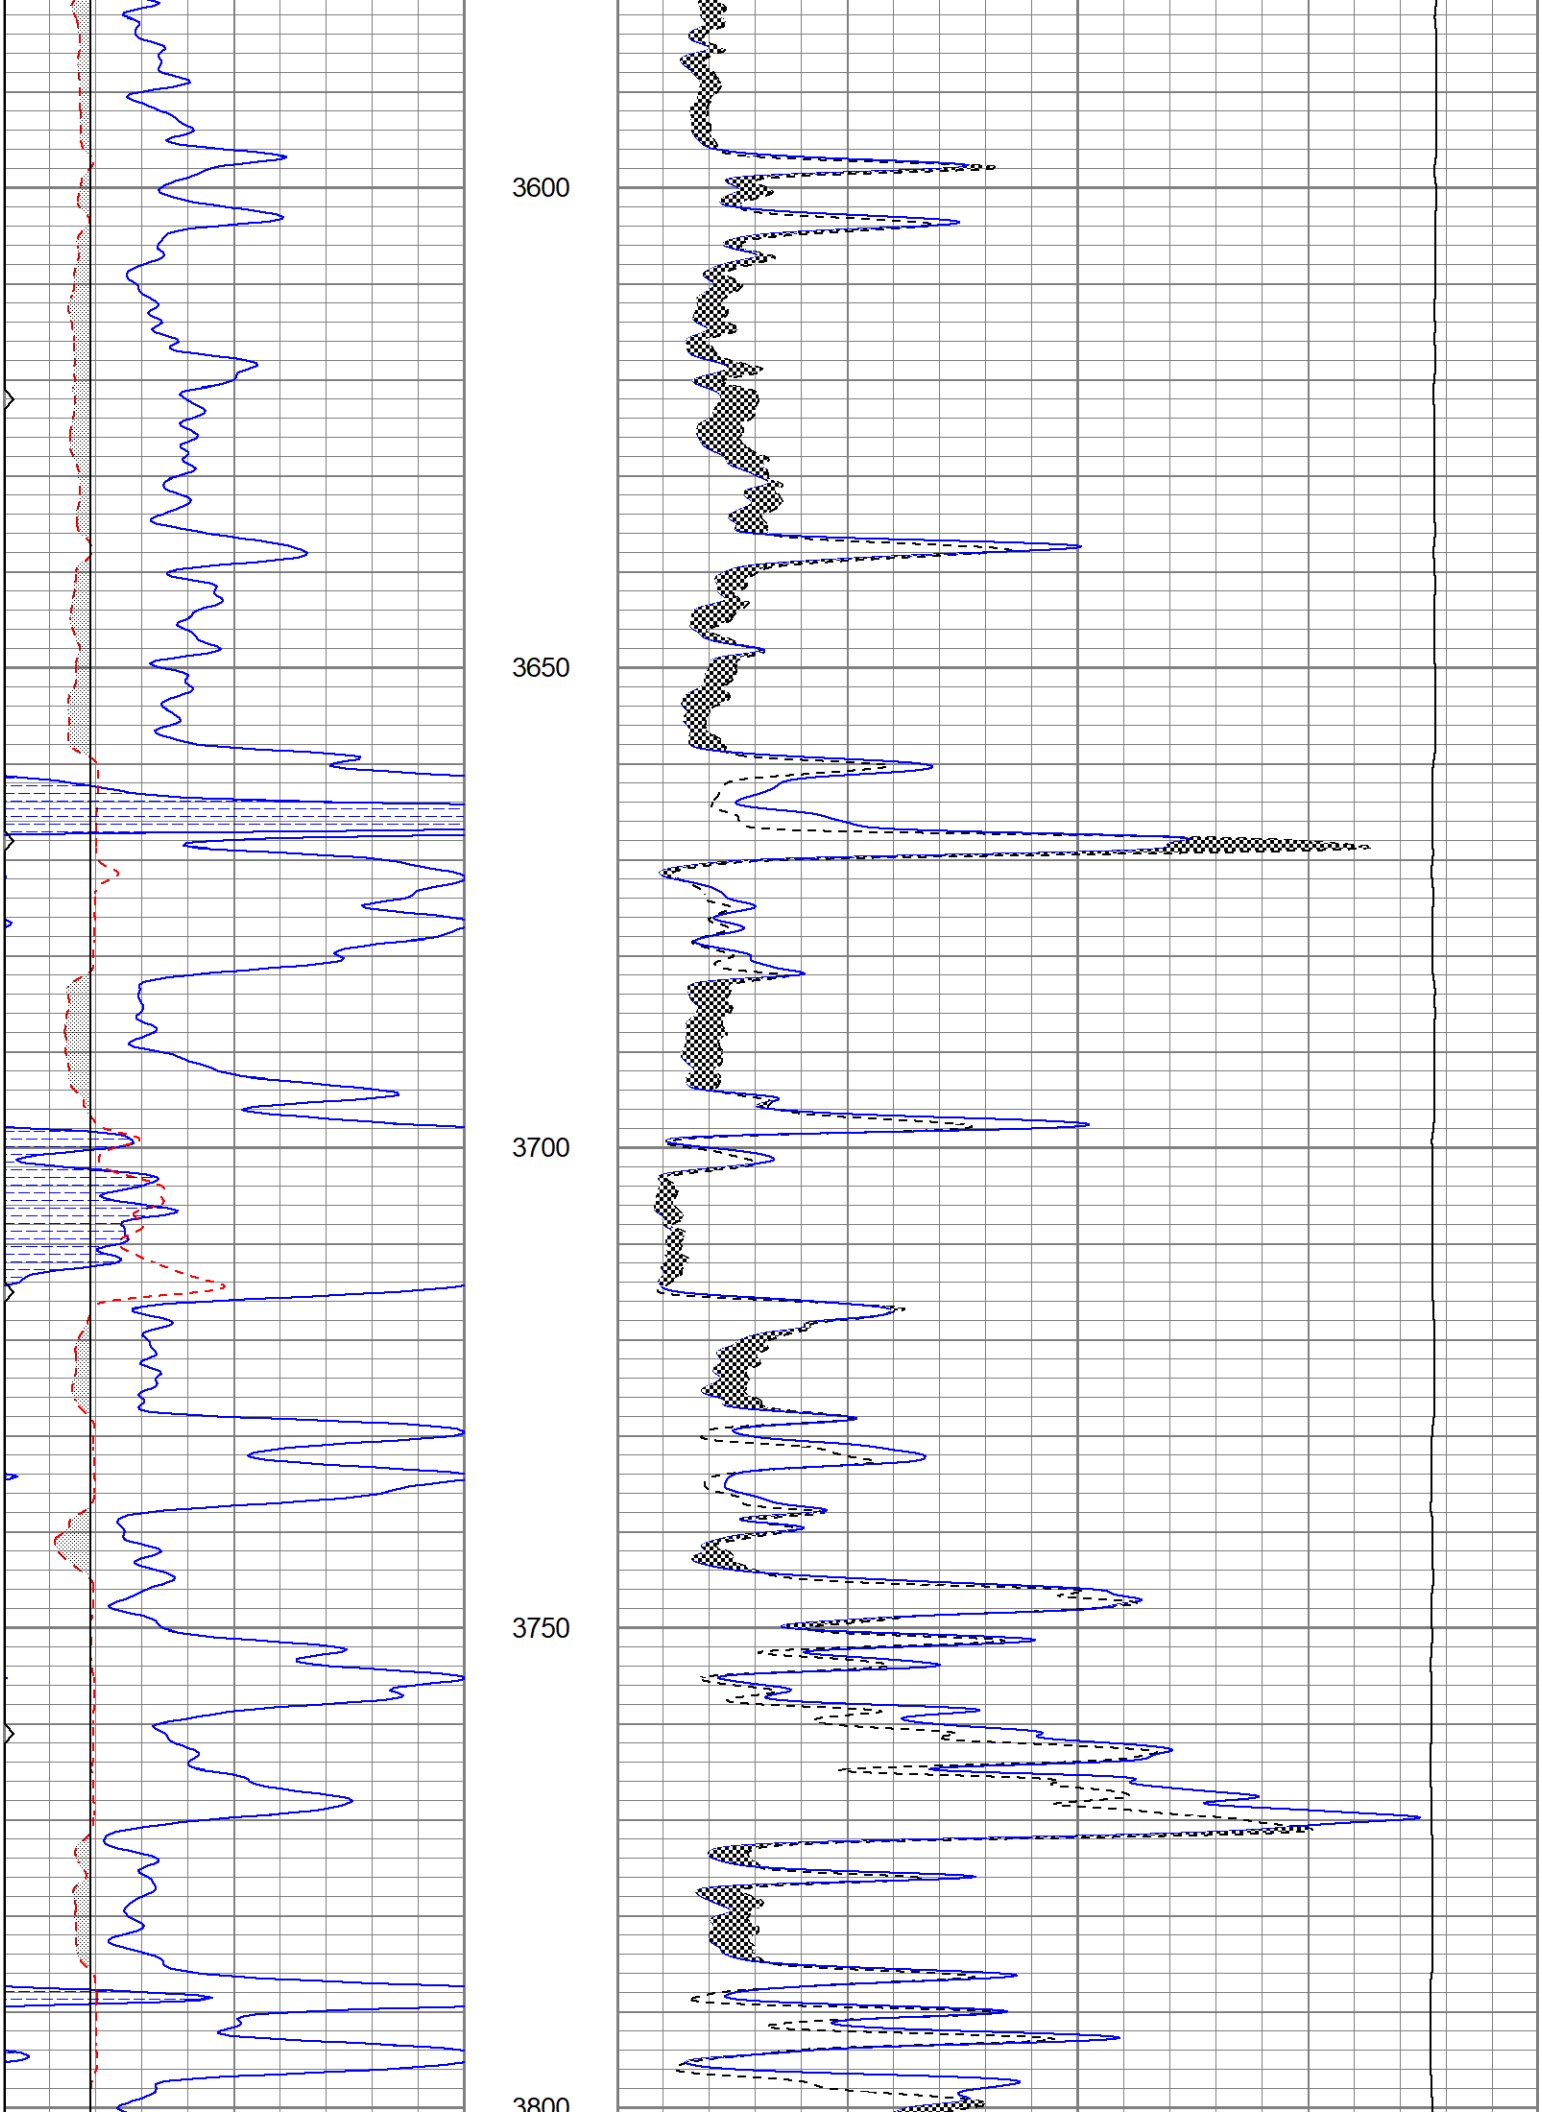
3600
3650
3700
3750
3800

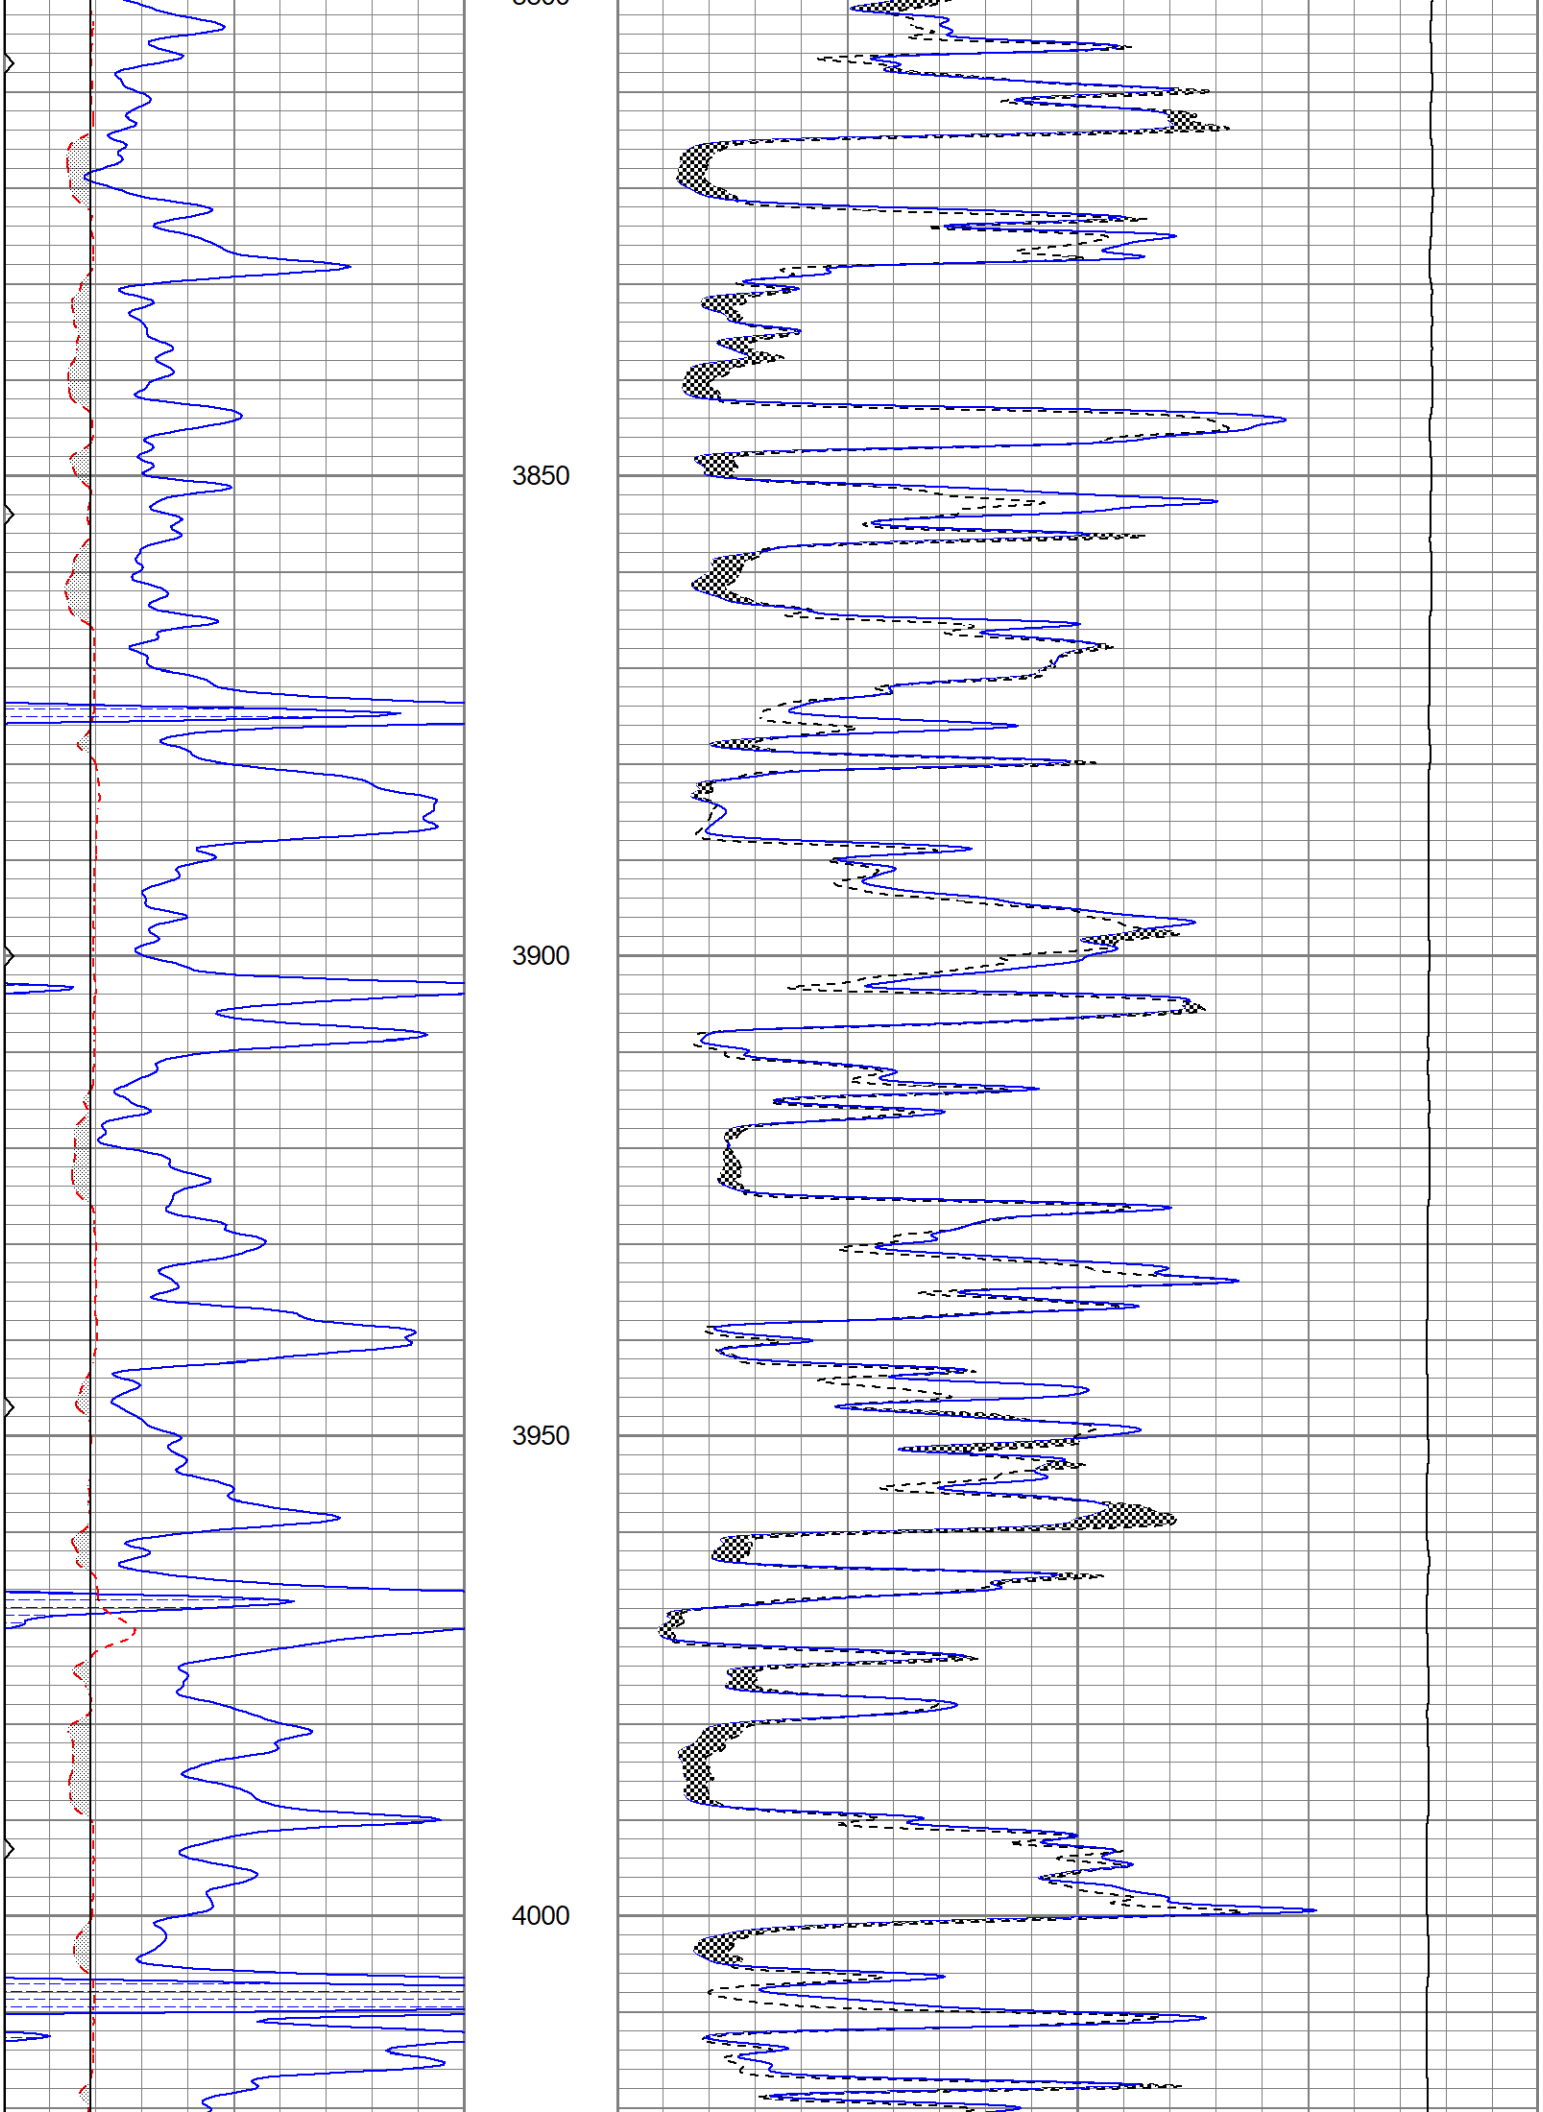
3850
3900
3950
4000

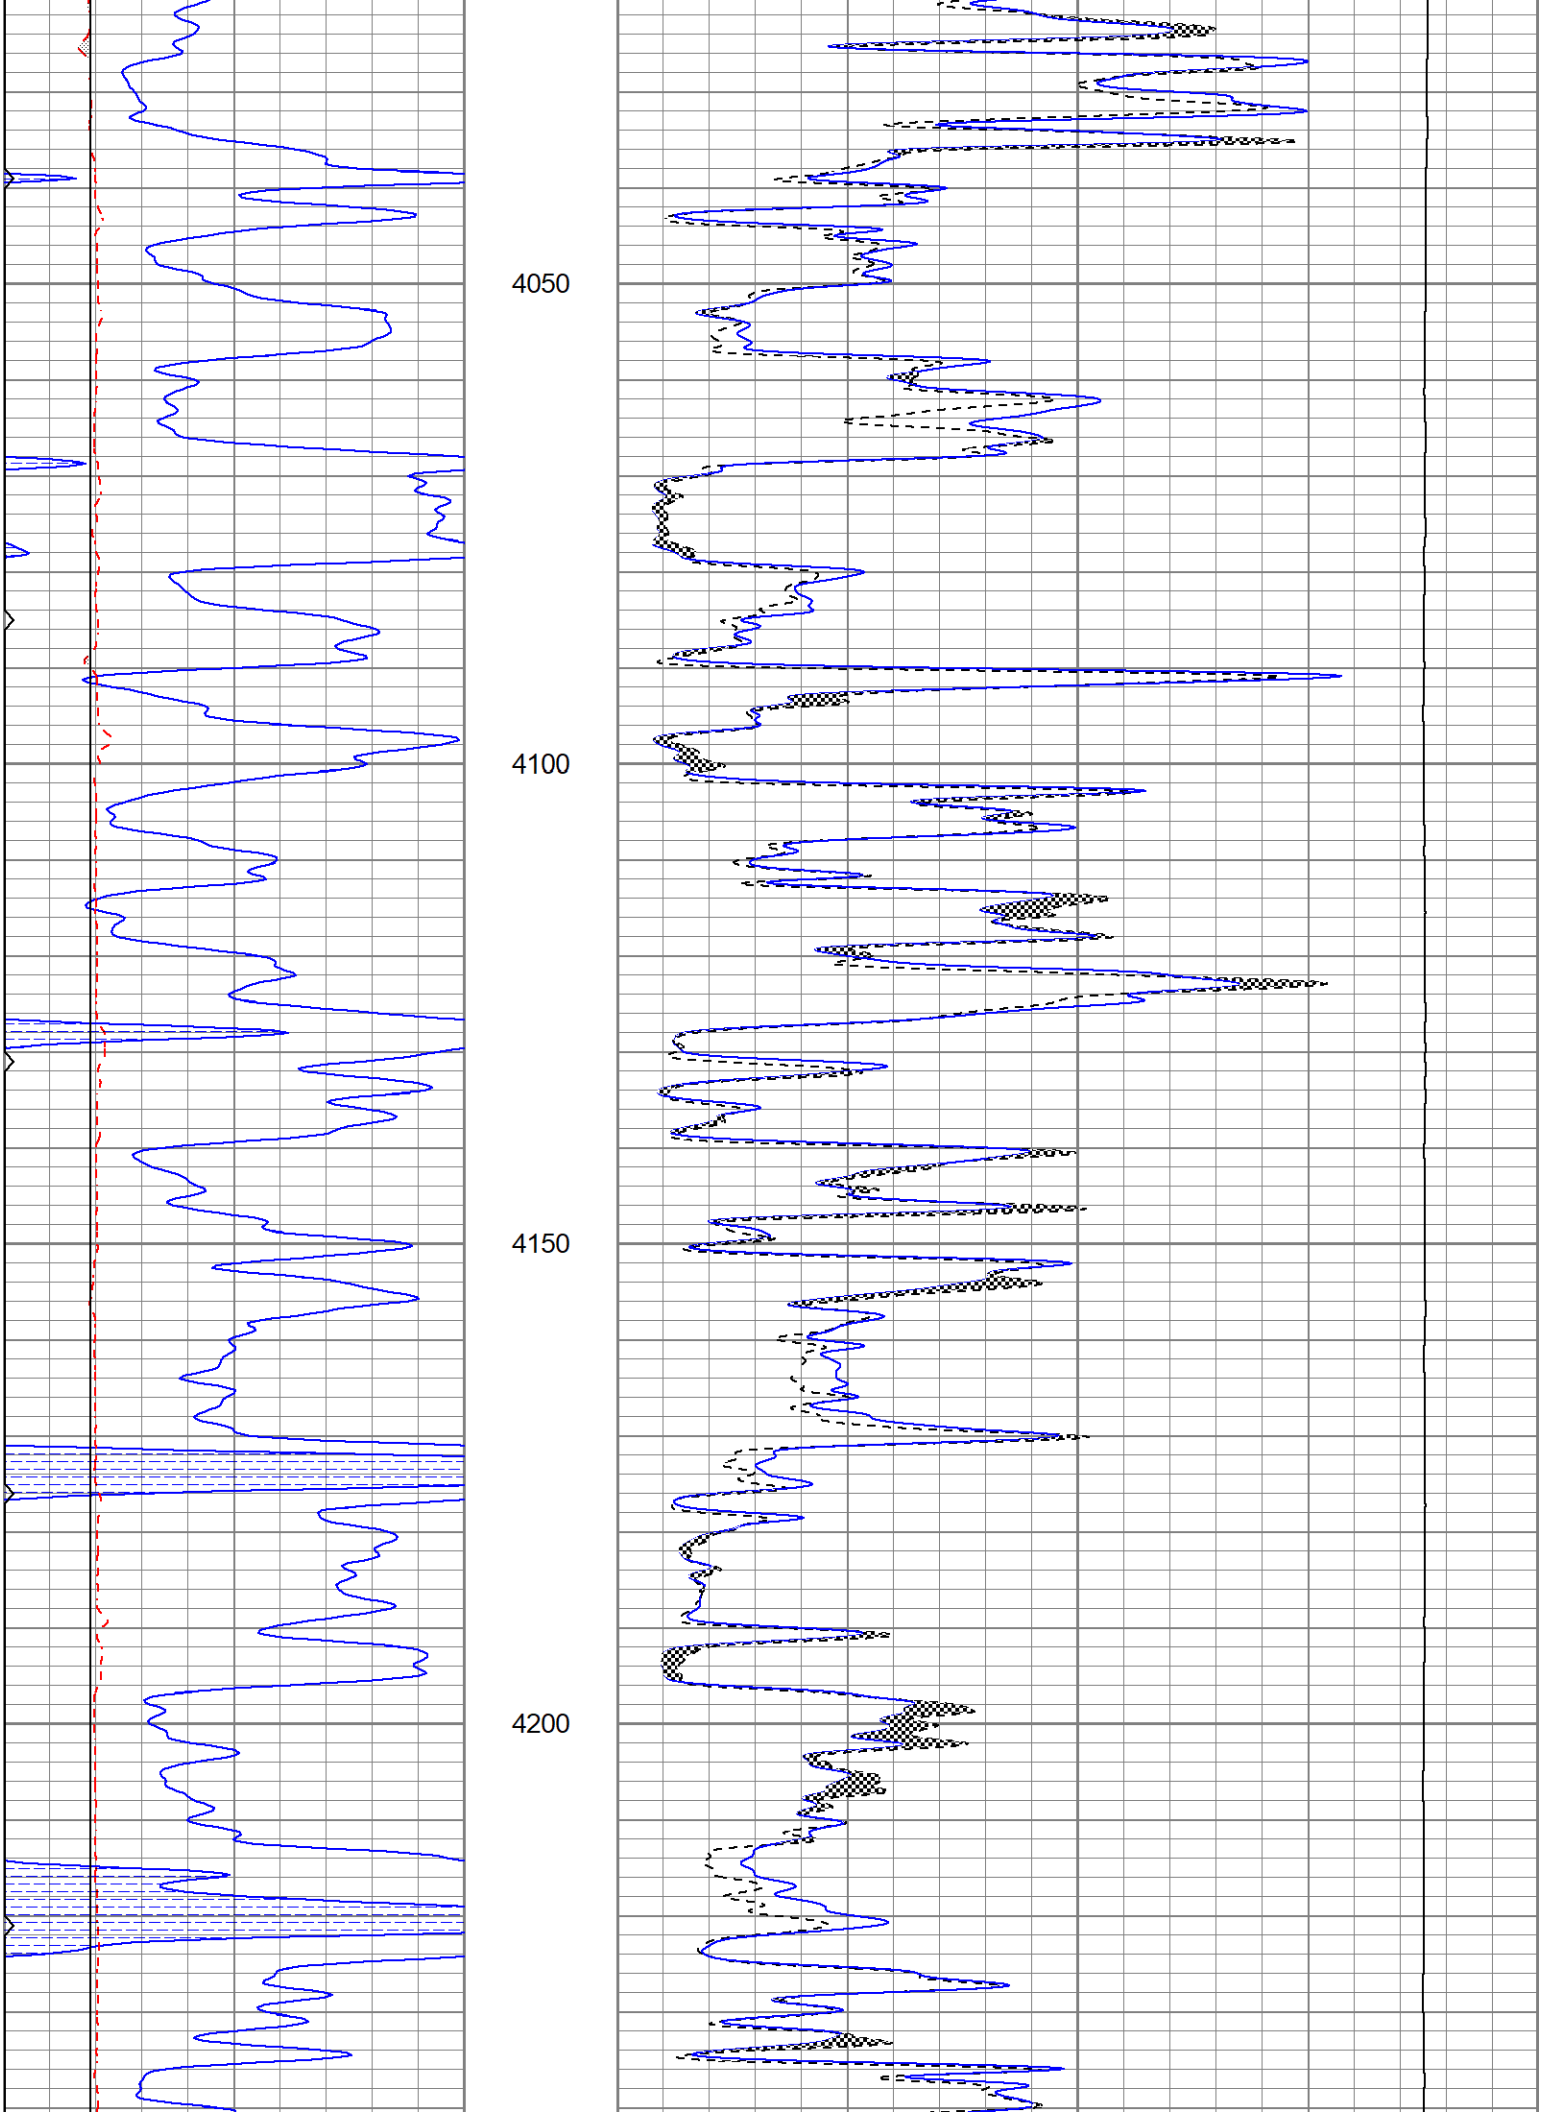
4050
4100
4150
4200

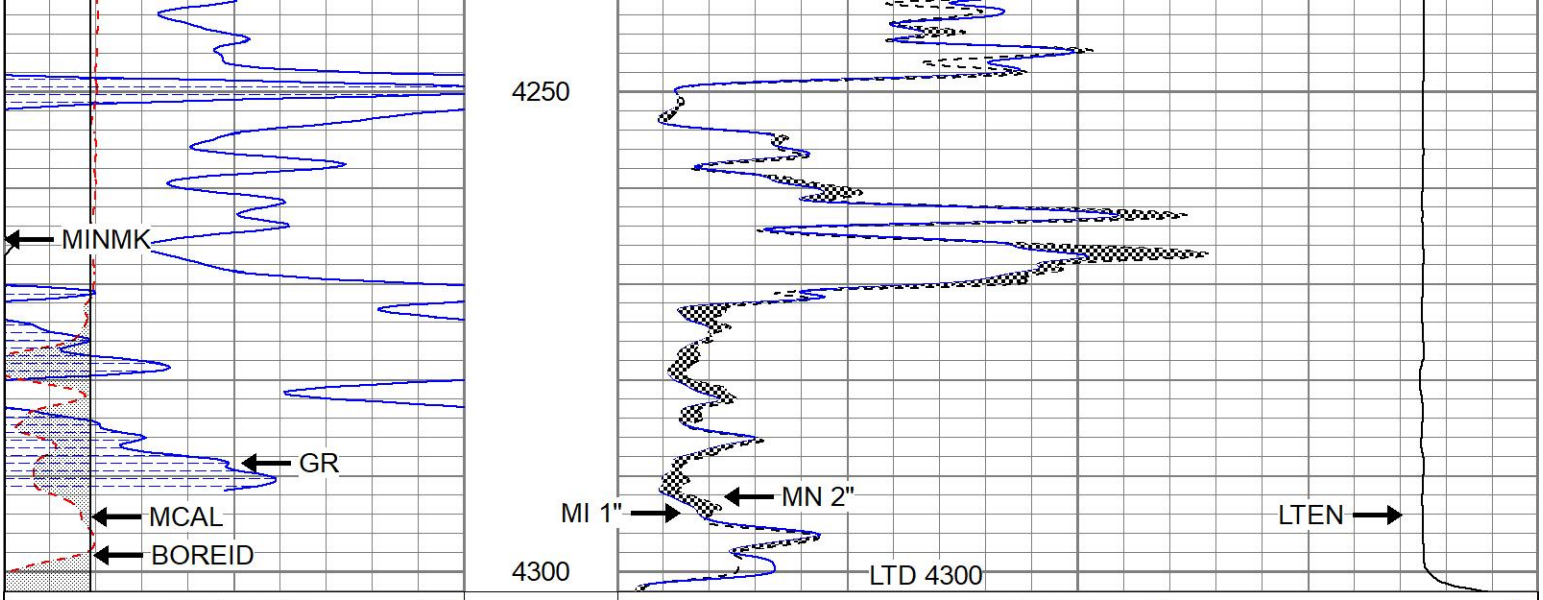

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50


0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0


REPEAT SECTION

Database File	tcdaryl#1-17oh.db
Dataset Pathname	pass4.1
Presentation Format	kml
Dataset Creation	Wed Jun 07 02:35:29 2023
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

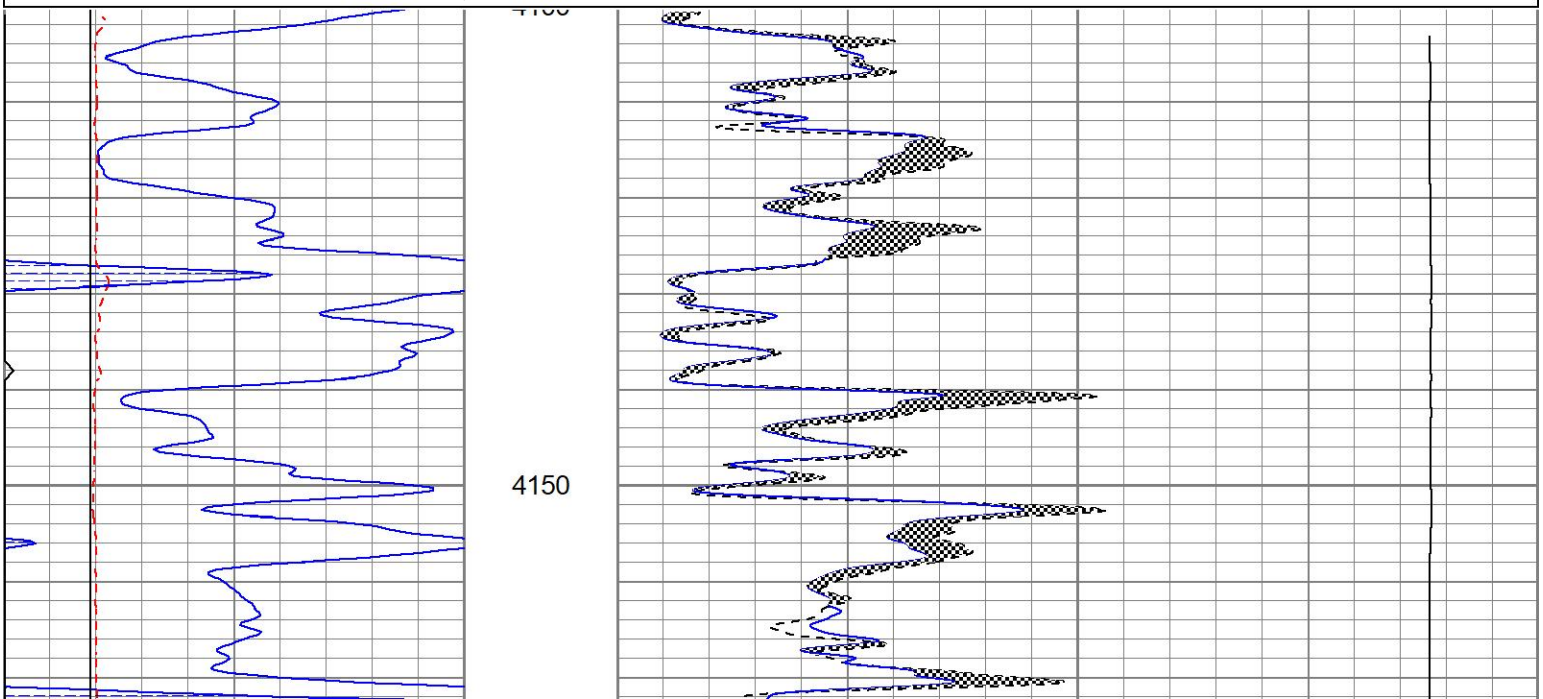

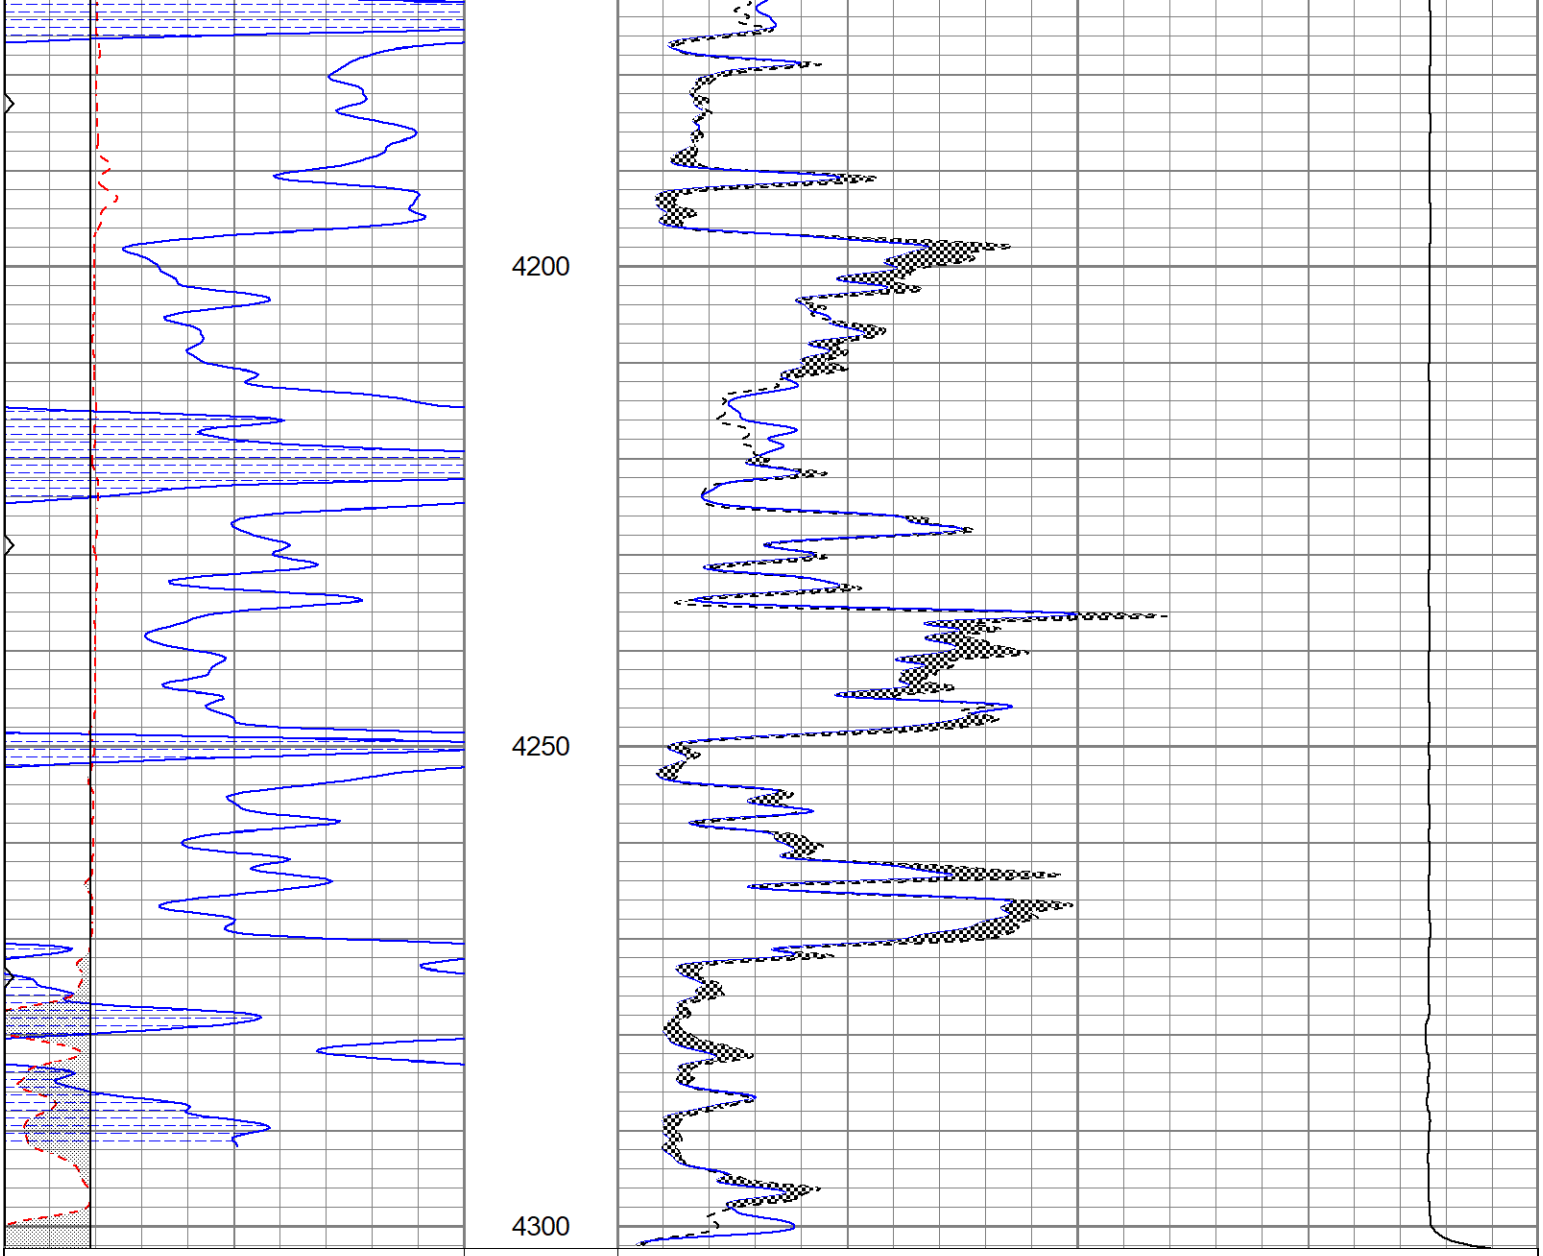

Calibration Report

Database File	tcdaryl#1-17oh.db
Dataset Pathname	pass4.1
Dataset Creation	Wed Jun 07 02:35:29 2023

Microlog Calibration Report

Serial-Model:	1600-Pengo
Performed:	Sun Apr 30 07:40:20 2023

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	-0.0289	0.4935	V	0.0000	10.0000	Ohm-m	19.1426	0.5535
Inverse	-0.0264	0.6515	V	0.0000	10.0000	Ohm-m	12.7525	0.3889
Caliper	3.2319	6.4483	V	8.0000	15.0000	in	2.1364	0.9962

Gamma Ray Calibration Report

Serial Number:	2001	
Tool Model:	OH	
Performed:	Mon Mar 13 07:38:49 2023	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	1.0000	GAPI/cps