

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Graham County, Sec. 4 Twp. 9S Rge. 21 (E) W (W)

Location as "NE/CNW%SW%" or footage from lines C NW NE

Lease Owner Morrison Producing Company

Lease Name Dartmouth College Well No. 1

Office Address Box 712, E1 Dorado, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed February 11 19 66

Application for plugging filed February 11 19 66

Application for plugging approved February 11 19 66


Plugging commenced February 11 19 66

Plugging completed February 11 19 66

Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production _____ 19 _____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

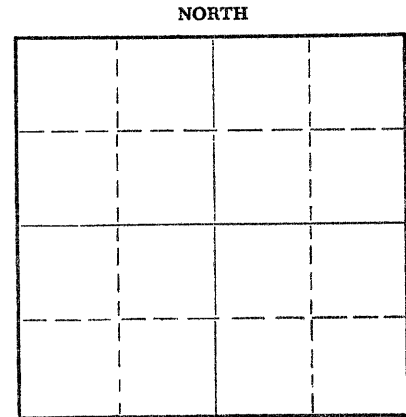

Name of Conservation Agent who supervised plugging of this well W. L. Nichols, Morland, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3770 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	232	7"	232	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged with heavy mud and 15 sx cement @ 540',
15 sx cement @ 210', 10 sx cement @ 40' to surface.

RECEIVED
STATE CORPORATION COMMISSION
2/16/66
FEB 16 1966

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Paine Drilling Co., Inc.
Address P. O. Box D, Hill City, Kansas

STATE OF Kansas, COUNTY OF Graham, ss.
D. F. McCarthy (employee of ~~owner~~ or ~~owner~~ or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) D. F. McCarthy
P. O. Box D, Hill City, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 14 day of February, 19 66
Donald Law
Notary Public.

My commission expires May 25, 1968

15-065-30184-00-00

CONTRACTOR'S WELL LOG

COMPANY:
CONTRACTOR:
WELL:
LOCATION:

Morrison Producing Company
Paine Drilling Co., Inc.
Dartmouth College # 1
C NW NE Section 4-98-21W
Graham County, Kansas
February 4, 1966
February 11, 1966

COMMENCED:
COMPLETED:

0	232	Surface Clay, Sand & Shale
232	1650	Shale & Sand
1650	1684	Anhydrite
1684	2375	Shale
2375	2475	Shale & Shells
2475	2869	Shale & Lime
2869	3169	Shale
3169	3365	Shale & Lime
3365	3702	Lime
3702	3770	Conglomerate
3770		Rotary Total Depth

RECEIVED
STATE CORPORATION COMMISSION

FEB 16 1966

CONSERVATION DIVISION
Wichita, Kansas

Set 7" Surface Casing @ 232 ft. with 135 sx cement.

Dry & Abandoned.

We hereby certify that the above is a correct and accurate log of the above mentioned well as shown on the daily drilling reports.

PAINE DRILLING CO., INC.

BY: *R. F. McCarthy*
Treasurer

Subscribed and sworn to before me this 11th day of February, 1966.

Donald Law
Notary Public

My Commission Expires *11/15/68*