


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

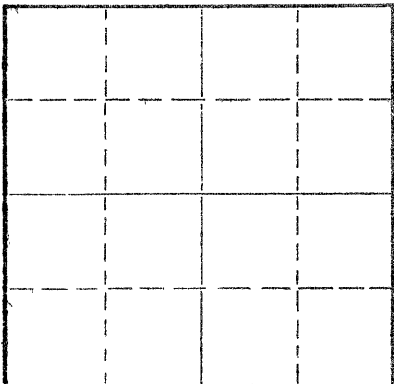

Locate well correctly on above
Section Plat

Graham County. Sec. 6 Twp. 9 Rge. 21 (E) W (W)
Location as "NE/CNW/SE/SW" or footage from lines NW NE NW
Lease Owner R. P. Nixon & Associates
Lease Name Rouse Well No. 1
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed June 6, 1969
Application for plugging filed June 6, 1969
Application for plugging approved June 6, 1969
Plugging commenced June 6, 1969
Plugging completed June 6, 1969
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Bill Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,748 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	200'	Cmtd.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill hole w/ heavy mud
Spotted 100' sax cement @ 890' thru 4 1/2" drill pipe
Spotted 20' sax cement @ 215' thru 4 1/2" drill pipe
Set bridge plug @ 40' w/ 1/2 sax hulls on plug
Dump 10 sax cement on plug to cellar

RECEIVED
STATE CORPORATION COMMISSION
JUL 1 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Shields Drilling Co., Inc.
Address Shields Building, Russell, Kansas

STATE OF Kansas COUNTY OF Russell
R. J. Shields contractor

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Shields Building, Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of June, 1969

My commission expires May 26, 1971
[Signature] Notary Public.

Shields


15-065-20184-00-00

Russell, Kansas

WELL LOG

Operator: R. P. Nixon & Associates
Well: Rouse #1
Commenced: May 31, 1969
Completed: June 6, 1969
Contractor: Shields Drilling Co., Inc.

Well Description: NW NE NW
Sec. 6-9S-21W
Graham Co., Kansas



CASING RECORD		
Size	Run	Pulled
8 5/8"	200'	Cmtd.

Elevation:
Treatment:
Production: D & A
Tops:

..... Figures Indicate Bottom of Formations

Surface soil, shale & sand	1,435'	
Shale, lime & shells	1,685'	
Anhydrite	1,716'	
Shale, shells & lime	2,085'	
Shale & lime	3,320'	
Lime	3,685'	
Lime & chert	3,748'	RTD

RECEIVED
STATE CORPORATION COMMISSION
JUL 1 1969
CONSERVATION DIVISION
Wichita, Kansas

Notes