

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-097-21396-00-00
Spot: SENW Sec/Twnshp/Rge: 28-29S-17W
1980 feet from N Section Line, 2100 feet from W Section Line
Lease Name: JANTZ Well #: 1-28
County: KIOWA Total Vertical Depth: 5082 feet

Operator License No.: 3842
Op Name: LARSON ENGINEERING INC. DBA LAR
Address: 562 WEST STATE ROAD 4
OLMITZ, KS 67564

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		2950		WITH 2 SX CMT \$165.17
CIBP		4800		WITH 2 SX CMT
PC		3185		WITH 100 SX CMT
PROD	5.5	5064	2120	WITH 110 SX CMT
SURF	8.625	466		WITH 265 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 04/11/2007 11:45 AM
Plug Co. License No.: 6426 Plug Co. Name: EXPRESS WELL SERVICE & SUPPLY INC
Proposal Rcvd. from: KEVIN WILSON Company: LARSON OPERATING Phone: (620) 653-7368

Proposed Plugging Method: SET CIBP @ 4800' & PUT 2 SX CMT ON TOP OF CIBP. SET CIBP @ 2950' & PUT 2 SX CMT ON TOP OF CIBP. PLUG AT 1200' WITH 15 SX GEL & 50 SX CMT. PLUG AT 480' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 04/11/2007 2:30 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SET CIBP @ 4800' & PUT 2 SX CMT ON TOP OF CIBP. SET CIBP @ 2950' & PUT 2 SX CMT ON TOP OF CIBP. SPOT PLUGS THROUGH 5 1/2" CASING. 1ST PLUG AT 1200' WITH 15 SX GEL & 50 SX CMT. 2ND PLUG AT 480' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4880	4886		MISS
4867	4872		MISS
2970	2980		COTTONWOOD

INVOICED
DATE 5-8-07
INV. NO. 2007061731

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

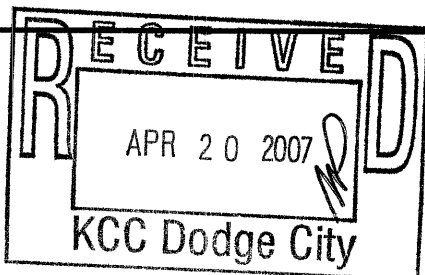

Signed

Stephen J. Puffer
RECEIVED
KANSAS CORPORATION COMMISSION
(TECHNICAL)

MAY 07 2007

CONSERVATION DIVISION
WICHITA, KS

Form CP-273