

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-065-23295-00-00
Spot: W2W2NW Sec/Twnshp/Rge: 16-10S-21W
1320 feet from N Section Line, 330 feet from W Section Line
Lease Name: GRECIAN Well #: 1
County: GRAHAM Total Vertical Depth: 3830 feet

Operator License No.: 7076
Op Name: BLACK DIAMOND OIL, INC.
Address: PO BOX 641
HAYS, KS 67601

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	222		

\$ 124.48

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 04/09/2007 8:00 PM
Plug Co. License No.: 31548 Plug Co. Name: DISCOVERY DRILLING
Proposal Rcvd. from: TOM ALM Company: DISCOVERY DRILLING Phone: (785) 623-2920

Proposed Plugging Method: Order 225 sxs 60/40 pozmix - 6% gel with 1/4# flocele per sack.
Space all plugs with heavy drilling mud through drill pipe.
No ar buckle found.

Plugging Proposal Received By: HERB DEINES Witness Type: NONE
Date/Time Plugging Completed: 04/09/2007 11:00 PM KCC Agent: HERB DEINES

Actual Plugging Report:

1st. Plug at 1775' w/25 sxs.
2nd. Plug at 975' w/100 sxs.
3rd. Plug at 275' w/40 sxs.
4th. Plug at 40' w/10 sxs.
Rathole with 15 sxs.
Mousehole with 10 sxs.

Perfs:

INVOICED
DATE 5-4-07
INV. NO. 2007061707

RECEIVED
KANSAS CORPORATION COMMISSION

MAY 03 2007

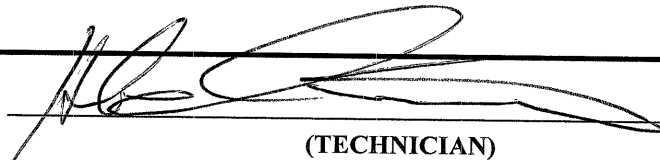
CONSERVATION DIVISION
WICHITA, KS

Remarks: ALLIED CEMENTING COMPANY.

Plugged through: DP

District: 04

Signed


(TECHNICIAN)

Form CP-2/3

APR 30 2007

