



MICRO RESISTIVITY LOG

Company	Koron Investments Inc.	
Well	Baughner A#4-29	
Field	Ellis NW	
County	Trego	State Kansas
Location:	API # : 15 195 22983	
SEC 23 TWP 12S RGE 21W		Other Services DIL CDNL
Permanent Datum	Ground Level	Elevation 2313'
Log Measured From	KB 8' AGL	K.B. 2321' D.F. 2320' G.L. 2313'
Drilling Measured From	KB	
Date	12-16-14	
Run Number	Two	
Depth Driller	4092'	
Depth Logger	4088'	
Bottom Logged Interval	4086'	
Top Log Interval	3250'	
Casing Driller	221'	
Casing Logger	221'	
Bit Size	7 7/8"	
Type Fluid in Hole	Chemical	
Density / Viscosity	9.4/53	
pH / Fluid Loss	9.5/8.8	
Source of Sample	Pit	
Rm @ Meas. Temp	1.1@55degf	
Rmf @ Meas. Temp	.88@55degf	
Rmc @ Meas. Temp	1.4@55degf	
Source of Rmf / Rmc	Calculated	
Rm @ BHT	.53@115degf	
Time Circulation Stopped	4:00 p.m.	
Time Logger on Bottom	9:30 p.m.	
Maximum Recorded Temperature	120degf	
Equipment Number	T173	
Location	Hays, KS	
Recorded By	L. Smith	
Witnessed By	Mr. Marc Downing	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments





Main Pass

Database File kibaughra#4-29oh.db
Dataset Pathname pass8.1
Presentation Format kml
Dataset Creation Tue Dec 16 23:01:42 2014
Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

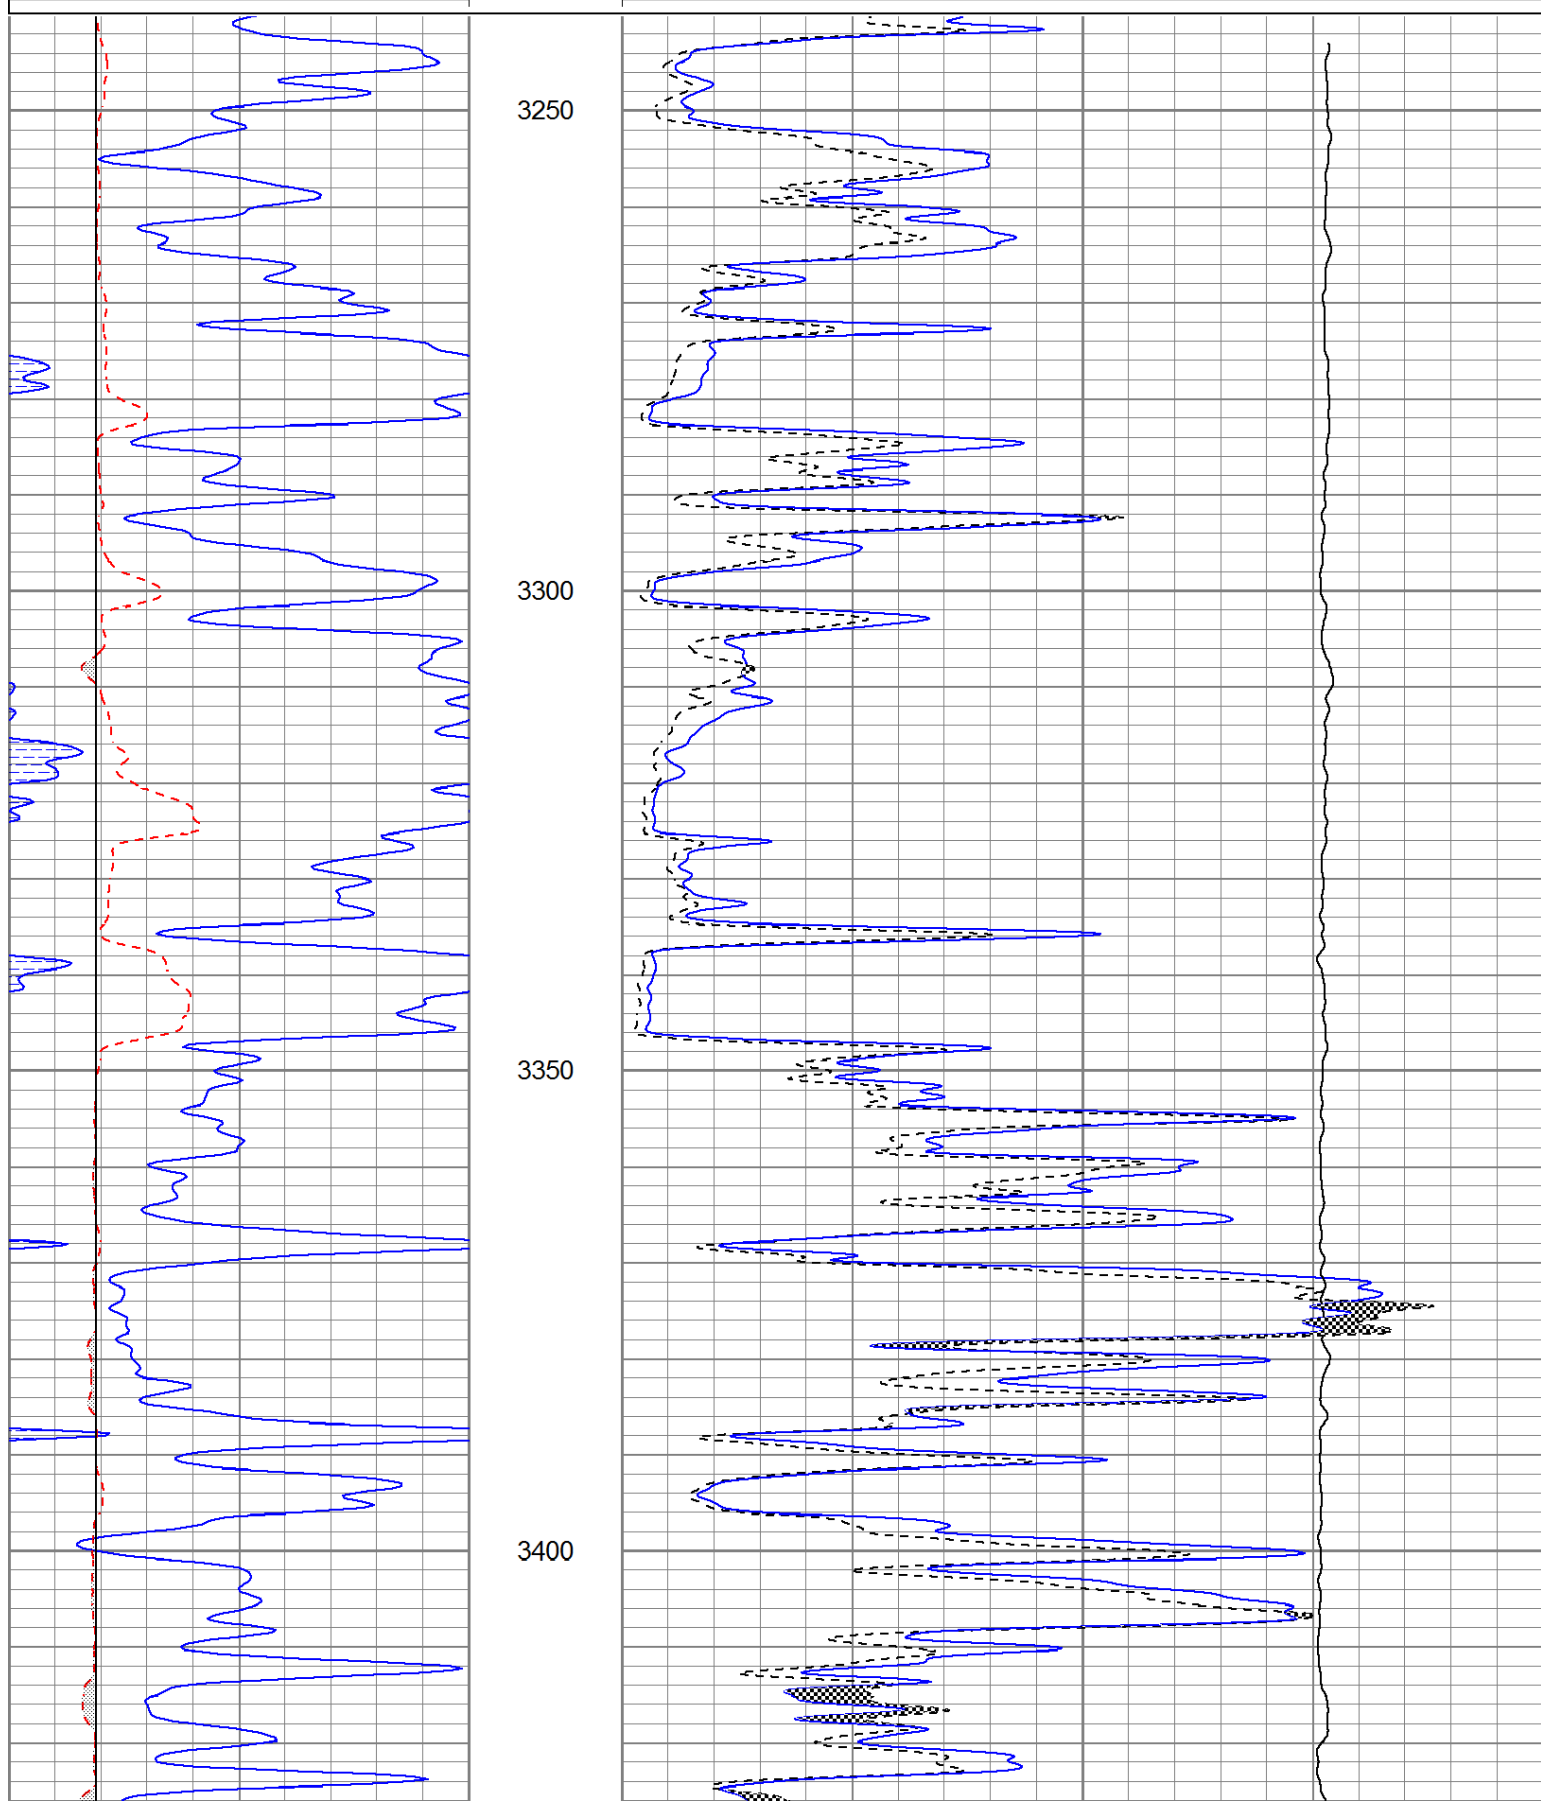

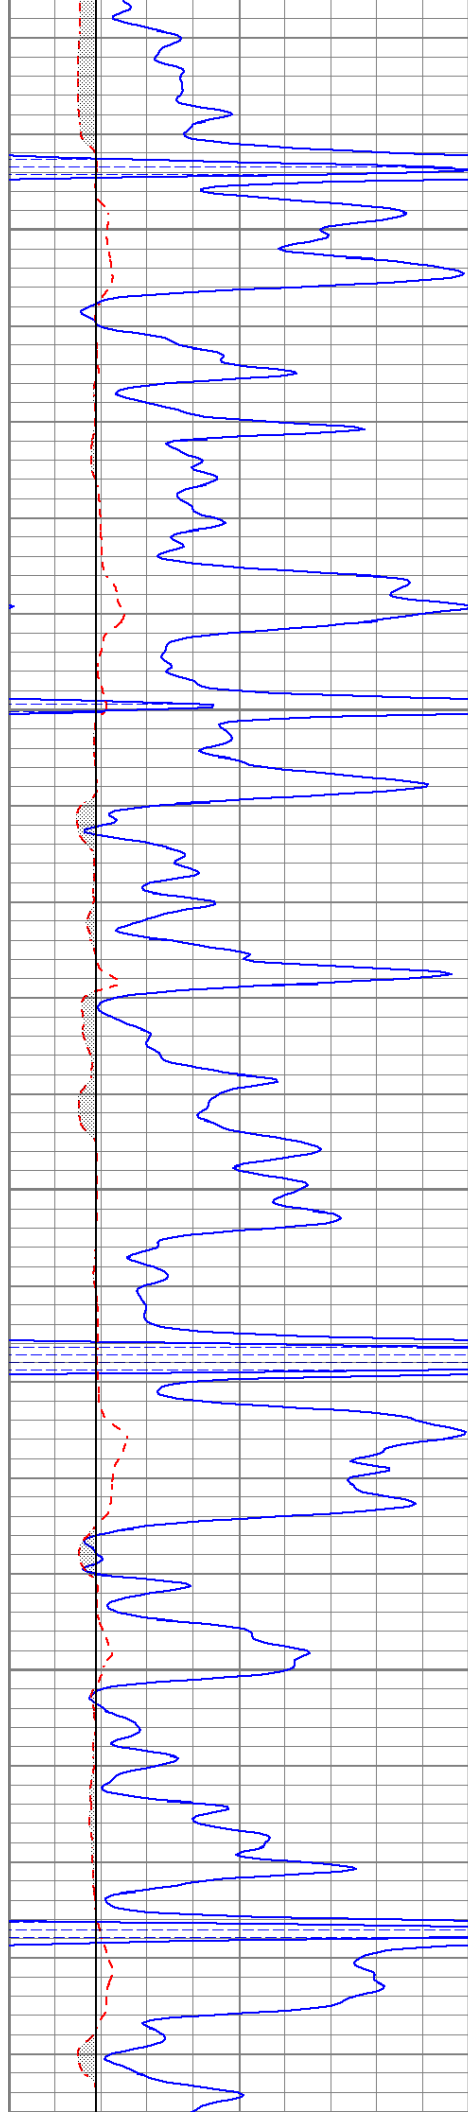



3450

3500

3550

3600

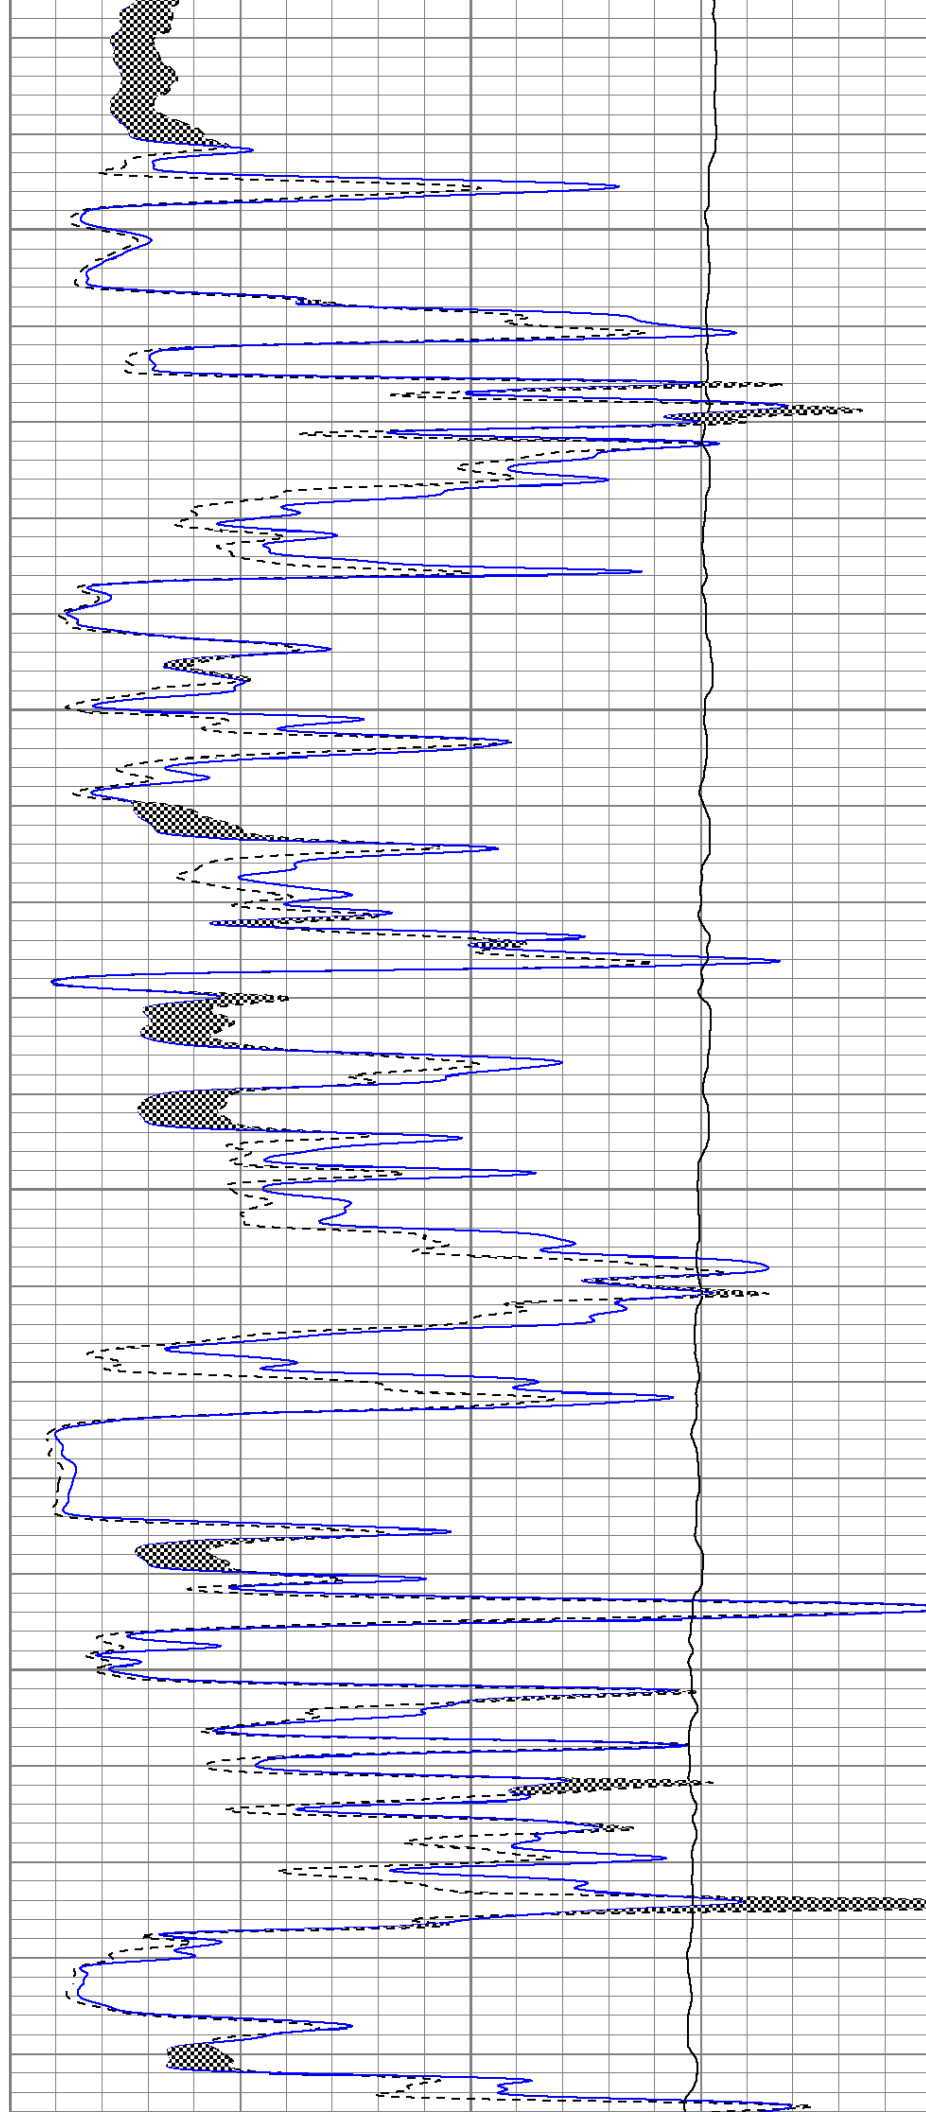

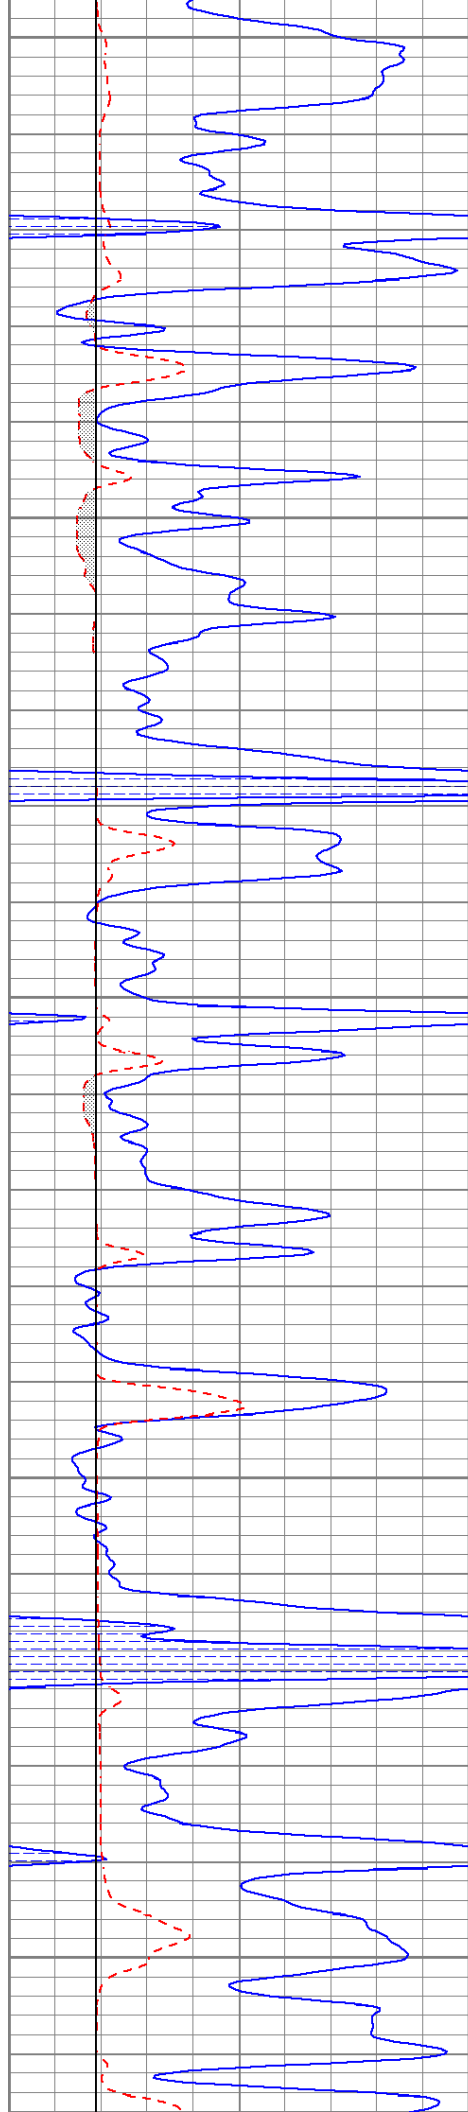


3650


3700

3750

3800

3850

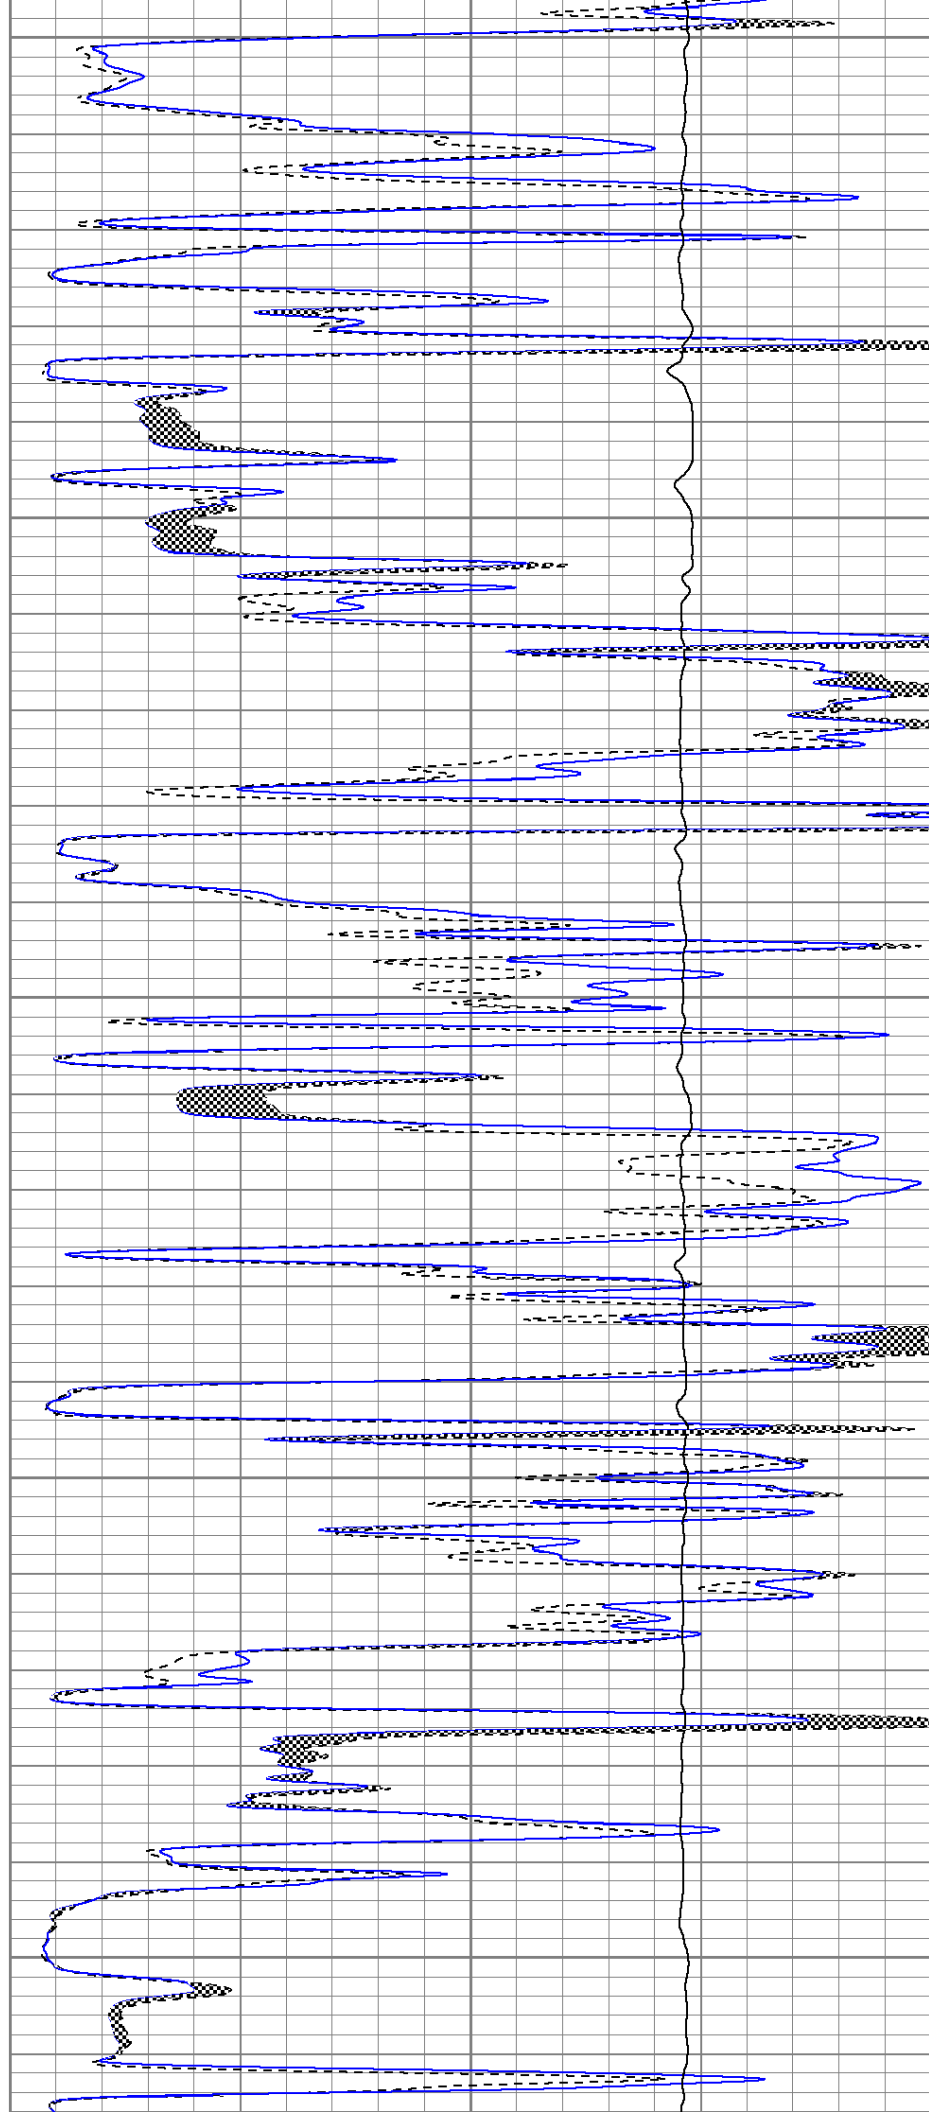

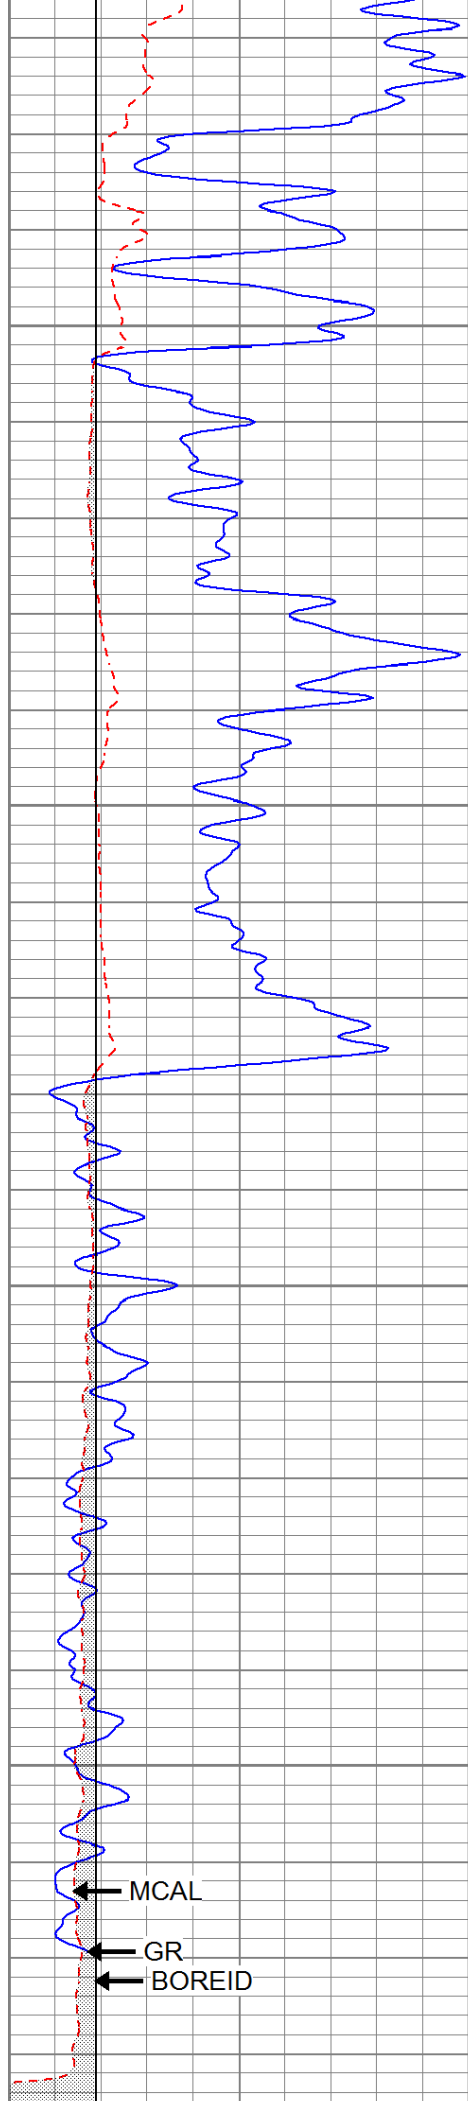


3900

3950

4000

4050

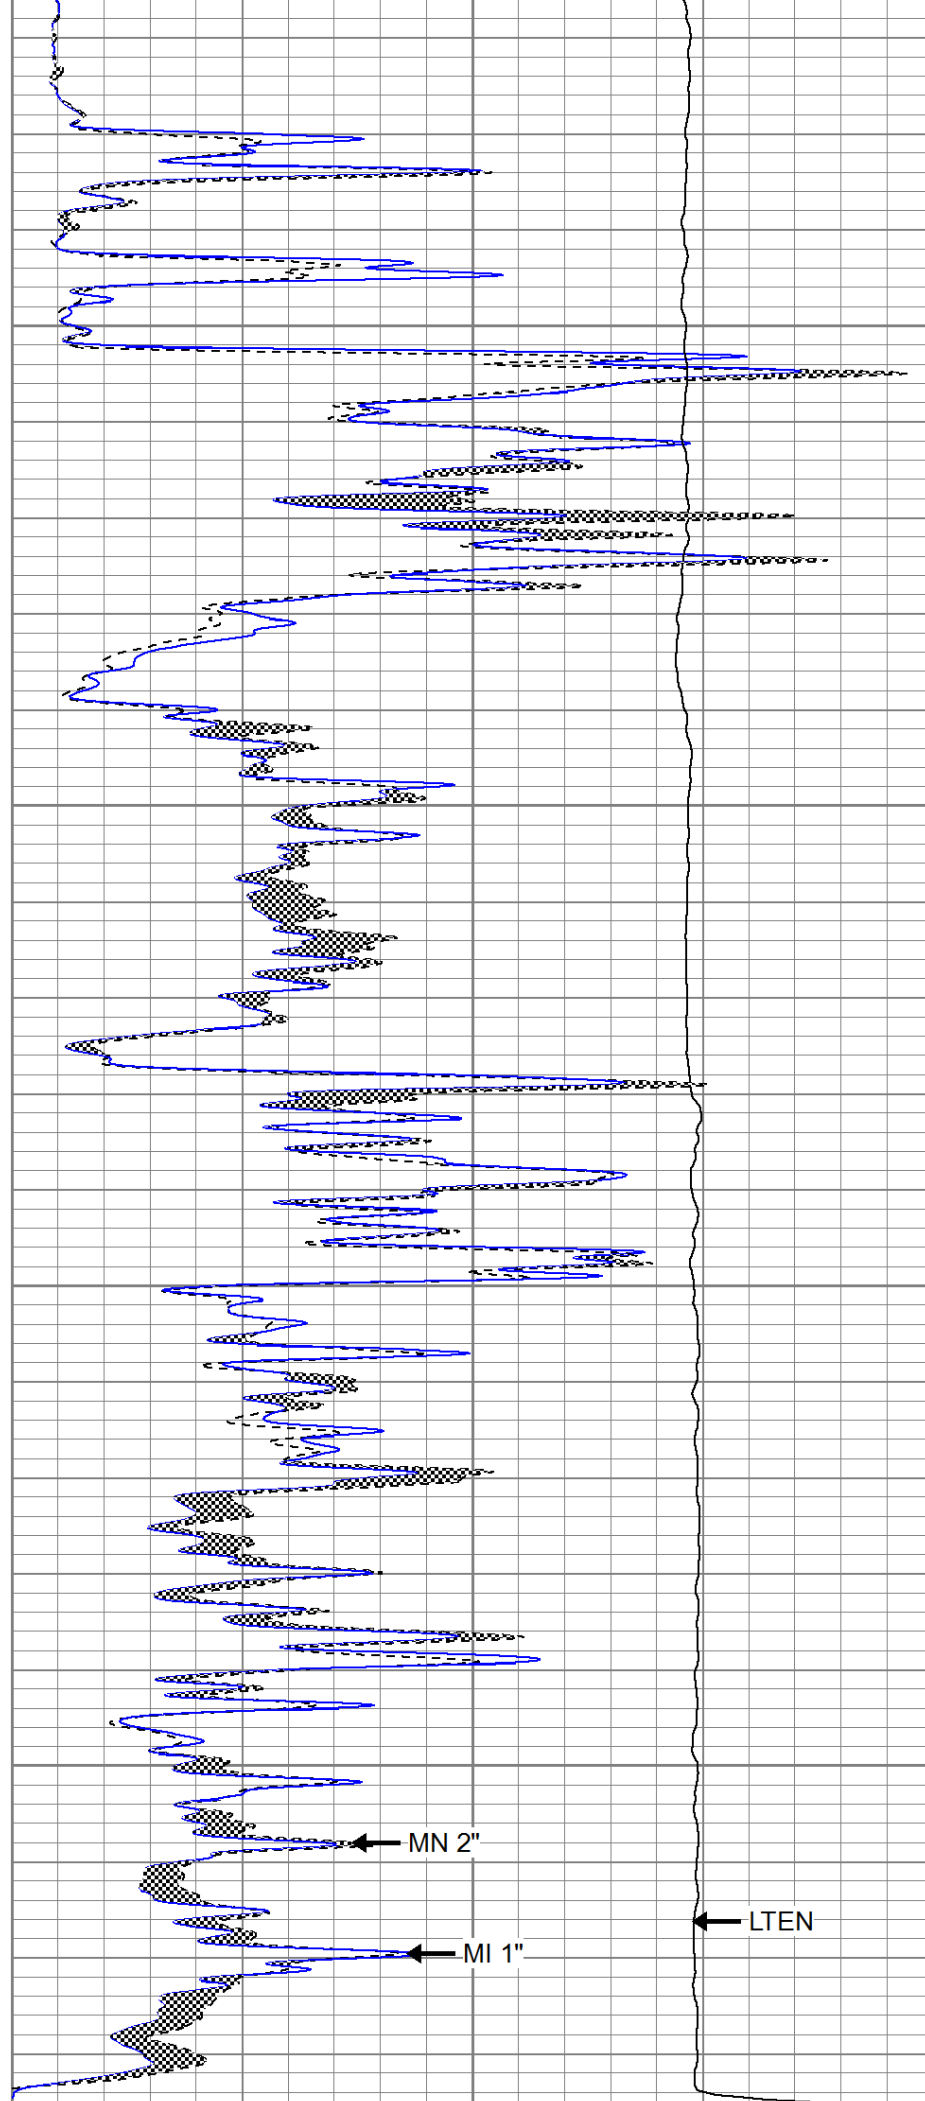

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0





Repeat Pass

Database File kibaughra#4-29oh.db
 Dataset Pathname pass7.1
 Presentation Format kml
 Dataset Creation Tue Dec 16 22:51:07 2014
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

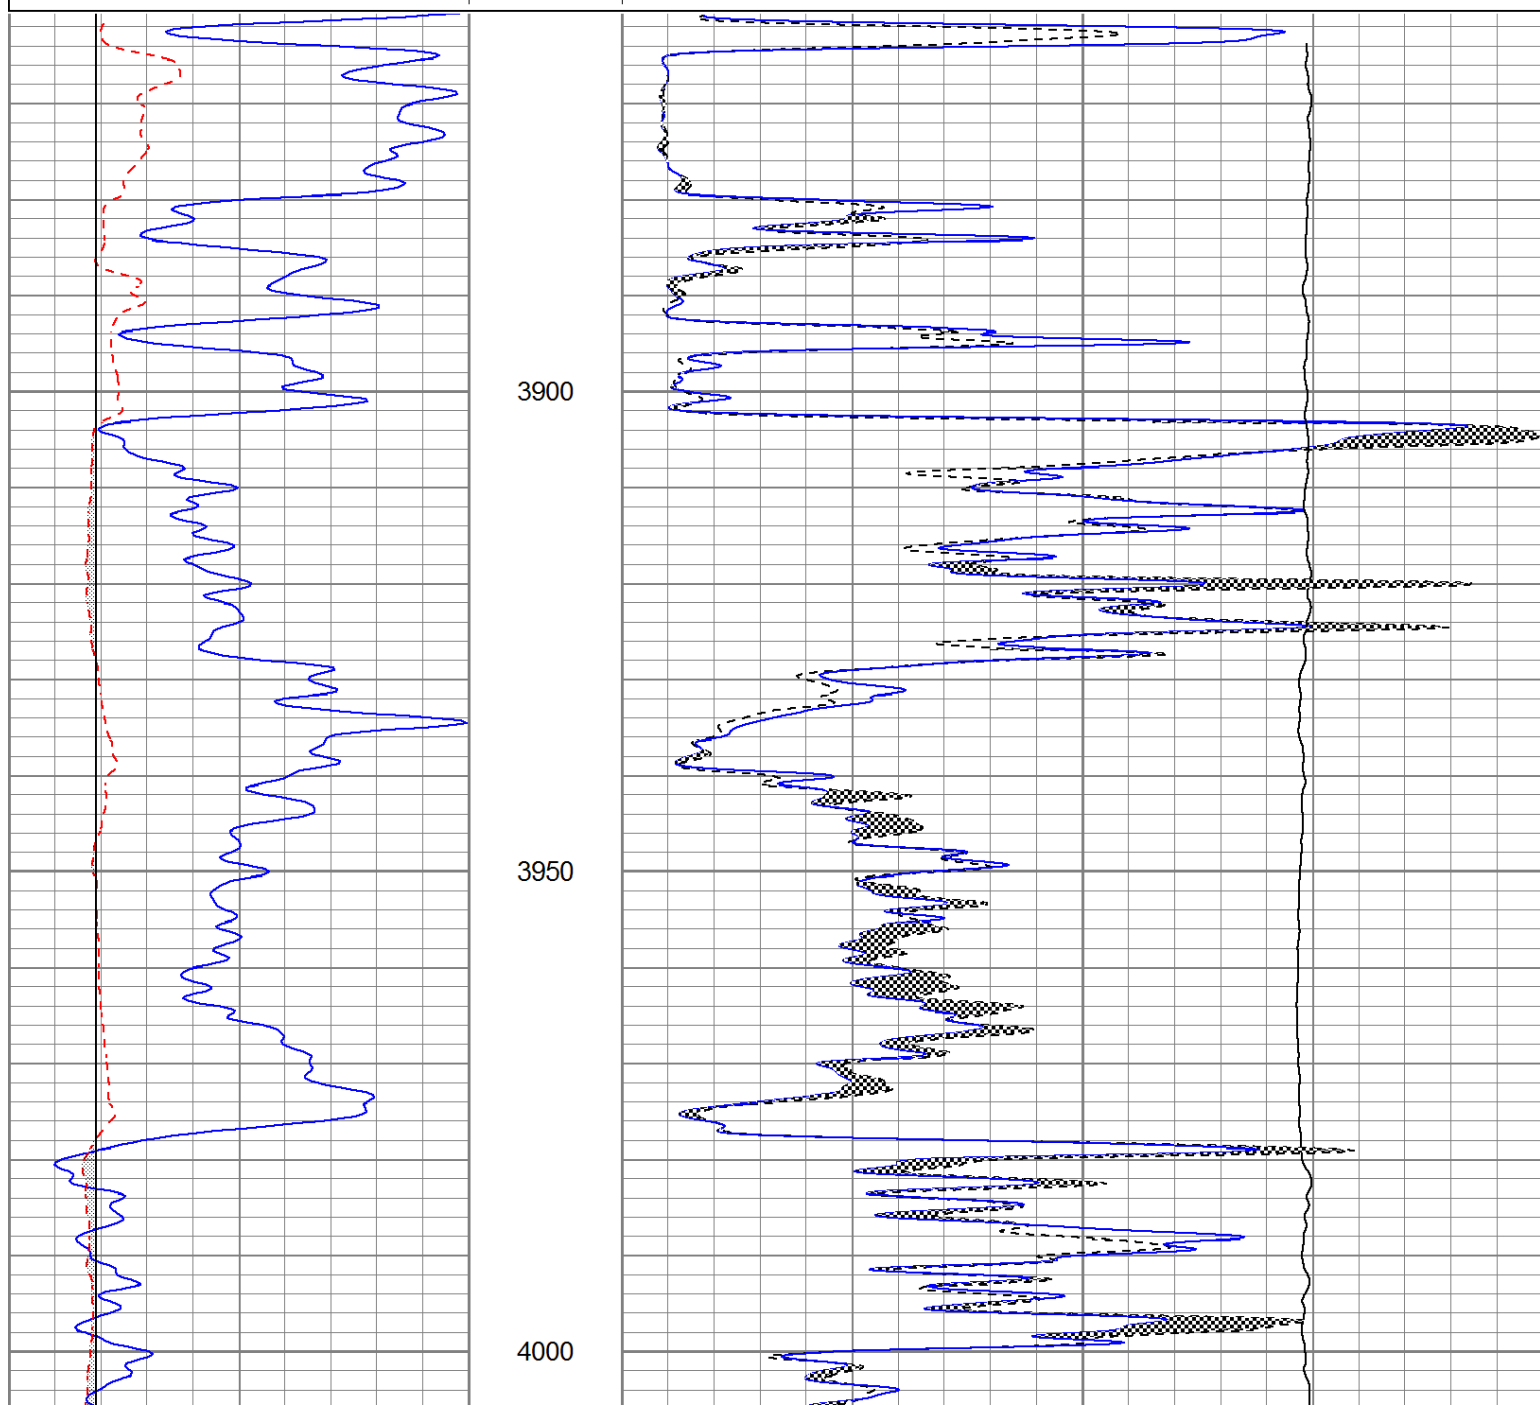

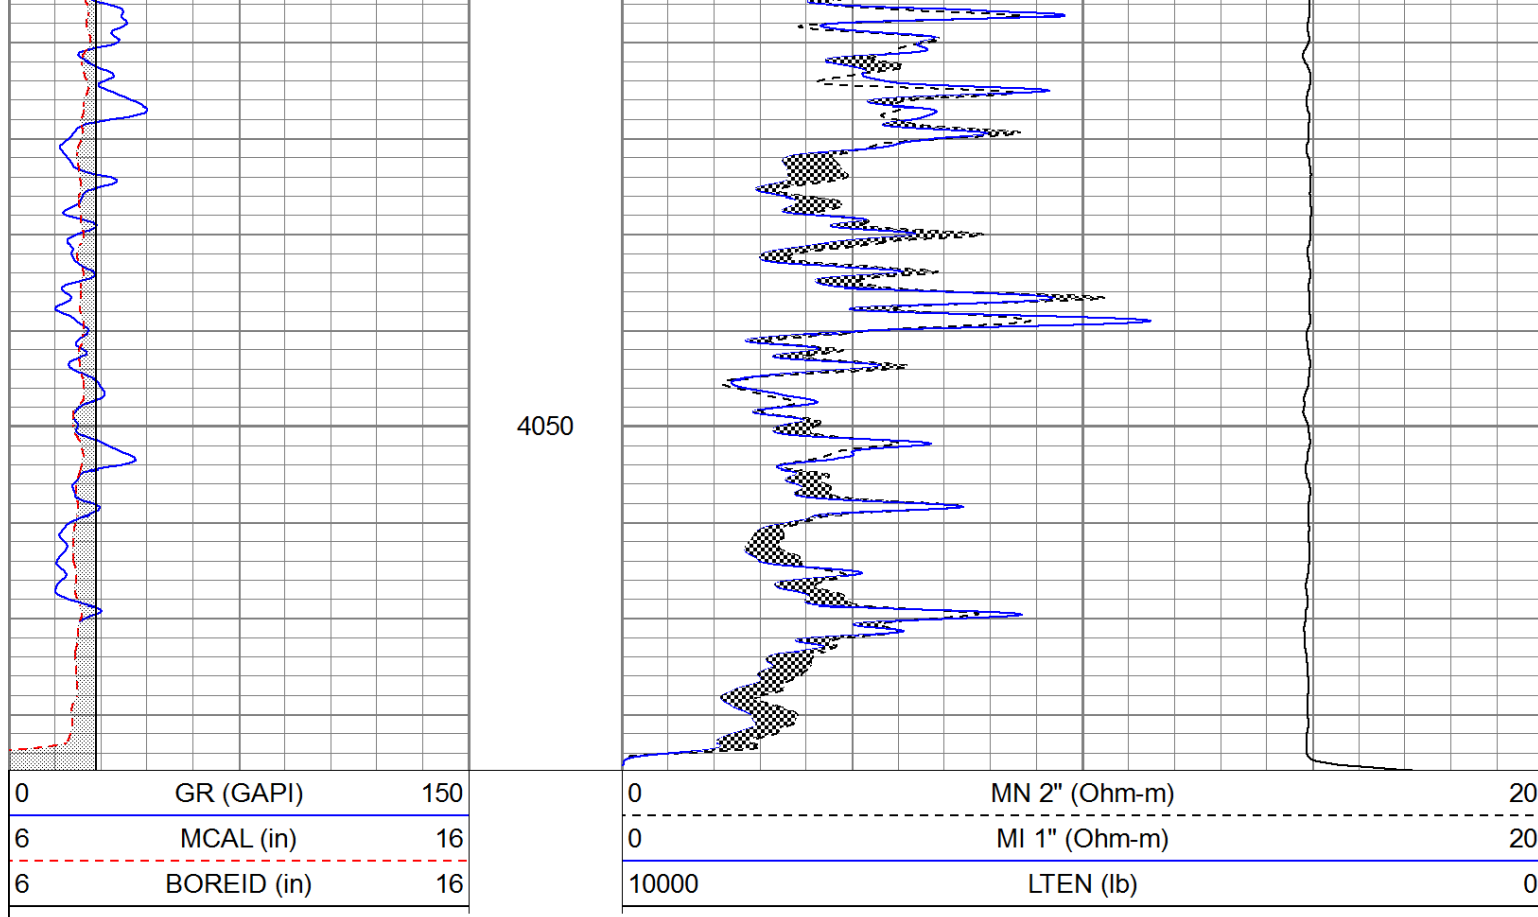

Calibration Report								
Database File	kibaughra#4-29oh.db							
Dataset Pathname	pass7.1							
Dataset Creation	Tue Dec 16 22:51:07 2014							
Microlog Calibration Report								
Serial-Model:			9151-Gerhart					
Performed:			Tue Dec 16 21:33:09 2014					
Readings			References				Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0200	0.4799	V	0.0000	10.0000	Ohm-m	21.7437	-0.4349
Inverse	-0.0019	0.6205	V	0.0000	6.5000	Ohm-m	10.4437	0.0199
Caliper	0.8560	1.8245	V	7.7000	13.0000	in	5.4720	3.0161
Gamma Ray Calibration Report								
Serial Number:			801					
Tool Model:			2.75POH					
Performed:			Tue Dec 16 21:39:17 2014					
Calibrator Value:			1.0		GAPI			
Background Reading:			0.0		cps			
Calibrator Reading:			1.0		cps			
Sensitivity:			0.8000		GAPI/cps			

Sensor	Offset (ft)	Schematic	Description	Length (ft)	O.D. (in)	Weight (lb)
GR	13.29		GR-2.75POH (801) Probe	3.73	2.75	43.00

