

TRIPLE COMBO LOG

Company	RITCHIE EXPLORATION, INC.	
Well	#1 SKILLEN TRUST 11B	
Field	WILDCAT	
County	KINGMAN	State KANSAS
Location:	API # : 15-095-22356-0000	Other Services CDL/CNL/DIL MEL/SONIC
Permanent Datum	GROUND LEVEL	Elevation 1398
Log Measured From	KELLY BUSHING 8' A.G.L	
Drilling Measured From	KELLY BUSHING	
Date	11/22/23	
Run Number	TWO	
Depth Driller	4555	
Depth Logger	4556	
Bottom Logged Interval	4554	
Top Log Interval	2700	1850-1750
Casing Driller	8.625@221	
Casing Logger	219	
Bit Size	7.785	
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 6,000 PPM
Density / Viscosity	9.5/80	
pH / Fluid Loss	10.0/10.4	
Source of Sample	FLOWLINE	
Rm @ Meas. Temp	.800@62F	
Rmf @ Meas. Temp	.600@62F	
Rmc @ Meas. Temp	.960@62F	
Source of Rmf / Rmc	MEASUREMENT	
Rm @ BHT	.410@121F	
Time Circulation Stopped	4 HOURS	
Time Logger on Bottom	12:45 P.M.	
Maximum Recorded Temperature	121F	
Equipment Number	922339	
Location	HAYS, KANSAS	
Recorded By	JEFF LUEBBERS	JEREMY PASEK
Witnessed By	JOHN GOLDSMITH	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-095-22356-0000


Comments

THANK YOU FOR USING ELI WIRELINE HAYS. KANSAS (785) 628-6395
DIRECTIONS
INTERSECTION OF HWY (14 & 54/400) 1/2S. UNDER OVERPASS TO STOP SIGN. CONTINUE S.
AND TAKE CURVE E. TO "SE 160 RD.", S. TO STOP SIGN, 1W., 1S., 1/2E., S. INTO



UPPER SECTION

0	Gamma Ray (GAPI)	150	MEL15	30	CN Porosity (pu)	-10	0.2	Deep Resistivity (Ohm-m)	2000
-100	SP (mV)	100	(Ohm-m)	30	Density Porosity (pu)	-10		Medium Resistivity	
-200	RxoRt	100	0	20	PE	20	0.2	(Ohm-m)	2000
6	DCAL (in)	16	MEL20		CORRECTION			Shallow Resistivity	
			(Ohm-m)		-0.25 (g/cc)	0.25	0.2	(Ohm-m)	2000
			0	20					
			TBHV (ft3)						
			ABHV (ft3)						

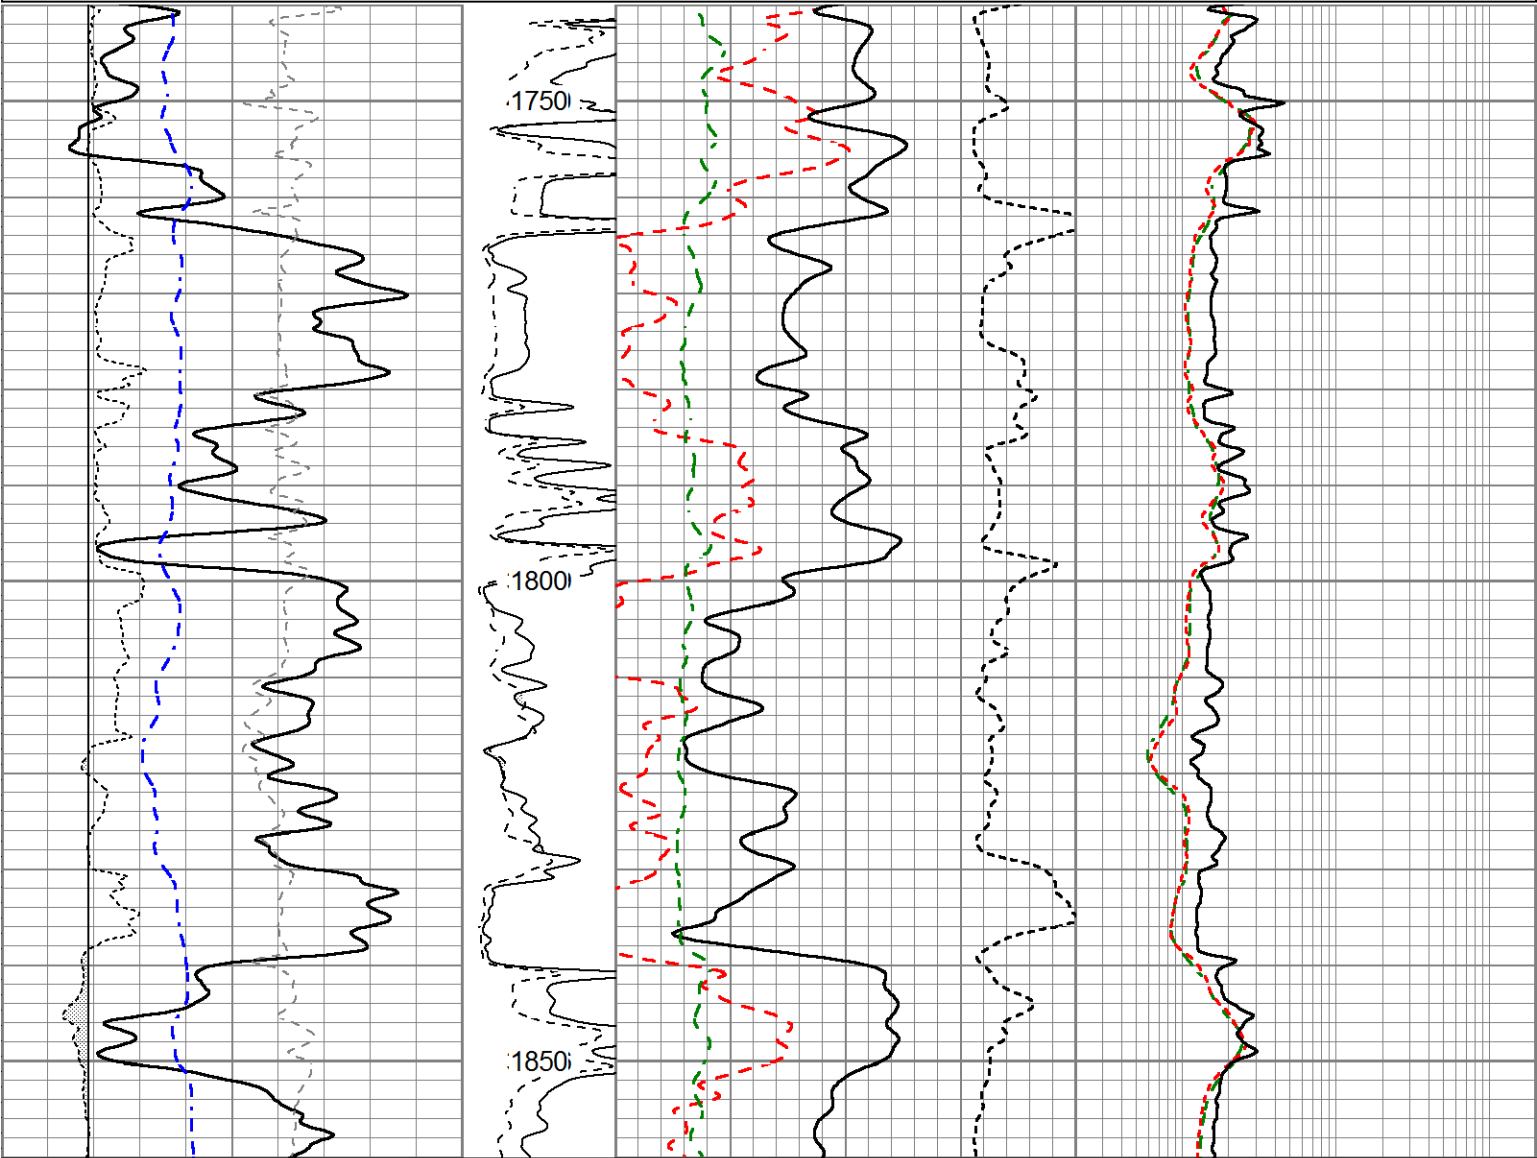

0	Gamma Ray (GAPI)	150	MEL15	30	CN Porosity (pu)	-10	0.2	Deep Resistivity (Ohm-m)	2000
-100	SP (mV)	100	(Ohm-m)	30	Density Porosity (pu)	-10		Medium Resistivity	
-200	RxoRt	100	0	20	PE	20	0.2	(Ohm-m)	2000
6	DCAL (in)	16	MEL20		CORRECTION			Shallow Resistivity	
			(Ohm-m)		-0.25 (g/cc)	0.25	0.2	(Ohm-m)	2000
			0	20					
			TBHV (ft3)						
			ABHV (ft3)						



MAIN SECTION

Database File 8340ddn.db
Dataset Pathname pass3.1C
Presentation Format _ritchie
Dataset Creation Wed Nov 22 14:37:16 2023
Charted by Depth in Feet scaled 1:240

0	Gamma Ray (GAPI)	150	MEL15	30	CN Porosity (pu)	-10	0.2	Deep Resistivity (Ohm-m)	2000
-100	SP (mV)	100	(Ohm-m)	30	Density Porosity (pu)	-10		Medium Resistivity	
-200	RxoRt	100	0 20				0.2	(Ohm-m)	2000
6	DCAL (in)	16	MEL20		CORRECTION			Shallow Resistivity	
			(Ohm-m)		-0.25 (g/cc) 0.25		0.2	(Ohm-m)	2000
			0 20						

