



# DUAL INDUCTION LOG

**Company** JOE GERSTNER OIL, LLC  
**Well** MYERS #1  
**Field** BEECHING EAST  
**County** RUSH **State** KANSAS

**Location:** API #: 15-165-22185-0000  
 943 FSL & 2022 FEL  
 SE - NW - SW - SE  
 SEC 1 TWP 16S RGE 16W  
**Permanent Datum** GROUND LEVEL Elevation 1926  
**Log Measured From** KELLY BUSHING 7' A.G.L  
**Drilling Measured From** KELLY BUSHING  
**Other Services** CDL/CNL  
 PE/MEL  
**Elevation** K.B. 1933  
 D.F. 1931  
 G.L. 1926

Date	1/11/24
Run Number	ONE
Depth Driller	3650
Depth Logger	3650
Bottom Logged Interval	3648
Top Log Interval	00
Casing Driller	8.625 @ 1021
Casing Logger	1021
Bit Size	7.875
Type Fluid in Hole	CHEMICAL MUD
Density / Viscosity	8.85/50
PH / Fluid Loss	11.0/8.0
Source of Sample	FLOWLINE
Rm @ Meas. Temp	.900 @ 65F
Rmt @ Meas. Temp	.675 @ 65F
Rmc @ Meas. Temp	1.08 @ 65F
Source of Rmf / Rmc	MEASUREMENT
Rm @ BHT	.518 @ 113F
Time Circulation Stopped	2 HOURS
Time Logger on Bottom	9:30 P.M.
Maximum Recorded Temperature	113F
Equipment Number	3802
Location	HAYS, KANSAS
Recorded By	COLE ROBBEN
Witnessed By	ANDREW STENZEL

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

### Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. ( 785 ) 628-6395

### DIRECTIONS:

FROM GORHAM EXIT OFF I70 GO SOUTH TO RUSH COUNTY LINE AT T IN ROAD, 2 MILES WEST TO 'CR390', 1 MILE SOUTH TO 'B' ROAD, 3/4 MILE EAST, NORTH INTO








# MAIN SECTION



Database File 7060pe.db  
 Dataset Pathname pass4M  
 Presentation Format \_dil2  
 Dataset Creation Thu Jan 11 23:01:12 2024  
 Charted by Depth in Feet scaled 1:600



0 Gamma Ray (GAPI) 150  
 -100 SP (mV) 100



1000 CILD (mmho/m) 0  
 0 RLL3 (Ohm-m) 50  
 0 Deep Induction (Ohm-m) 50  
 50 RILD X10 (Ohm-m) 500  
 50 RLL3 X10 (Ohm-m) 500

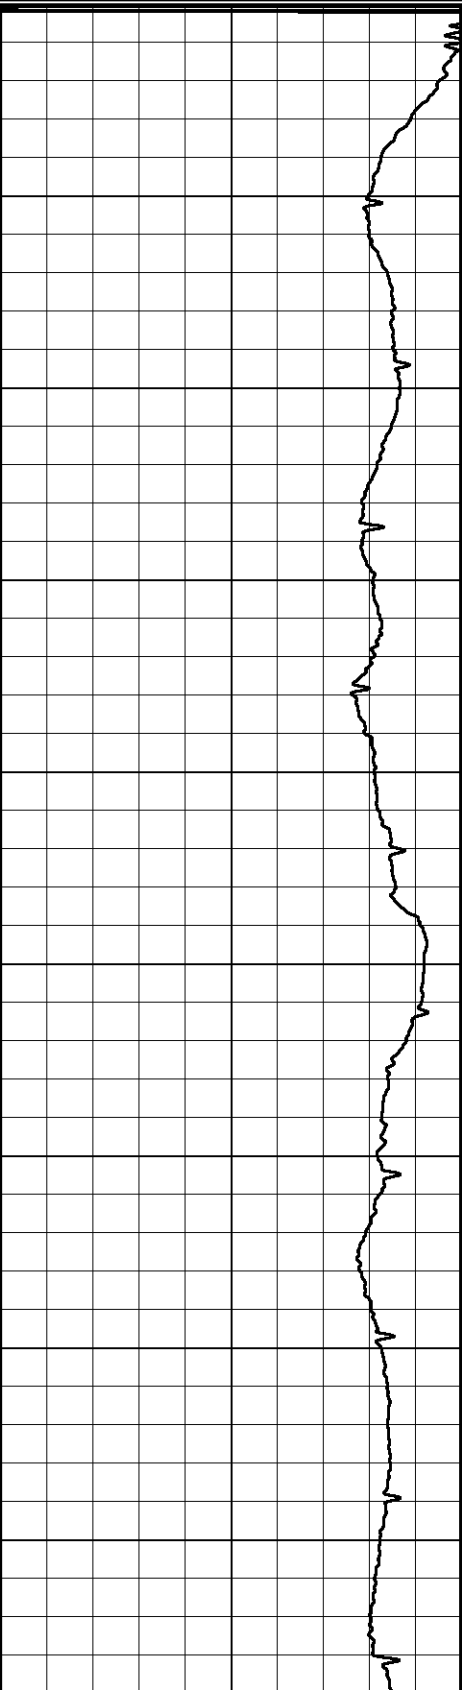
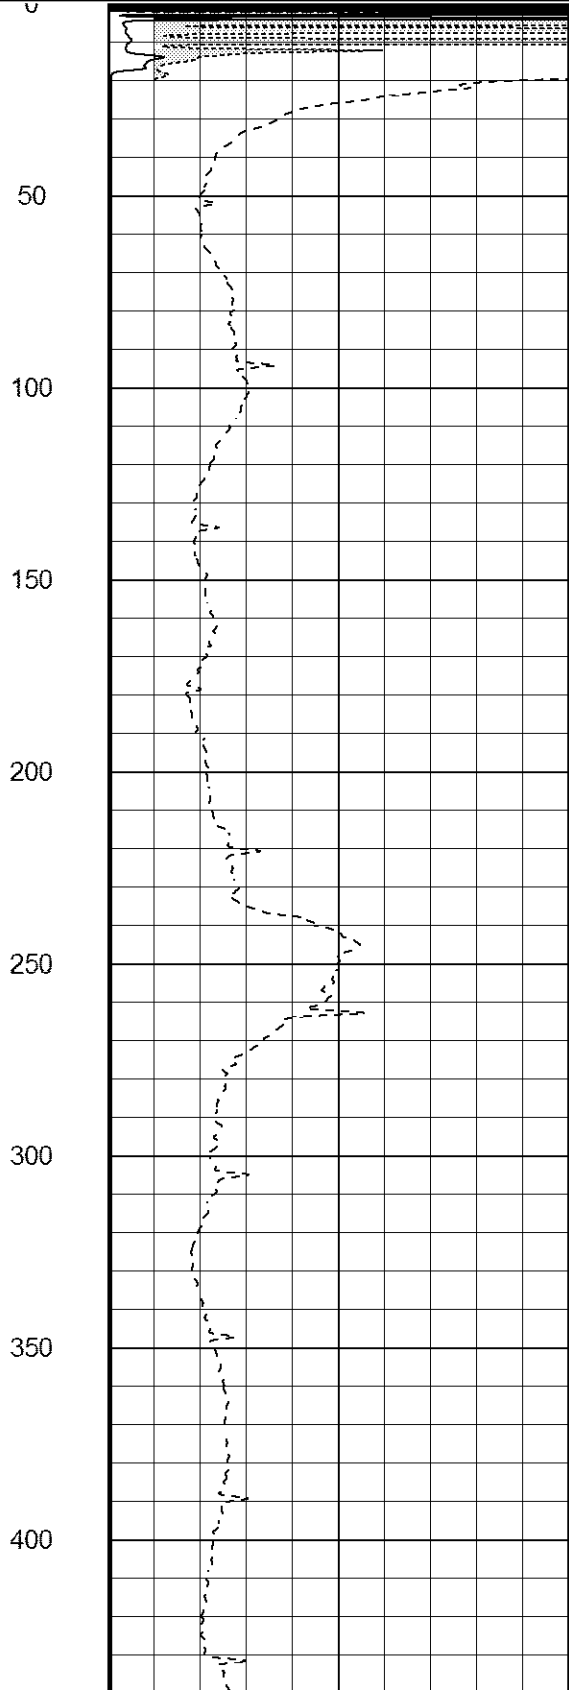
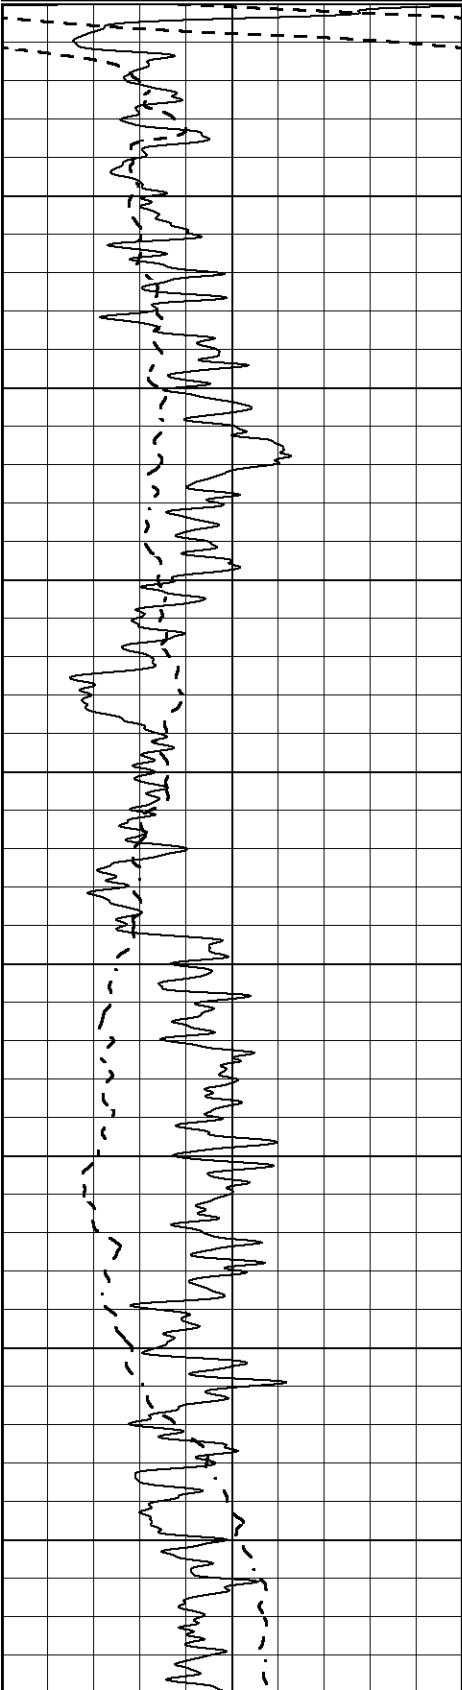


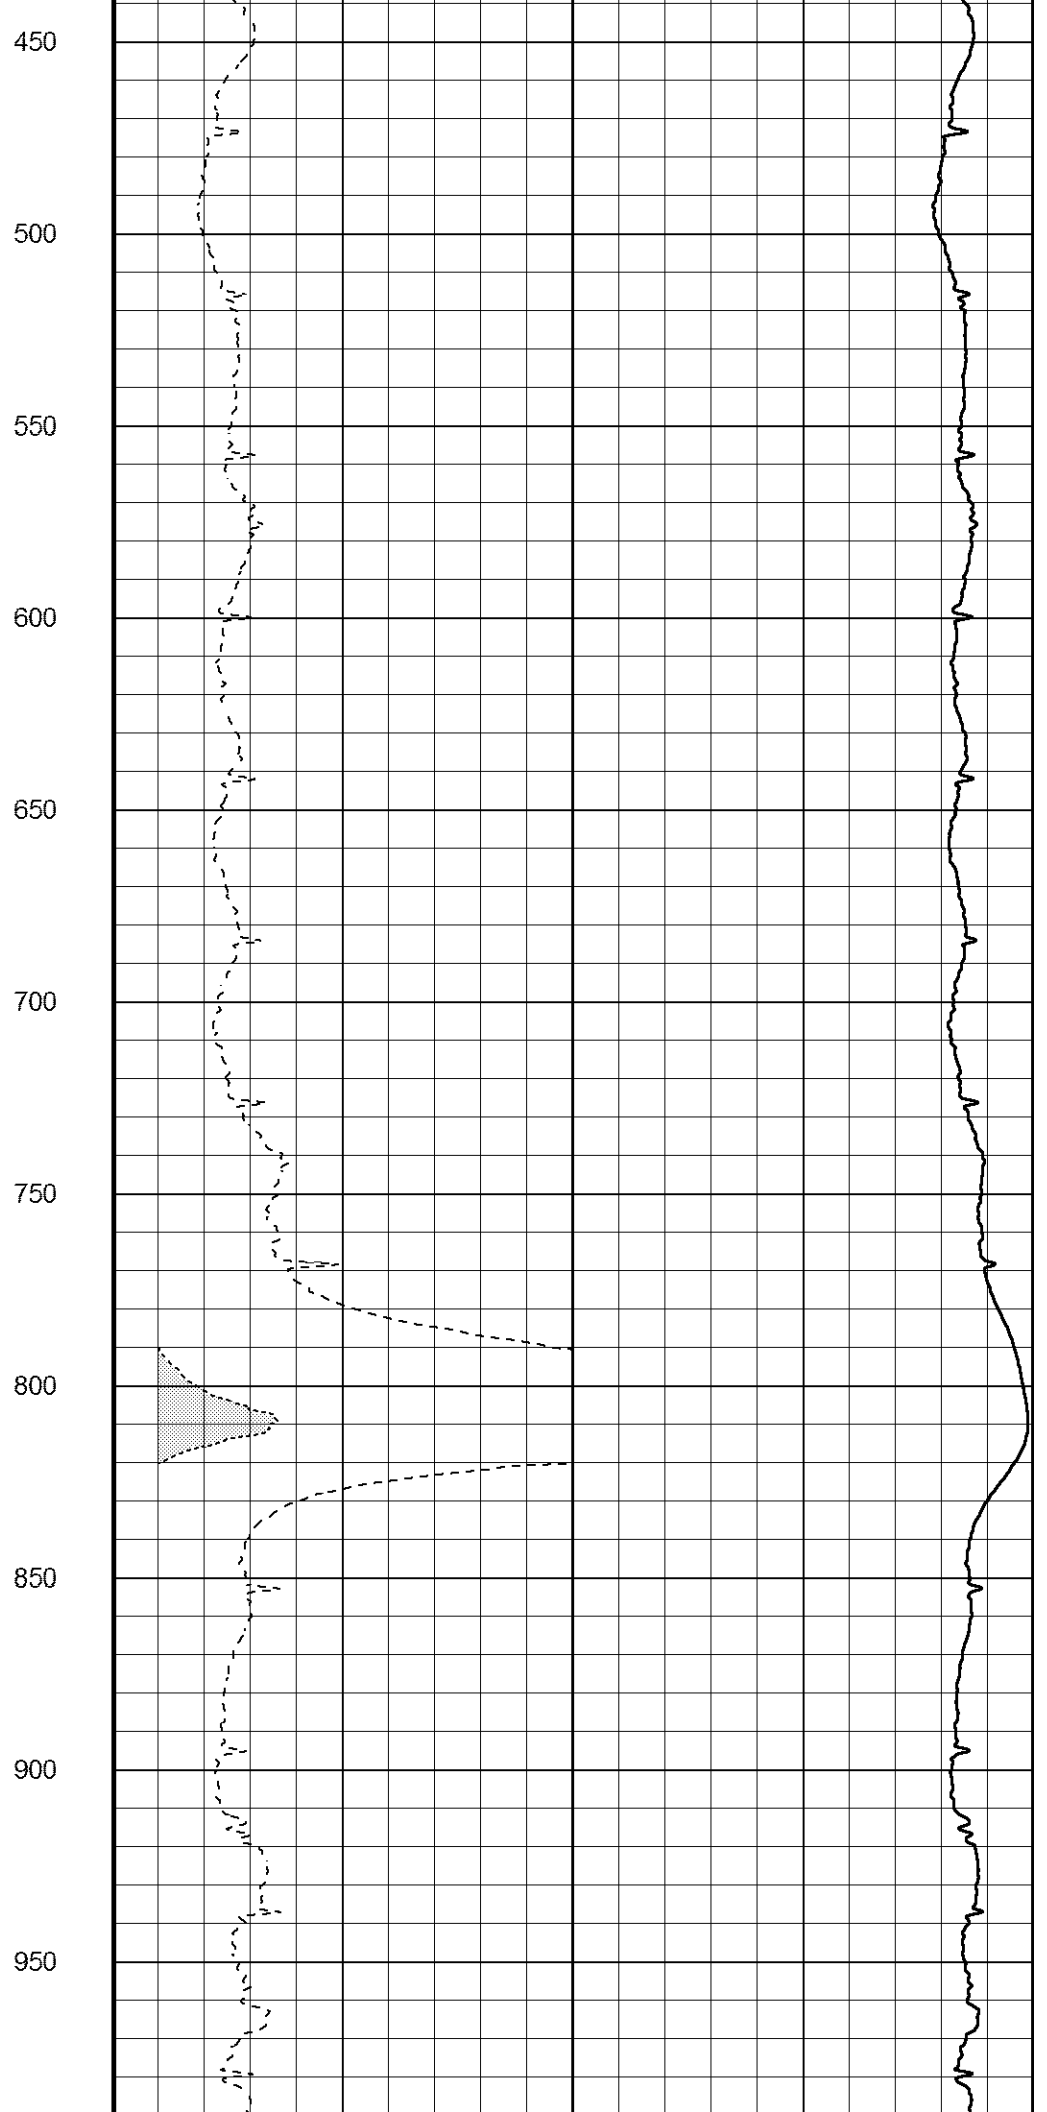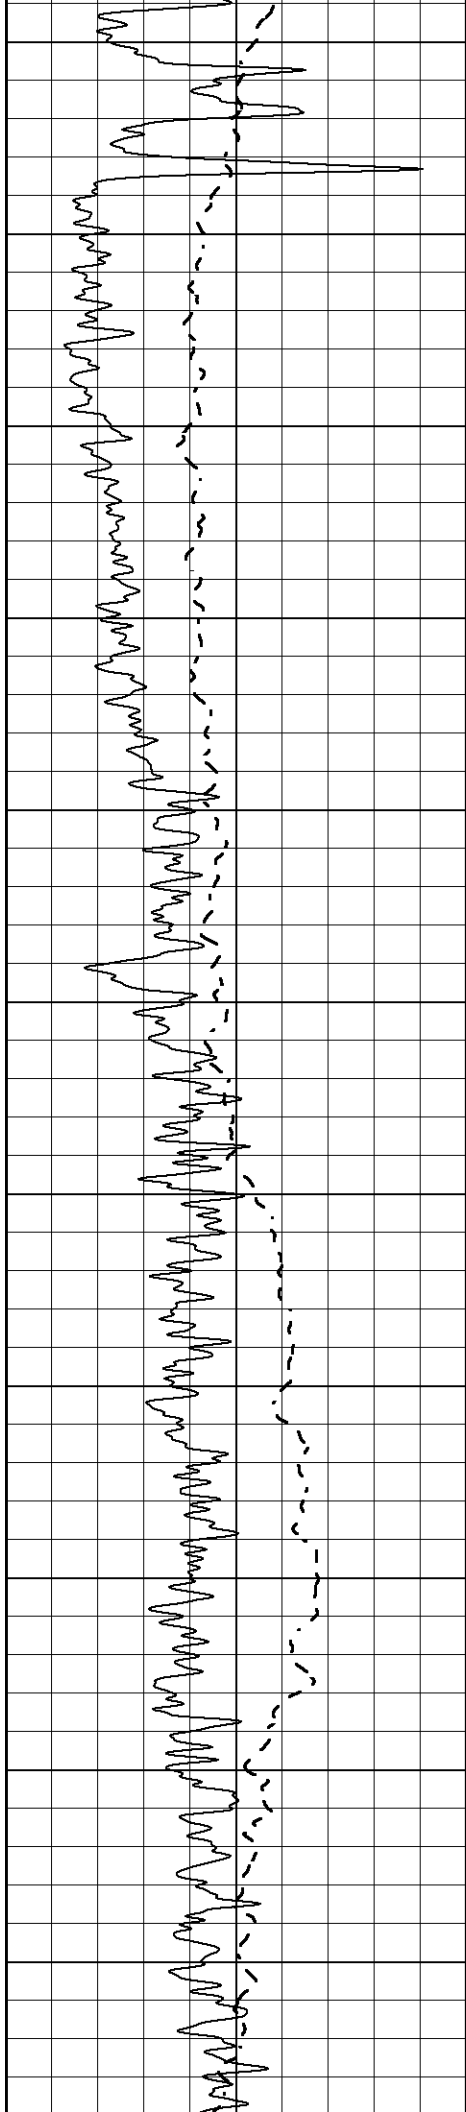


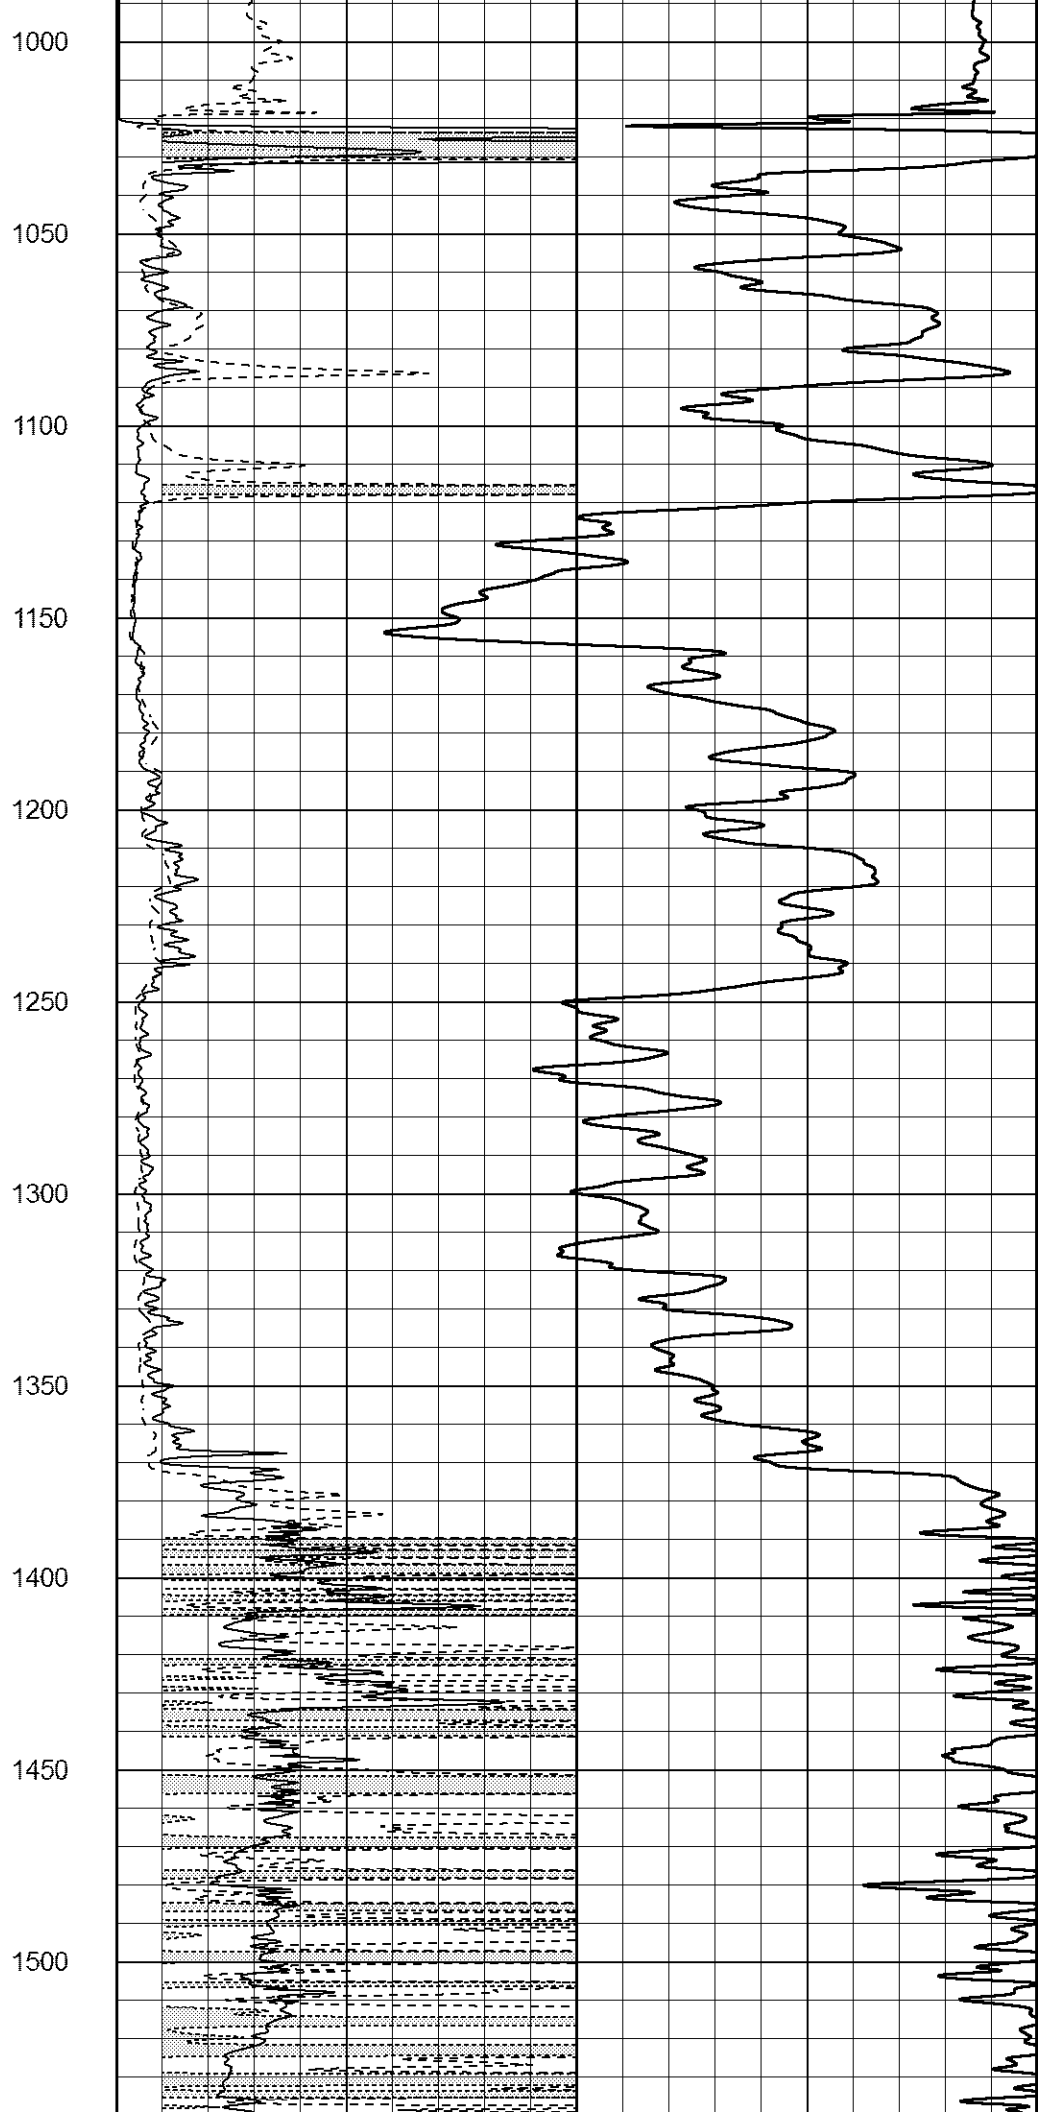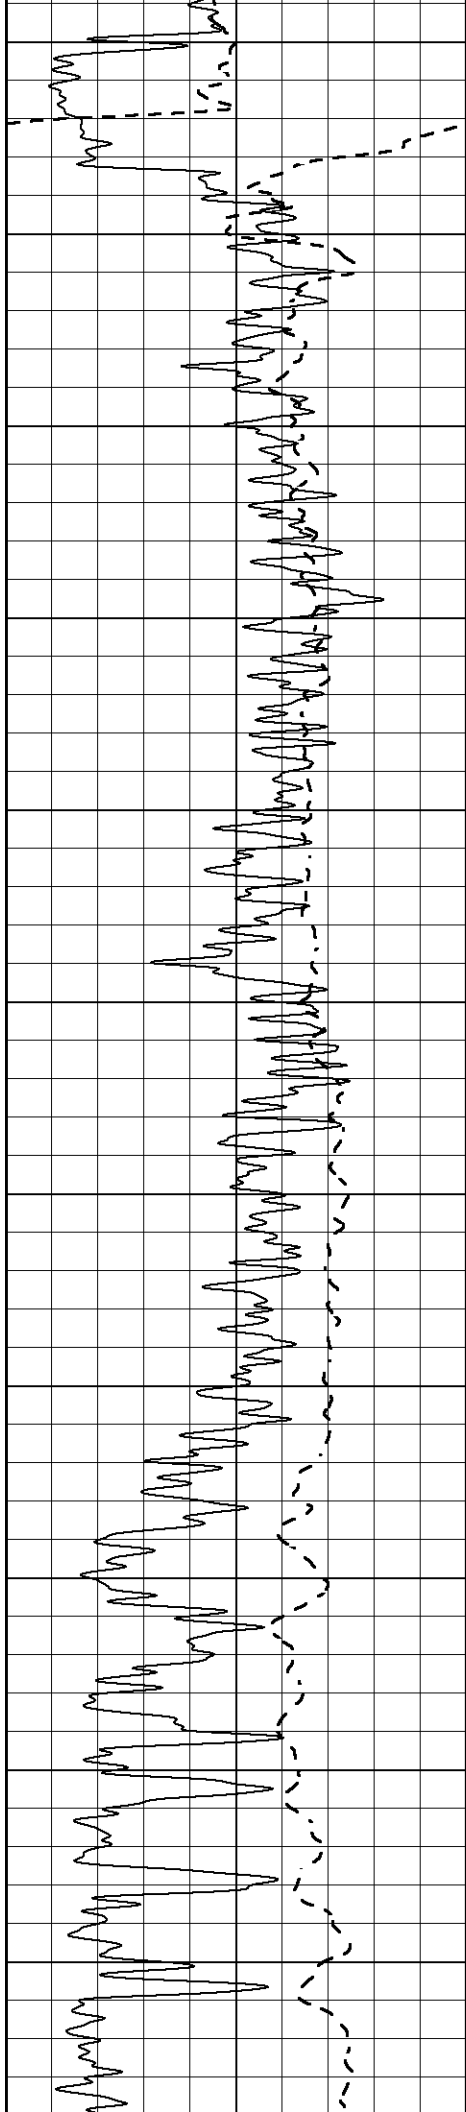

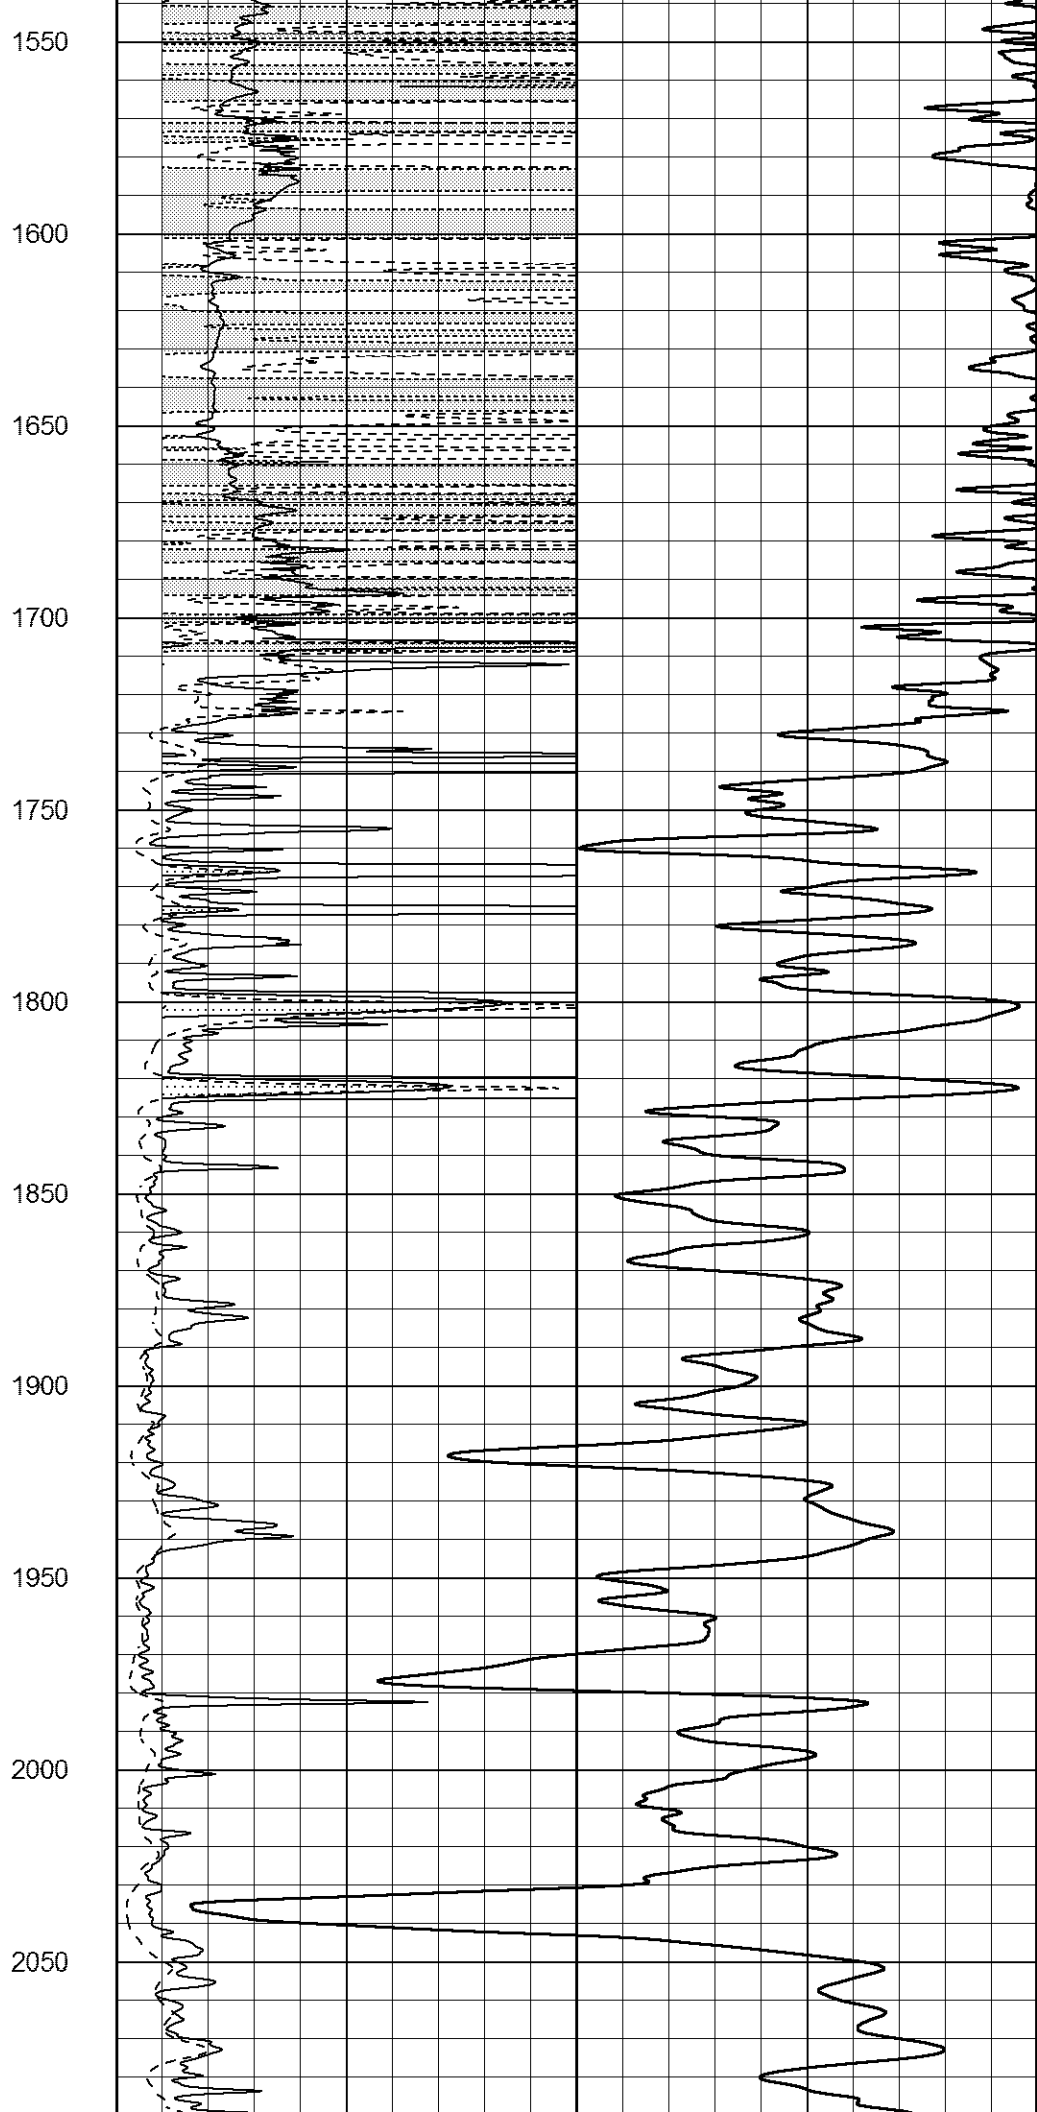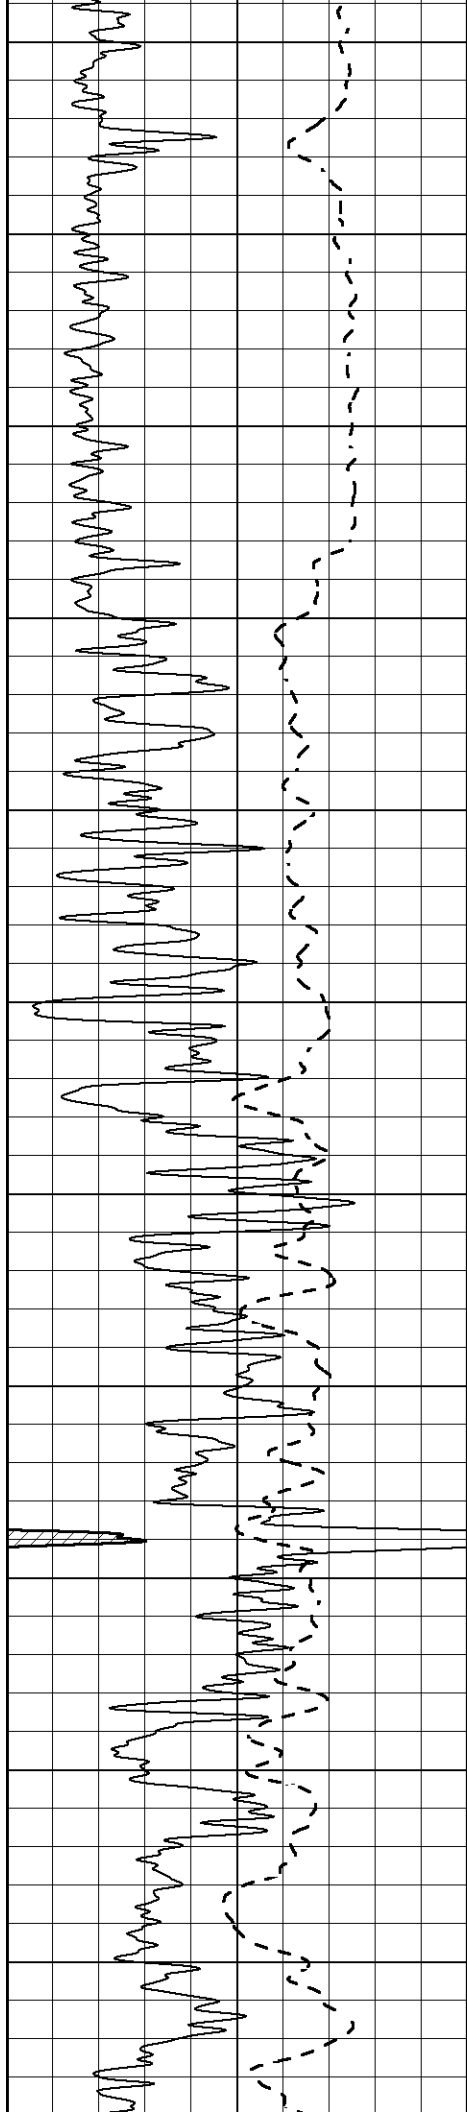


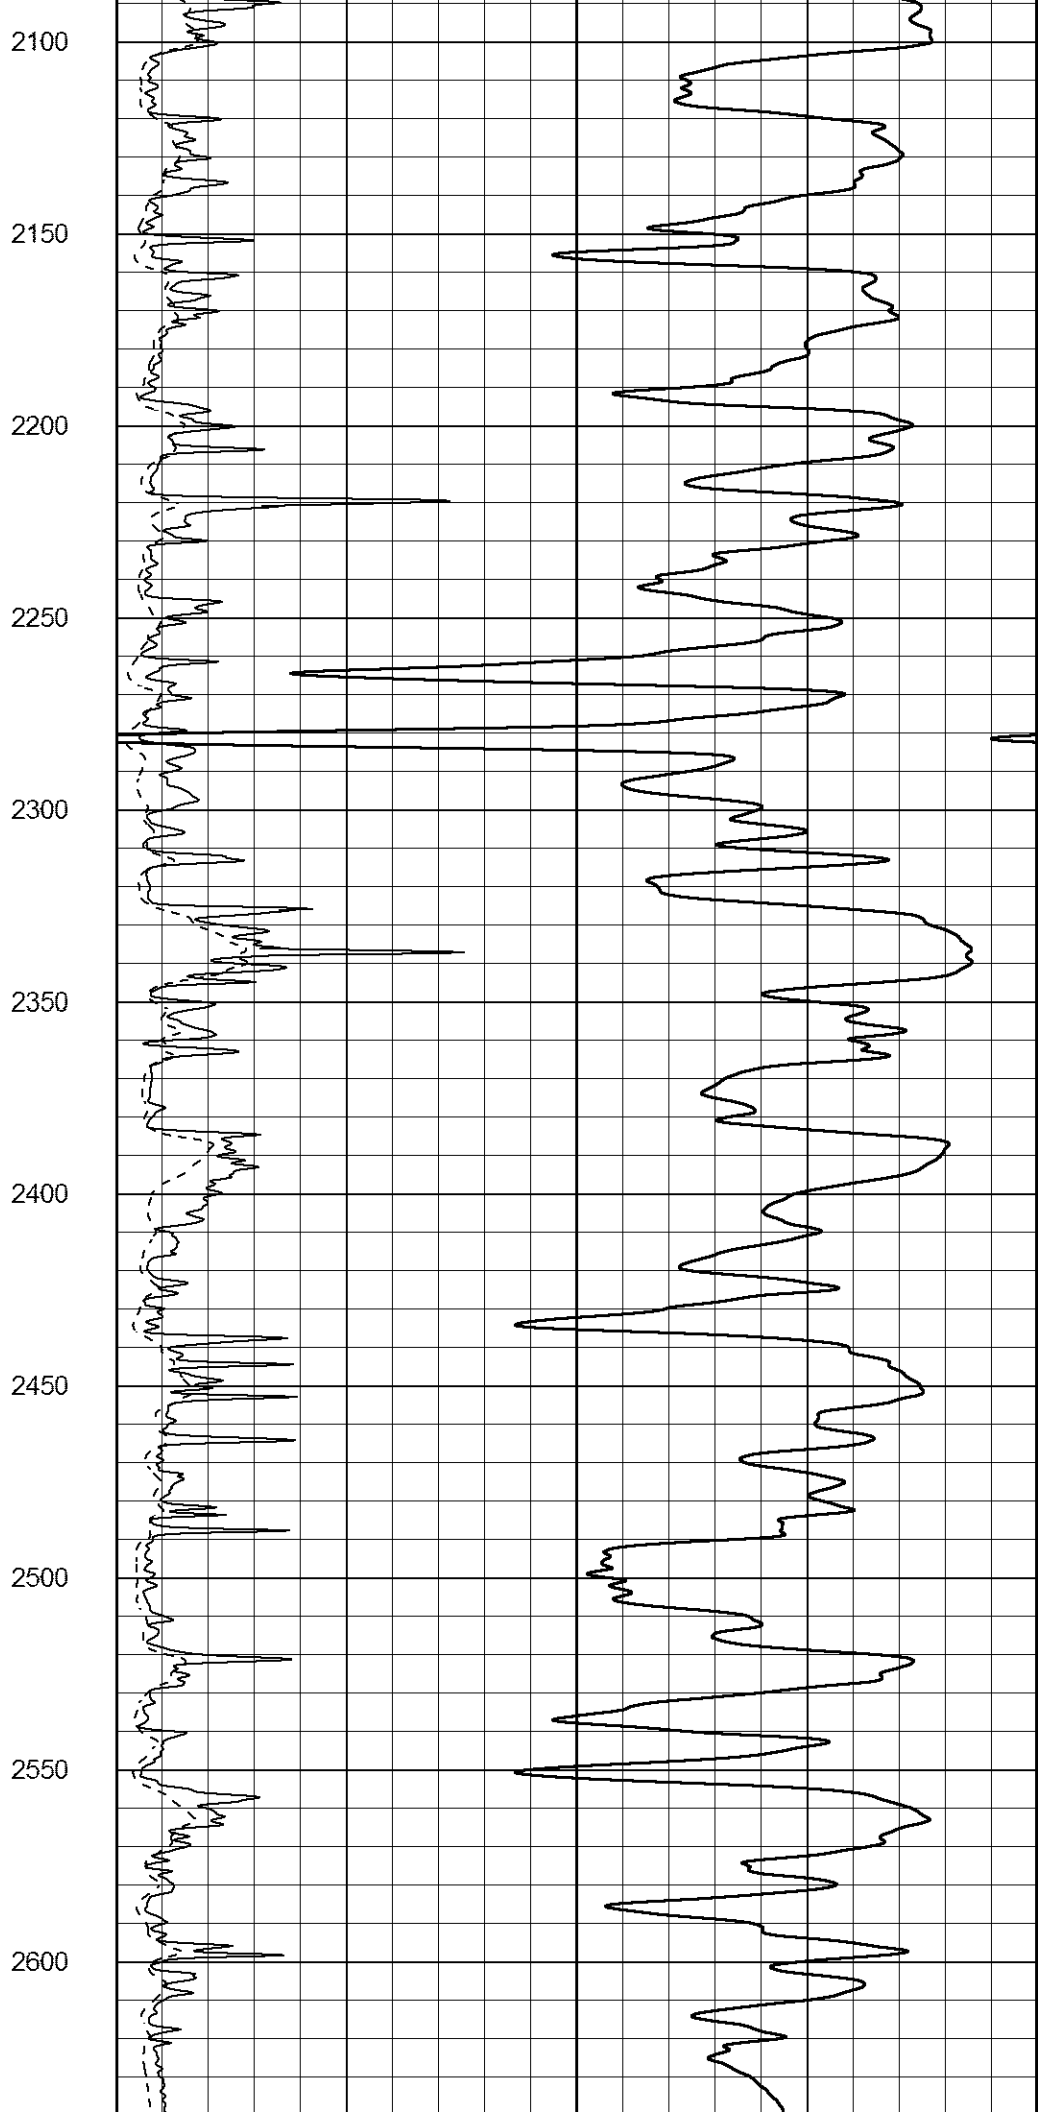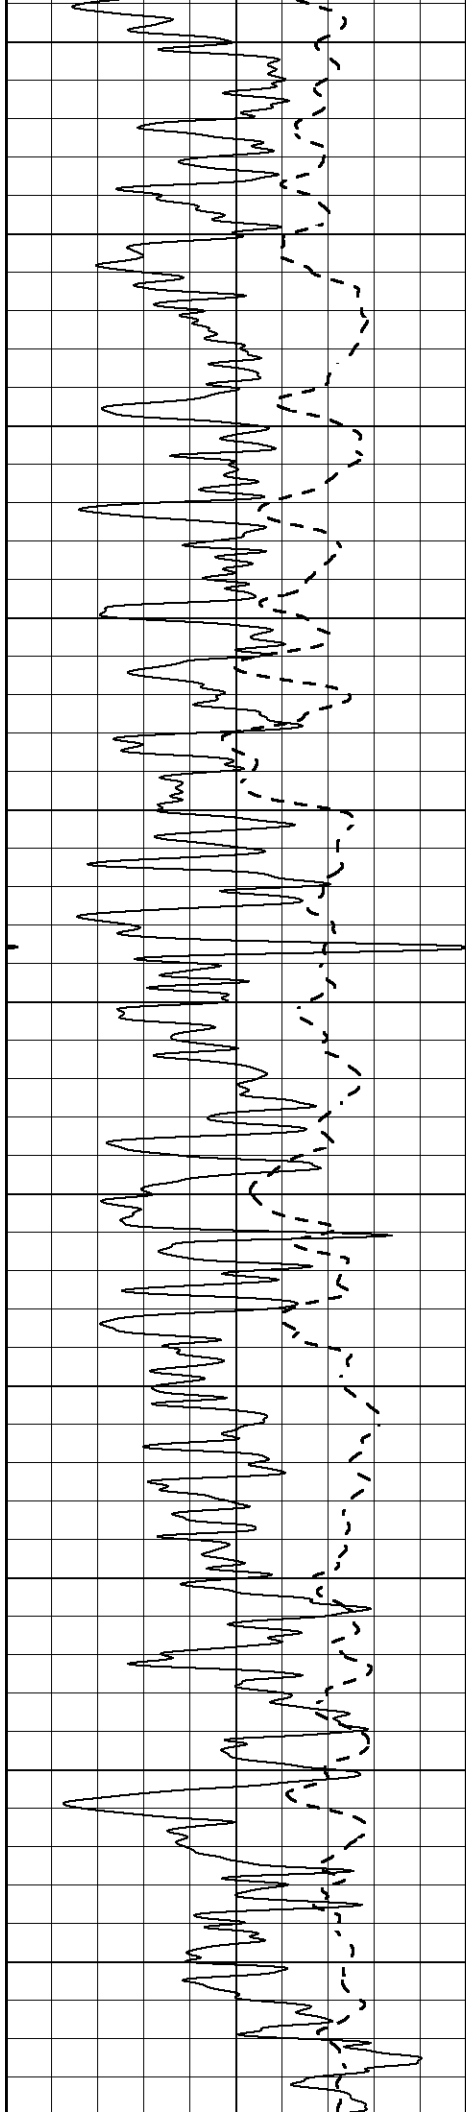

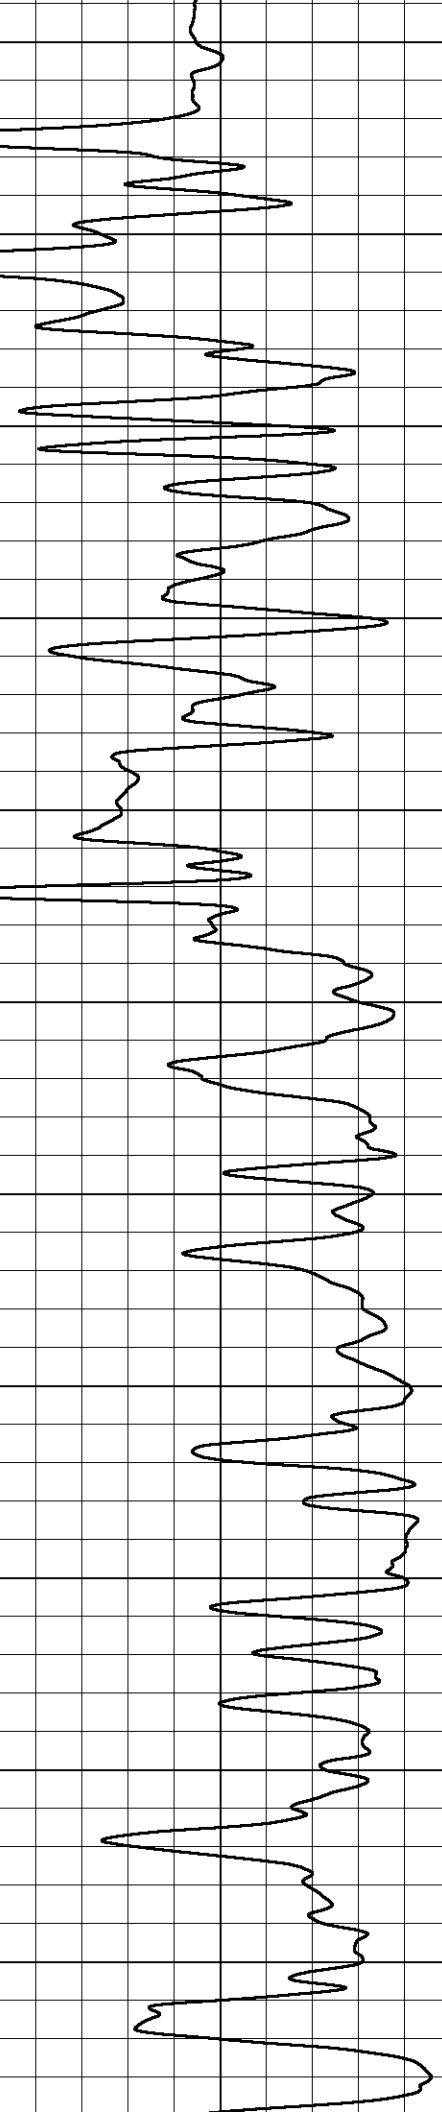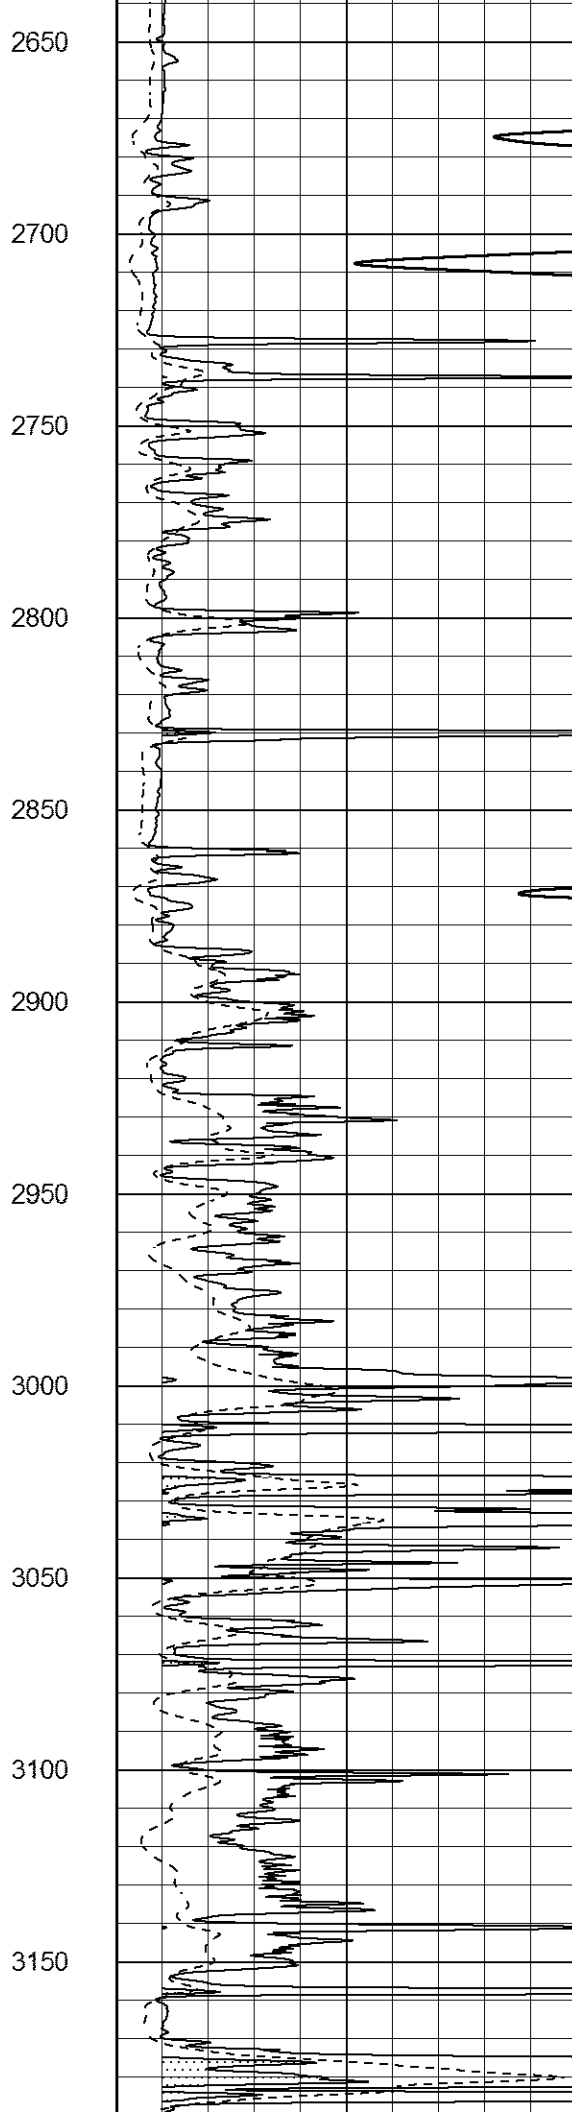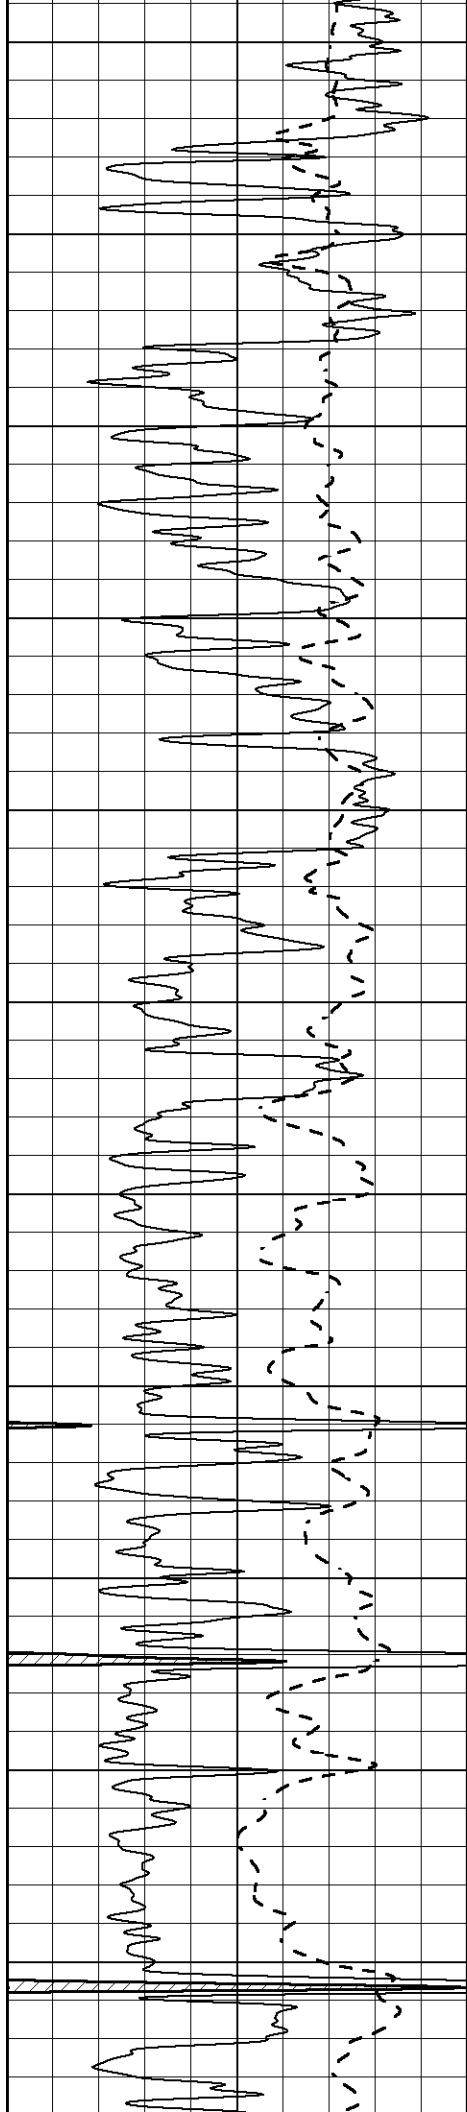


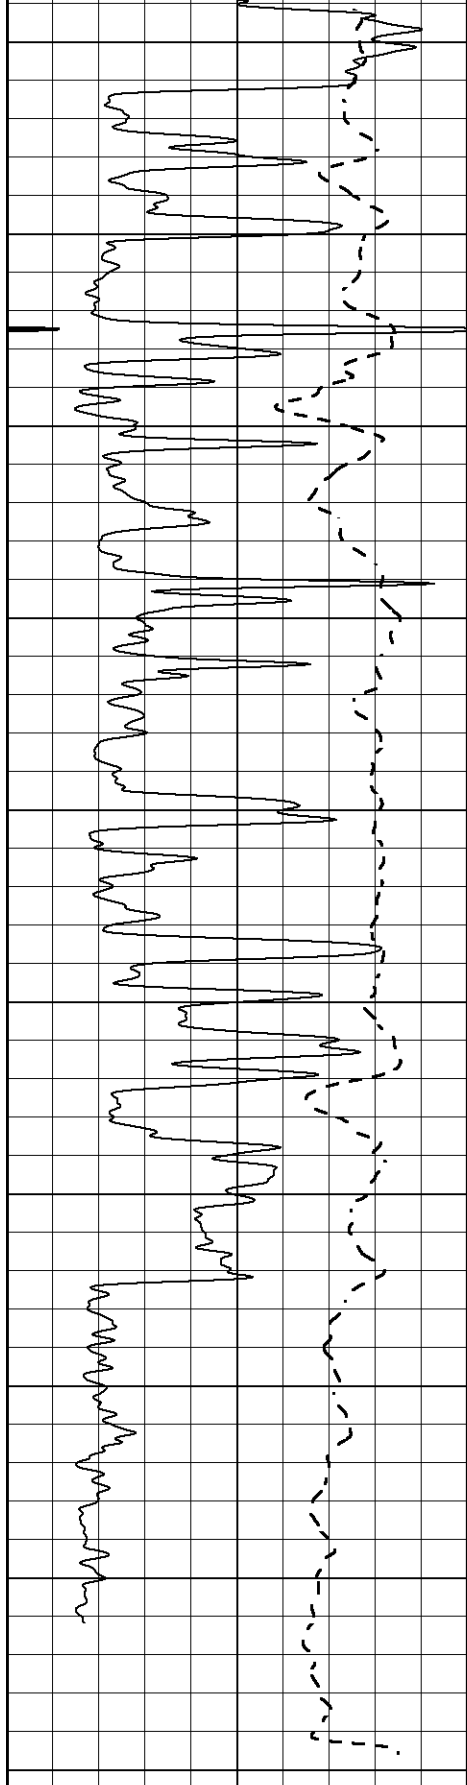


0	Gamma Ray (GAPI)	150
-100	SP (mV)	100

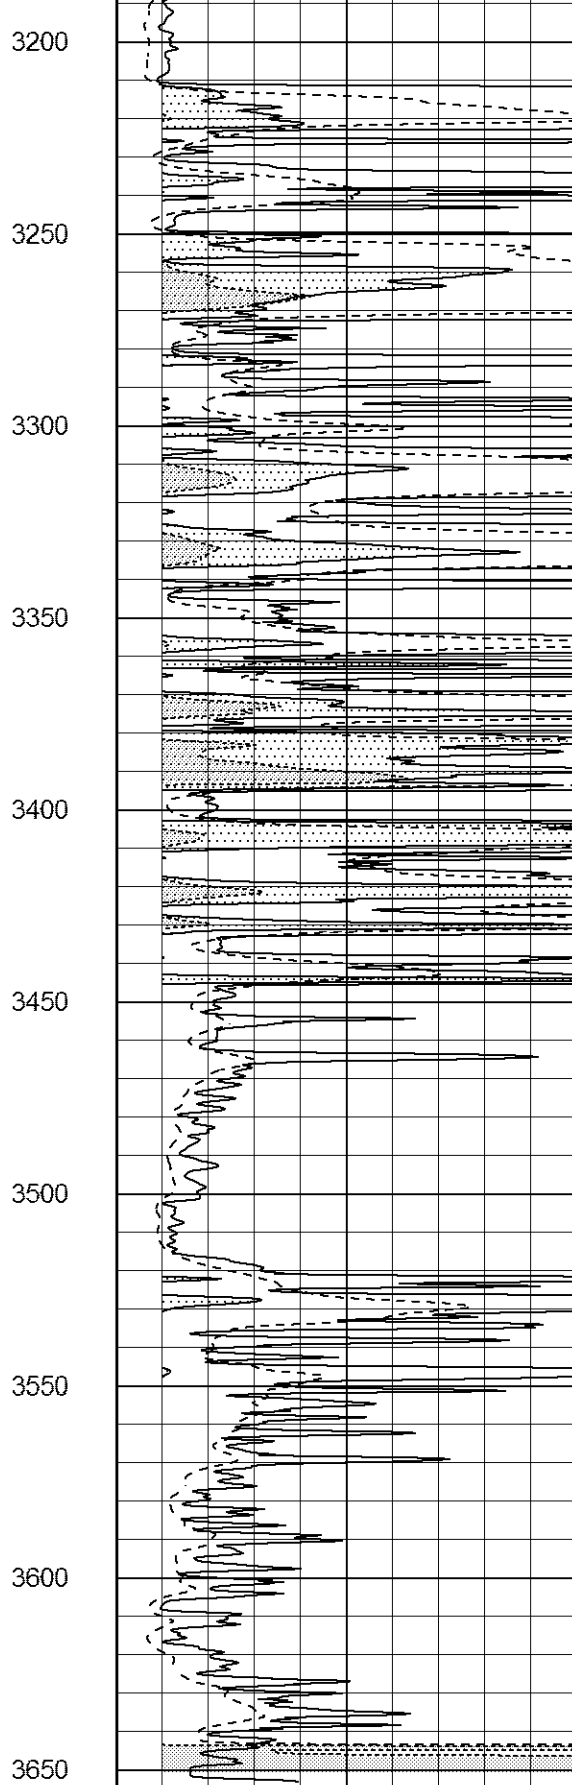

1000	CILD (mmho/m)	0
0	RLL3 (Ohm-m)	50
0	Deep Induction (Ohm-m)	50
50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

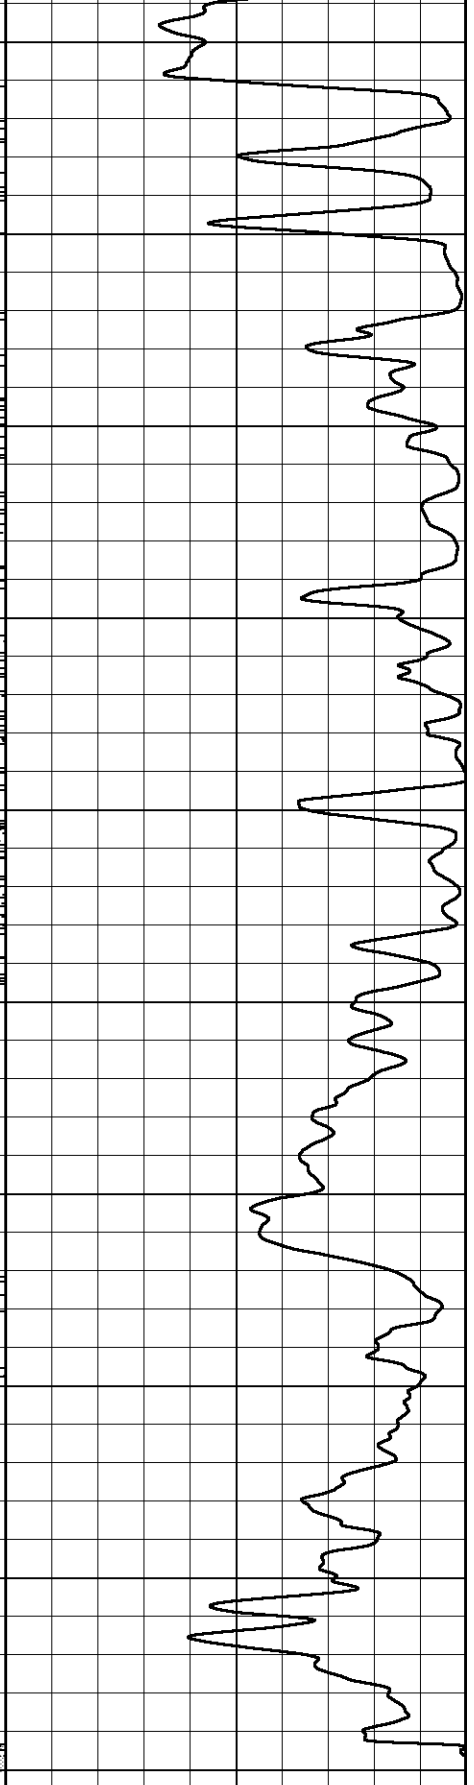

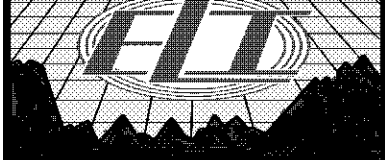


# ANHYDRITE

Database File 7060pe.db  
 Dataset Pathname pass4A  
 Presentation Format \_dil  
 Dataset Creation Thu Jan 11 23:07:45 2024  
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

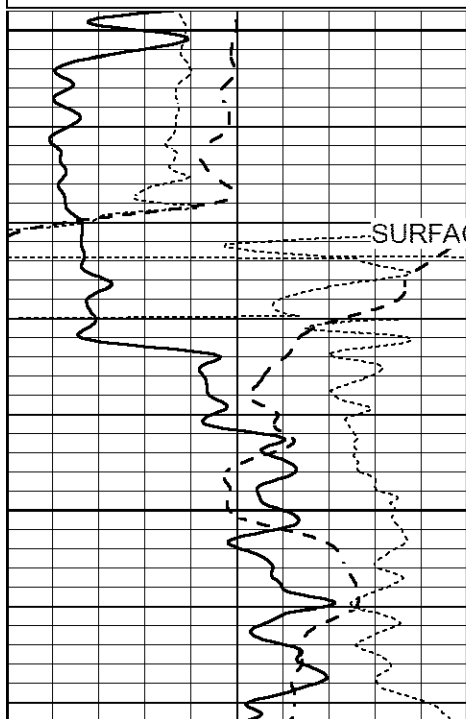

1000

SURFACE CASING @ 1021

1050

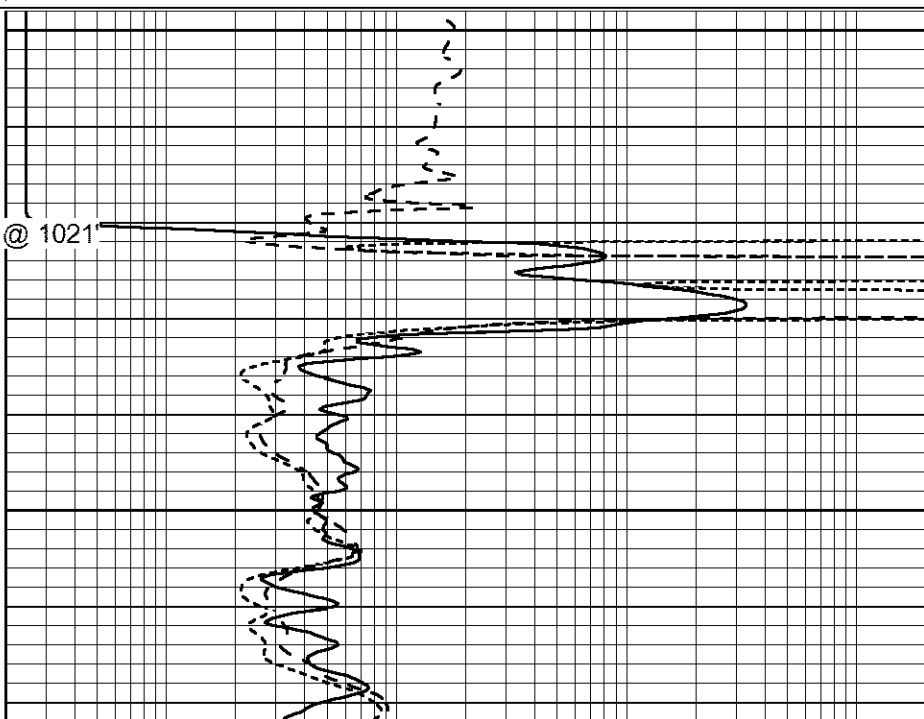

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000




# MAIN SECTION


Database File 7060pe.db  
 Dataset Pathname pass4D  
 Presentation Format \_dil  
 Dataset Creation Thu Jan 11 22:33:07 2024  
 Charted by Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

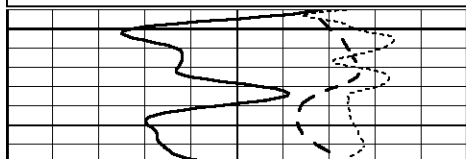

2800

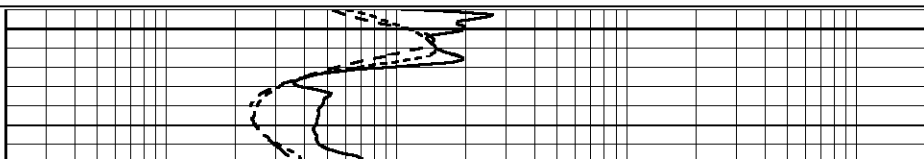

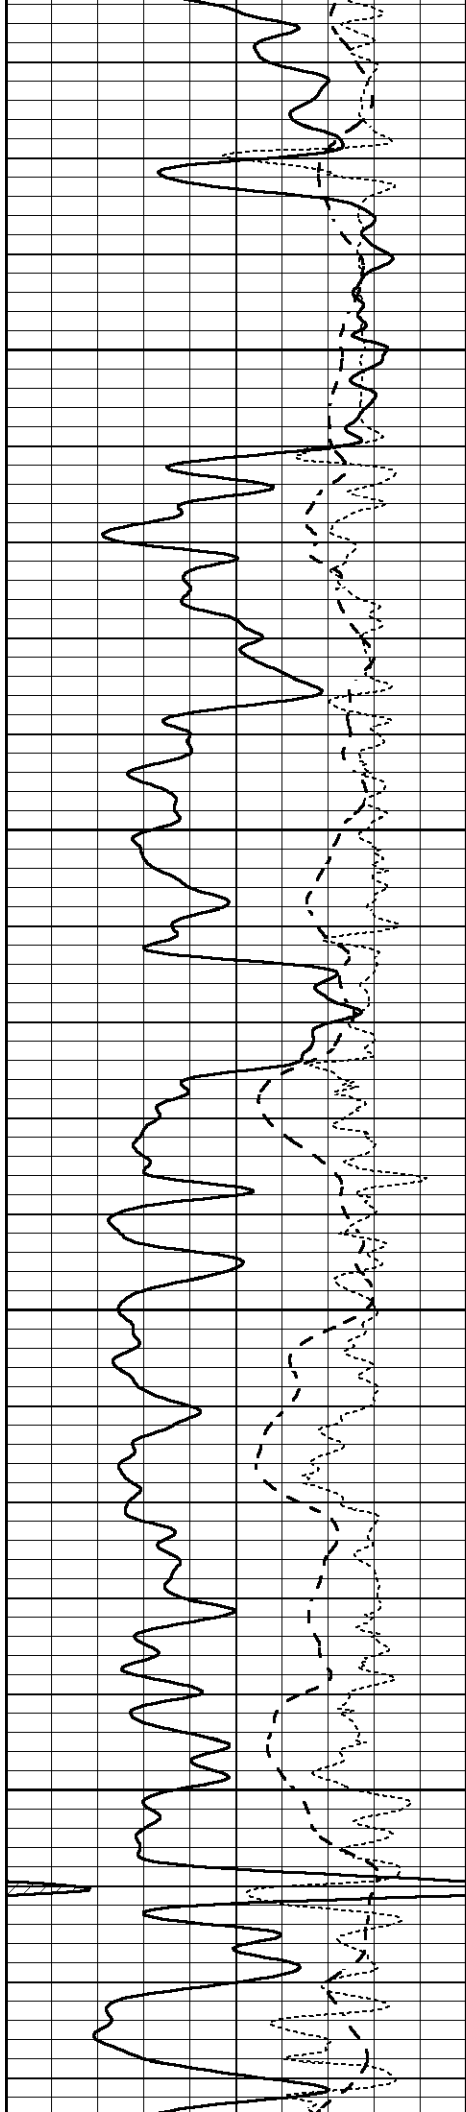



2850

2900

2950

3000

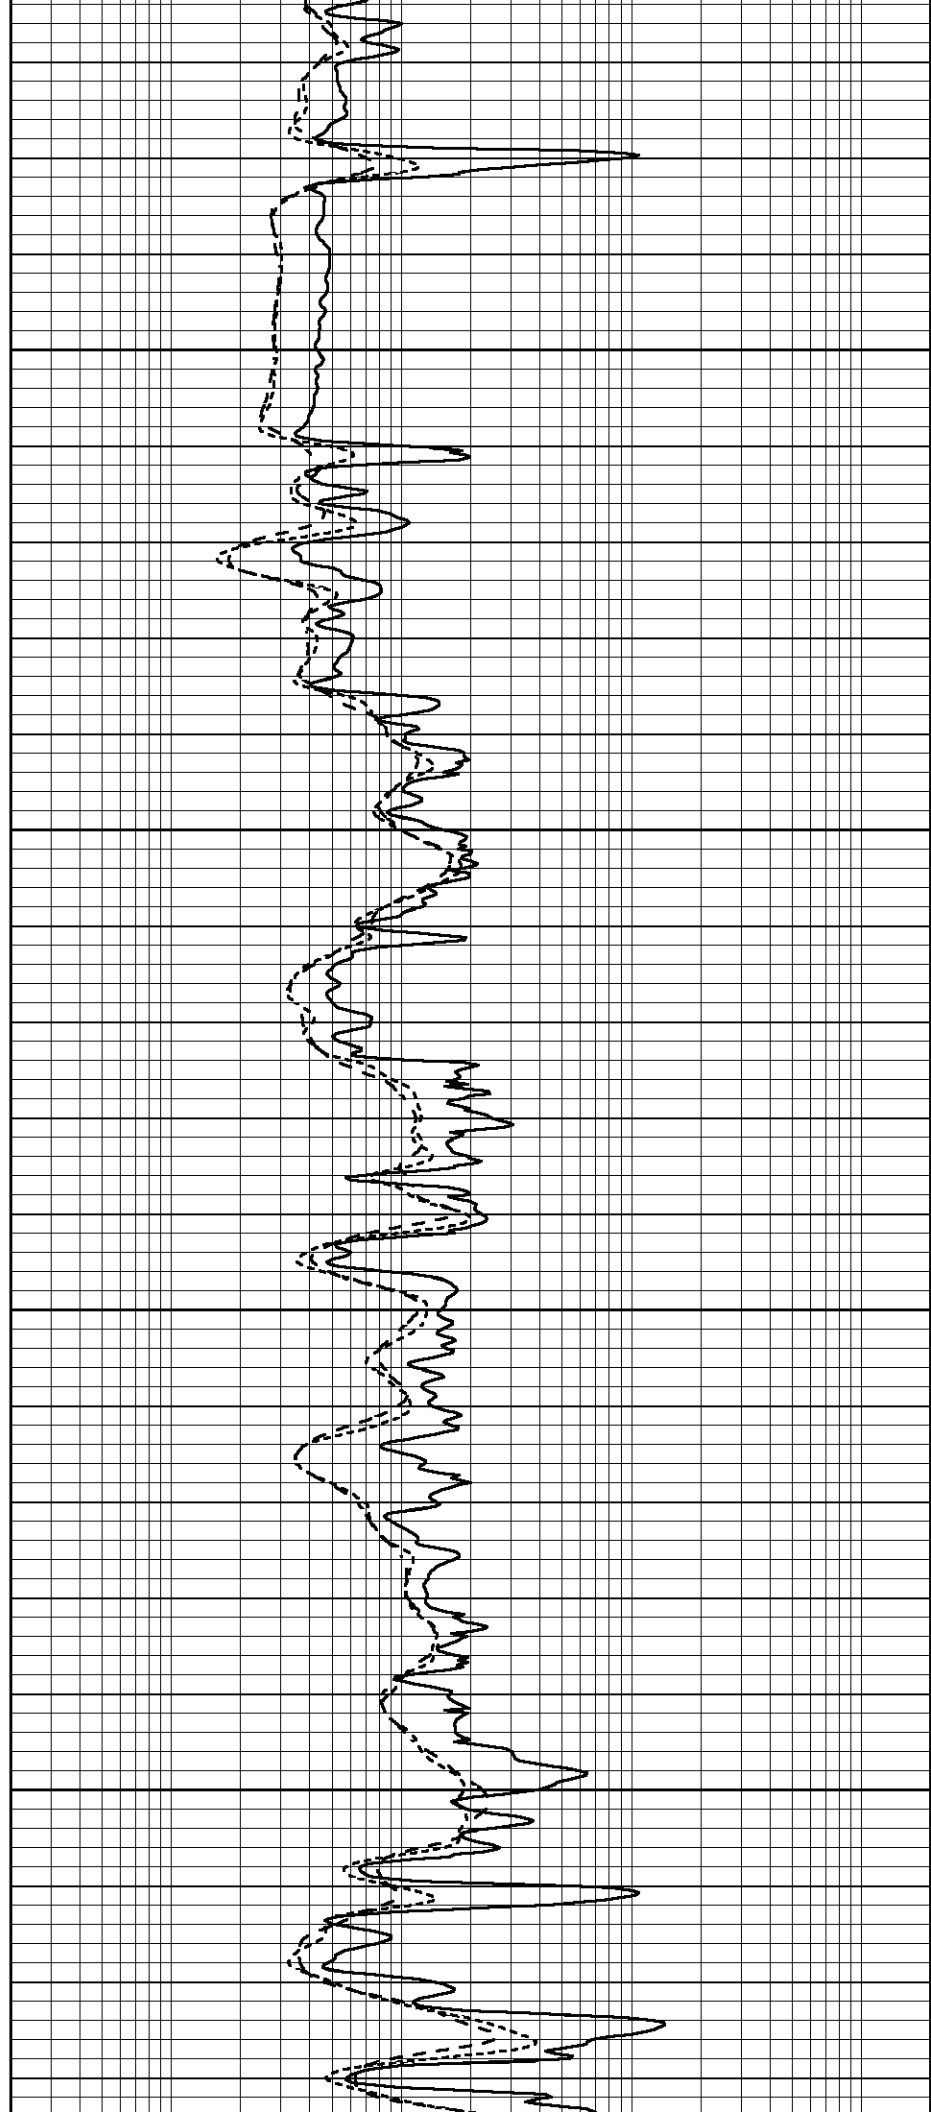

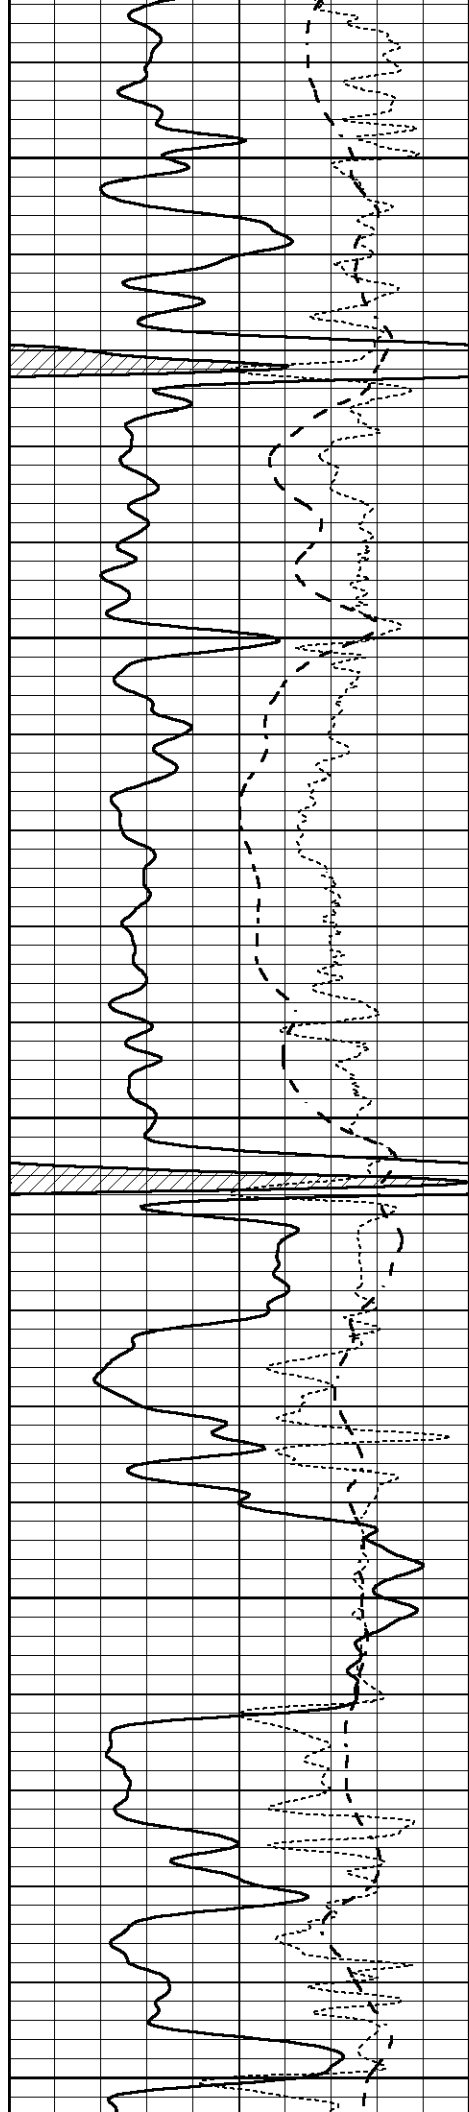


3050


3100

3150

3200

3250

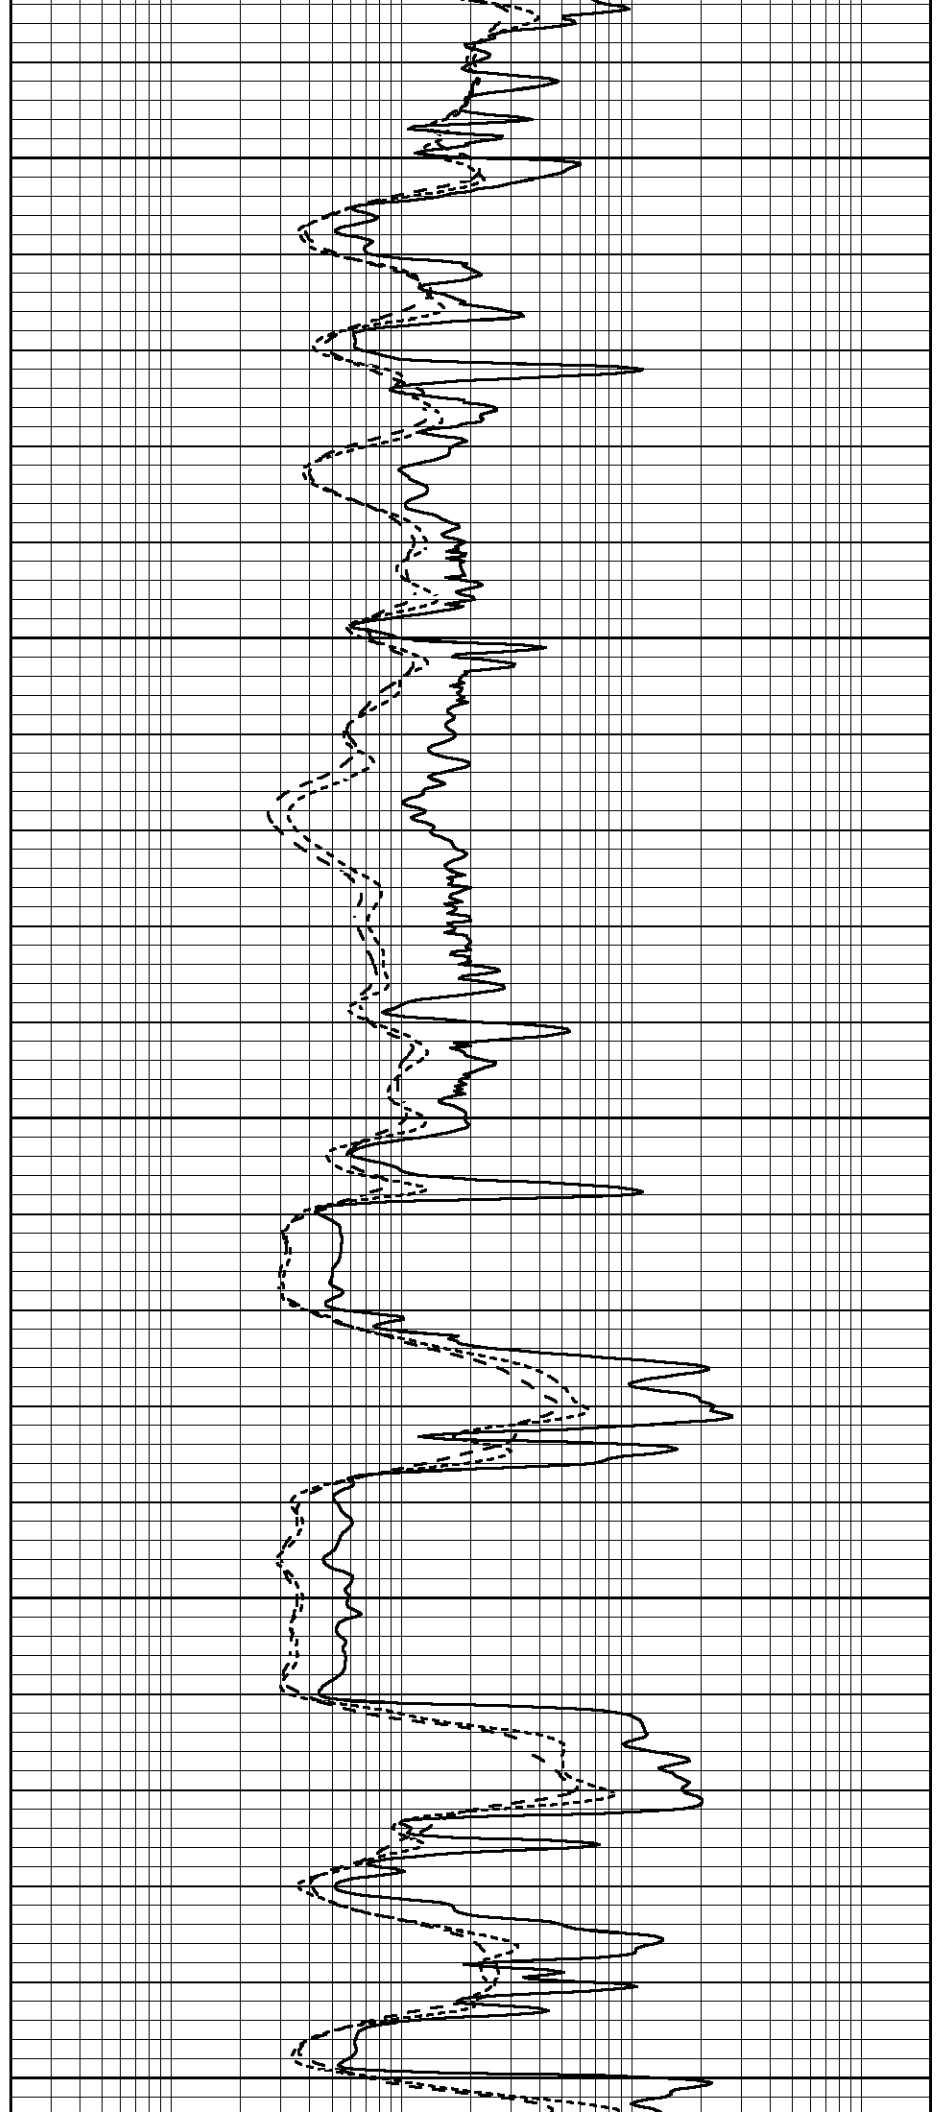

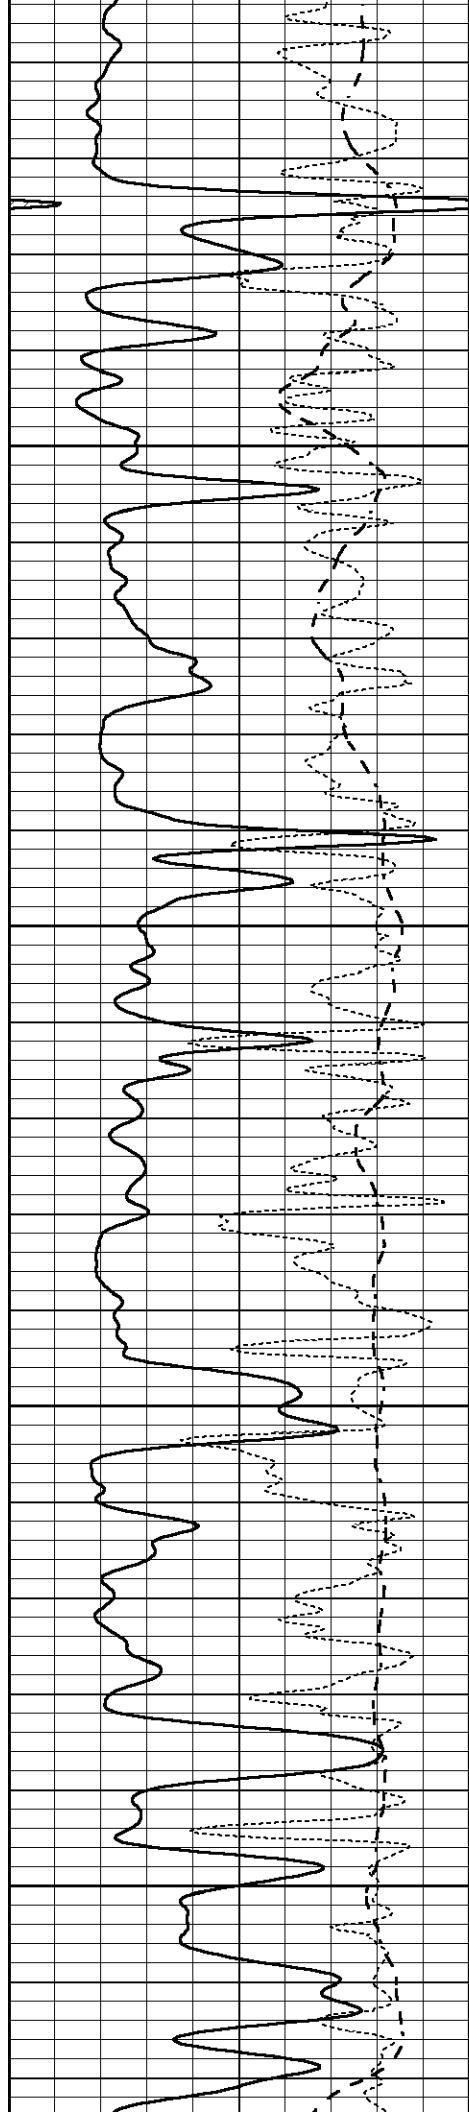




3300

3350

3400

3450

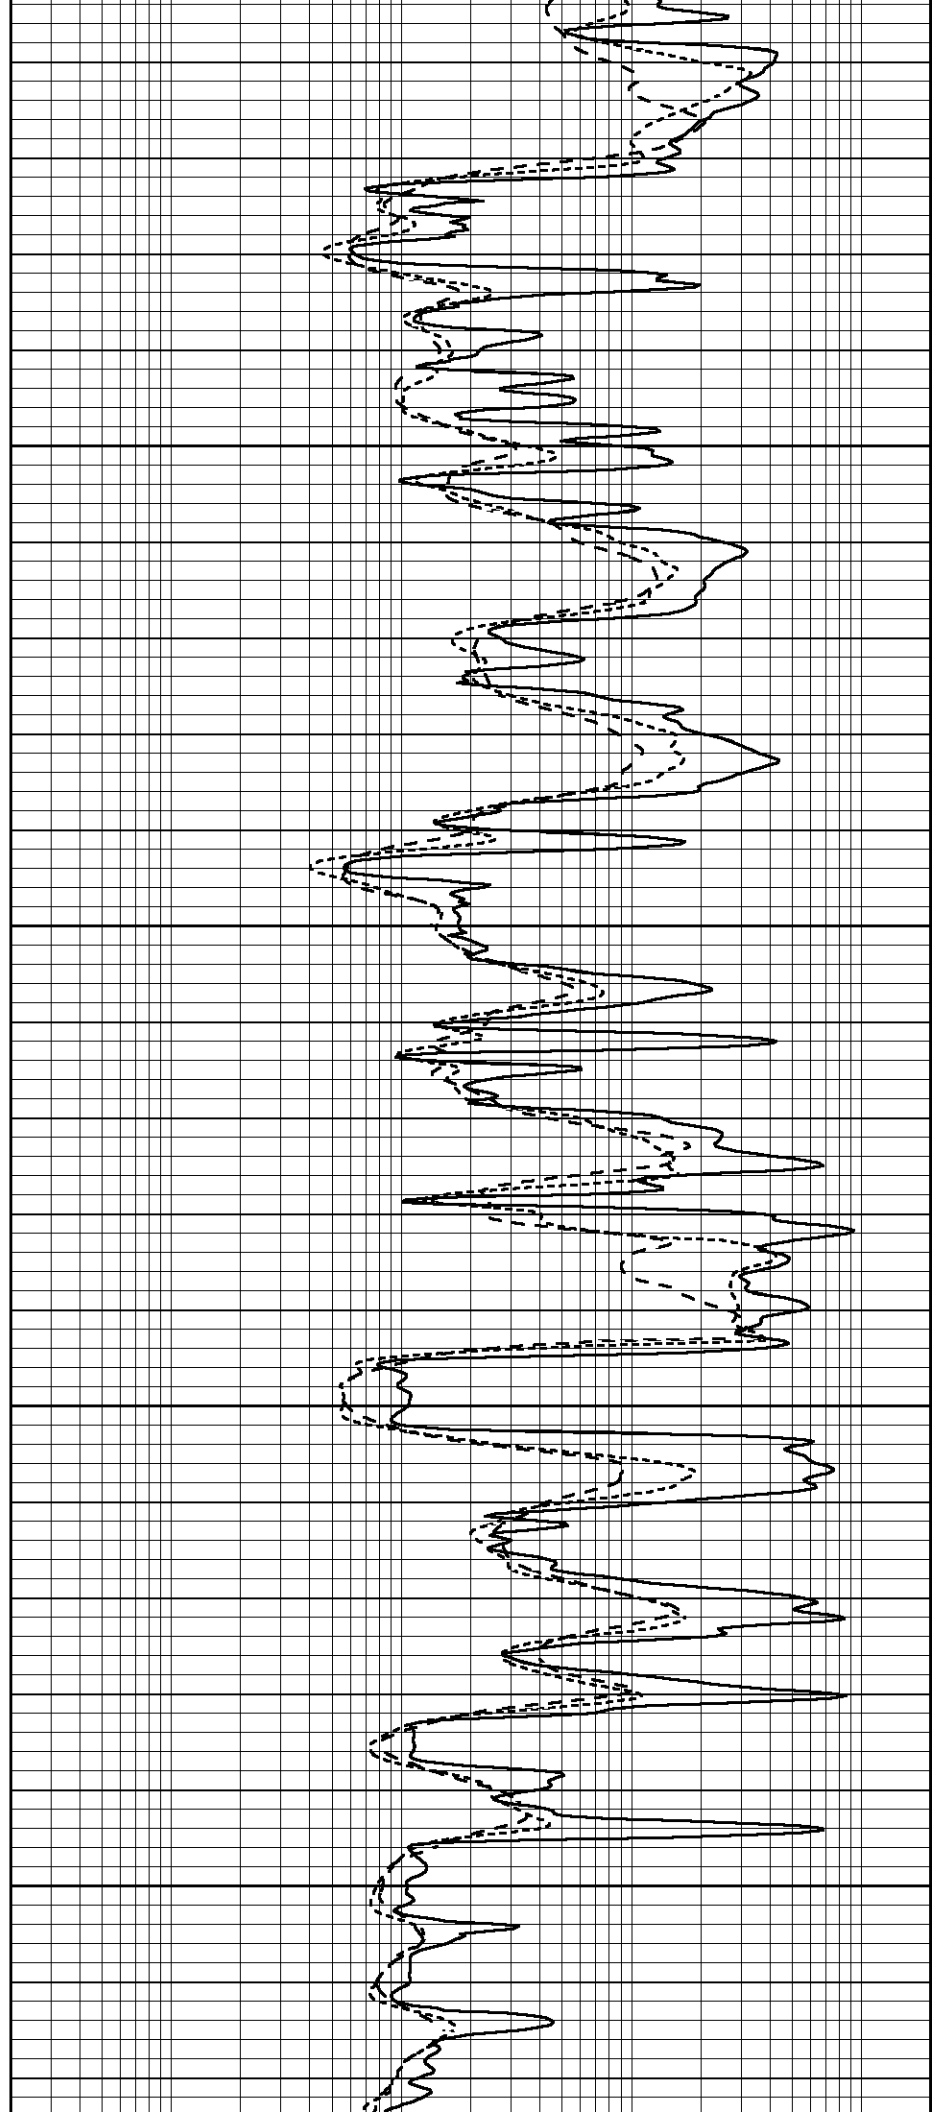

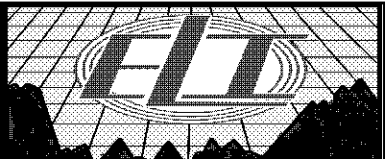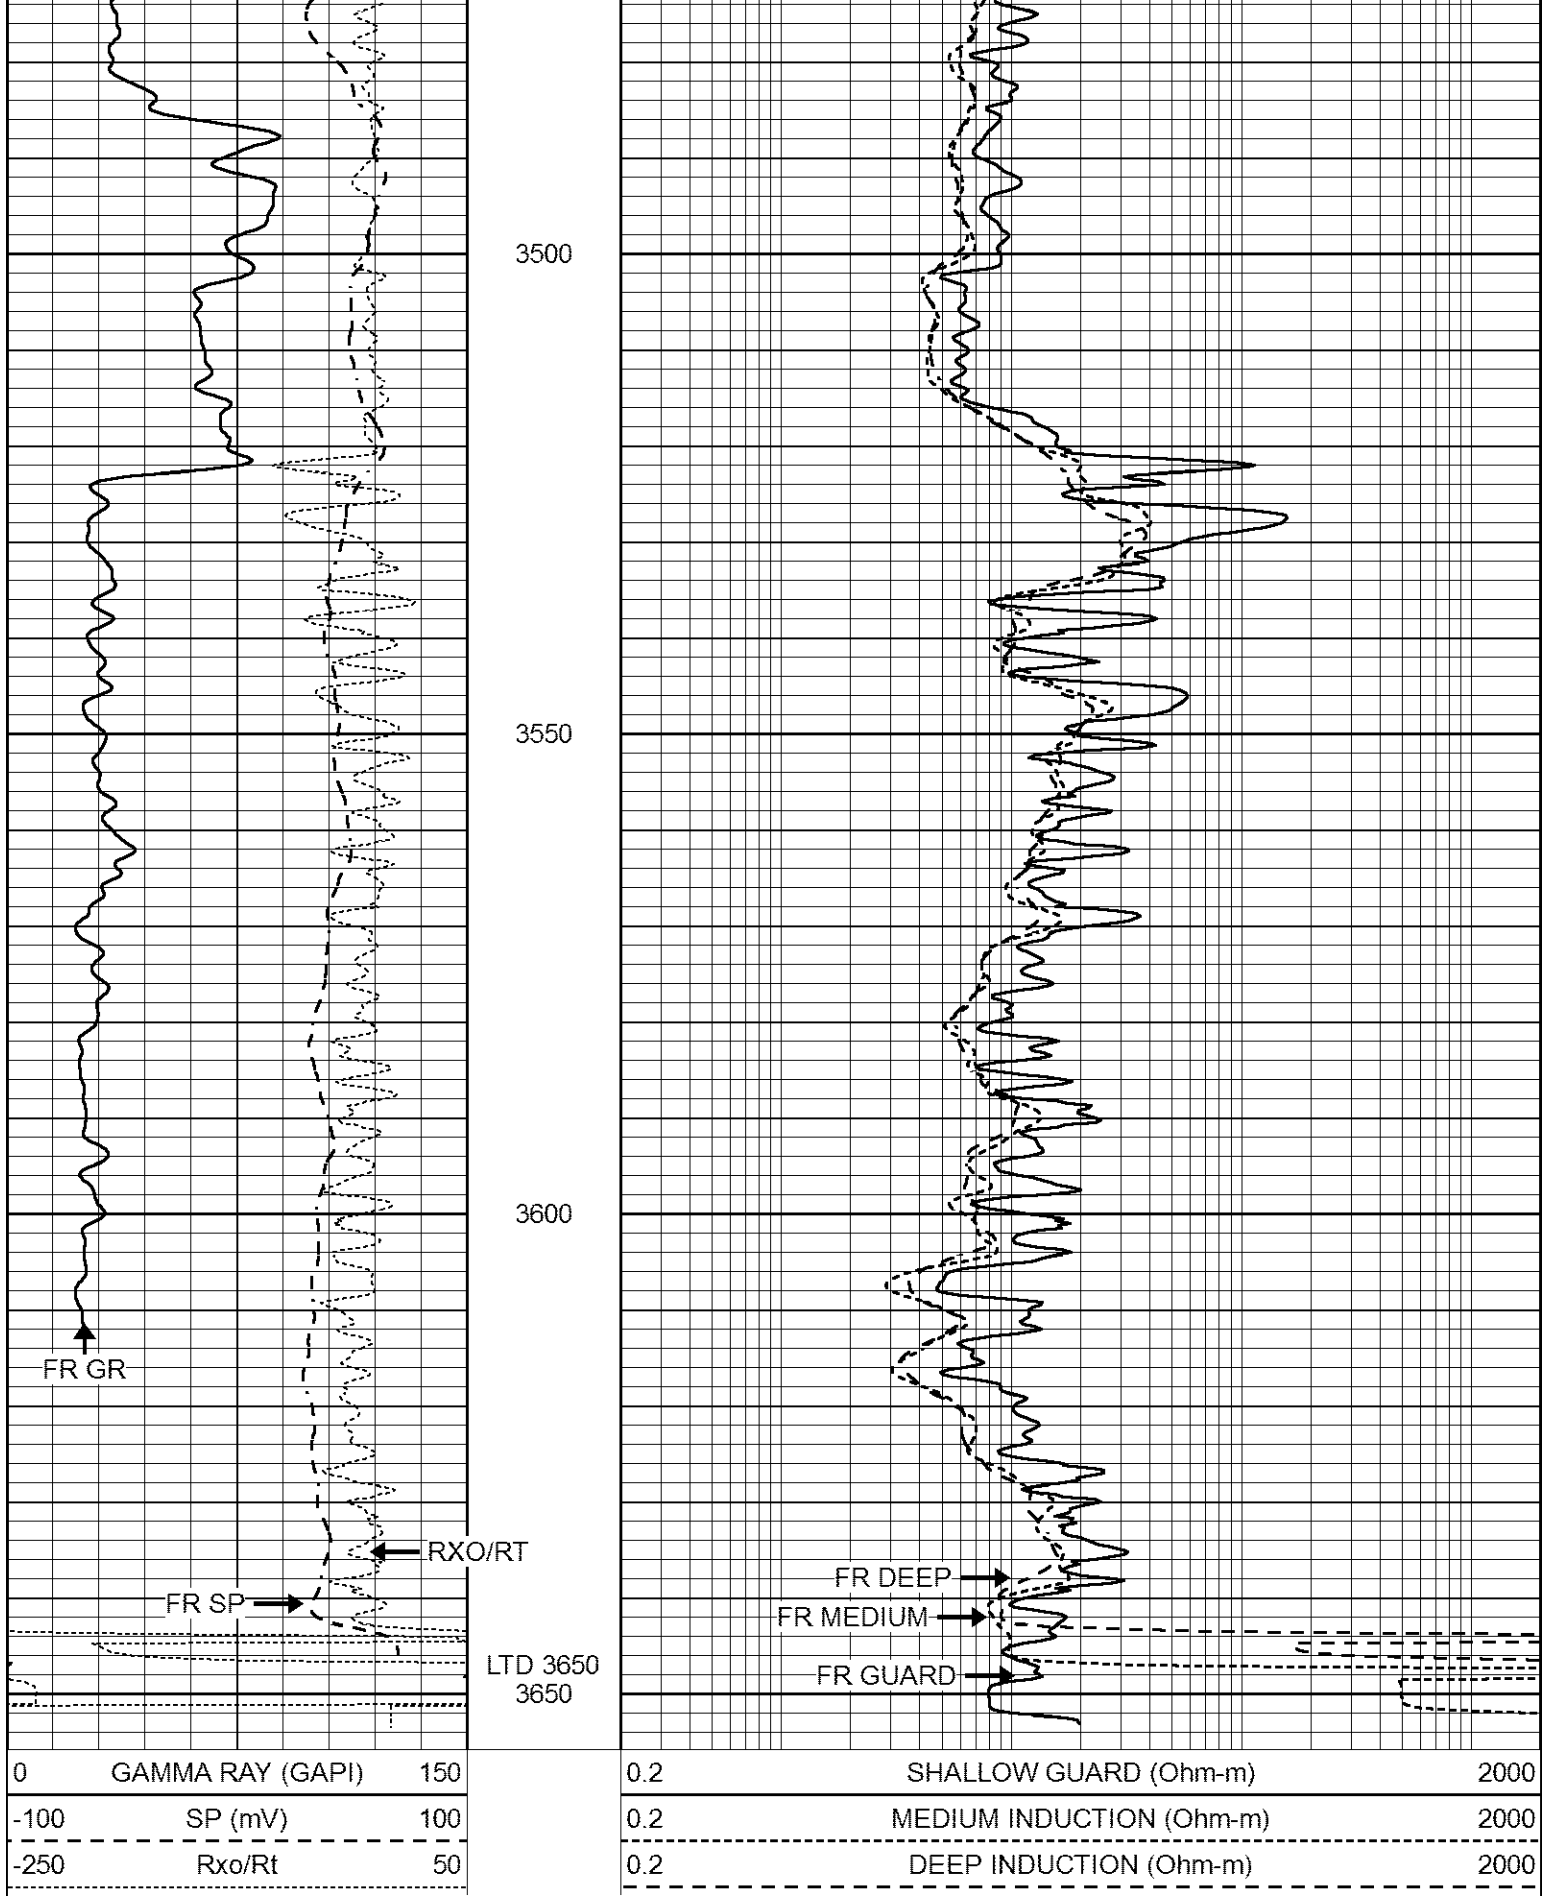



# REPEAT SECTION

Database File 7060pe.db  
 Dataset Pathname pass3R  
 Presentation Format \_dil  
 Dataset Creation Thu Jan 11 22:37:39 2024  
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

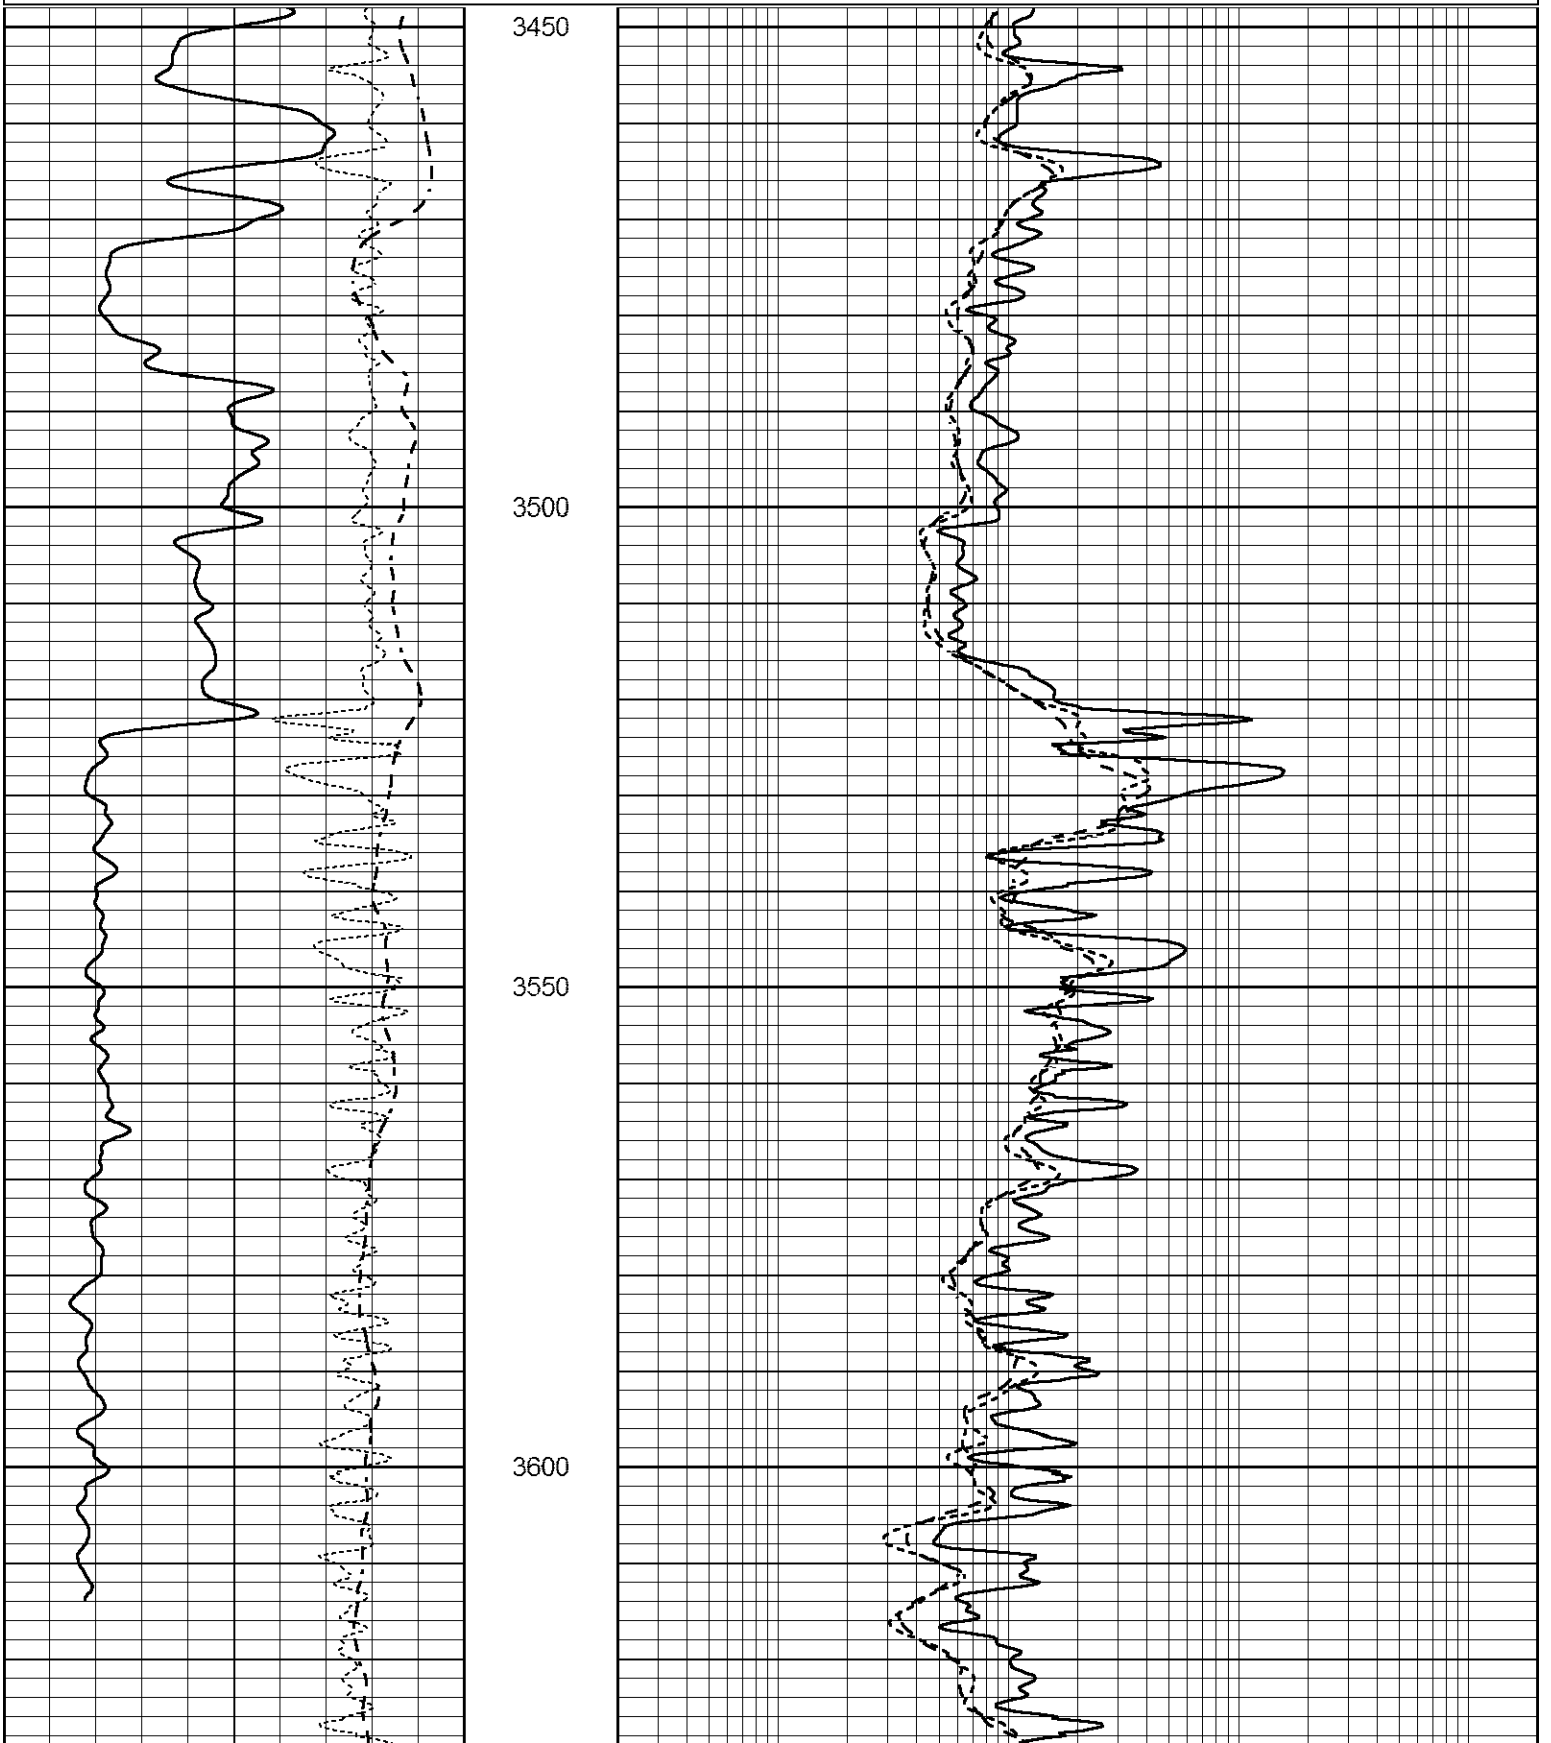

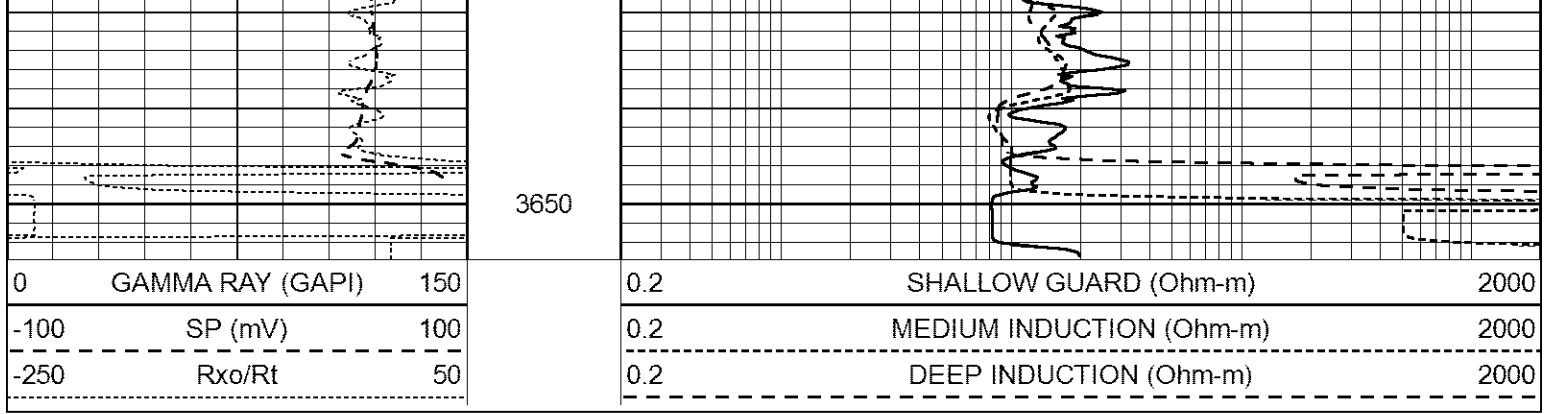

Calibration Report

Database File 7060pe.db  
 Dataset Pathname pass4M  
 Dataset Creation Thu Jan 11 23:01:12 2024

Dual Induction Calibration Report

Serial-Model: FW1410-55-Probe  
 Surface Cal Performed: Sat Jul 29 01:57:42 2023  
 Downhole Cal Performed: Tue Feb 19 11:44:24 2019  
 After Survey Verification Performed: Tue Feb 19 11:44:27 2019

Surface Calibration

Loop:	Readings			V	References			Results	
	Air	Loop			Air	Loop	mmho/m	m	b
Deep	0.011	0.656			1.000	400.000	mmho/m	565.000	-8.500
Medium	-0.000	0.731			1.000	464.000	mmho/m	530.000	-14.000
Internal:	Zero			V	Cal			m	
Deep	0.007	0.649				0.000	400.000	mmho/m	623.784
Medium	0.004	0.743			0.000	464.000	mmho/m	627.284	-2.251

Downhole Calibration

	Readings			mmho/m	References			Results	
	Zero	Cal			Zero	Cal	mmho/m	m'	b'
Deep	-0.824	395.917	mmho/m		-0.976	397.550	mmho/m	1.004	-0.149
Medium	3.565	471.327	mmho/m		3.468	471.590	mmho/m	1.001	-0.099
LL3		7.503	V			1500.000	Ohm-m		
		0.001	V			20.000	Ohm-m		
		-7.481	V			3745.000	mmho-m		

After Survey Verification

	Readings			mmho/m	Targets			Results	
	Zero	Cal			Zero	Cal	mmho/m	m'	b'
Deep	0.000	0.000	mmho/m		-0.824	395.917	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m		3.565	471.327	mmho/m	1.000	0.000
LL3		0.000	Ohm-m			1500.000	Ohm-m		
		0.000	Ohm-m			20.000	Ohm-m		
		0.000	mmho-m			3745.000	mmho-m		

Litho Density Calibration Report  
 Serial: 003 Model: PRB

Master Calibration

Performed Mon May 22 11:48:02 2023

Background Magnesium Aluminum Aluminum+Fe

Window 1	1512.3	7465.7	2749.0	2519.6	cps
Window 2	1398.8	6705.7	2507.3	2313.8	cps
Window 3	1289.2	5259.5	2124.1	2009.6	cps
Window 4	351.1	351.6	351.8	353.2	cps
Long Space	0.0	5306.9	1108.5	915.0	cps
Short Space	3.3	2239.9	1441.2	1212.0	cps
Rho		1.7100	2.5900	0.0000	g/cc
Pe		2.0000	2.7500	5.7900	

Rib Angle : 44.3      Rib Slope : 0.975      Density/Spine Ratio : 0.541  
 Spine Angle : 74.3      Spine Slope : 3.551      Spine Intercept : -18.8

Before Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 080621PMC  
 Tool Model: NABORS

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		pu
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		pu
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number: 46001  
 Tool Model: Probe1  
 Performed: Thu Apr 20 09:55:57 2023

Performed:

Thu Apr 20 09:55:57 2023

Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.4300	GAPI/cps