



MICRO LOG

Company	SHAKESPEARE OIL COMPANY, INC.		
Well	BLOOM #3-22		
Field	CALE NORTH		
County	GOVE	State	KANSAS
Location:	API # : 15-063-22440-0000		Other Services CDL/CNL/PE DIL/SONIC
Permanent Datum	GROUND LEVEL	Elevation	2951
Log Measured From	KELLY BUSHING 9' A.G.L		
Drilling Measured From	KELLY BUSHING		
Date	3/22/24		
Run Number	TWO		
Depth Driller	4620		
Depth Logger	4620		
Bottom Logged Interval	4604		
Top Log Interval	3500		
Casing Driller	8.625@236		
Casing Logger	234		
Bit Size	7.785		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2.500 PPM	
Density / Viscosity	9.3/52		
pH / Fluid Loss	10.5/8.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.40@77F		
Rmf @ Meas. Temp	1.05@77F		
Rmc @ Meas. Temp	1.68@77F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.884@122F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	11:30 P.M.		
Maximum Recorded Temperature	122F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS	JEREMEY PASEK	
Witnessed By	KENT MATSON		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-063-22440-0000

Comments

THANK YOU FOR USING ELI WIRELINE HAYS. KANSAS (785) 628-6395
DIRECTIONS


I-70 & CAMPUS EXIT, 2 1/2S. ON "RD. 18" PAST FARM TO (PRIVATE DRIVE) 1/2W., N. INTO




MAIN SECTION

Database File	8424pe.db
Dataset Pathname	pass7.3
Presentation Format	_micro
Dataset Creation	Sat Mar 23 00:27:37 2024
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV	0	LTEN (lb)	5000
			0 (ft3)	10		

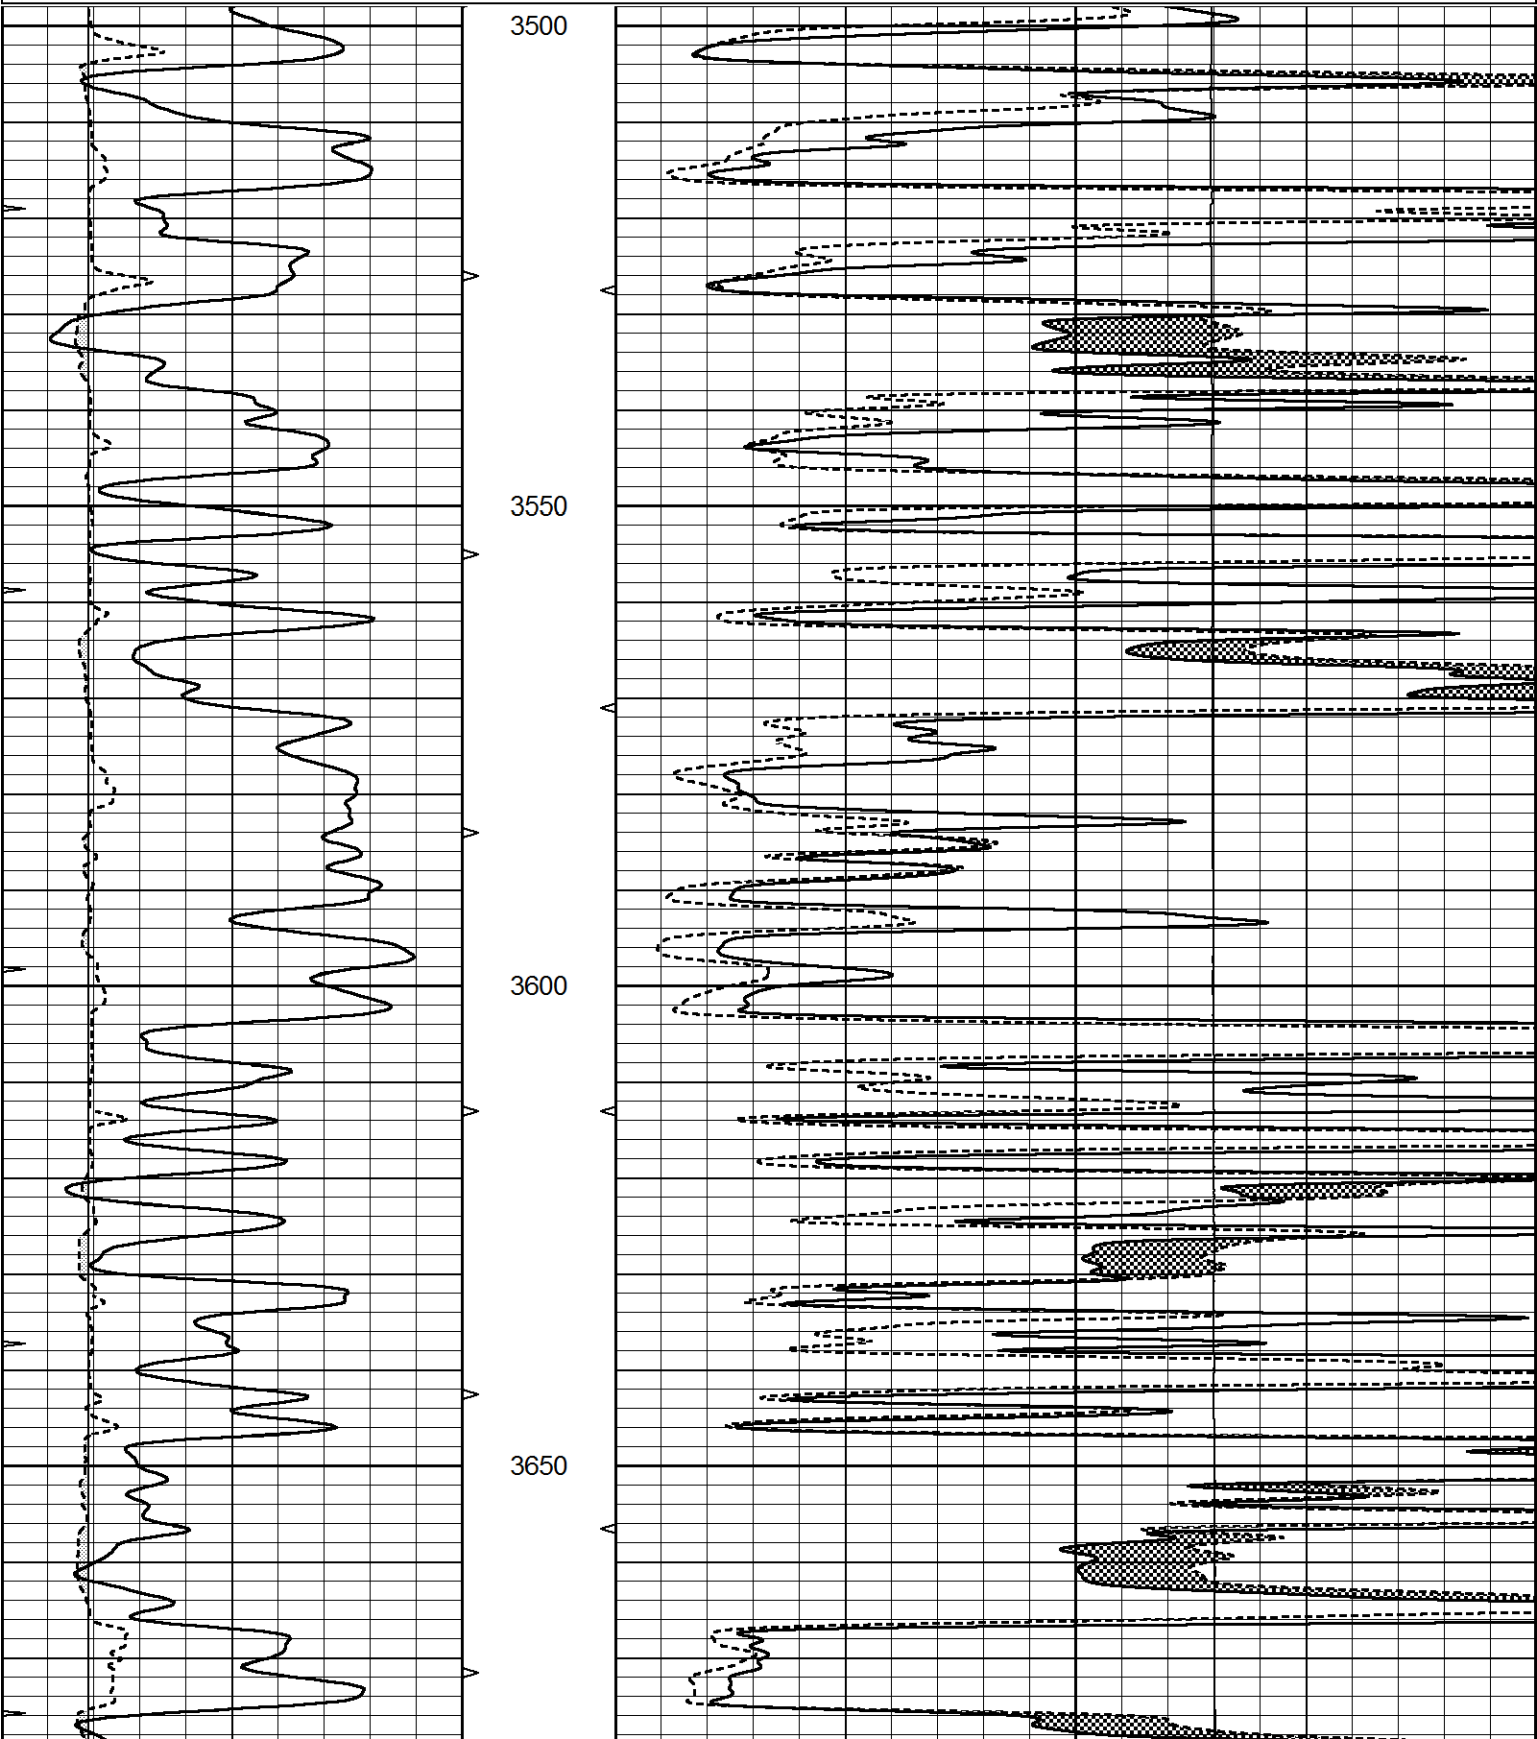

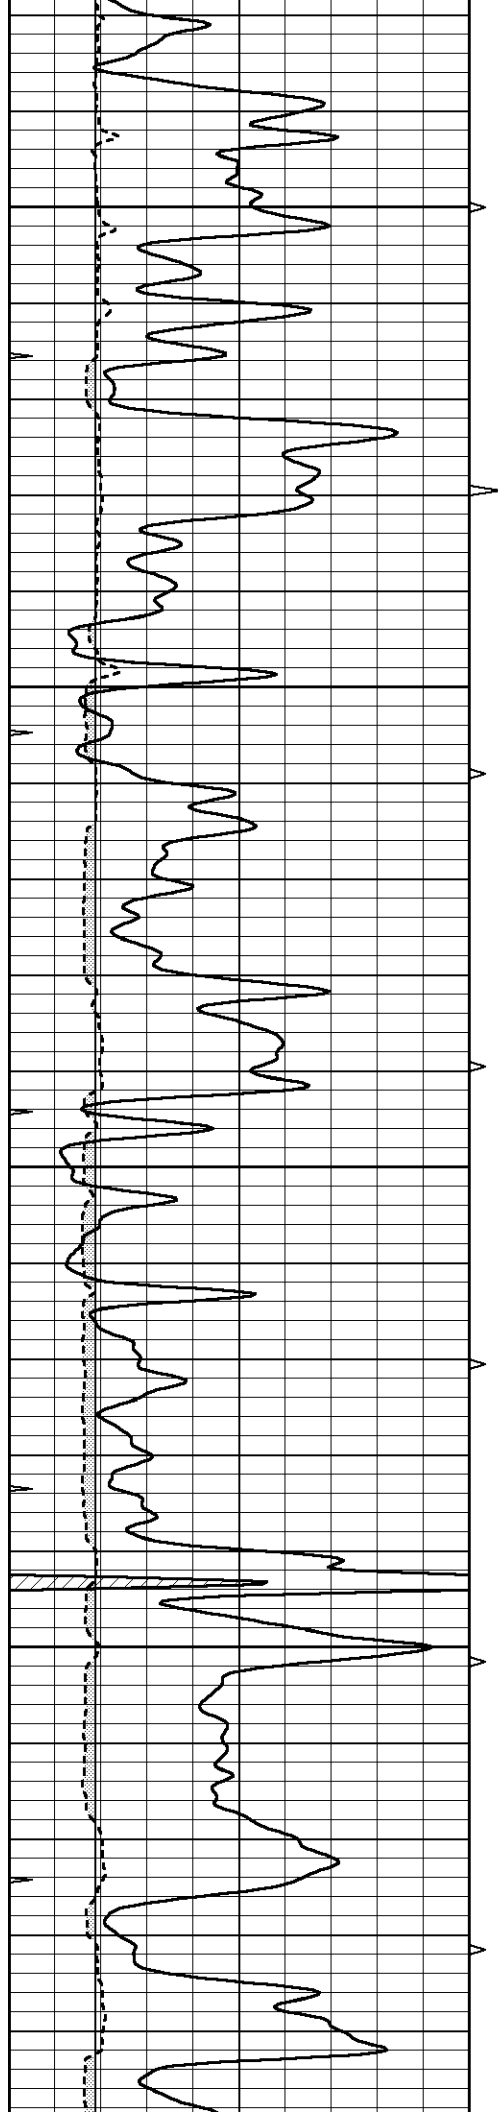



3700

3750

3800

3850

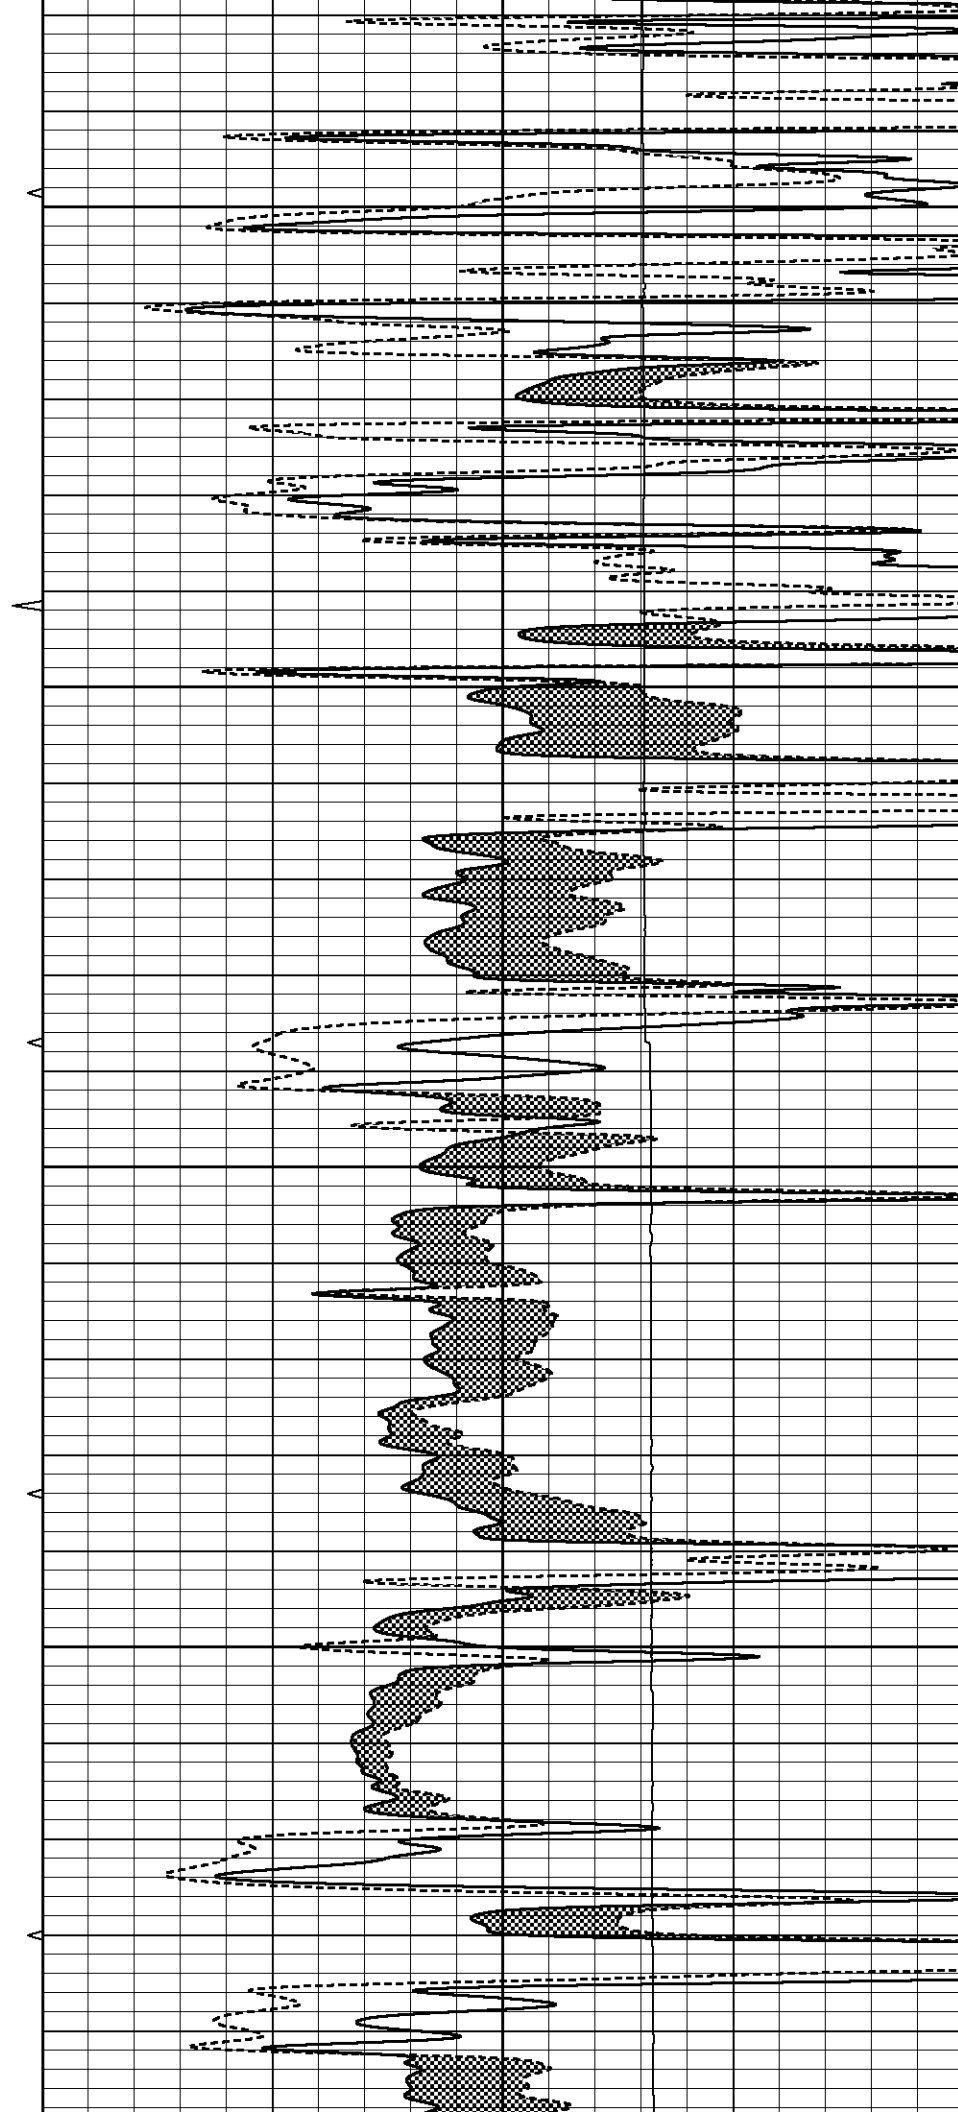

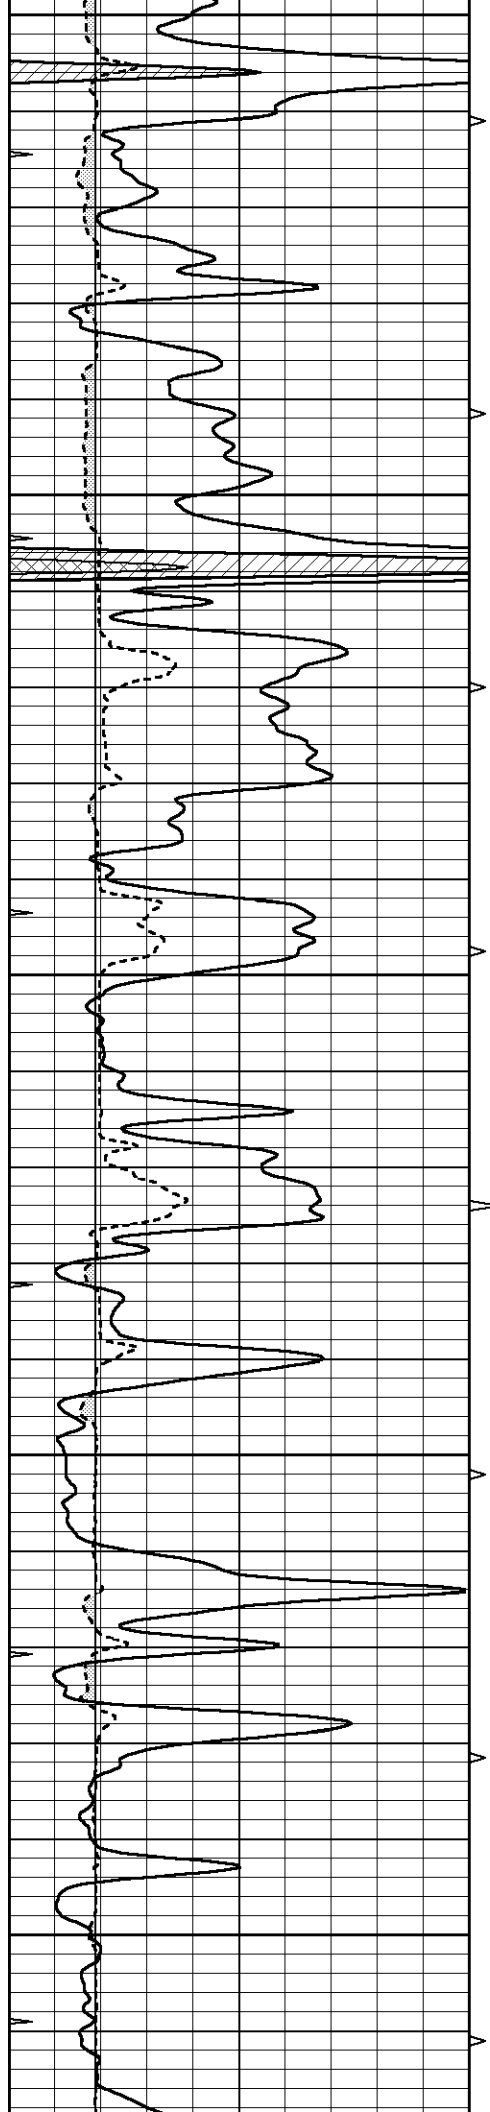


3900


3950

4000

4050

4100

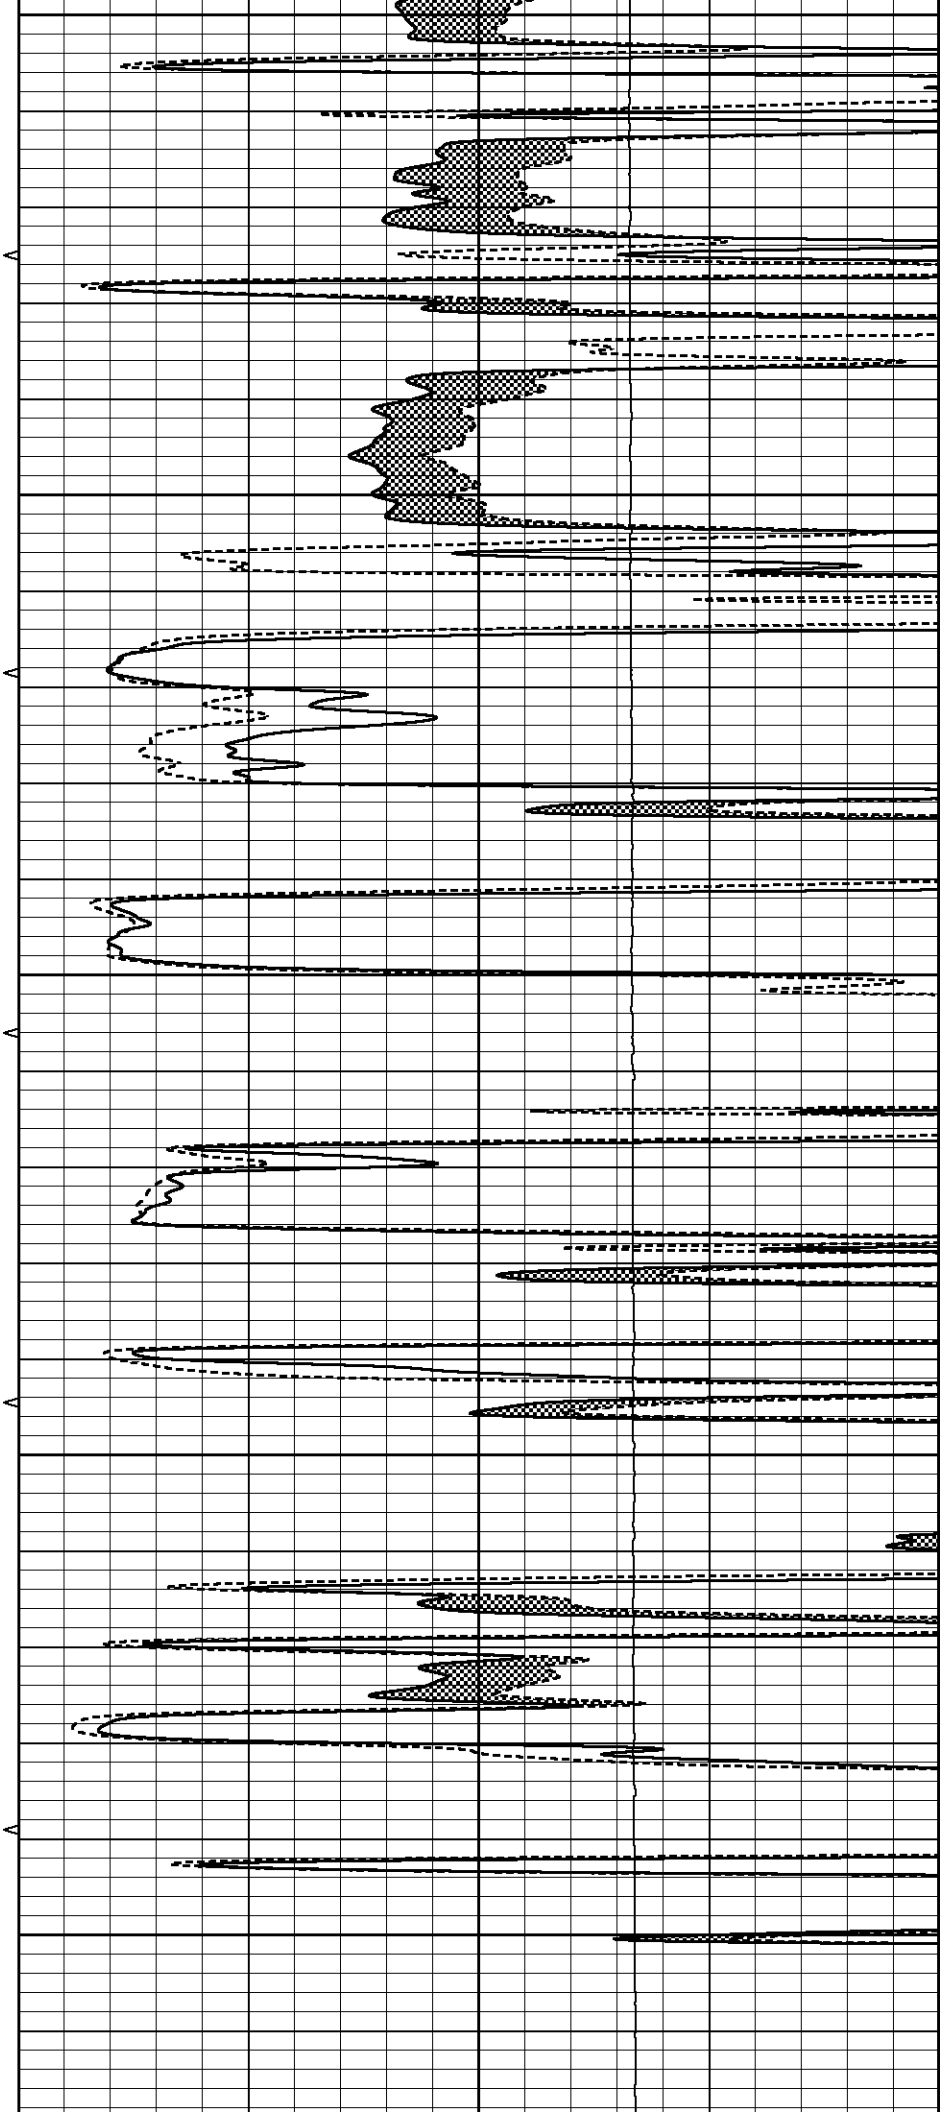

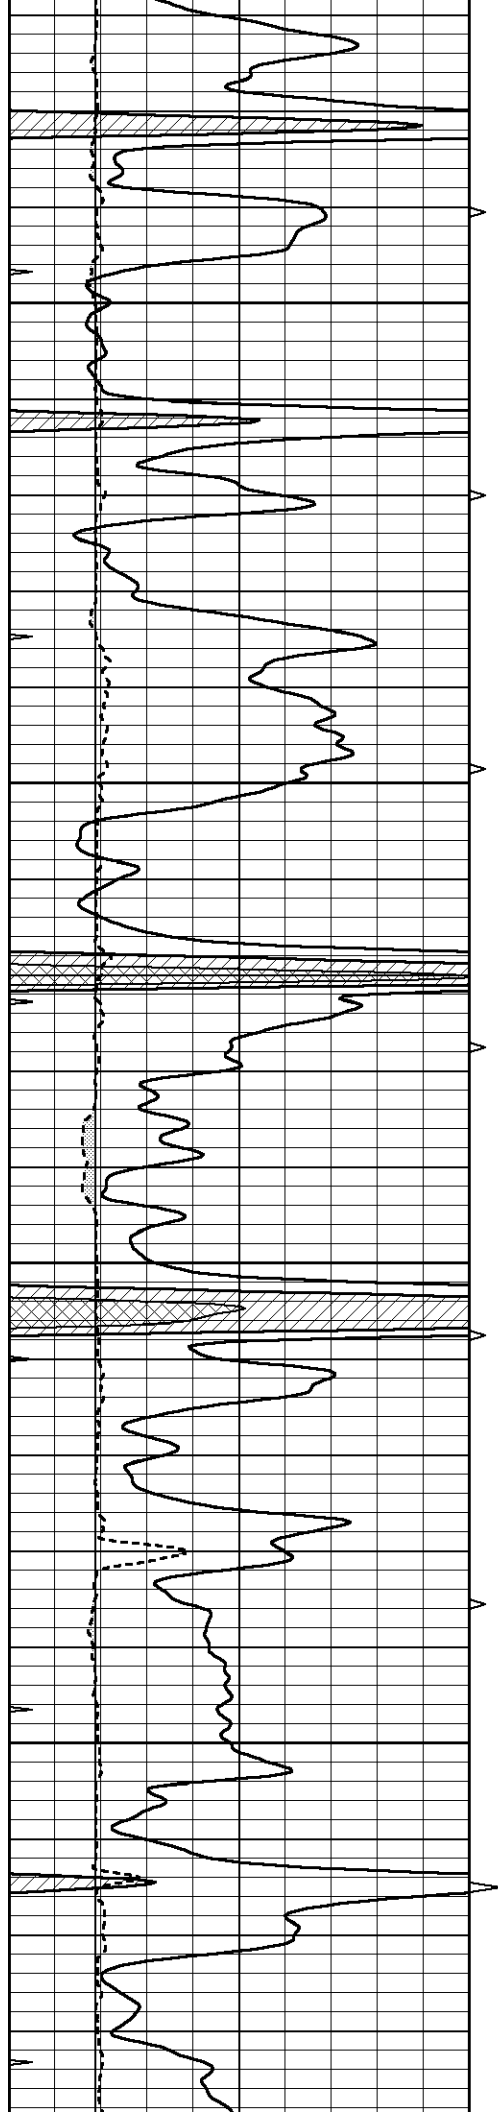



4150

4200

4250

4300

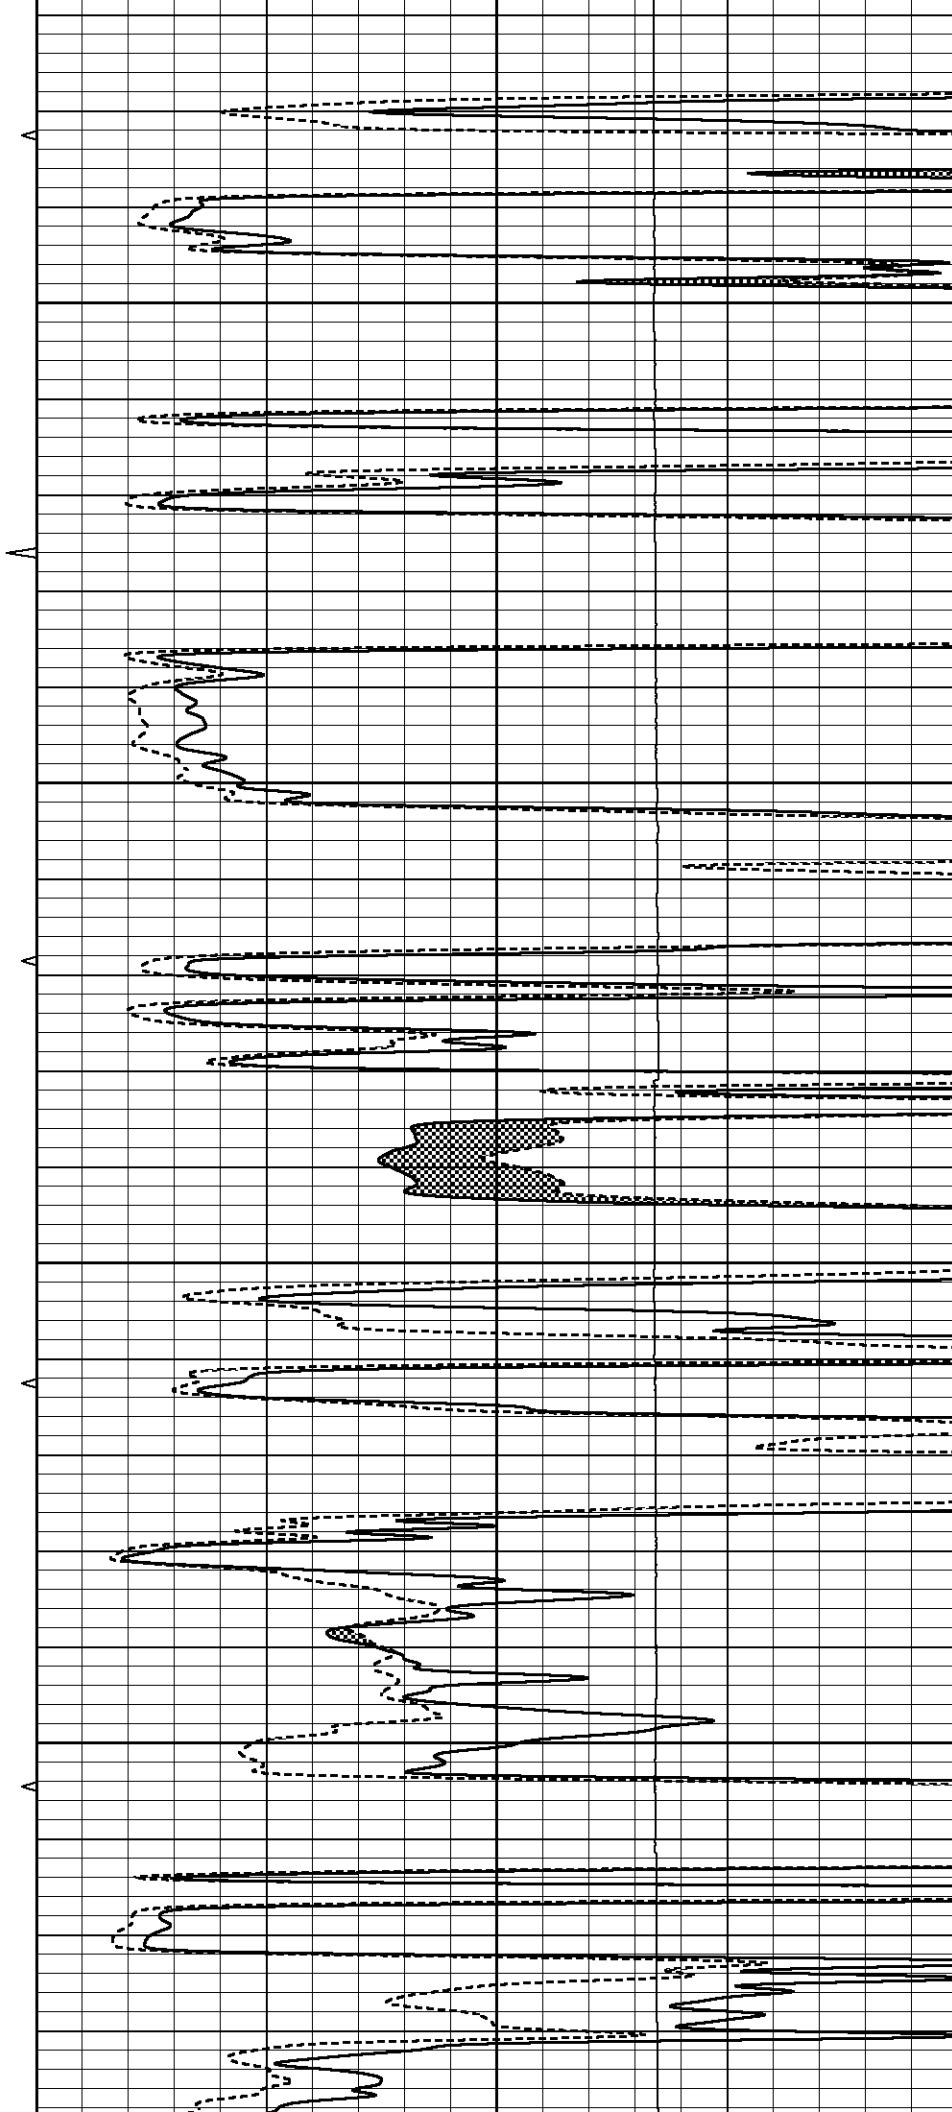

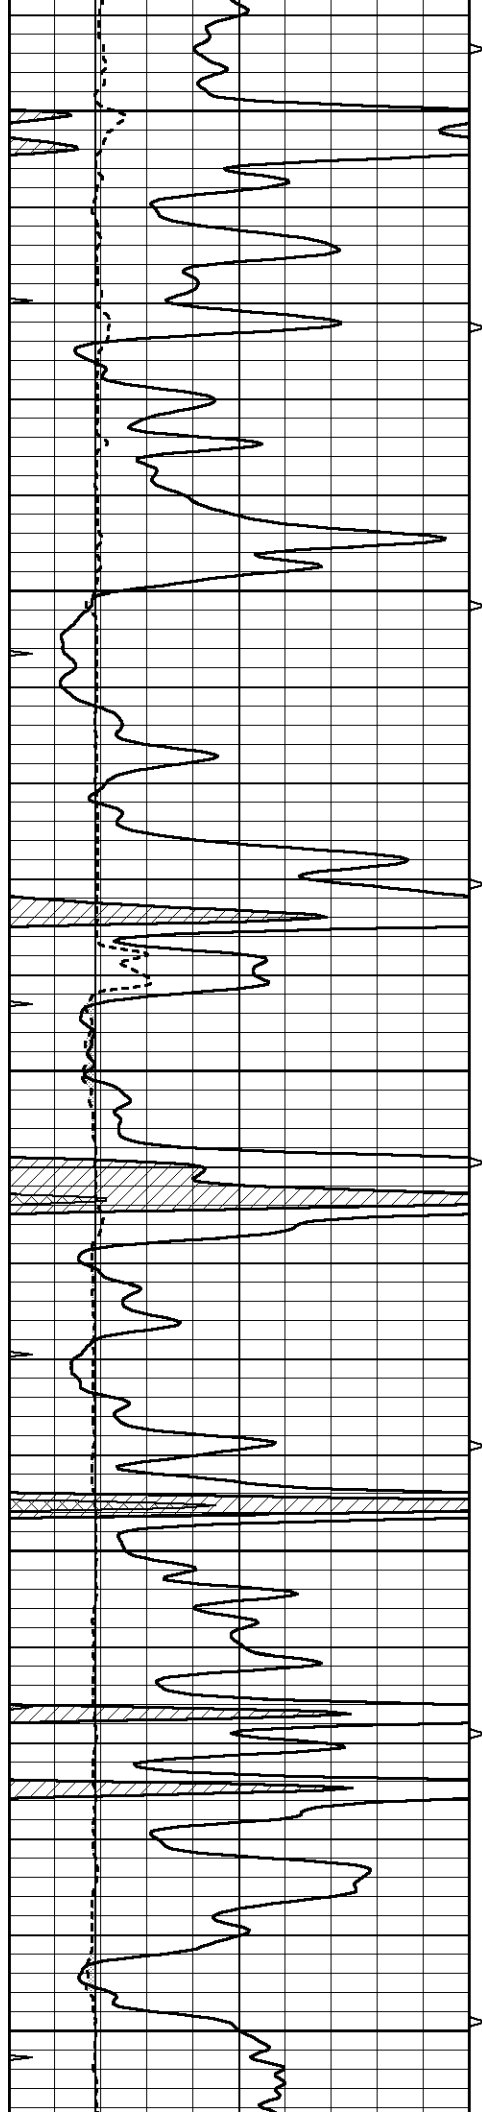


4350


4400

4450

4500



4550

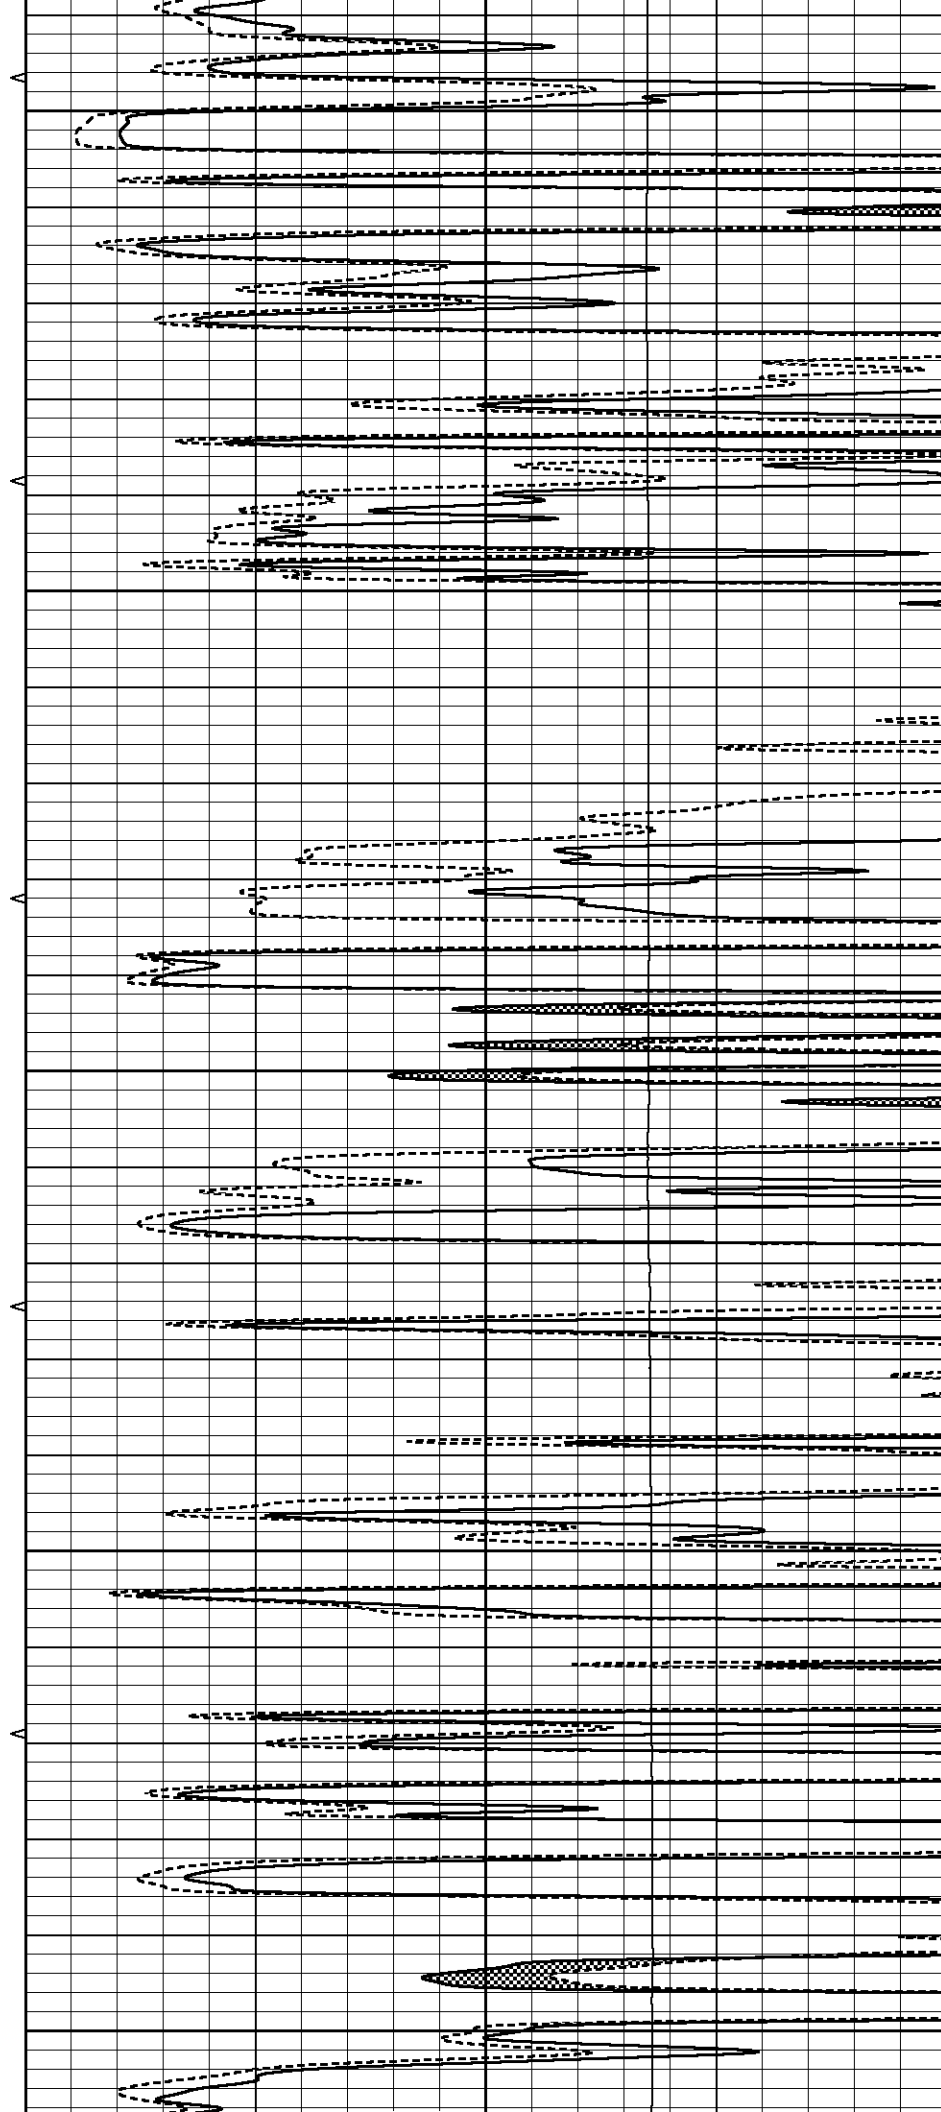


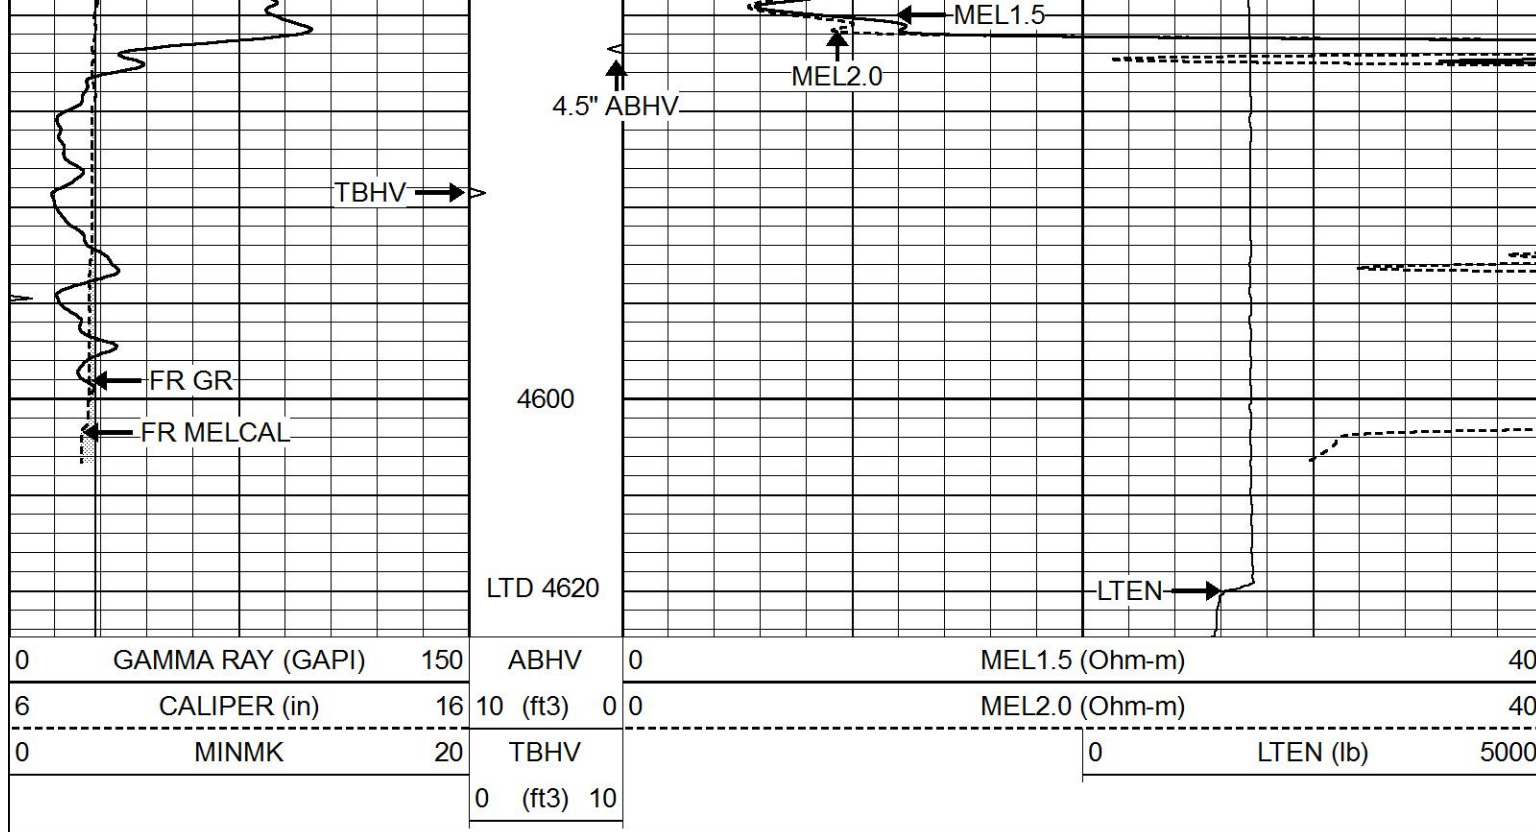

REPEAT SECTION

Database File 8424pe.db
 Dataset Pathname pass6.1
 Presentation Format _micro
 Dataset Creation Fri Mar 22 23:54:34 2024
 Charted by Depth in Feet scaled 1:240

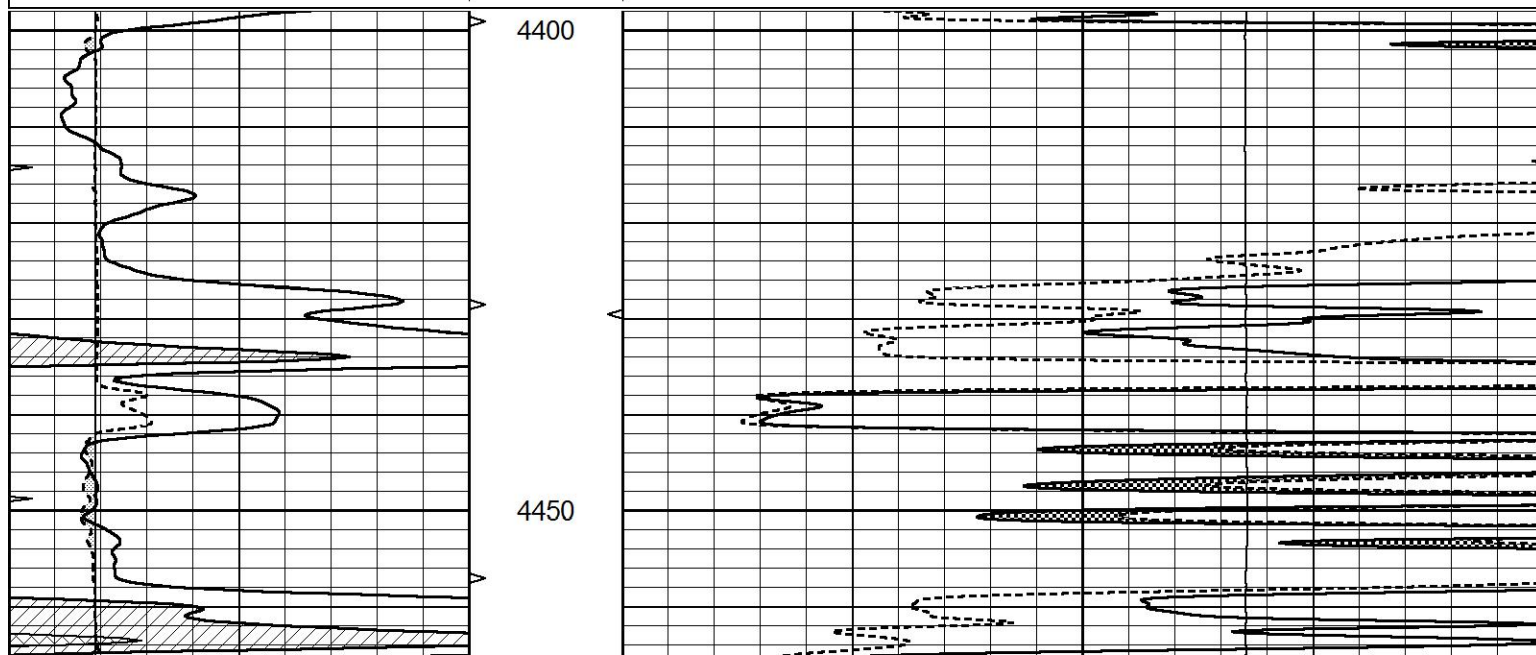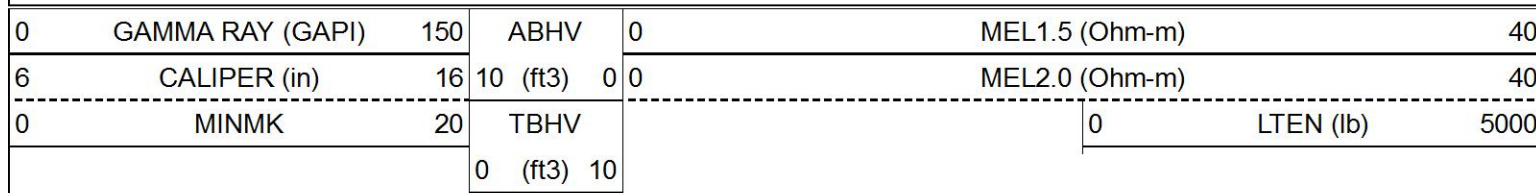

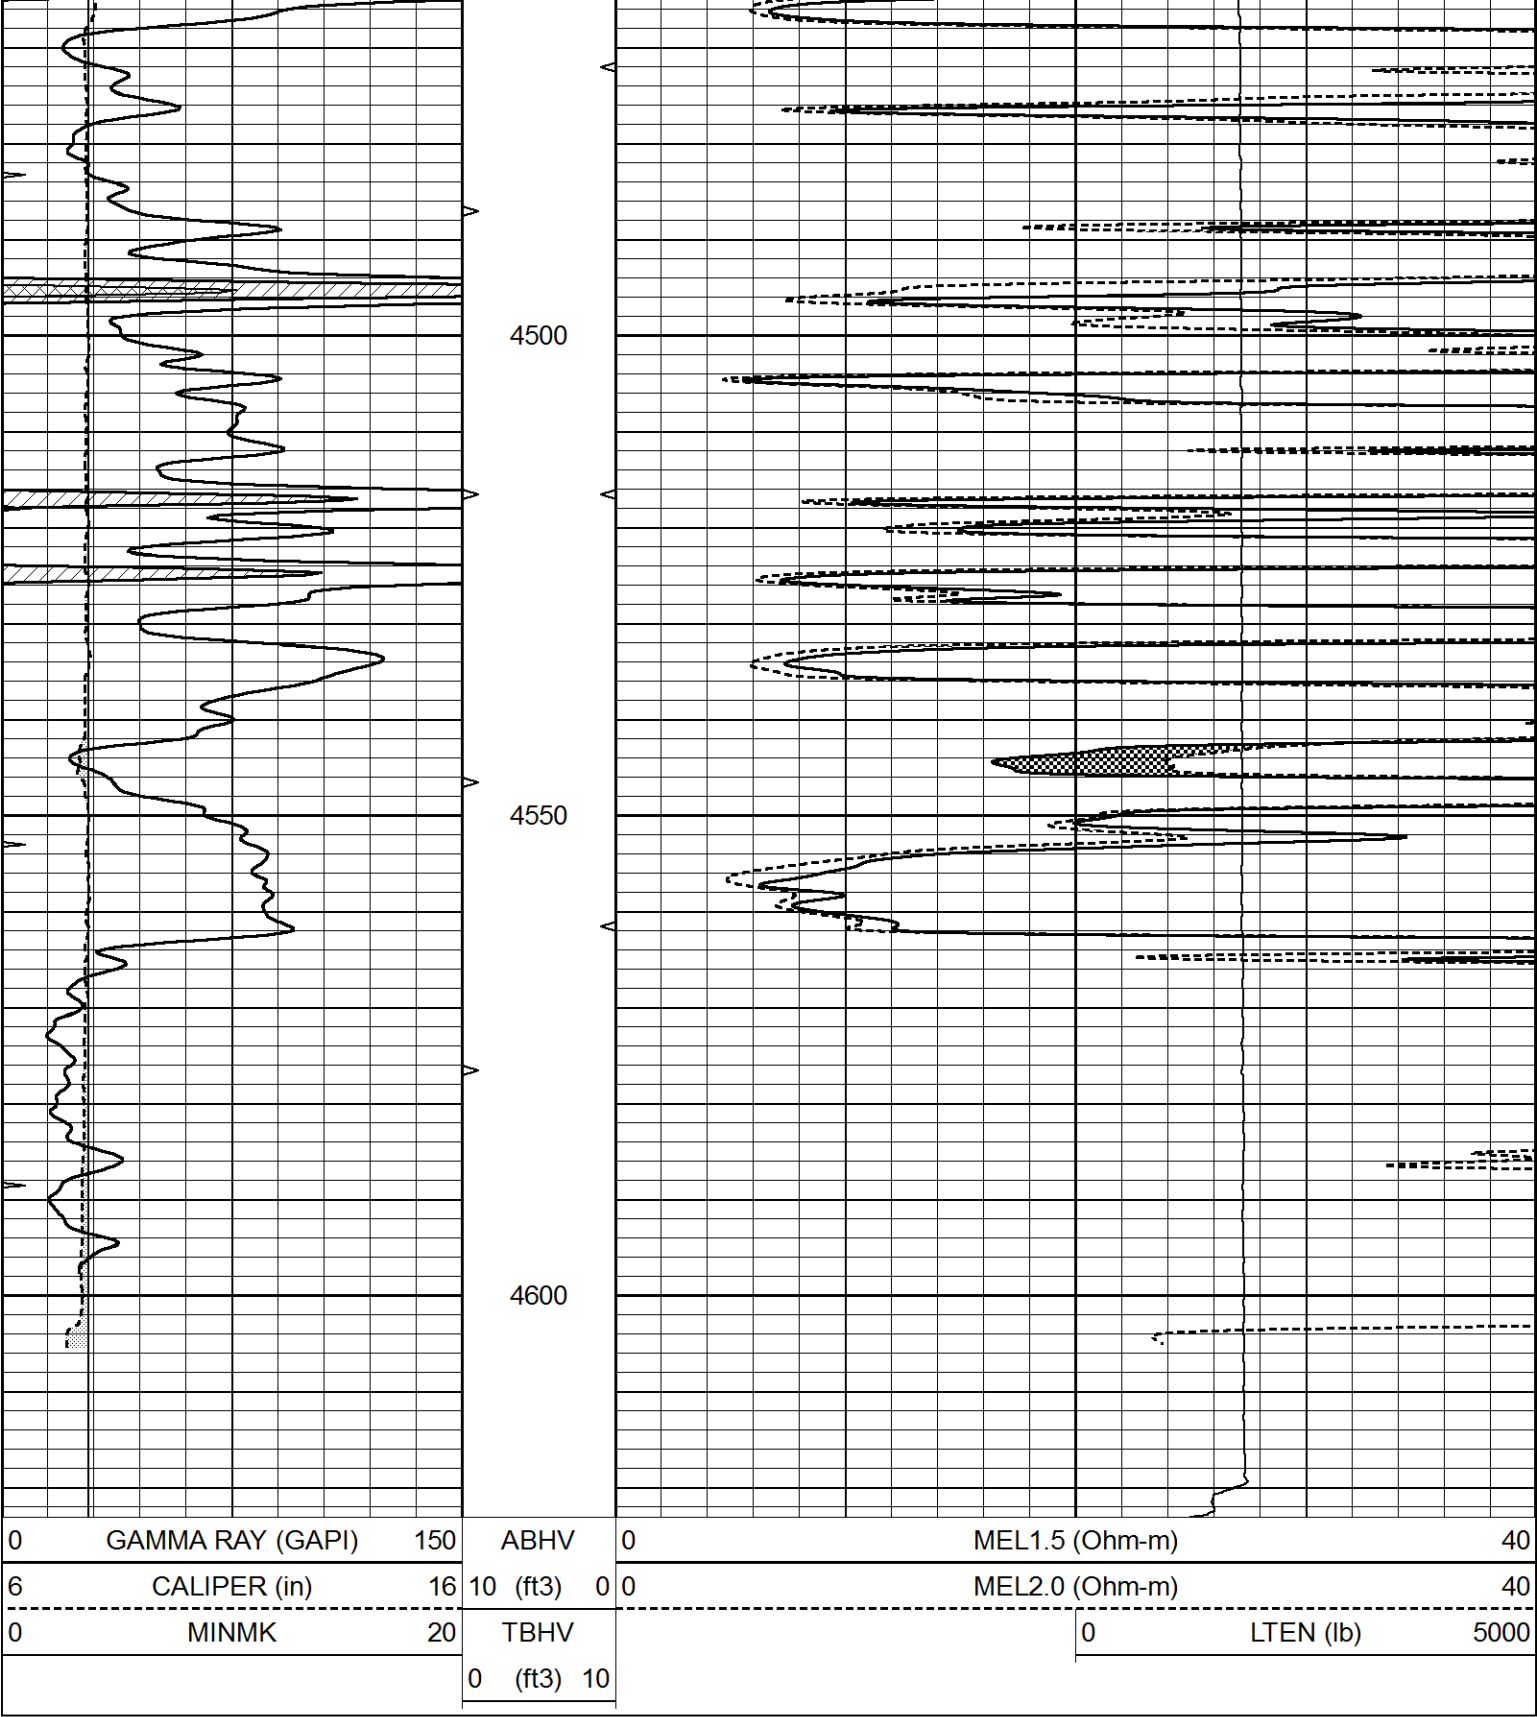

Calibration Report

Database File 8424pe.db
Dataset Pathname pass7.3
Dataset Creation Sat Mar 23 00:27:37 2024

MICRO Calibration Report

Serial Number: 070910
Tool Model: ProbeN
Performed: Fri Mar 22 23:53:45 2024

Caliper Calibration:	Gain=3.376	Offset=2.498
References	Low Cal 8.000	High Cal 16.000
Readings	1.630	4.000
1.5" Calibration:	Gain=60.000	Offset=-0.500
References	Low Cal 0.000	High Cal 20.000
Readings	0.000	1.216
2" Calibration:	Gain=66.000	Offset=-1.000
References	Low Cal 0.000	High Cal 20.000
Readings	0.002	1.053
Gamma Ray Calibration Report		
Serial Number:	070559	
Tool Model:	OPEN_GR	
Performed:	Fri Mar 15 23:44:57 2024	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.3000	GAPI/cps