

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-069-20111-00-01 <sup>02</sup> KCC a/b 6-8-07  
Spot: SWNWSWSE Sec/Twnshp/Rge: 22-25S-30W  
700 feet from S Section Line, 2570 feet from E Section Line  
Lease Name: RENICK Well #: 3  
County: GRAY Total Vertical Depth: 5060 feet

Operator License No.: 33358  
Op Name: RENICK ENERGY, L.C.  
Address: 10502 6 RD  
INGALLS, KS 67853

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		950		WITH 2 SX CMT
PROD	4.5	5042	0	WITH 200 SX CMT \$164.45
SURF	8.625	850		WITH 450 SX CMT

Well Type: SWD-OIL UIC Docket No: ~~D266350~~ Date/Time to Plug: 04/26/2007 8:00 AM  
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY  
Proposal Rcvd. from: MARK RENICK Company: RENICK ENERGY Phone: (620) 260-7301

Proposed Plugging Method: SET CIBP AT 4800" +2 SACKS OF CEMENT ON TOP OF PLUG. SET CIBP AT 950"+ 2 SACKS OF CEMENT ON TOP OF PLUG. PERORATE 4 1/2" CG AT 870'. FILL 4 1/2" X 8 5/8 " CASING WITH 200 SACKS OF CEMENT.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 04/26/2007 5:30 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

OBSTRUCTION IN CASING AT 1176'. 1ST PLUG SET CIBP @ 950' & 2 SX CMT. TEST CASING. WOULD NOT HOLD PRESSURE. 2ND PLUG PERFORATE CASING AT 870'. SET CMT RETAINER AT 820' WITH 2 3/8" TUBING. PUMPED 150 SX CMT (DID NOT CIRCULATE). PULL OUT OF HOLE AND FILL CASING WITH 50 SX CMT. 3RD PLUG PUMP 50 SX CMT DOWN 8 5/8" ANNULUS. MAXIMUM PRESSURE 500#. SHUT IN PRESSURE 0#.

Perfs:


Top	Bot	Thru	Comments
5004	5016		
4896	4922		

INVOICED  
DATE 5-31-07  
INV. NO. 2007061807

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: TBG

District: 01

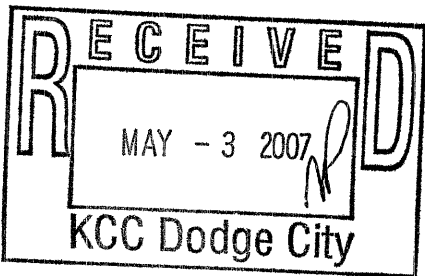

Signed [Signature]

(TECHNICIAN) RECEIVED  
KANSAS CORPORATION COMMISSION  
MAY 21 2007  
CONSERVATION DIVISION  
WICHITA, KS

Form C [Signature]