

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-083-21525-00-00
Spot: W2NE Sec/Twnshp/Rge: 28-21S-23W
1360 feet from N Section Line, 2010 feet from E Section Line
Lease Name: RUDZIK Well #: 1-28
County: HODGEMAN Total Vertical Depth: 4700 feet

Operator License No.: 31652
Op Name: NORSTAR PETROLEUM, INC.
Address: 6855 S. HAVANA ST., STE 250
CENTENNIAL, CO 80112

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	222		WITH 160 SX CMT

\$ 152.75

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 05/07/2007 11:00 AM
Plug Co. License No.: 31548 Plug Co. Name: DISCOVERY DRILLING
Proposal Rcvd. from: TOM ALM Company: DISCOVERY DRILLING Phone: (785) 623-2920

Proposed Plugging Method: 1ST PLUG AT 1630' WITH 50 SX CMT. 2ND PLUG AT 700' WITH 80 SX CMT. 3RD PLUG AT 240' WITH 40 SX CMT. 4TH PLUG AT 60' WITH 20 SX CMT. 5TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 6TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: MICHAEL MAIER WitnessType: NONE
Date/Time Plugging Completed: 05/07/2007 2:45 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

Perfs:

1ST PLUG AT 1630' WITH 50 SX CMT. 2ND PLUG AT 700' WITH 80 SX CMT. 3RD PLUG AT 240' WITH 40 SX CMT. 4TH PLUG AT 60' WITH 20 SX CMT. 5TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 6TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

INVOICED
DATE 5-31-07
INV. NO. 2007061801


Remarks: USED 60/40 POZMIX 6% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

Signed

Michael J. Maier
(TECHNICIAN)

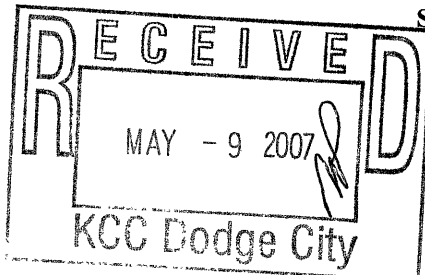

RECEIVED
KANSAS CORPORATION COMMISSION Form CP-2/3

MAY 21 2007

CONSERVATION DIVISION
WICHITA, KS