



MICRO LOG

Company PIONEER OPERATIONS, LLC.

Well FENTON #1-A

Field UNNAMED

County ROOKS State KANSAS

Location: API #: 15-163-24531-0000

330' FNL & 1650' FWL
NW - NE - NW

SEC 15 TWP 7S RGE 17W

Permanent Datum GROUND LEVEL Elevation 1880
Log Measured From KELLY BUSHING 7' A.G.L.
Drilling Measured From KELLY BUSHING

Other Services
CDL/CNL
DIL

Elevation

K.B. 1887
D.F. 1885
G.L. 1880

Date 3/16/26

Run Number TWO

Depth Driller 3440

Depth Logger 3439

Bottom Logged Interval 3437

Top Log Interval 2600

Casing Driller 8.625@231

Casing Logger 231

Bit Size 7.785

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.2/44

pH / Fluid Loss 10.5/9.6

Source of Sample FLOWLINE

Rm @ Meas. Temp 1.40@72F

Rmf @ Meas. Temp 1.05@72F

Rmc @ Meas. Temp 1.68@72F

Source of Rmf / Rmc MEASUREMENT

Rm @ BHT .908@111F

Time Circulation Stopped 3 HOURS

Time Logger on Bottom 4:15 P.M.

Maximum Recorded Temperature 111F

Equipment Number 922339

Location HAYS, KANSAS

Recorded By JEFF LUEBBERS

Witnessed By SEAN DEENIHAN

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-163-24531-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS. KANSAS (785) 628-6395
DIRECTIONS
STOCKTON, KS., 3.8 E. ON HWY 24, 1/2 N. INTO





MAIN SECTION

Database File	9521ddn.db
Dataset Pathname	pass6.1
Presentation Format	micro
Dataset Creation	Mon Mar 16 17:16:11 2026
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

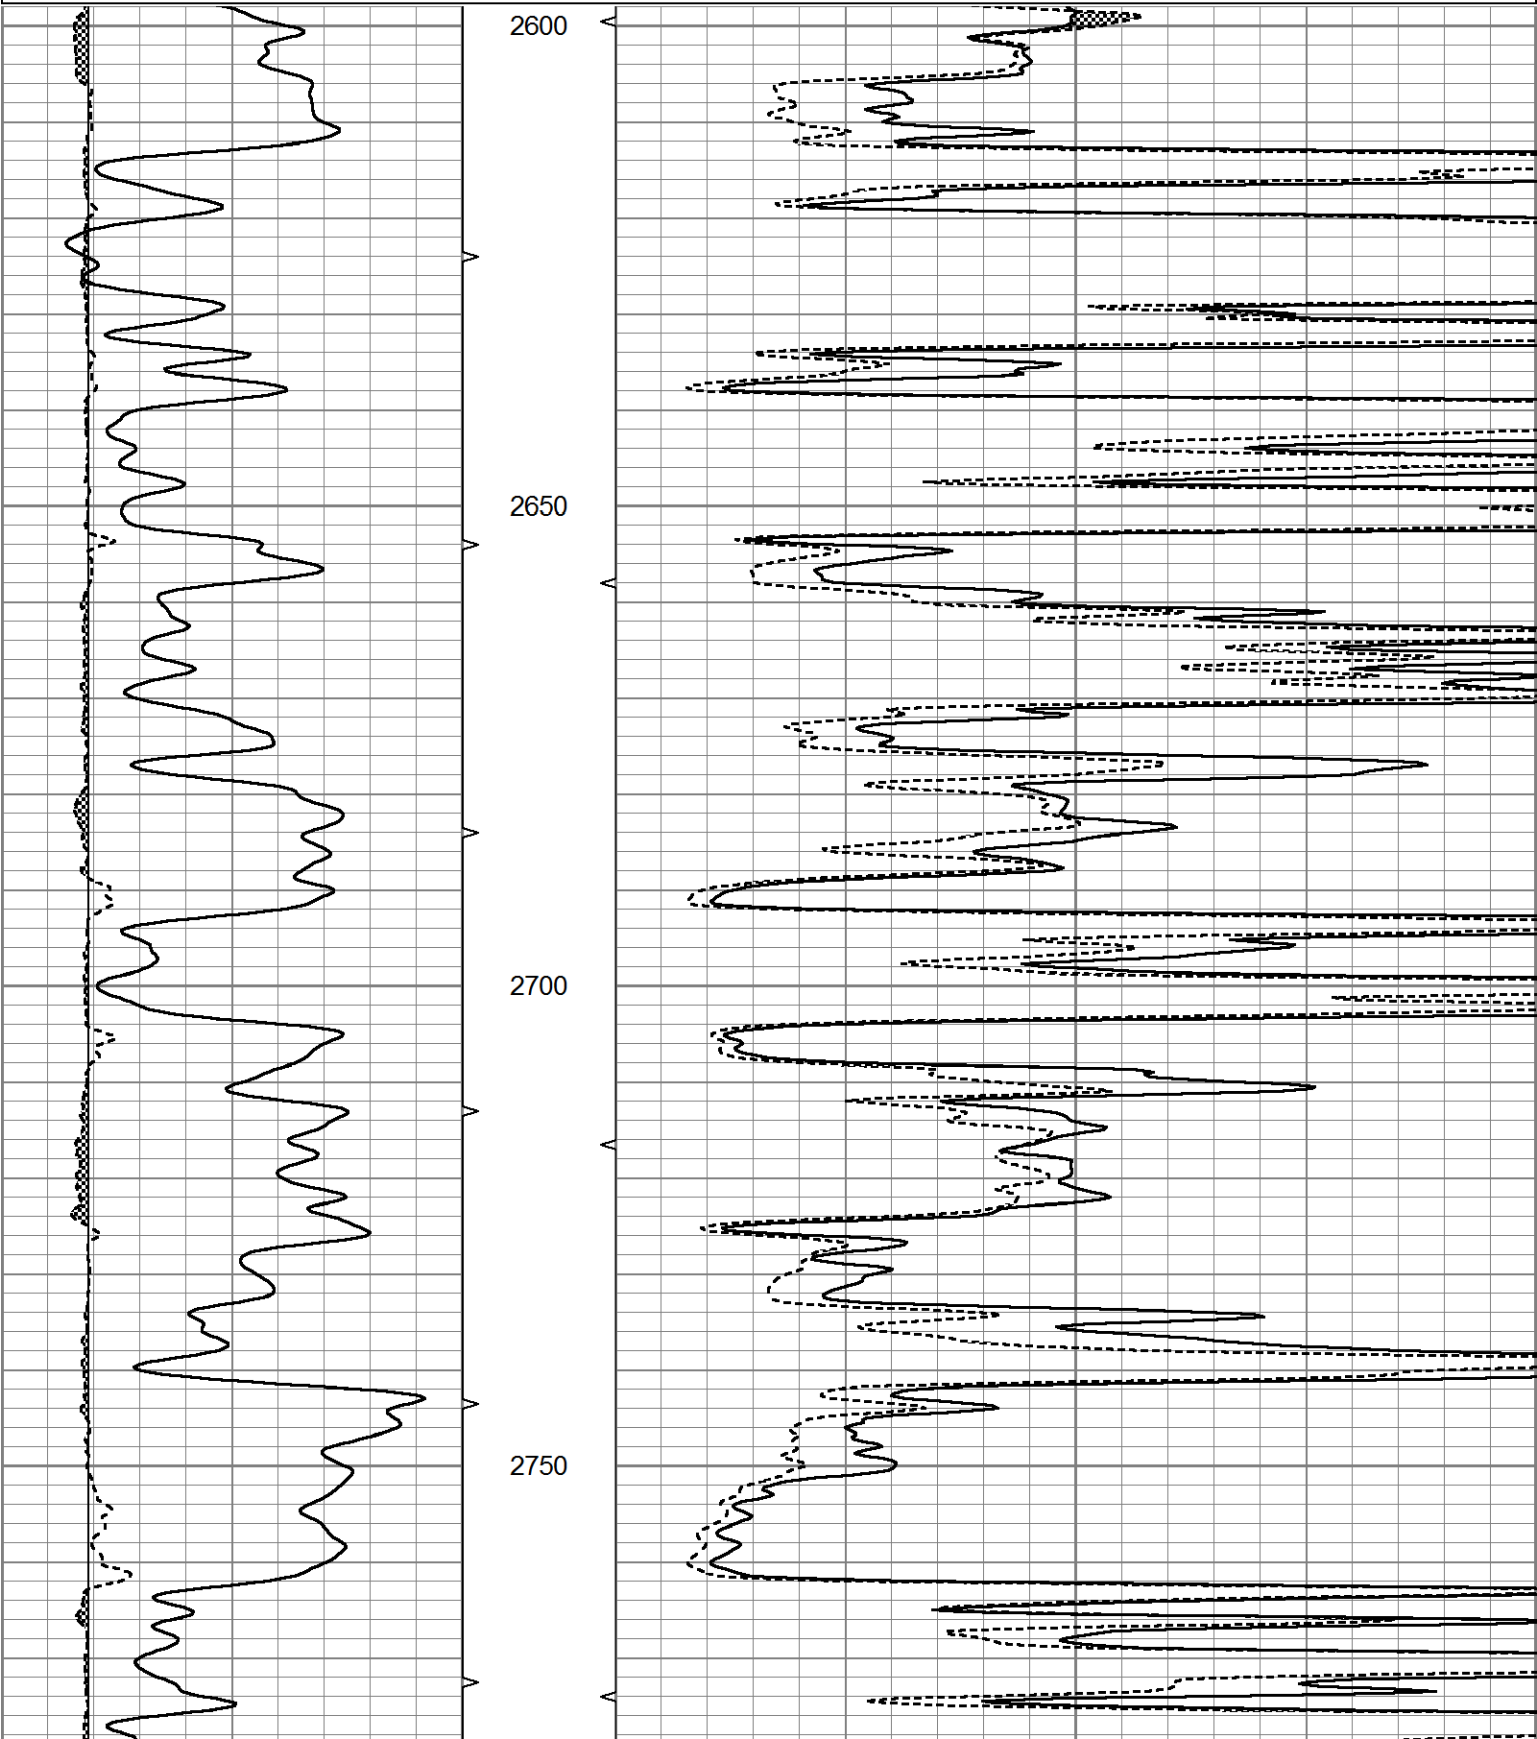

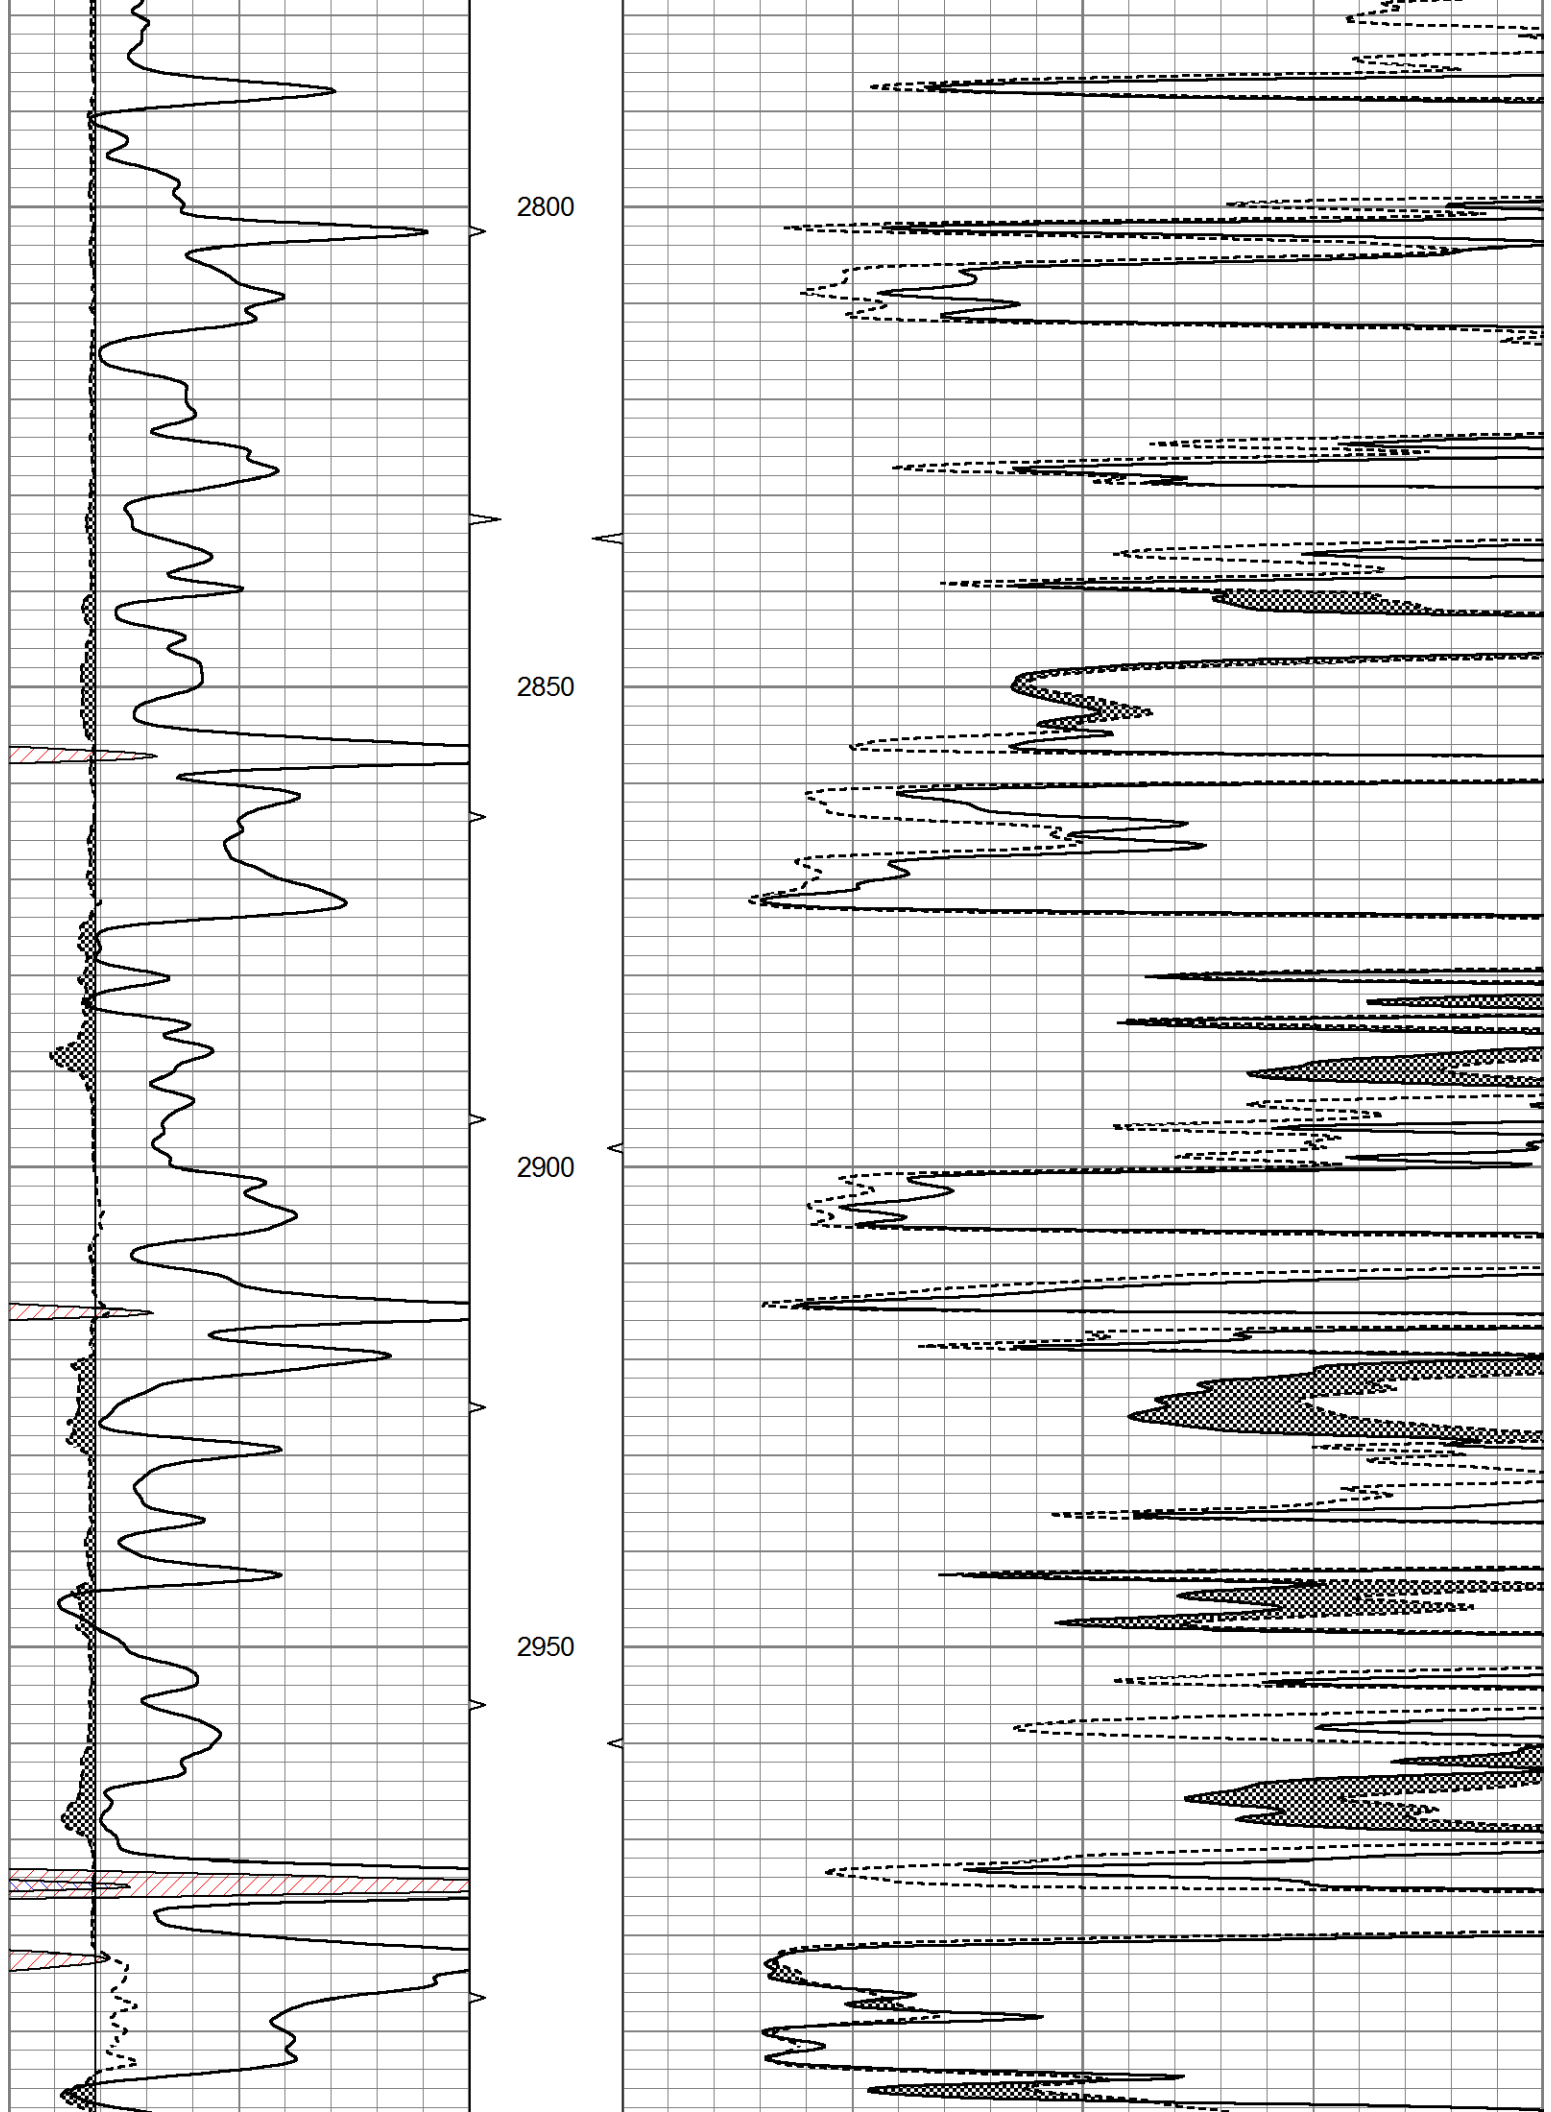

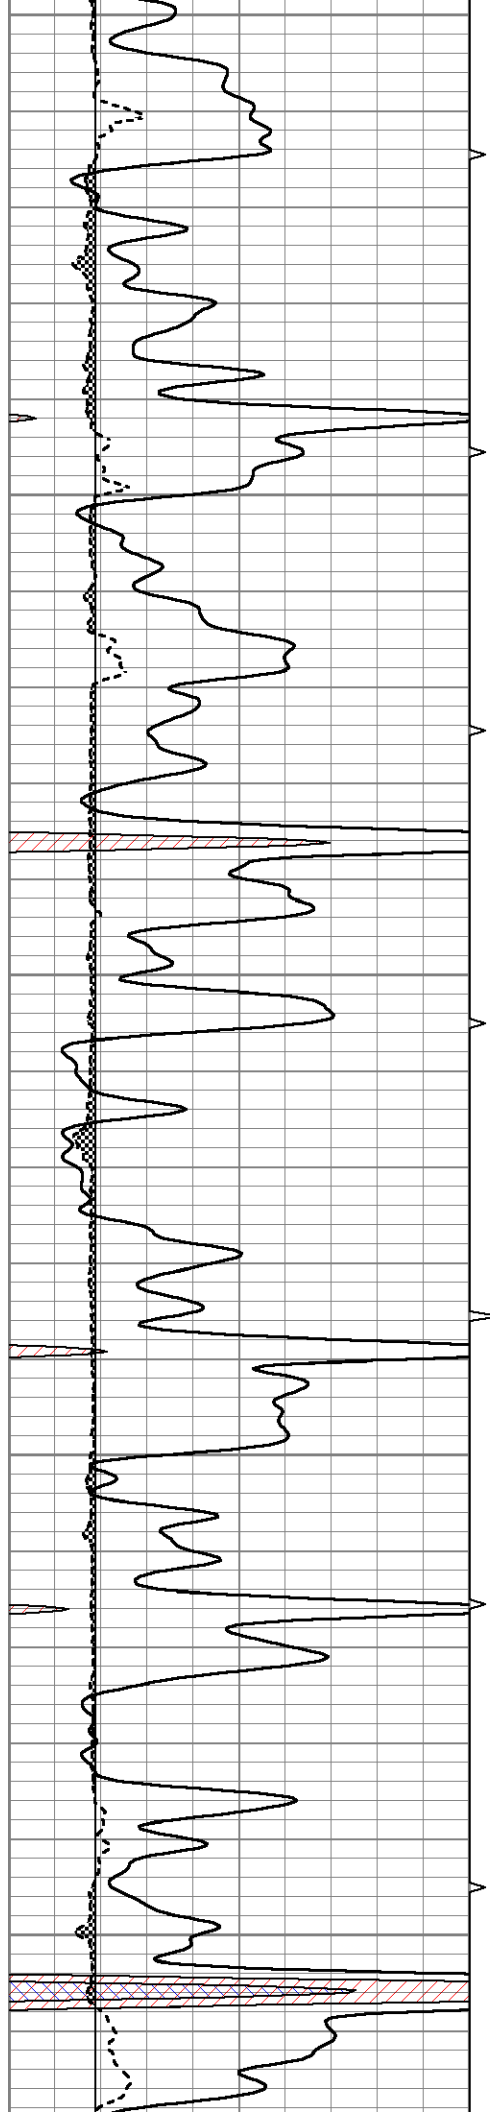


3000


3050

3100

3150

3200

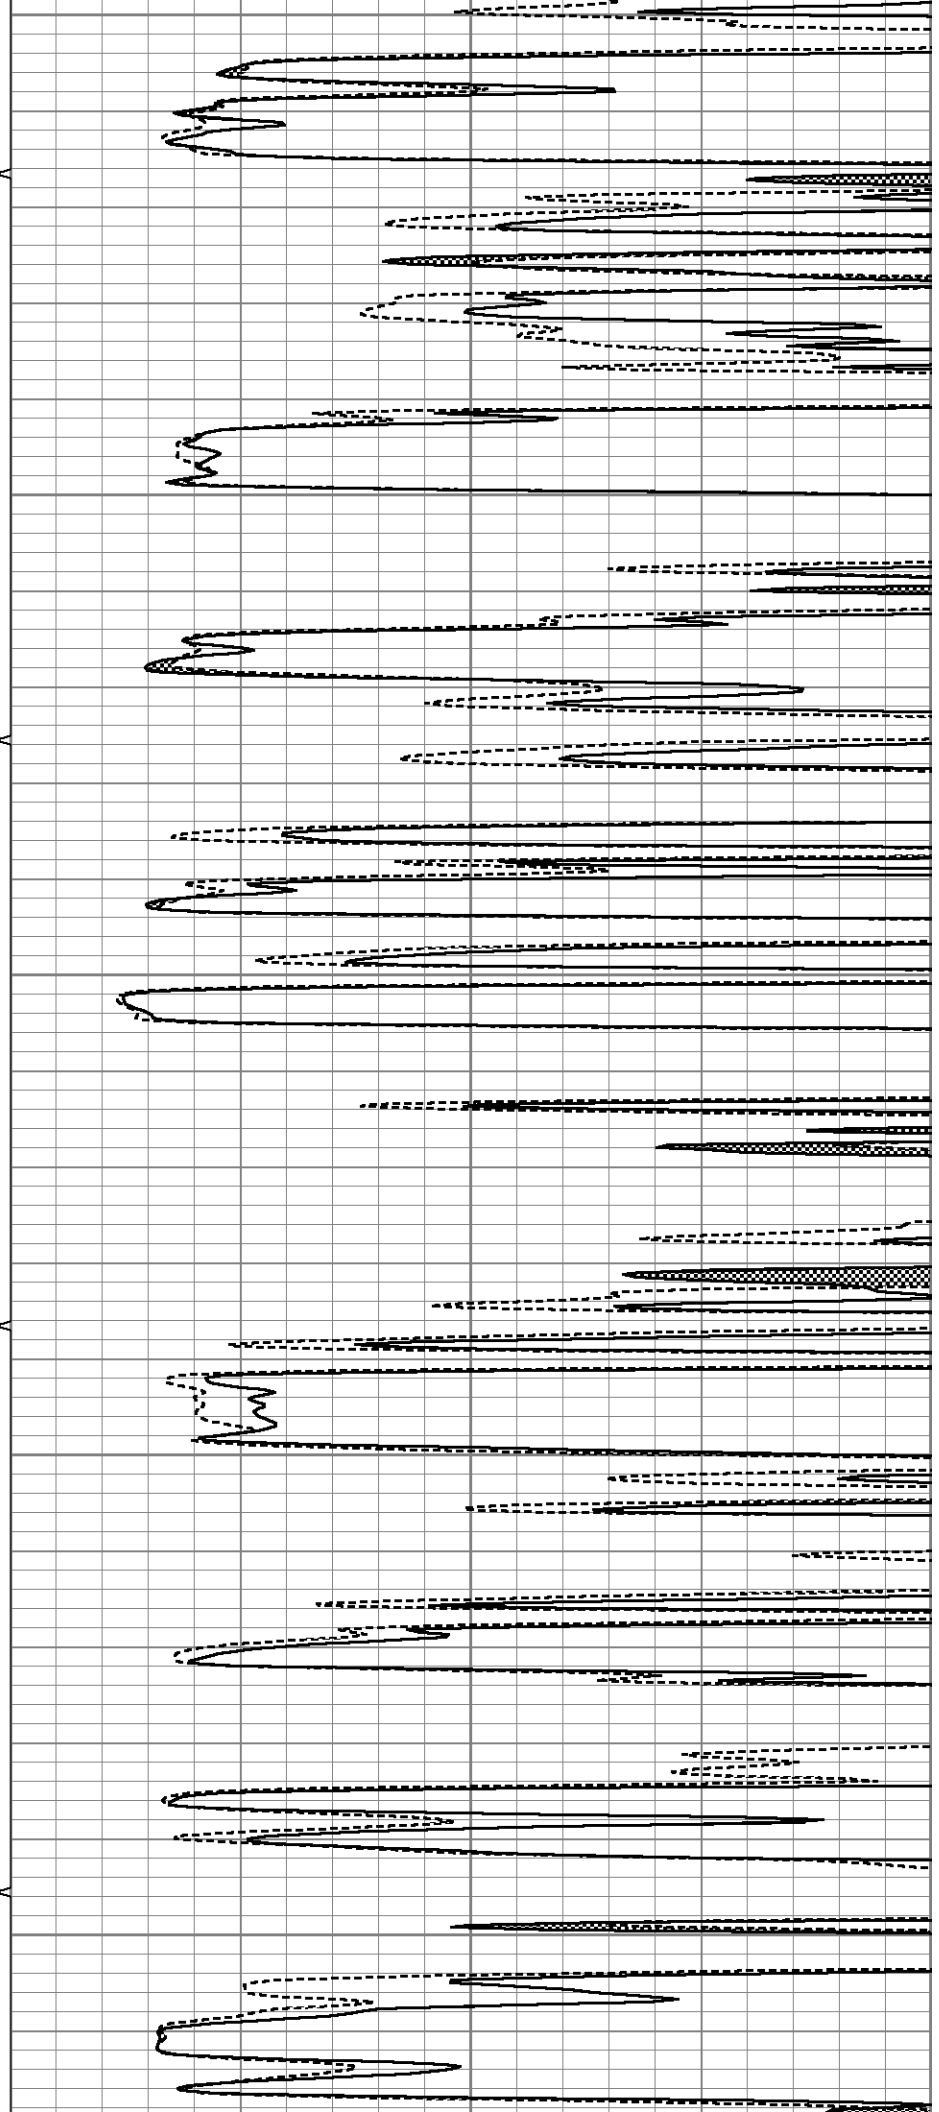

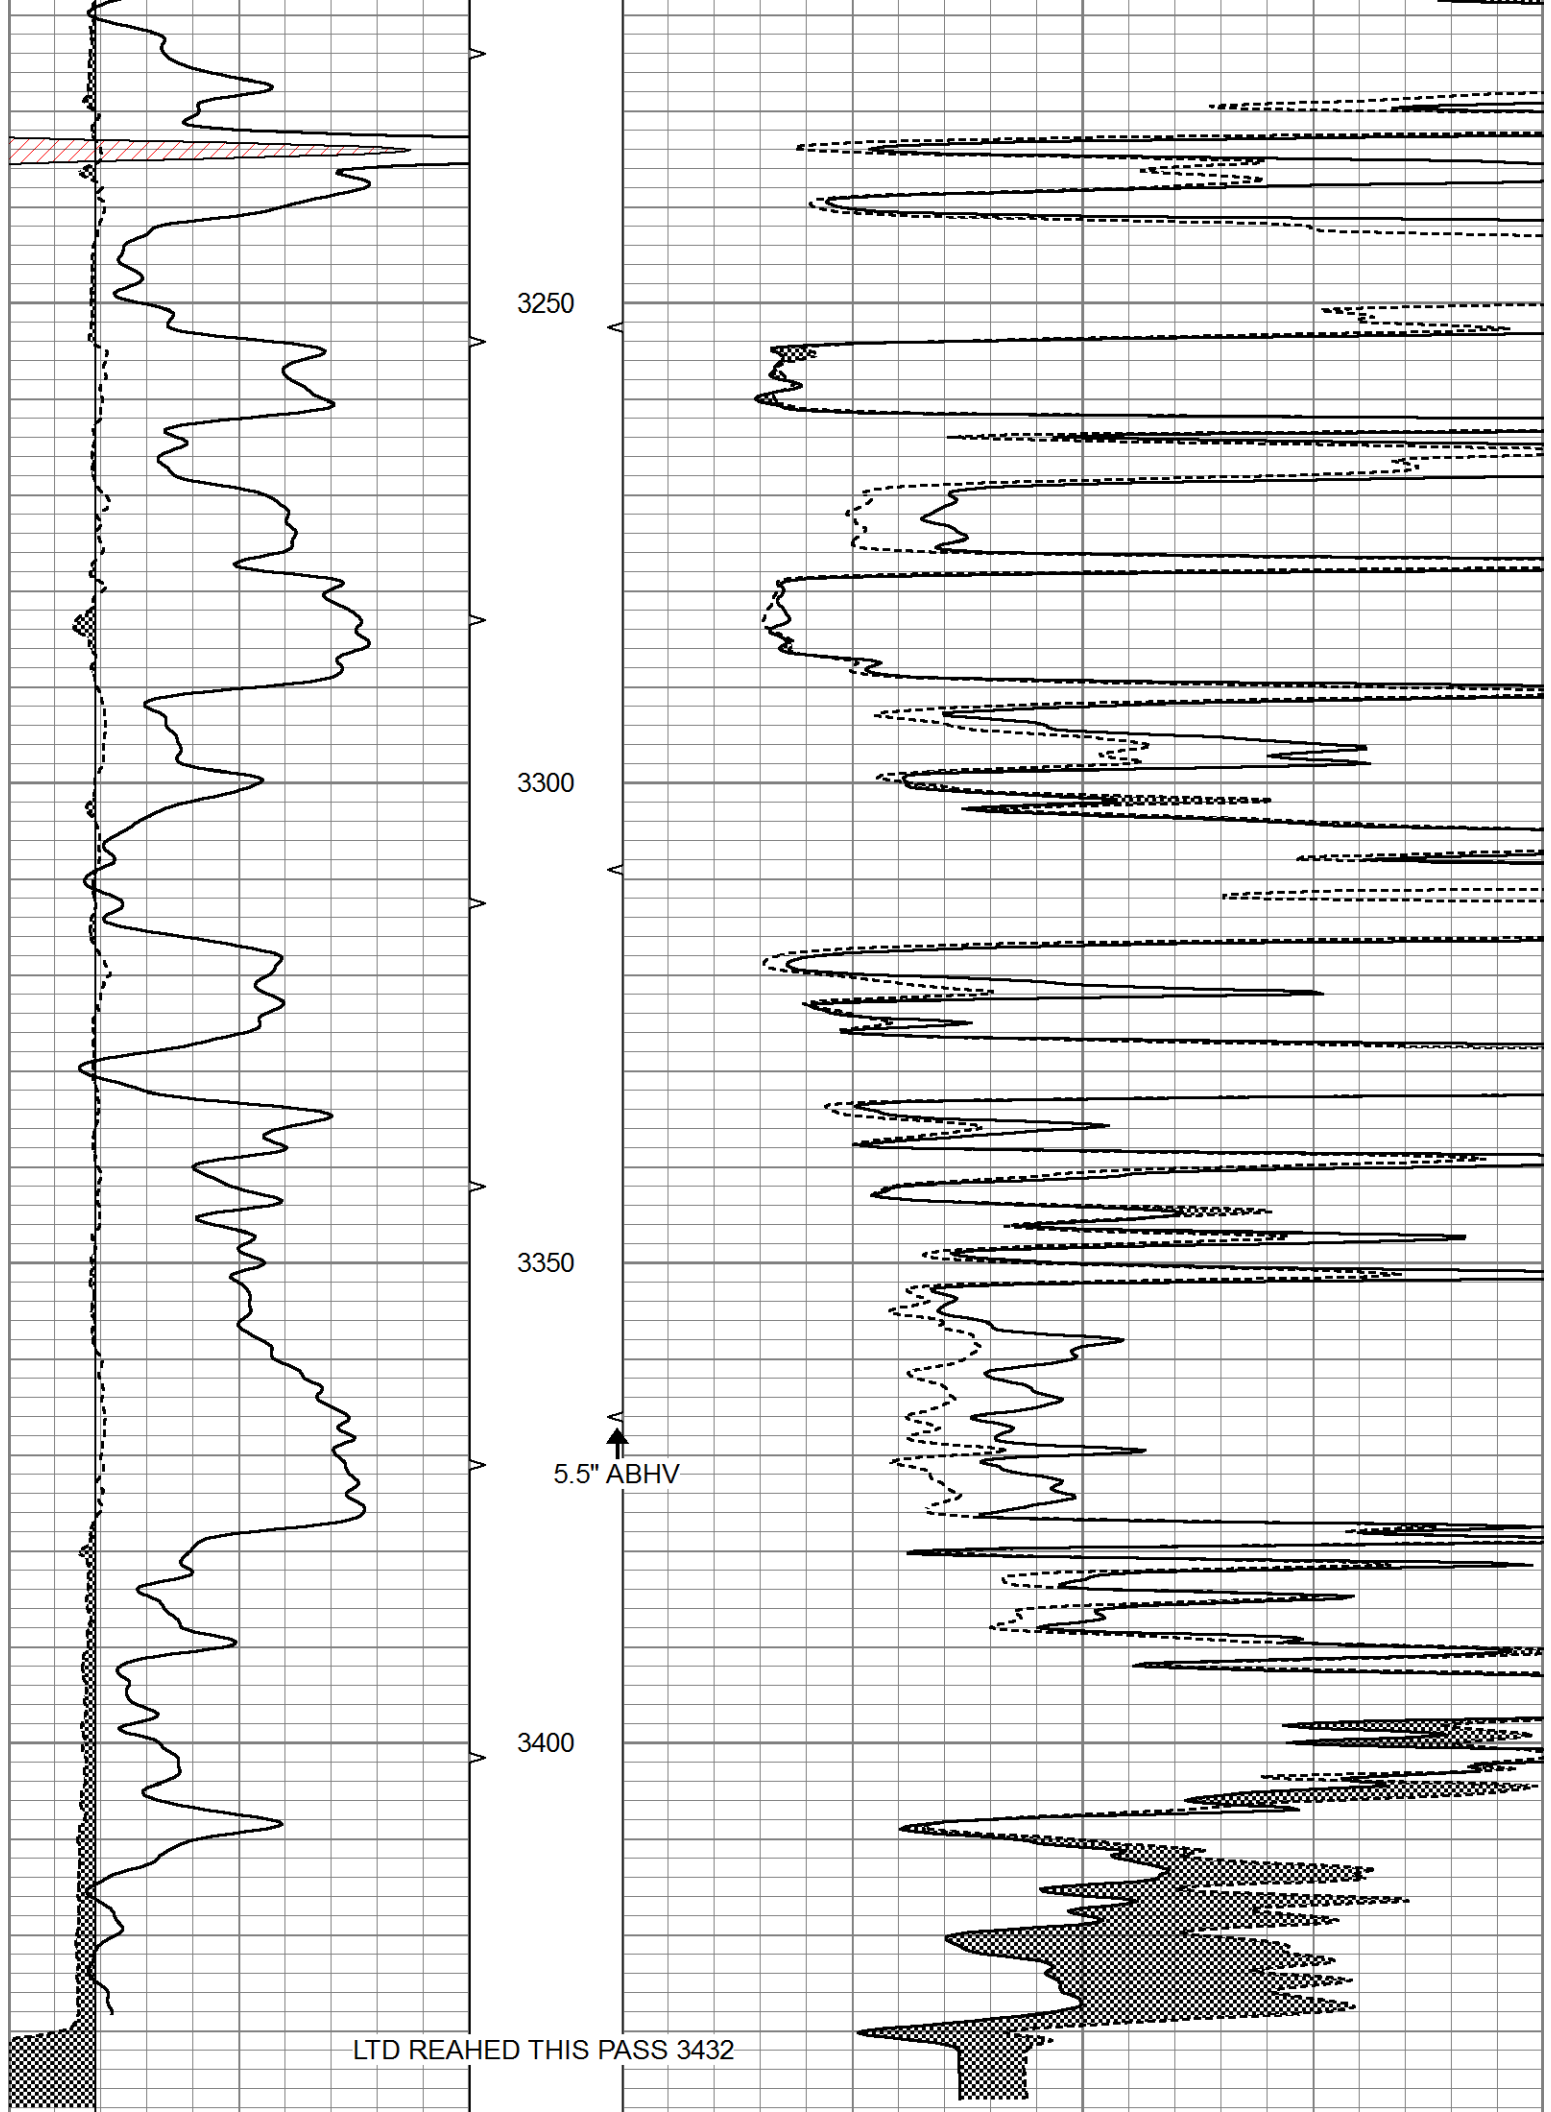


0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3) 0	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			




REPEAT SECTION

Database File 9521ddn.db
 Dataset Pathname pass5.1
 Presentation Format micro
 Dataset Creation Mon Mar 16 17:26:52 2026
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3) 0	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

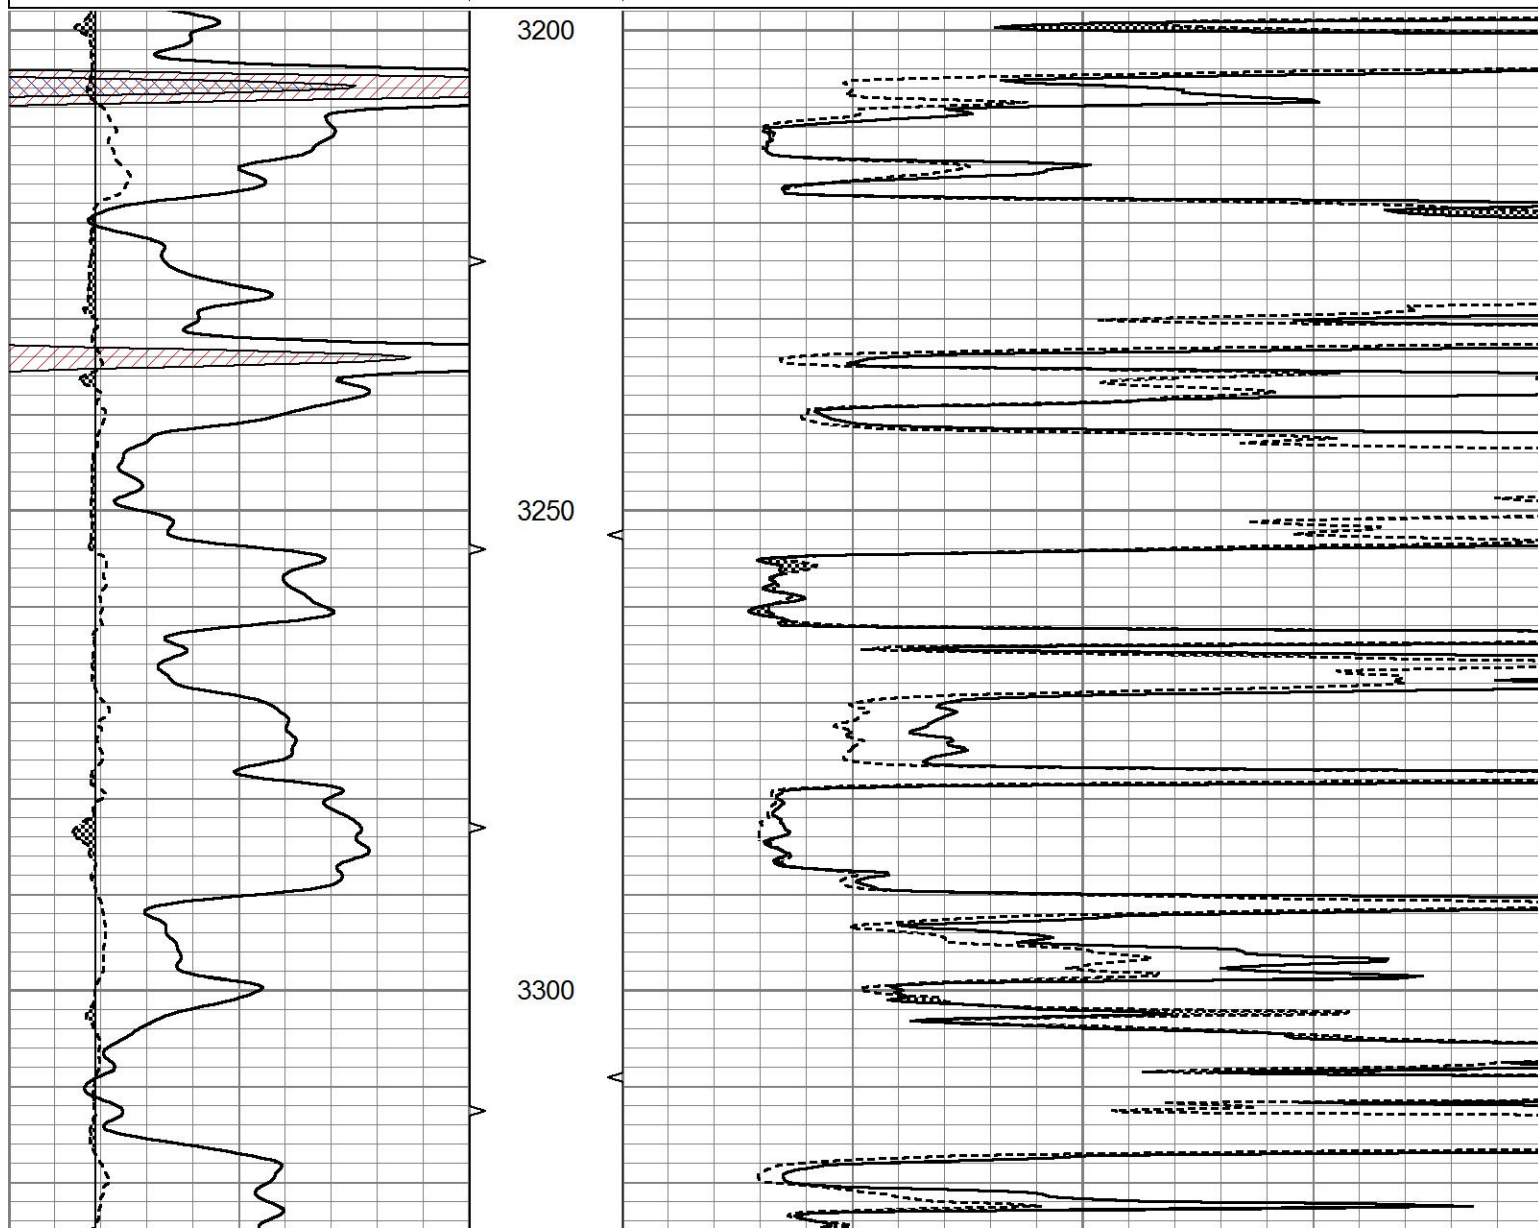

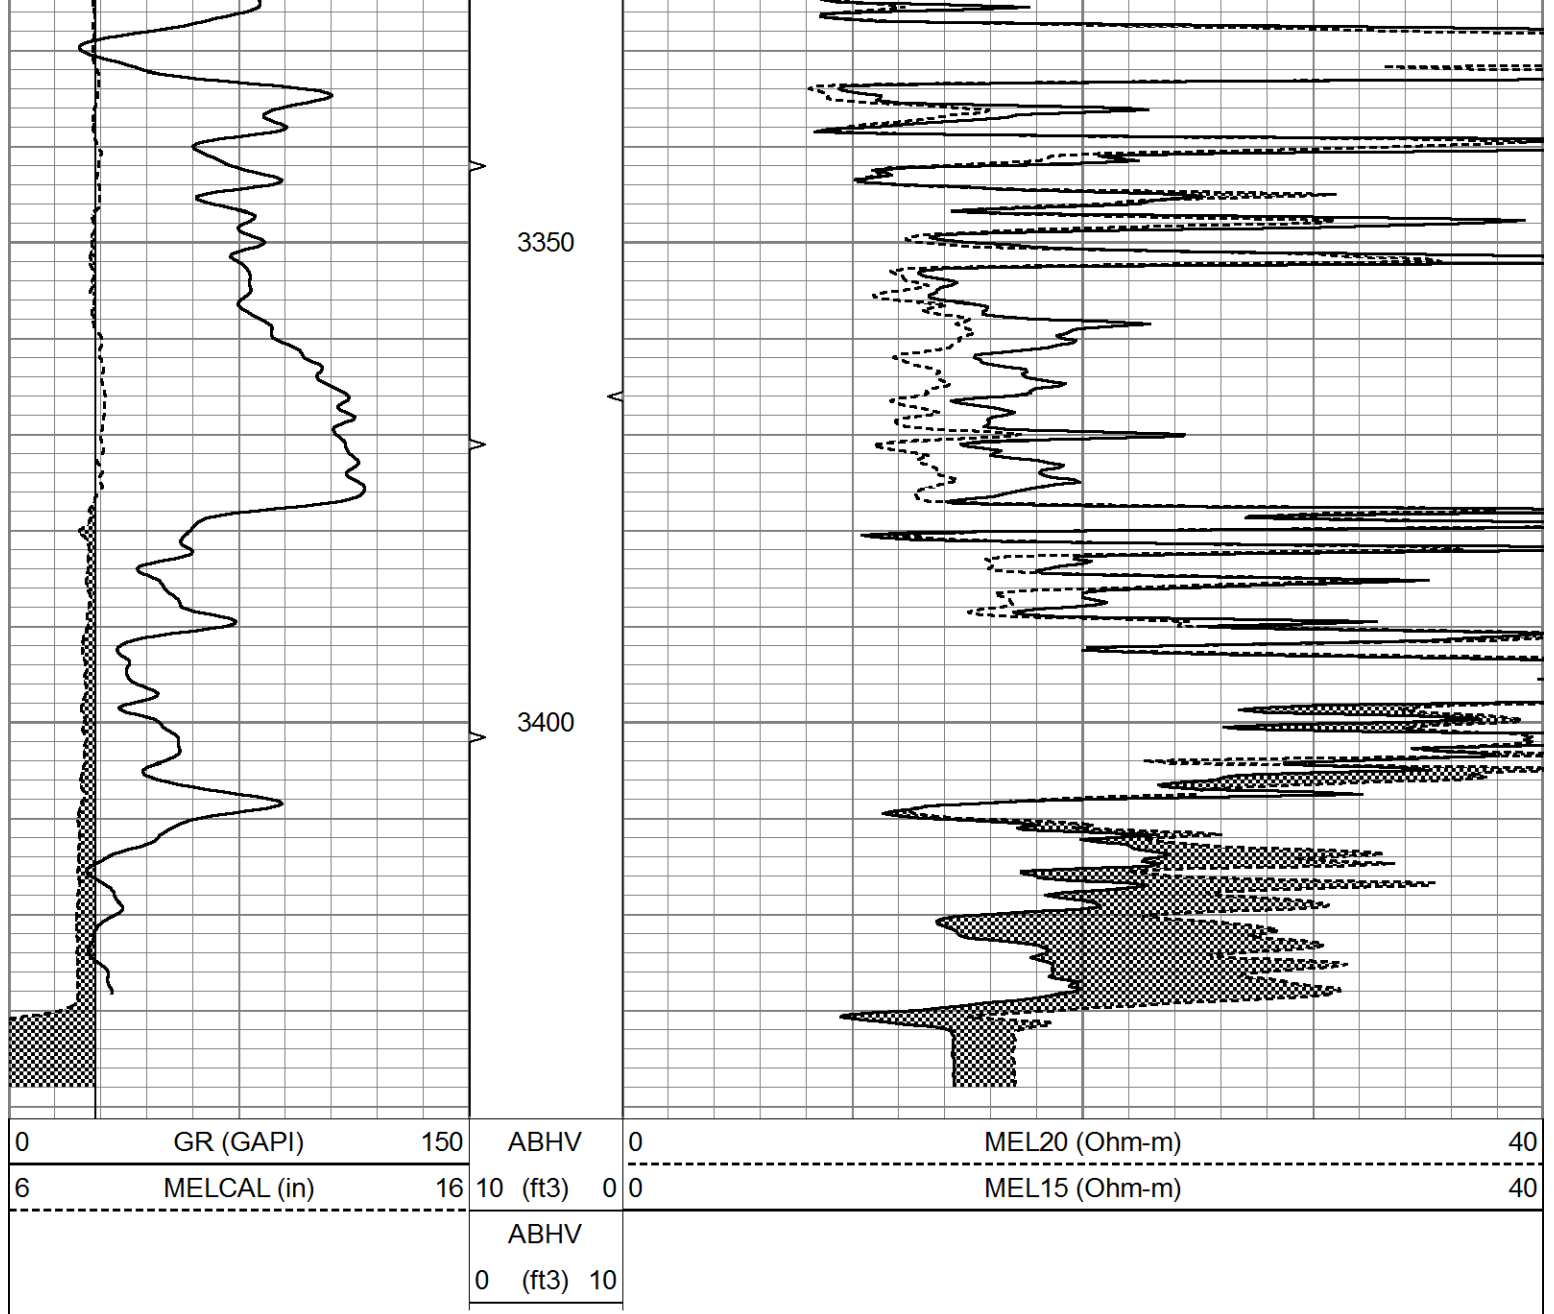

Calibration Report			
Database File	9521ddn.db		
Dataset Pathname	pass6.1		
Dataset Creation	Mon Mar 16 17:16:11 2026		
MICRO Calibration Report			
Serial Number:	MICRO6		
Tool Model:	PROBE		
Performed:	Wed Feb 04 17:41:57 2026		
Caliper Calibration:	Gain=3.670	Offset=3.156	
	Low Cal	High Cal	
References	8.000	16.000	
Readings	1.320	3.500	
1.5" Calibration:	Gain=55.000	Offset=0.500	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.001	1.216	
2" Calibration:	Gain=70.000	Offset=0.000	

Z-Calibration:	Gain=70.000	Offset=0.000
References	Low Cal	High Cal
	0.000	20.000
Readings	0.004	0.985
Gamma Ray Calibration Report		
Serial Number:	GR6	
Tool Model:	OPEN	
Performed:	Sat Jan 10 18:28:23 2026	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.9000	GAPI/cps