

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-025-21409-00-00
Spot: SWSWSEW Sec/Twnshp/Rge: 9-31S-21W
2480 feet from N Section Line, 1560 feet from W Section Line
Lease Name: SHRAUNER Well #: 1-9
County: CLARK Total Vertical Depth: 6410 feet

Operator License No.: 5316
Op Name: FALCON EXPLORATION, INC.
Address: 125 N. MARKET, STE. 1252
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	635		WITH 400 SX CMT

\$ 208.33

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 05/15/2007 12:00 PM
Plug Co. License No.: 5822 Plug Co. Name: VAL ENERGY, INC.
Proposal Rcvd. from: RON MOON Company: VAL ENERGY, INC. Phone: (316) 263-6688

Proposed Plugging Method: 1ST PLUG AT 6330' WITH 50 SX CMT. 2ND PLUG AT 1110' WITH 50 SX CMT. 3RD PLUG AT 660' WITH 50 SX CMT. 4TH PLUG AT 210' WITH 30 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.


Plugging Proposal Received By: LINDLEY REIMER WitnessType: NONE
Date/Time Plugging Completed: 05/15/2007 2:15 PM KCC Agent: LINDLEY REIMER

Actual Plugging Report: _____ Perfs: _____
1ST PLUG AT 6330' WITH 50 SX CMT. 2ND PLUG AT 1110' WITH 50 SX CMT. 3RD PLUG AT 660' WITH 50 SX CMT. 4TH PLUG AT 210' WITH 30 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

INVOICED
DATE 5-23-07
INV. NO. 2007061787

Remarks: USED 60/40 POZMIX 6% GEL BY JET STAR.
Plugged through: DP

District: 01

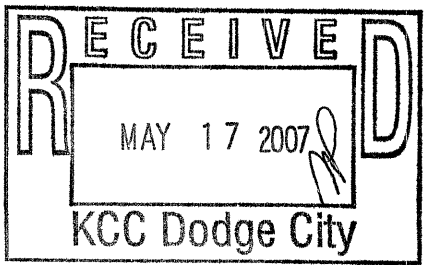

Signed _____ (TECHNICIAN)

RECEIVED
KANSAS CORPORATION COMMISSION

MAY 21 2007

CONSERVATION DIVISION
WICHITA, KS