

FRAC - FINDER LOG

Company	DOWNING - NELSON OIL CO., INC.		
Well	HFI #2-27		
Field	UNNAMED		
County	RAWLINS	State	KANSAS
Location:	API # : 15-153-21328-0000		Other Services CDL/CNL/DIL MEL/SONIC
Permanent Datum	GROUND LEVEL	Elevation	3358
Log Measured From	KELLY BUSHING 11' A.G.L		
Drilling Measured From	KELLY BUSHING		
	SEC 27 TWP 4S RGE 36W		
1549' FSL & 1459' FWL			
4/1/24			
Run Number	TWO		
Depth Driller	4960		
Depth Logger	4962		
Bottom Logged Interval	4954		
Top Log Interval	3600		
Casing Driller	8.625@478		
Casing Logger	478		
Bit Size	7.785		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 1,200 PPM	
Density / Viscosity	9.5/67		
pH / Fluid Loss	10.5/7.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	2.00@60F		
Rmf @ Meas. Temp	1.50@60F		
Rmc @ Meas. Temp	2.40@60F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.960@125F		
Time Circulation Stopped	4.5 HOURS		
Time Logger on Bottom	9.45 P.M.		
Maximum Recorded Temperature	125F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS	JEREMEY PASEK	
Witnessed By	MARC DOWNING		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-153-21328-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS. KANSAS (785) 628-6395
DIRECTIONS
BREWSTER, KS., N. TO "RD. H", 1E., 1/2N. ON TRAIL & E. INTO





MAIN SECTION

Database File	8479ddn.db
Dataset Pathname	pass7.1
Presentation Format	frac
Dataset Creation	Mon Apr 01 23:10:55 2024
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	200	WVF1 (usec)	1200
6	BOREID (in)	16	10 (ft3)	0		
6	CALIPER (in)	16	TBHV			
			0 (ft3)	10		

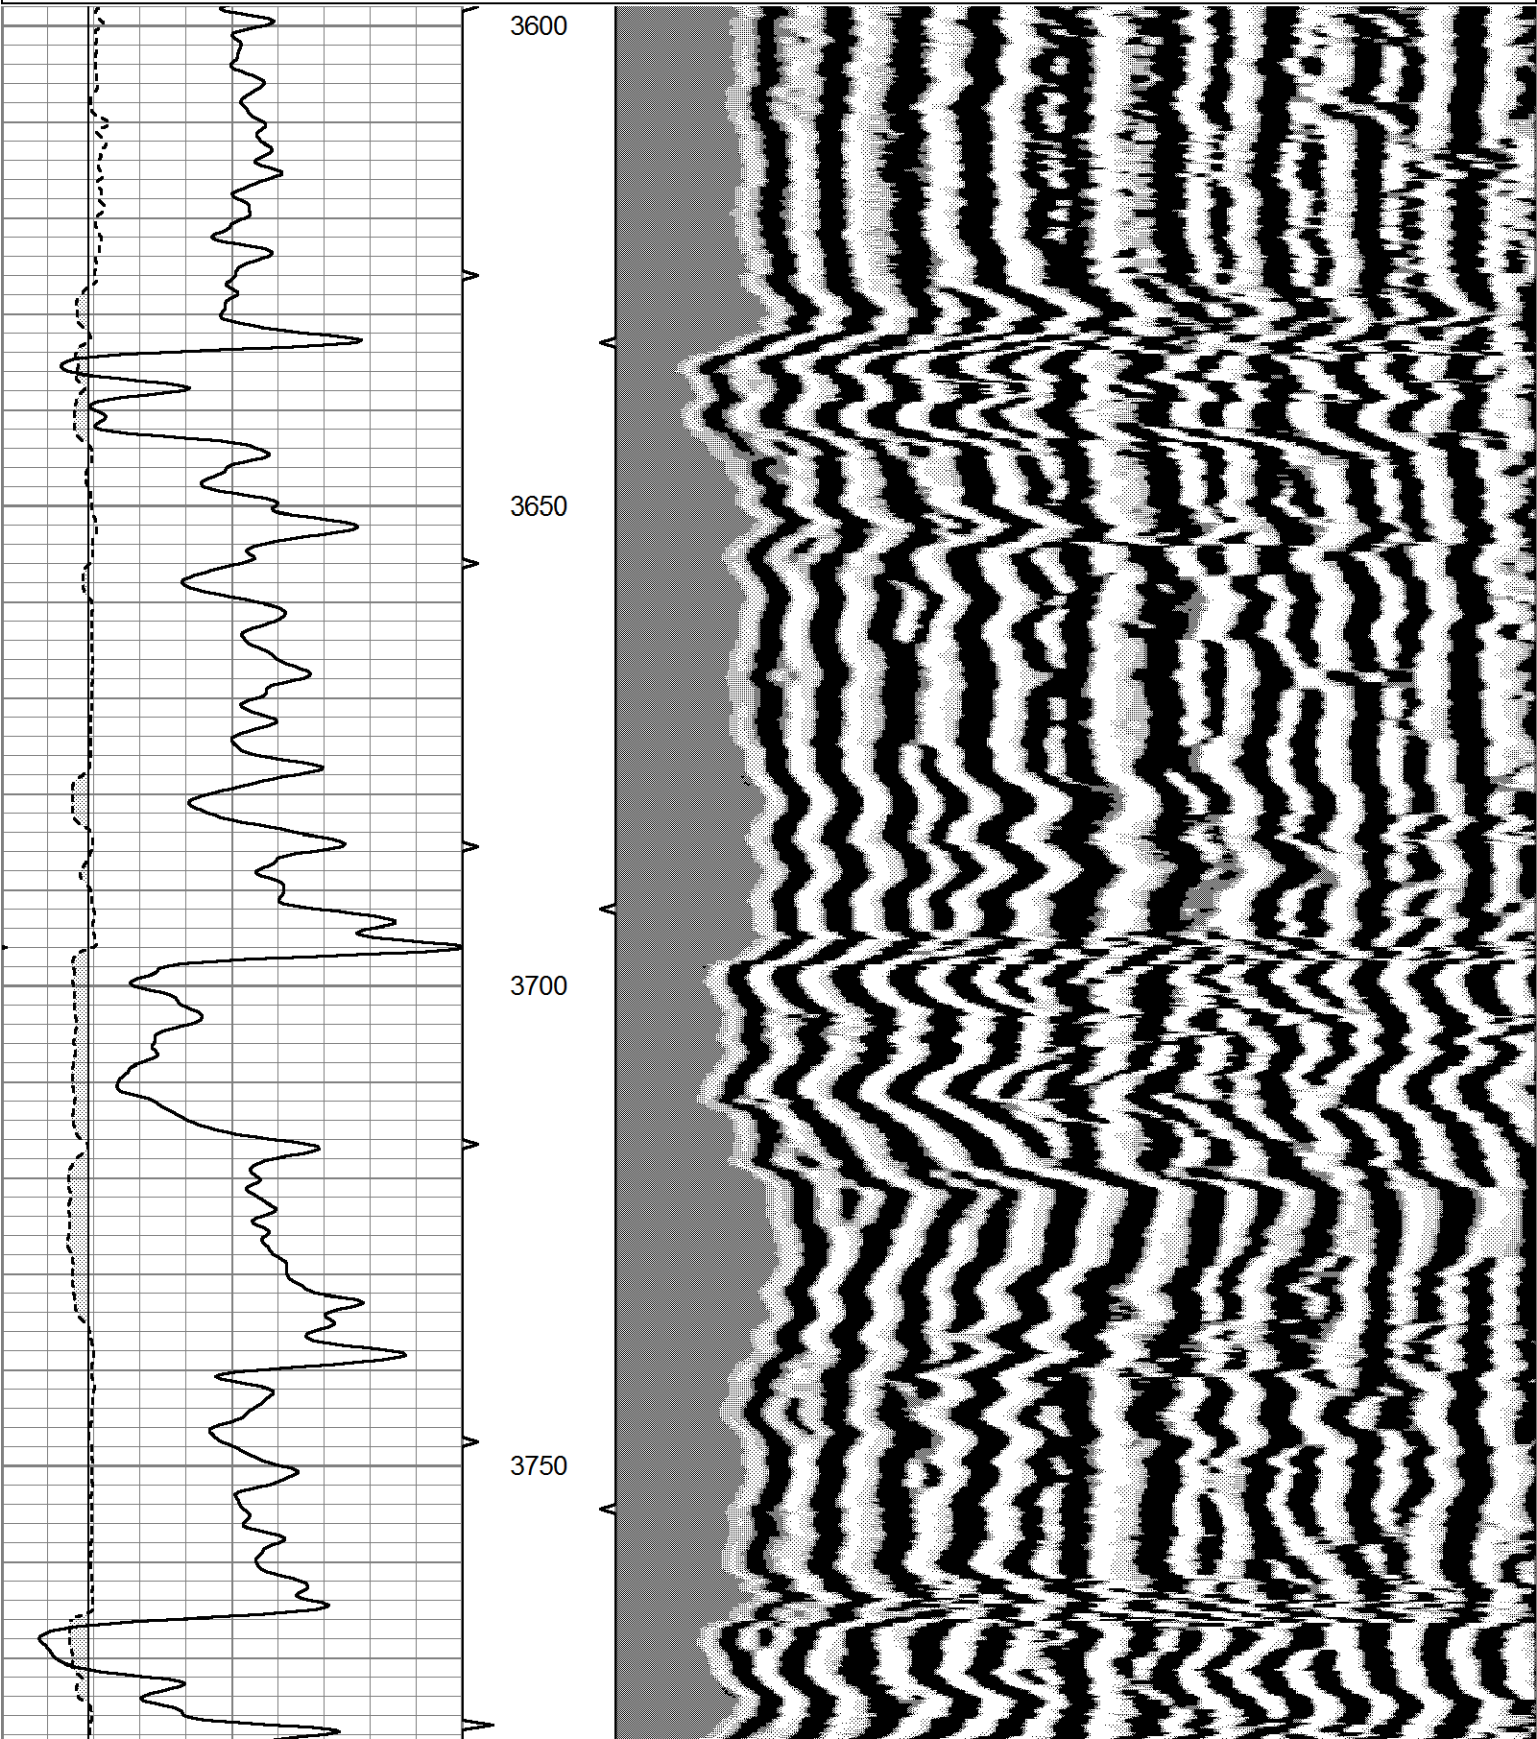

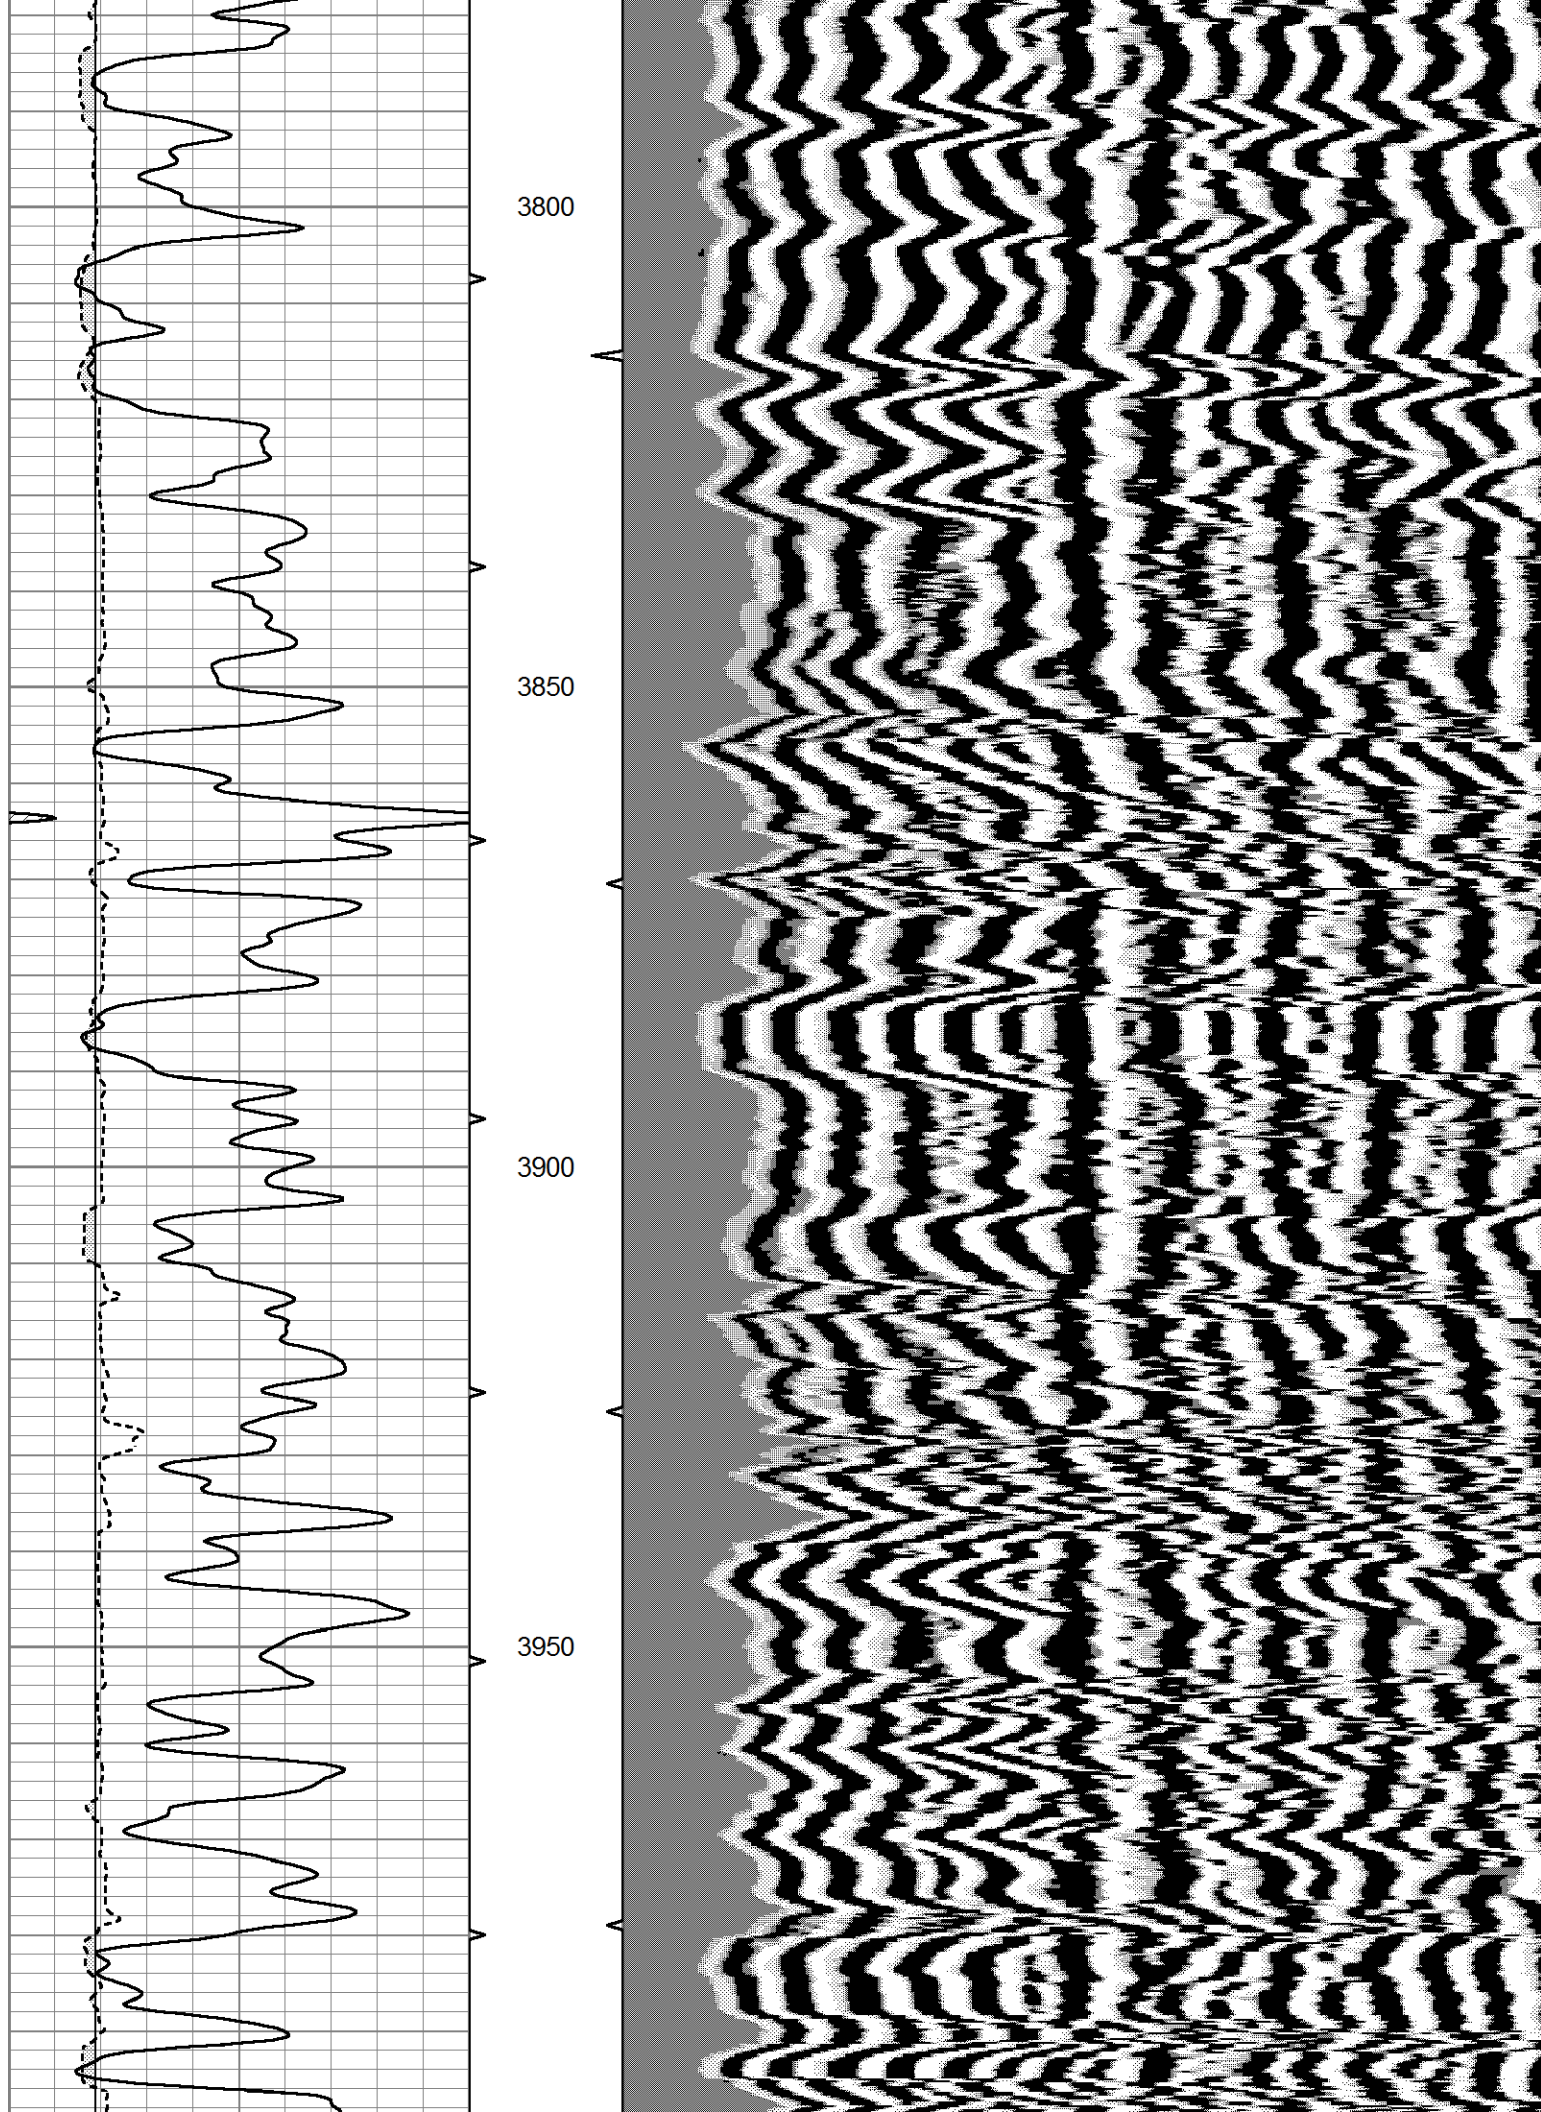

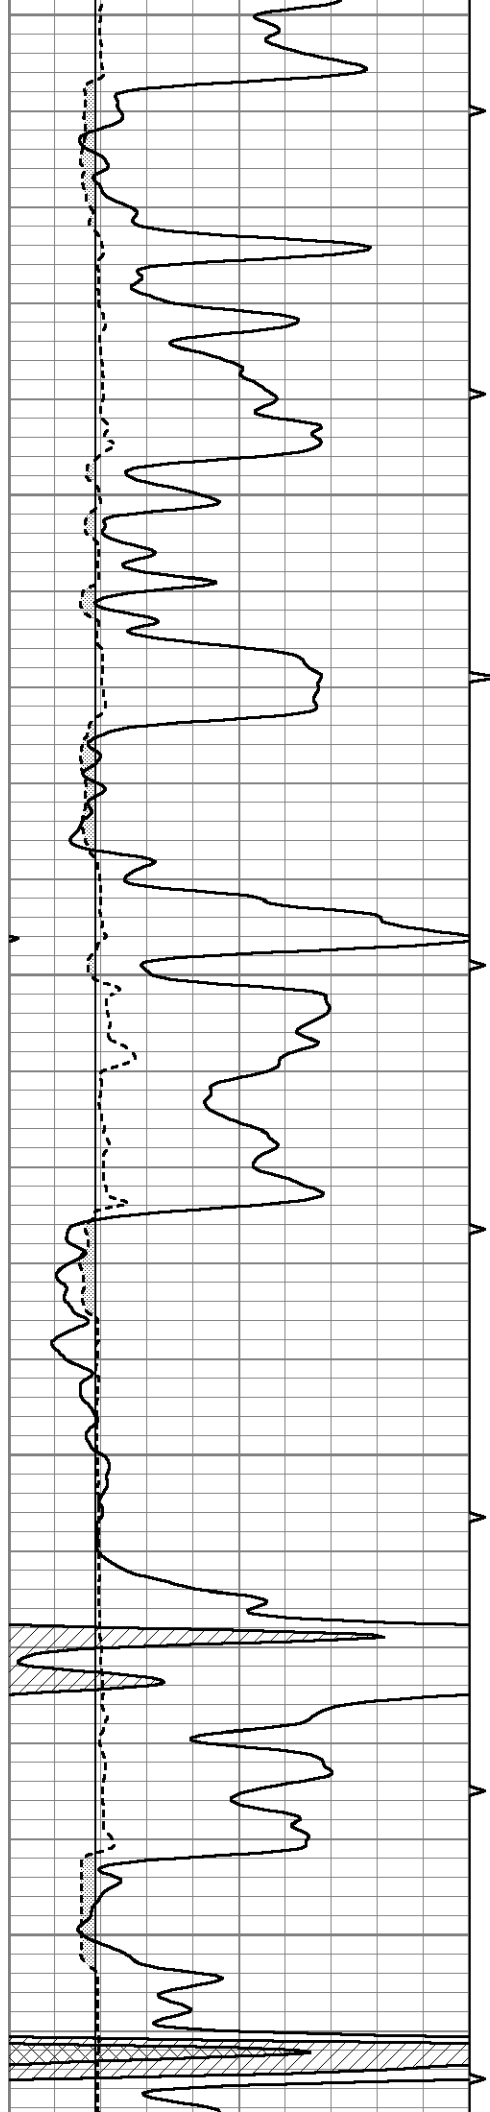


4000


4050



4100


4150

4200

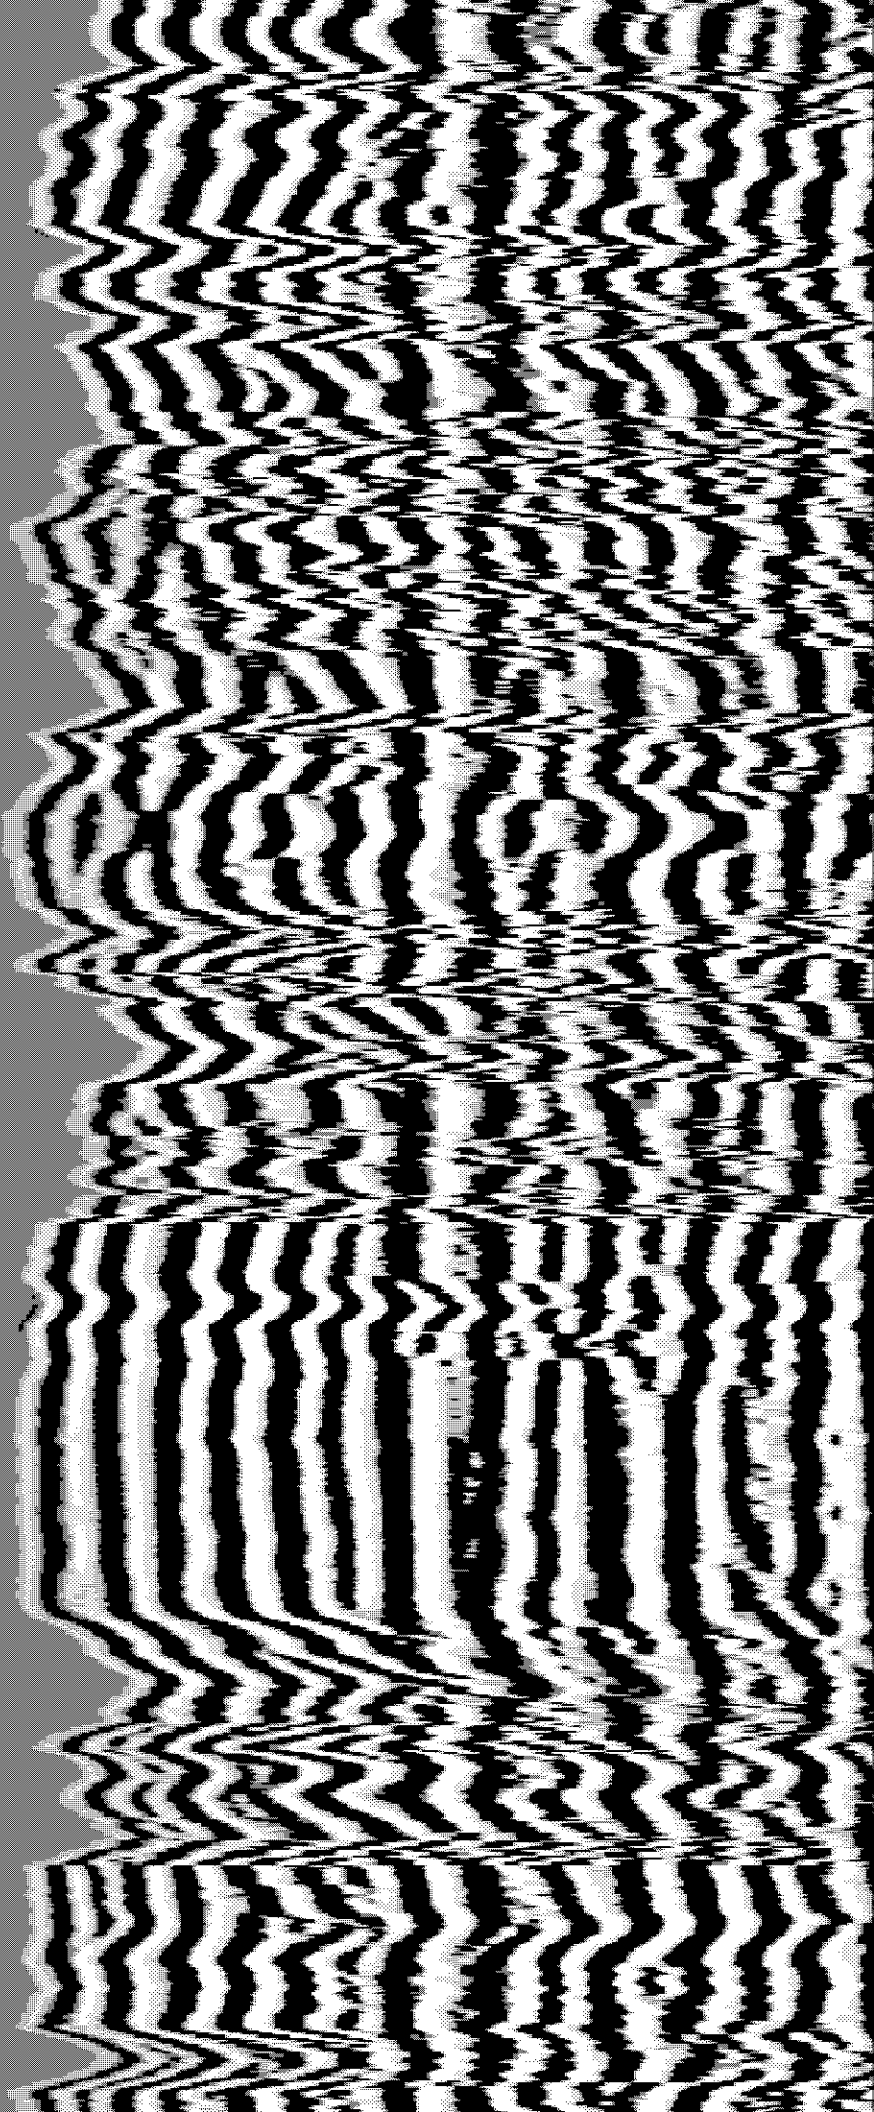

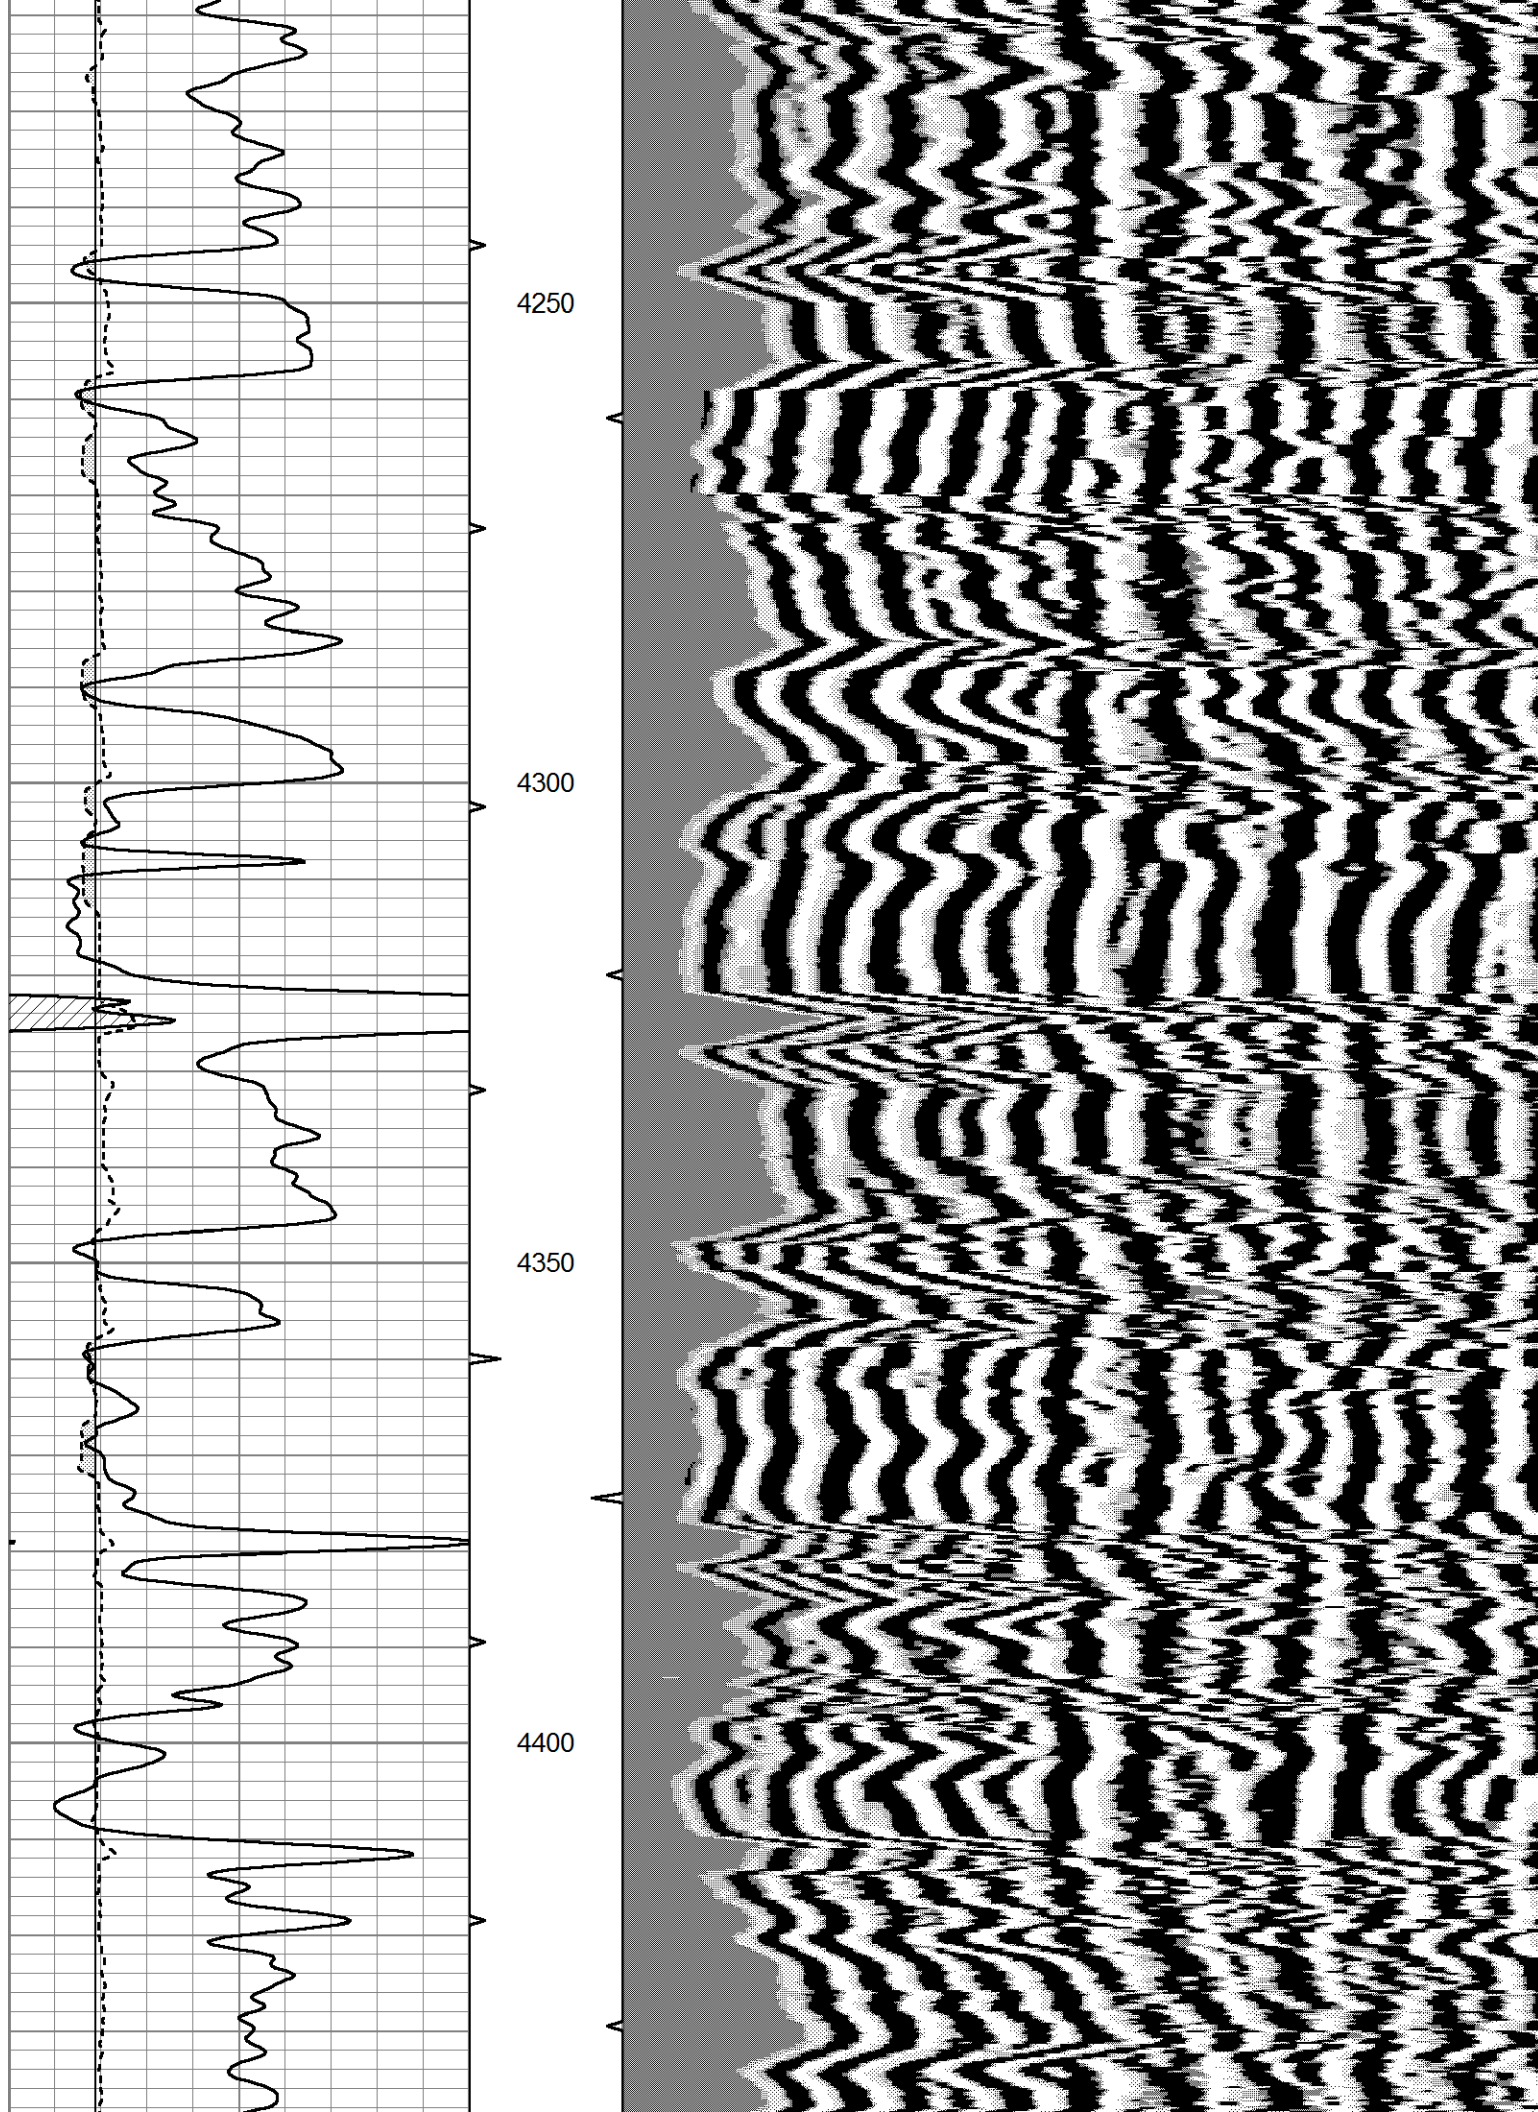

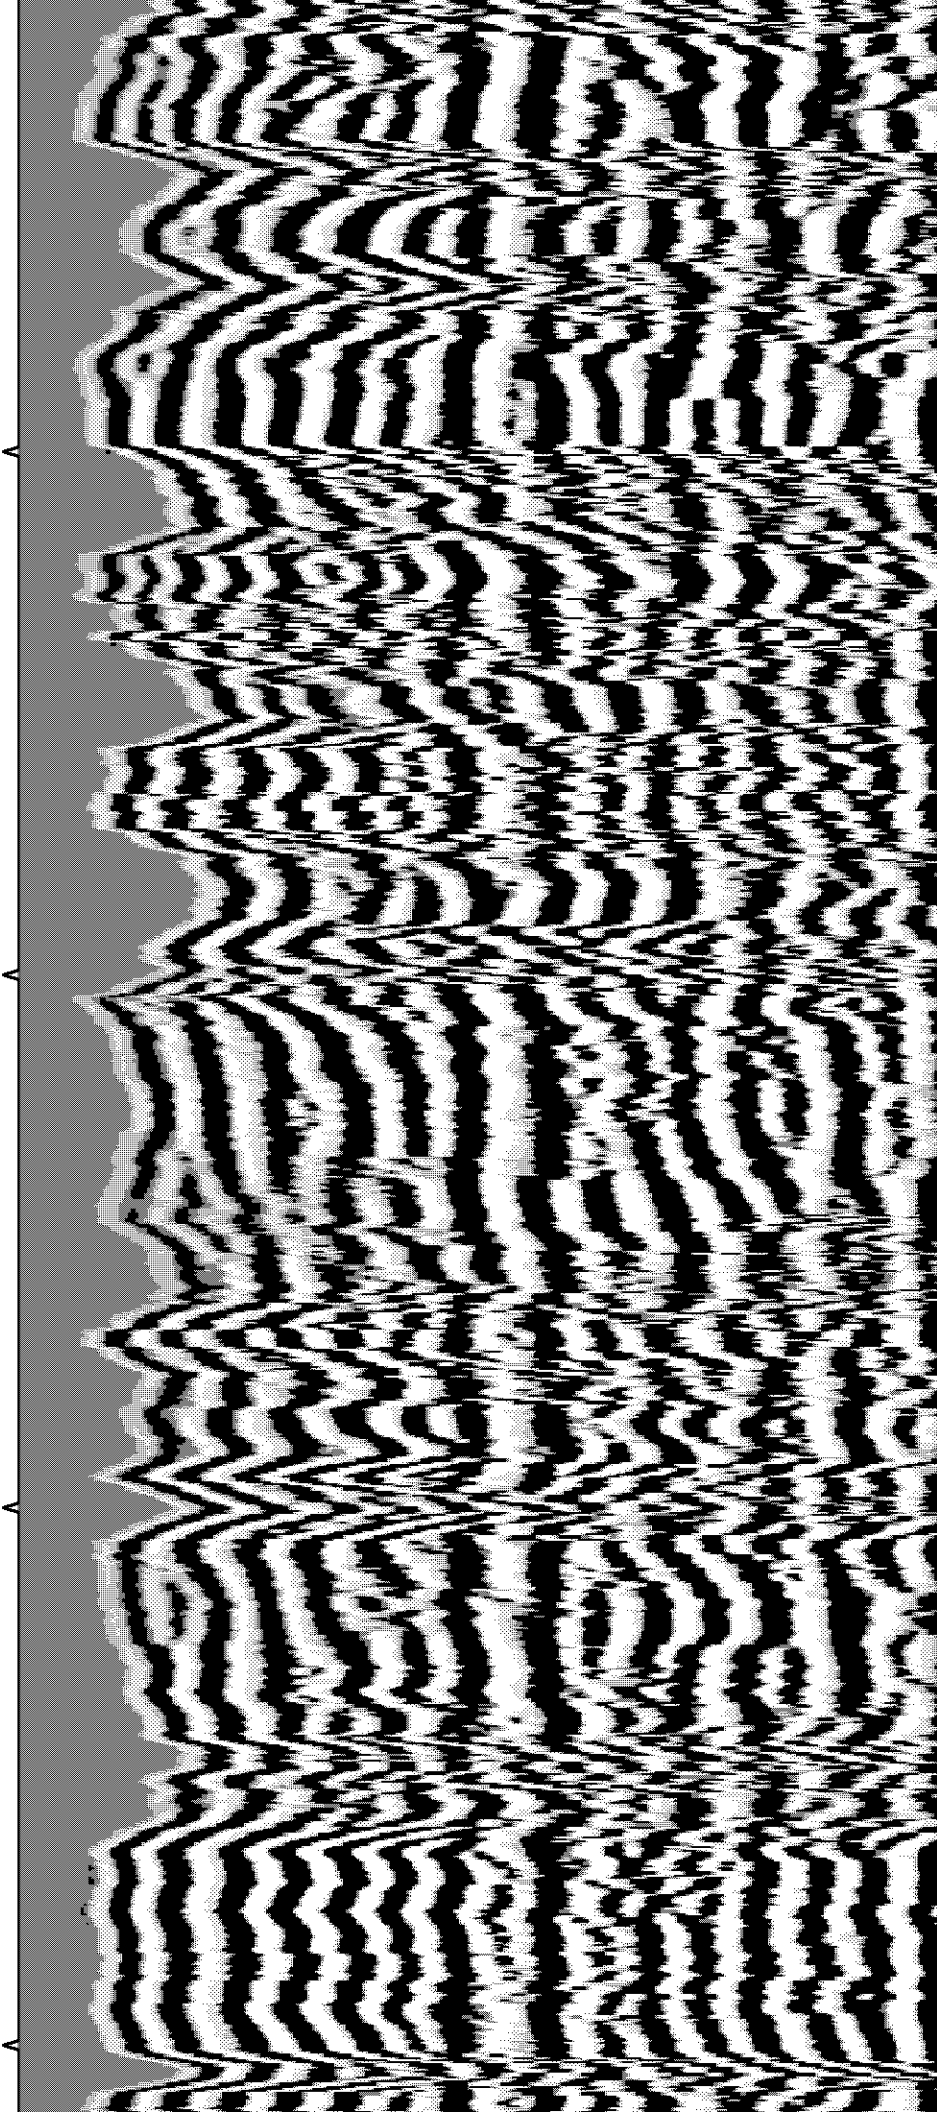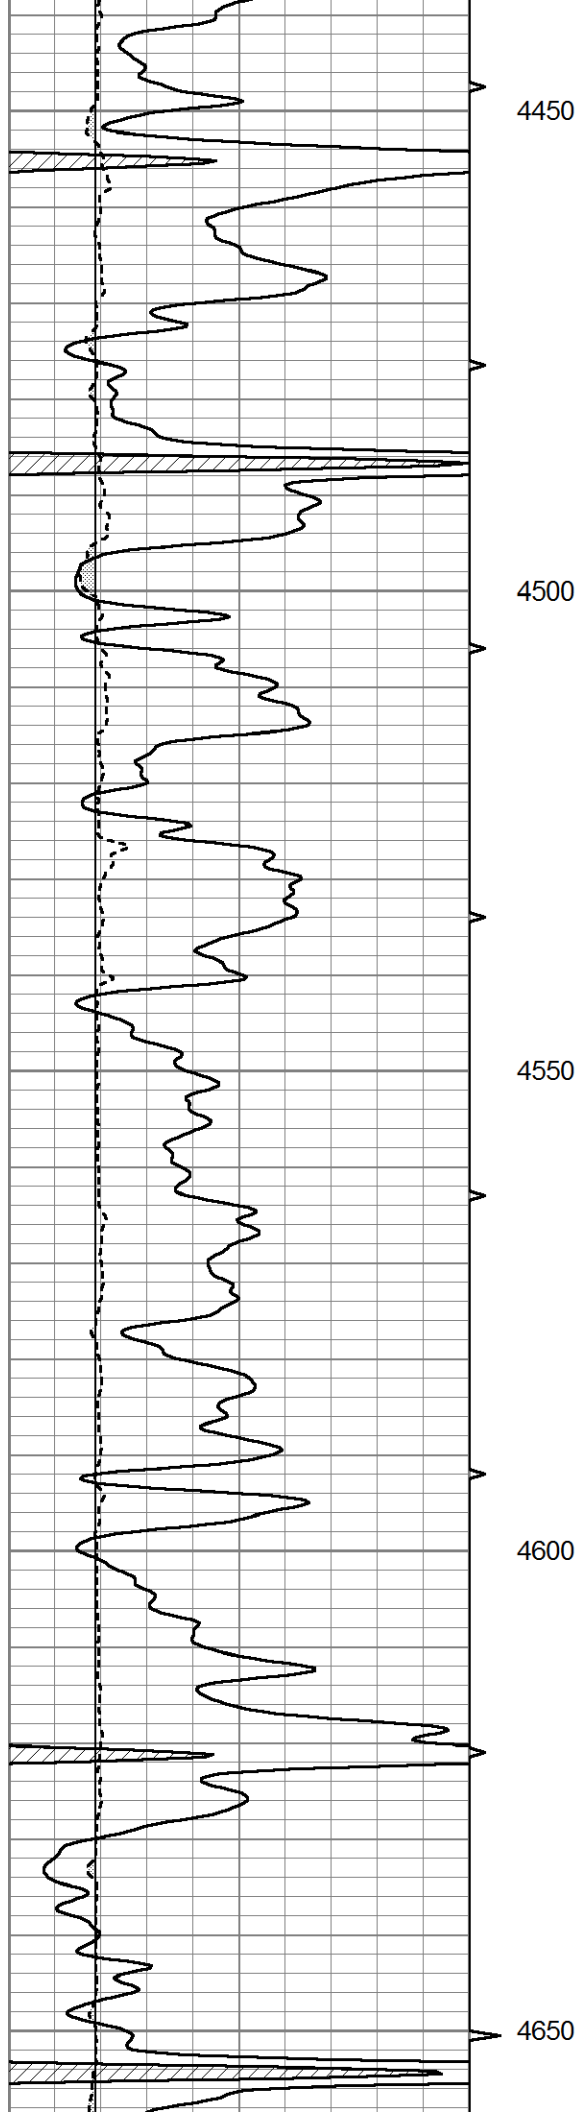

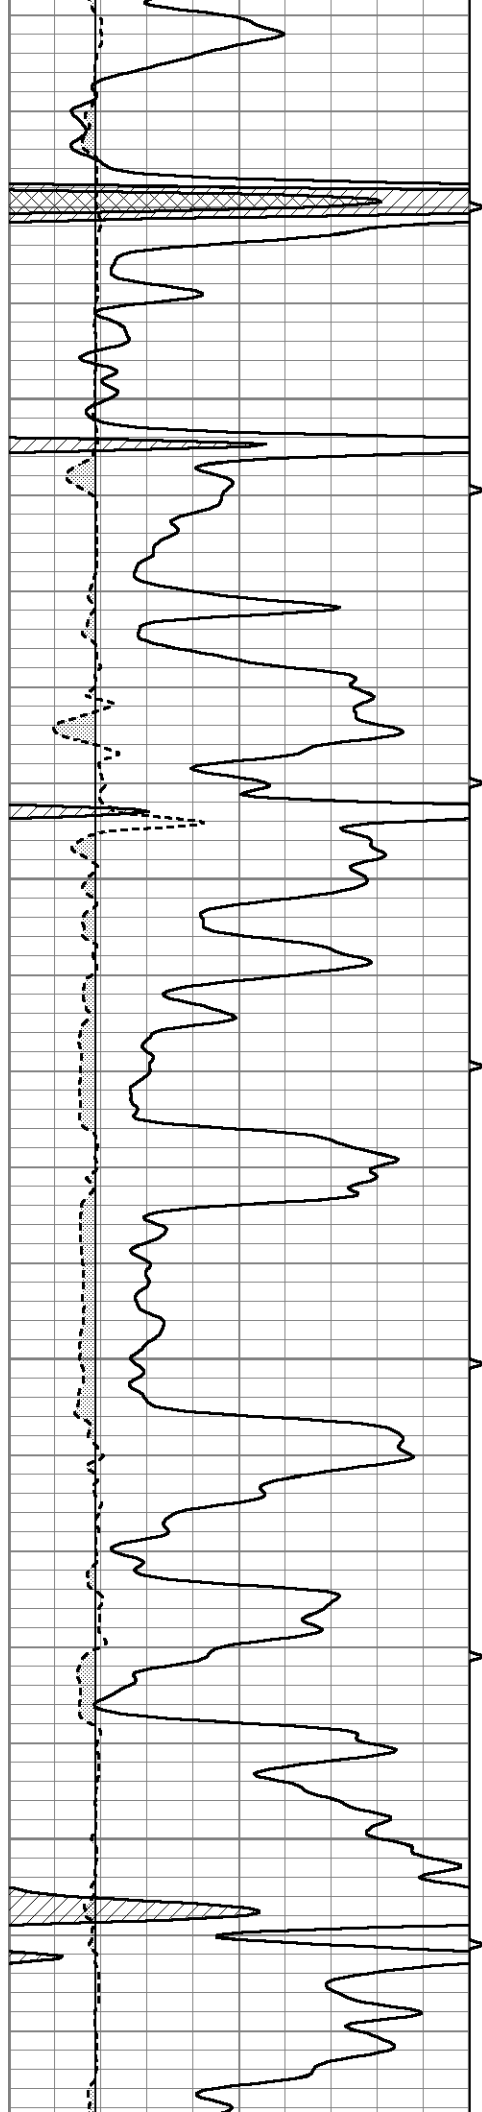

4700

4750

4800

4850

