

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-185-12954-00-01  
Spot: E2W2NE Sec/Twnshp/Rge: 1-22S-12W  
4117 feet from S Section Line, 1718 feet from E Section Line  
Lease Name: MELLIES Well #: 1  
County: STAFFORD Total Vertical Depth: 3585 feet

Operator License No.: 5558  
Op Name: DAWSON-MARKWELL EXPL. CO.  
Address: PO BOX 2446  
OKLAHOMA CITY, OK 73101

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	3558	0	WITH 125 SX CMT
SURF	8.625	246		WITH 165 SX CMT

\$ 116.51

Well Type: SWD UIC Docket No: D27900.0 Date/Time to Plug: 05/17/2007 1:00 PM  
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.  
Proposal Rcvd. from: CURTIS KELSO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: PROPOSED METHOD SAME AS ACTUAL PLUGGING.

Plugging Proposal Received By: RICHARD LACEY Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 05/17/2007 4:35 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

TUBING & PACKER FISH FROM 2170-3470' COULDN'T FISH OUT OF HOLE DUE TO SEVERE CORROSION. RAN TUBING & PACKER TO 2140'. PRESSURED TO 1600 PSIG BELOW PACKER. RELEASED PACKER & PUMPED 50 SX CMT DOWN TUBING. PERFORATED 5 1/2" @ 600'. RAN TUBING TO 590'. PUMPED CMT DOWN TUBING. CIRCULATED CMT TO SURFACE UP 5 1/2" WITH 100 SX CMT. NO BLOW ON 8 5/8" X 5 1/2" ANNULUS. PULLED TUBING OUT OF HOLE. FILLED 5 1/2" WITH 25 SX CMT. PUMPED 10 SX CMT IN 8 5/8" X 5 1/2" ANNULUS. PRESSURED TO 500 PSIG & BLEW HOLE IN SURFACE PIPE.

Perfs:

Top	Bot	Thru	Comments
3558	3584	OH	

INVOICED


DATE 6-5-07

INV. NO. 2007061826

Remarks: USED 60 /40 POZMIX 6% GEL BY COPELAND.

Plugged through: TBG

District: 01

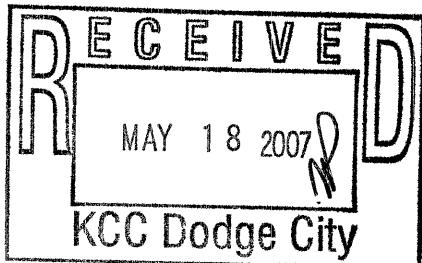

Signed

Richard W. Lacey

(TECHNICIAN)

RECEIVED  
KANSAS CORPORATION COMMISSION Form CP-23

MAY 23 2007

CONSERVATION DIVISION  
WICHITA, KS

*[Handwritten signature]*  
RKT