

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-055-21925-00-00
Spot: NWNWNE Sec/Twnshp/Rge: 23-26S-32W
4950 feet from S Section Line, 2440 feet from E Section Line
Lease Name: OHMES Well #: 2-A
County: FINNEY Total Vertical Depth: 2740 feet

Operator License No.: 32787
Op Name: KANSAS NATURAL GAS OPERATING, I
Address: PO BOX 818 1200 MAIN STREET
HAYS, KS 67601

| String | Size | Depth (ft) | Pulled (ft) | Comment |
|--------|-------|------------|-------------|-----------------|
| PROD | 5.5 | 2737 | 0 | WITH 425 SX CMT |
| SURF | 8.625 | 934 | | WITH 275 SX CMT |

\$ 89.05

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 05/04/2007 9:00 AM
Plug Co. License No.: 99997 Plug Co. Name: HALLIBURTON ENERGY SERVICES
Proposal Rcvd. from: STEVE LEHNING, SUPT. Company: KANSAS NATURAL GAS Phone: (785) 625-7353

Proposed Plugging Method: HOOK ONTO 5 1/2" CASING & BULLHEAD, APPROX. 280 SACKS OF 60-40 POZ MIX CEMENT & 6 % GEL MIXED W/ 500# OF COTTONSEED HULLS TO LOAD CASING W /CEMENT. HOOK ONTO BACKSIDE & ATTEMPT TO CHECK ANNULUS. CUT WELLHEAD OFF 6' BELOW GROUND. RECOMMENDATION BY MR. MICHEAL MAIER FROM KCC IN DODGE CITY.

Plugging Proposal Received By: MICHAEL MAIER WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 05/04/2007 11:30 AM KCC Agent: KEN JEHLIK

Actual Plugging Report:

FILL 5 1/2" CASING WITH 500# HULLS & 244 SX CMT. PRESSURE TO 500#. HOOK UP TO 5 1/2" X 8 5/8" ANNULUS AND FILL WITH 15 SX CMT. PRESSURE TO 200#. TOP OFF 5 1/2" CASING WITH 6 SX CMT.

Perfs:


| Top | Bot | Thru | Comments |
|------|------|------|----------|
| 2716 | 2724 | | |
| 2692 | 2702 | | |

INVOICED
DATE 6-5-07
INV. NO. 2007061831

Remarks: USED 60/40 POZMIX 6% GEL BY HALLIBURTON.

Plugged through: CSG

District: 01

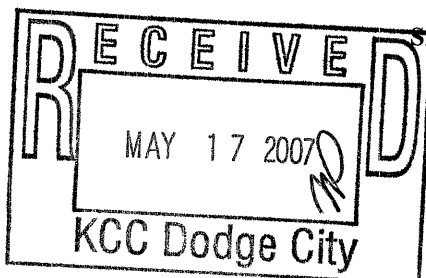

Signed

Ken Jehlik
(TECHNICIAN)

RECEIVED
KANSAS CORPORATION COMMISSION Form CP-2/3

MAY 25 2007

CONSERVATION DIVISION
WICHITA, KS