


15-065-03360-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

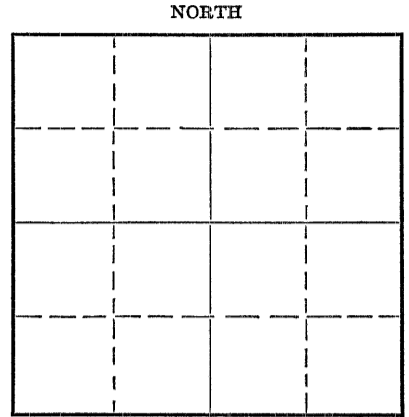

Graham County. Sec. 7 Twp. 9 Rge. 21 (E) W (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SE SW SE
Lease Owner B & R Drilling, Inc.
Lease Name Cooley Well No. 1
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed February 18, 1951 19
Application for plugging filed February 17, 1951 Verbally 19
Application for plugging approved February 17, 1951 " 19
Plugging commenced February 18, 1951 19
Plugging completed February 18, 1951 19
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19_____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 384.0 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	198'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugging Record

First plug at 190' cement with 15 sack. Fill hole with mud last plug at 25'. Cement with 10 sacks.

3/14/51

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to B & R Drilling, Inc.
Address Russell, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.
W. A. Michaelis, Jr. (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) W. A. Michaelis, Jr.
Russell, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 8th day of March, 19 51

Carol Sumner
Notary Public.

My commission expires 6-17-54

23-5091-s 8-50-10M

PLUGGING
FILE SEC 7 T 9 R 226
PAGE 63 LINE 37

B & R Drilling, Inc.
Cooley No. 1

SE SW 34 Sec. 7-9-21W
Graham County, Kansas

Total Depth 3840'
Comm: 2-7-51
Comp: 2-18-51

Reebner Shale-3440
Lansing K.C. 3478
Shaly Conglomerate 3769
Arbuckle 3812

Casing

Cement

8 5/8" Set 2 198'

135 Saz cement Lonestar

Formation	Depth
Surface Sand-Clay	40
Shale-Sand	70
Shale	150
Shale-Shell	415
Shale	650
Sand-Shale	750
Shale-Shell	1000
Shale	1100
Sand	1225
Shale-Sand	1515
Redbed-Shale	1610
Anhydrite	1640
Shale-Shell	1735
Redbed	1745
Anhydrite	1795
Shale-Shells	2090
Shale-Lime	3590
Lime	3650
Lime-Shale	3796
Shale-Conglomerate	3815
Lime	3830
Arbuckle Lime	3840

STATE OF KANSAS)
)SS
RUSSELL COUNTY)

I hereby certify that the above information is true and correct to the best of my knowledge.

Violet Keller

Subscribed and sworn to before me this 8th day of March, 1951.

Clara Sumner
Notary Public

My commission expires 6-17-54

PLUGGING
FILE NO. 9 T 9 MW
PAGE 62 LINE 37