

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Graham County. Sec. 7 Twp. 9S Rge. (E) 21 (W)

Location as "NE/CNW/SW" or footage from lines SE SE NE

Lease Owner Peel-Hardman Oil Operators

Lease Name Thompson Well No. 1

Office Address R. R. #3, Box 144B, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil Well

Date well completed July 1, 19 53

Application for plugging filed June 2, 19 56

Application for plugging approved June 5, 19 56


Plugging commenced July 9, 19 56

Plugging completed July 12, 19 56

Reason for abandonment of well or producing formation No longer producing oil in sufficient quantities to warrant commercial production.

If a producing well is abandoned, date of last production February 29, 19 56

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

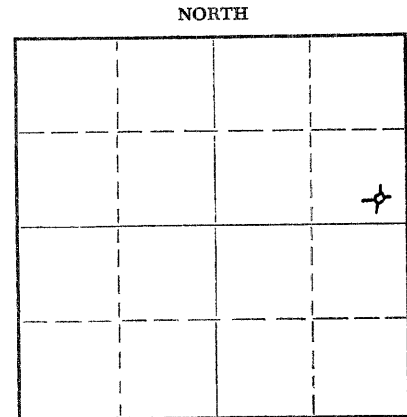

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Arbuckle Depth to top 3785 Bottom 3790 Total Depth of Well 3890 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	183'	8 5/8"	183'	None
		0	3790'	5 1/2"	3790'	2727'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Dumped six sacks of cement in bottom of hole. Shot pipe off at 2727'. Pulled pipe and mudded hole to 180'. Set rock bridge and dumped 15 sacks of cement. Mudded hole to 35'. Set rock bridge and dumped 10 sacks of cement at top.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Bert Self, R. R. #2, Hutchinson, Kansas

Address \_\_\_\_\_

STATE OF Kansas, COUNTY OF Barton, ss. William Herbert

(employee of owner or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *William Herbert*

R. R. #3, Box 144B, Wichita, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 27th day of August, 19 56

*Marian M. Herbert* Notary Public.

My commission expires June 4, 1959.

PLUGGING  
FILE SEC 7 T 9 R 21W  
BOOK PAGE 67 LINE 41

RECEIVED  
8/29/56  
COMMISSION  
DIVISION

DRILLER'S LOG

Company: Peel-Hardman Oil Producers

SE SE NE  
Sec. 7, Twp. 9S, Rge. 21W

Farm: Thompson Well No. 1  
Total Depth: 3790'

County: Graham  
Kansas

Comm: 6-18-53 Comp: 6-28-53  
Contractor: Peel Brothers, Inc.

Elevation:

Casing:  
8 5/8" 183' cem.  
5 1/2" 3786' cem.

Production:

Figures below indicate bottom of formations

Sand & Shale	0 -	183
Shale		785
Sand		900
Shale		1500
Sand & Shale		1740
Anhydrite		1780
Shale		1785
Shale & Red Bed		2130
Shale & Shells		2450
Shale & Lime		3215
Lime		3790
Total Depth		3790

This is to certify that the above information is to the best of my knowledge true and correct.

PEEL BROTHERS, INC.

BY: Mandell E. Peel

SUBSCRIBED AND SWORN to before me this 29th day of June, 1953.

My commission expires January 9, 1957 Louis B. Welch  
Notary Public

PLUGGING  
FILE SEC 7 T 9 R 21W  
BOOK PAGE 67 LINE 41