

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

Graham County. Sec. 13 Twp. 9 Rge. 21 (E) (W)

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NW SW SE

Lease Owner The Derby Oil Company

Lease Name Balthazor Well No. 3

Office Address 120 W. Douglas, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed May 25, 19 50

Application for plugging filed Sept. 28, 19 51

Application for plugging approved Sept. 30, 19 51

Plugging commenced Nov. 2, 19 51

Plugging completed Nov. 4, 19 51

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well E. Petty

Producing formation Depth to top Bottom Total Depth of Well Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	174	none
				4 1/2"	3824	3220

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Rocked hole to 3660'. Run 5 sacks of cement.  
Mudded hole 174'. Rock bridge to 160'. Run 15 sks cement.  
Mudded hole to 35'. Set 5' rock bridge and run 10 sacks of cement.  
Well completed

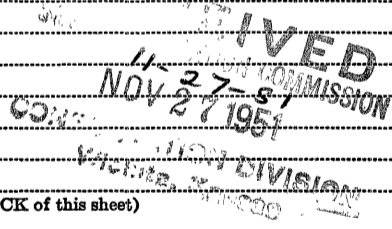

Name of Plugging Contractor West Supply Company  
Address Chase, Kansas


STATE OF Kansas, COUNTY OF Sedgwick, ss.  
F. W. Heiser (employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) F. W. Heiser, Exploitation Engineer  
(Address)

SUBSCRIBED AND SWORN to before me this 26th day of November, 19 51

H. A. Bilson Notary Public

My commission expires August 24, 1953



DRILLER'S LOG

Company: The Derby Oil Company

Sec. 13, Twp. 9S, Rge. 21W,  
NW SW SE

Farm: Balthazor Well No. 3

Total Depth: 3825'

County: Graham,  
Kansas

Comm: 5-3-50 Comp: 5-13-50

Contractor: Glenn Peel Drilling Co., Inc.

Elevation:

Casing:

Production:

8 5/8" 174' cem.  
4 1/2" 3824' cem.

Figures below indicate bottom of formations

Surface Clay	0 -	50
Shale w/sand Streaks		100
Shale & Shells		175
Shale		450
Shale & Shells		720
Shale w/sand Streaks		808
Shale & Shells		1245
Sand		1360
Shale & Sand		1725
Anhydrite		1760
Shale		2225
Line		2675
Broken Line		2695
Iron		2710
Line & Shale		2983
Shale & Line		3330
Line		3770
Conglomerate		3779
Arbuckle		3805
Line		3825
Total Depth		3825

This is to certify that the above information is, to the best of our knowledge, true and correct.

GLENN PEEL DRILLING COMPANY, INC.

BY:     *Glenn Peel*    

SUBSCRIBED AND SWORN TO before me this     25th     day of     May    , 1950

My commission expires     June 4, 1951         *Marion M. Nash*      
Notary Public

**PLUGGING**  
FILE SEC 13 T 9 R 21 W  
BOOK PAGE 9 LINE 2