


DISTRICT CONSERVATION AGENT'S REPORT

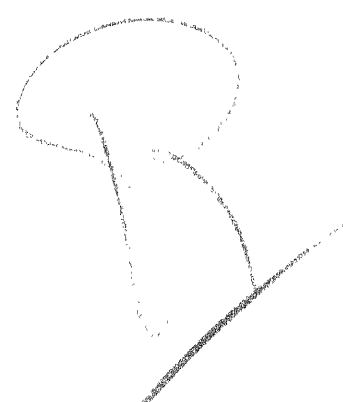

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. 62-15

LOCATION NW NW SE

SEC. 9 TWP. 9 RGE. 20

Dry Hole _____ Abandoned Oil Well Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 1 Lease Whisman

Operator Derby Oil Co Address 410 W. Douglas

Field _____ County Rooks

Total Depth 3702 Feet.

(Describe briefly the manner in which the well was plugged)

8 5/8" at 196' circulated with cement - 3 4 1/2" at 3655 with
150 sax cement behind - Lane Wells plugs to 3380, top perf
3326'.
3350'

Filled with chat to 3313', set 3 sax cement with dump bailer,
pulled 2660' 4 1/2", filled hole with heavy mud to 190', set rock
bridge and 15 sax cement, heavy mud to 35', set rock and 10 sax
cement to bottom cellar.

PLUGGING
FILE SEC 9 T 9 R 20
BOOK PAGE 68 LINE 15

RECEIVED
STATE CORPORATION COMMISSION
3/23/51
MAR 23 1951

[Signature]
CONSERVATION DIVISION
District Conservation Agent

Date 3-19-51