MICRO LOG

Company CHARTER ENERGY, INC.
Well WILD WEST #1
Field PRITCHARD
County BARTON State KANSAS

Company CHARTER ENERGY, INC.
Well WILD WEST #1
Field PRITCHARD
County BARTON
State KANSAS

Location: API # : 15-009-26428-0000
763 FSL & 700 FWL
SW - NE - SW - SW
SEC 26 TWP 20S RGE 14W

Other Services
CDL/CNL
DIL

Permanent Datum GROUND LEVEL Elevation 1902
Log Measured From KELLY BUSHING 10' A.G.L
Drilling Measured From KELLY BUSHING

Elevation
K.B. 1912
D.F. 1910
G.L. 1902

Date	9/2/24		
Run Number	ONE		
Depth Driller	3625		
Depth Logger	3625		
Bottom Logged Interval	3623		
Top Log Interval	2800		
Casing Driller	8.625 @ 825		
Casing Logger	825		
Bit Size	7.875		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 5,600 PPM	
Density / Viscosity	9.2/57		
pH / Fluid Loss	10.5/6.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.850 @ 82F		
Rmf @ Meas. Temp	.638 @ 82F		
Rmc @ Meas. Temp	1.02 @ 82F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.617 @ 113F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	8:45 P.M.		
Maximum Recorded Temperature	113F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	COLE ROBBEN		
Witnessed By	JOSHUA AUSTIN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395


DIRECTIONS:


FROM GREAT BEND, KANSAS AND HIGHWAY 156 GO WEST 4 MILES TO ROAD SW 50TH AVE, 2 MILES SOUTH TO SW 50TH ROAD, 1 MILE EAST, 1 MILE SOUTH, 1/8TH MILE EAST, NORTH INTO


MAIN SECTION


Database File	8916ddn.db
Dataset Pathname	pass7.10
Presentation Format	_micro
Dataset Creation	Mon Sep 02 21:07:29 2024
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)		40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)		40
0	MINMK	20	TBHV			0 LTEN (lb)	5000
			0 (ft3) 10				

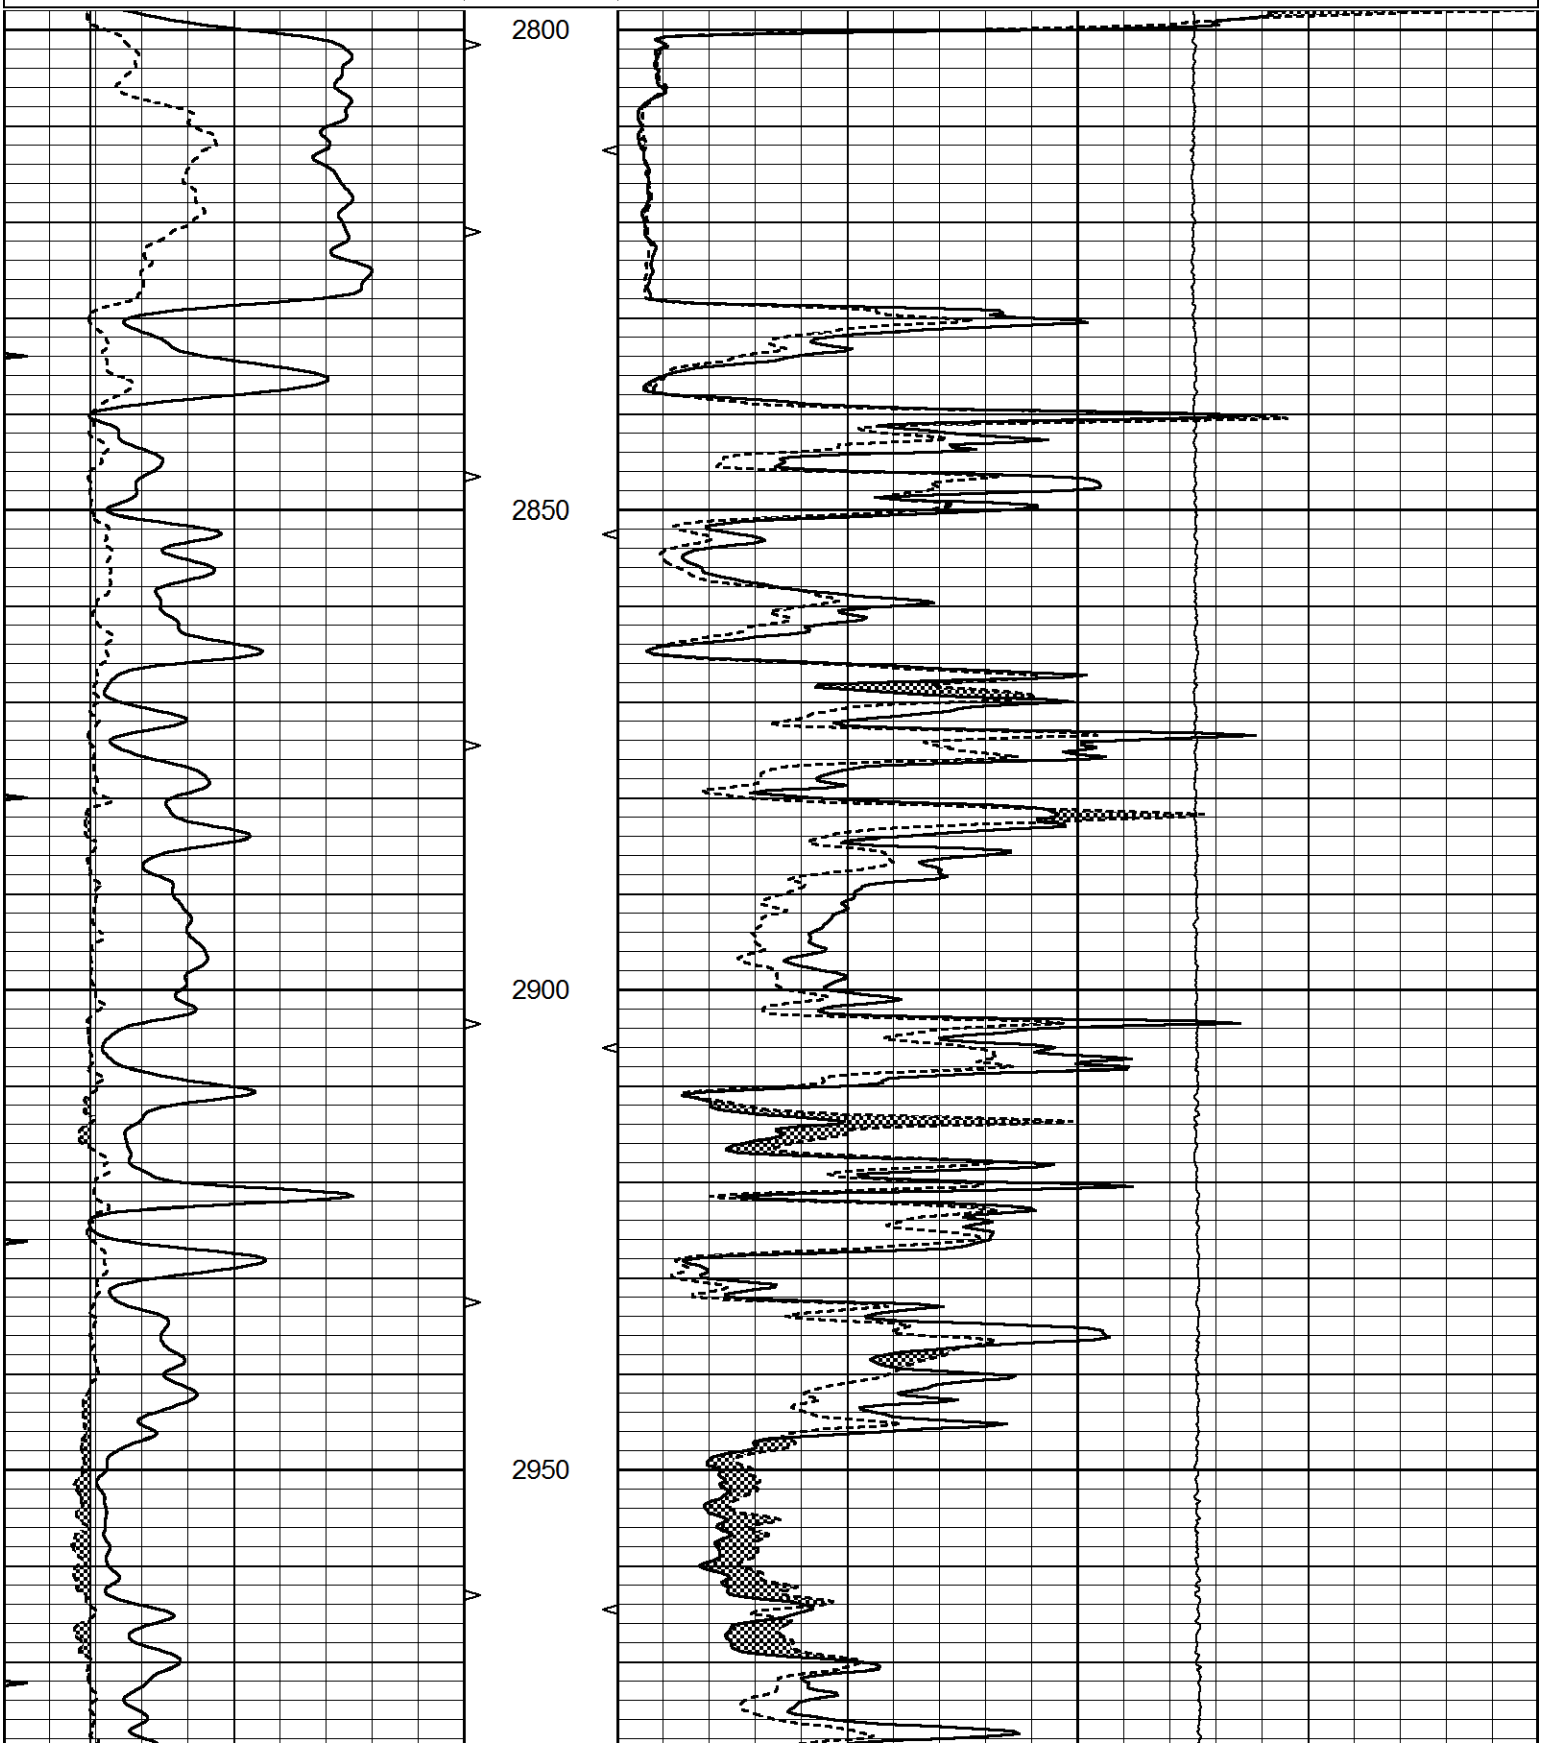

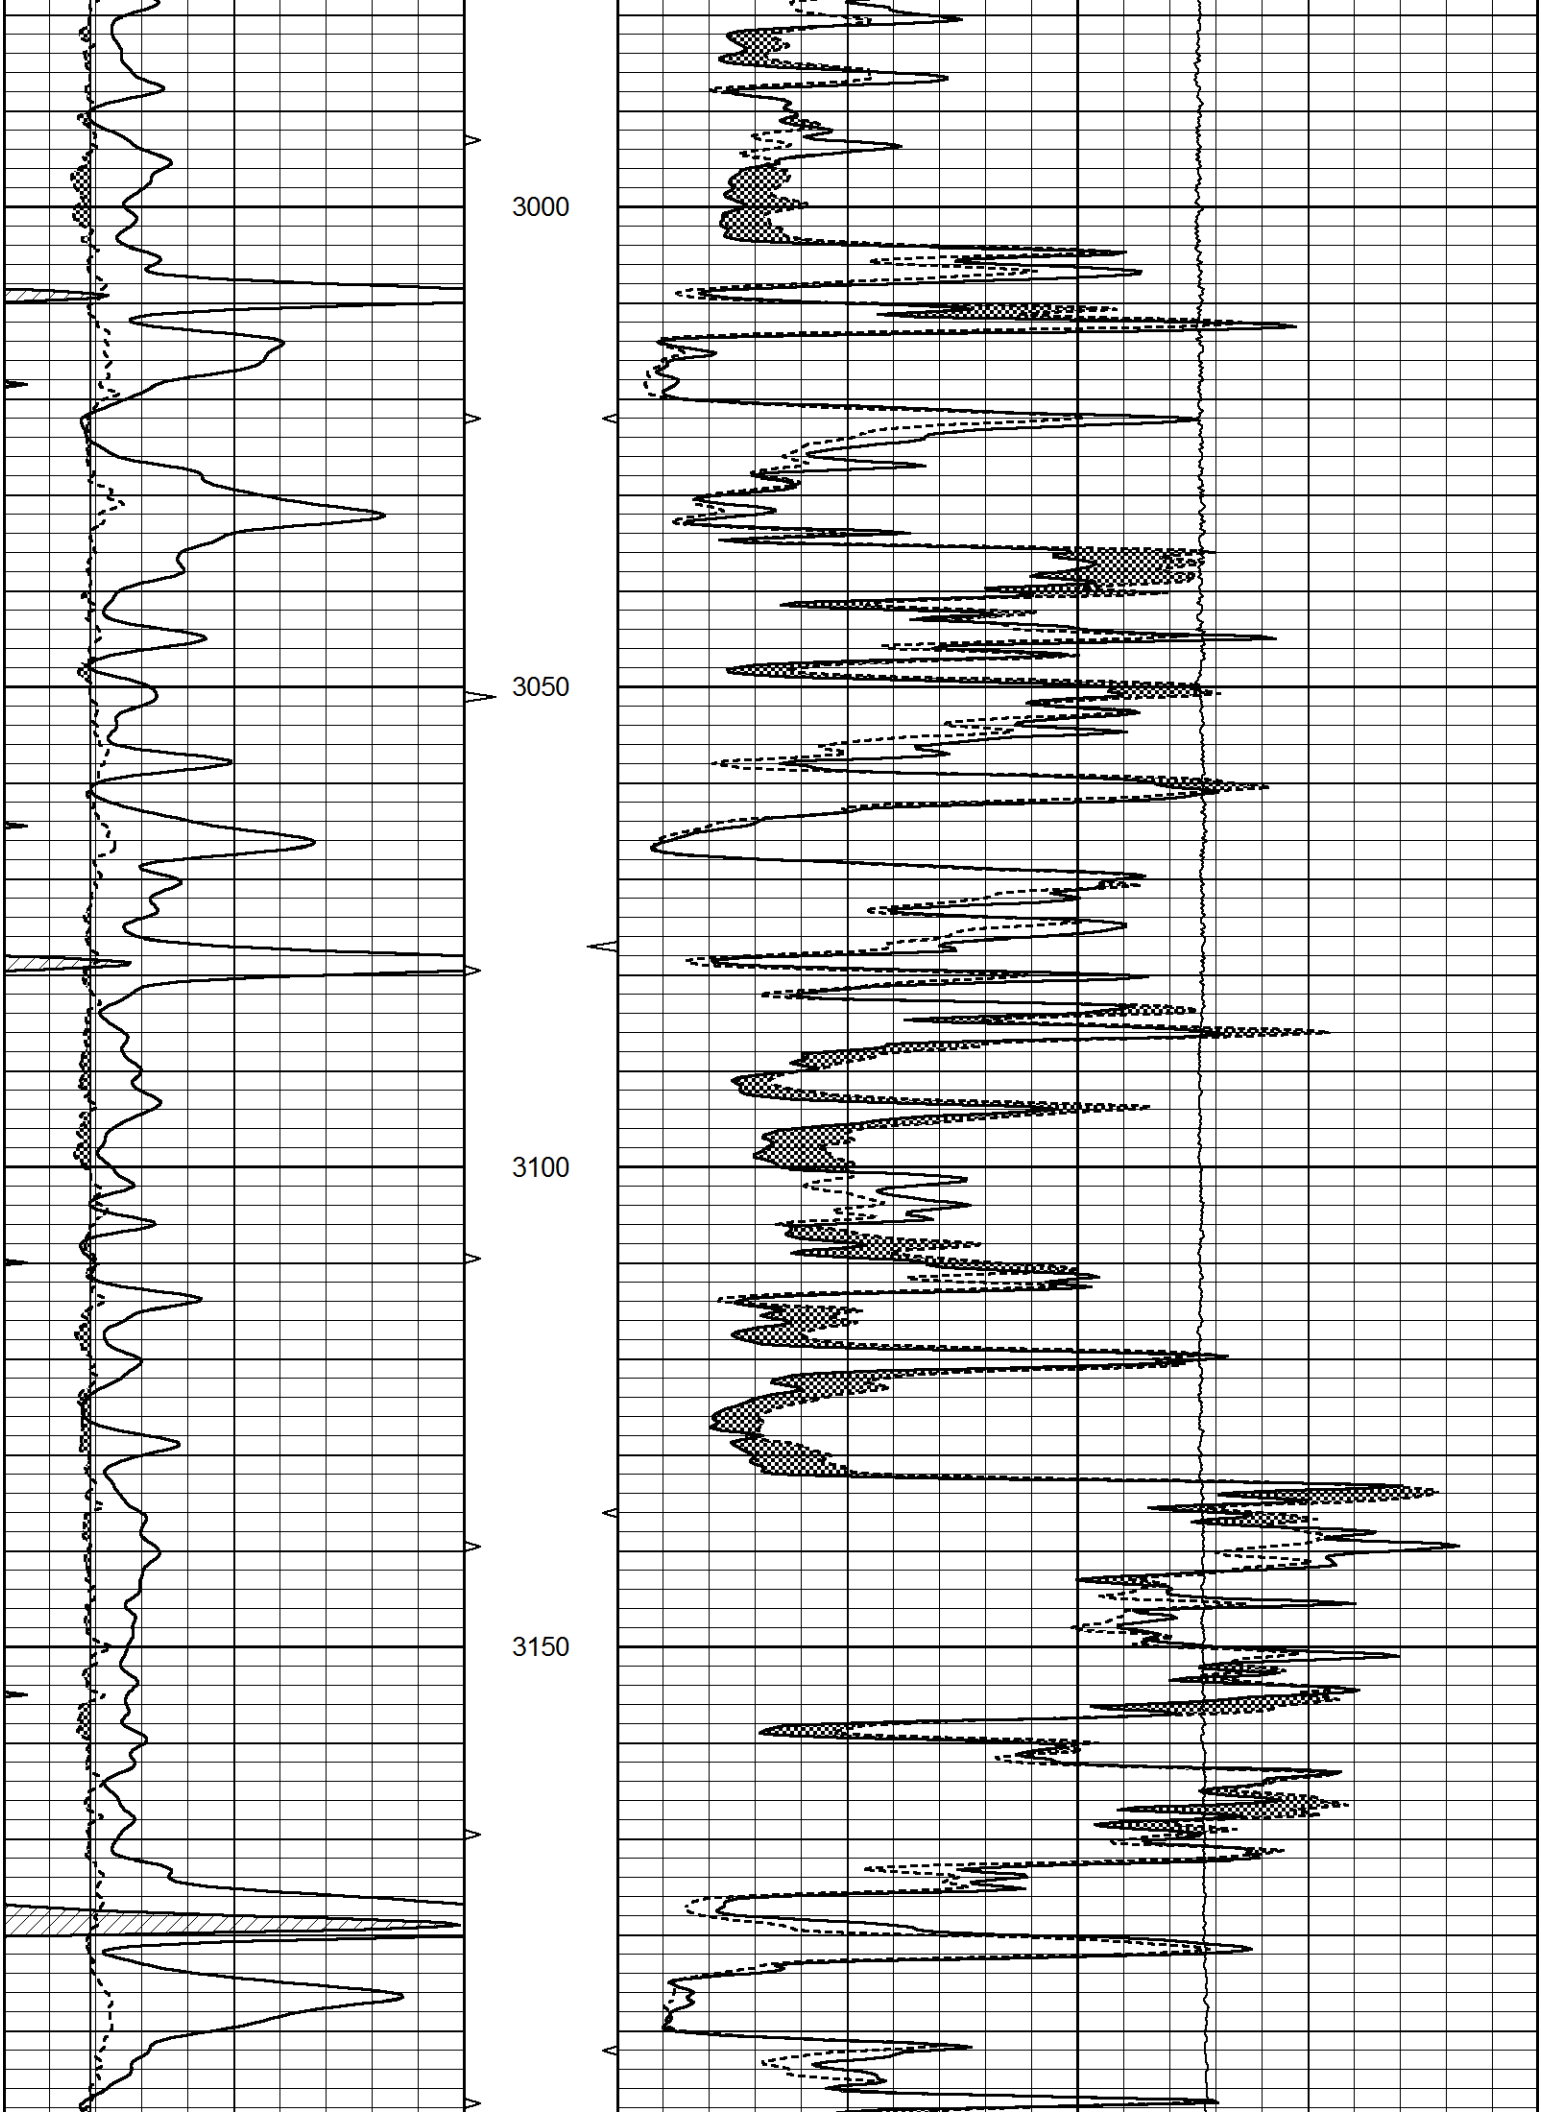
3000
3050
3100
3150

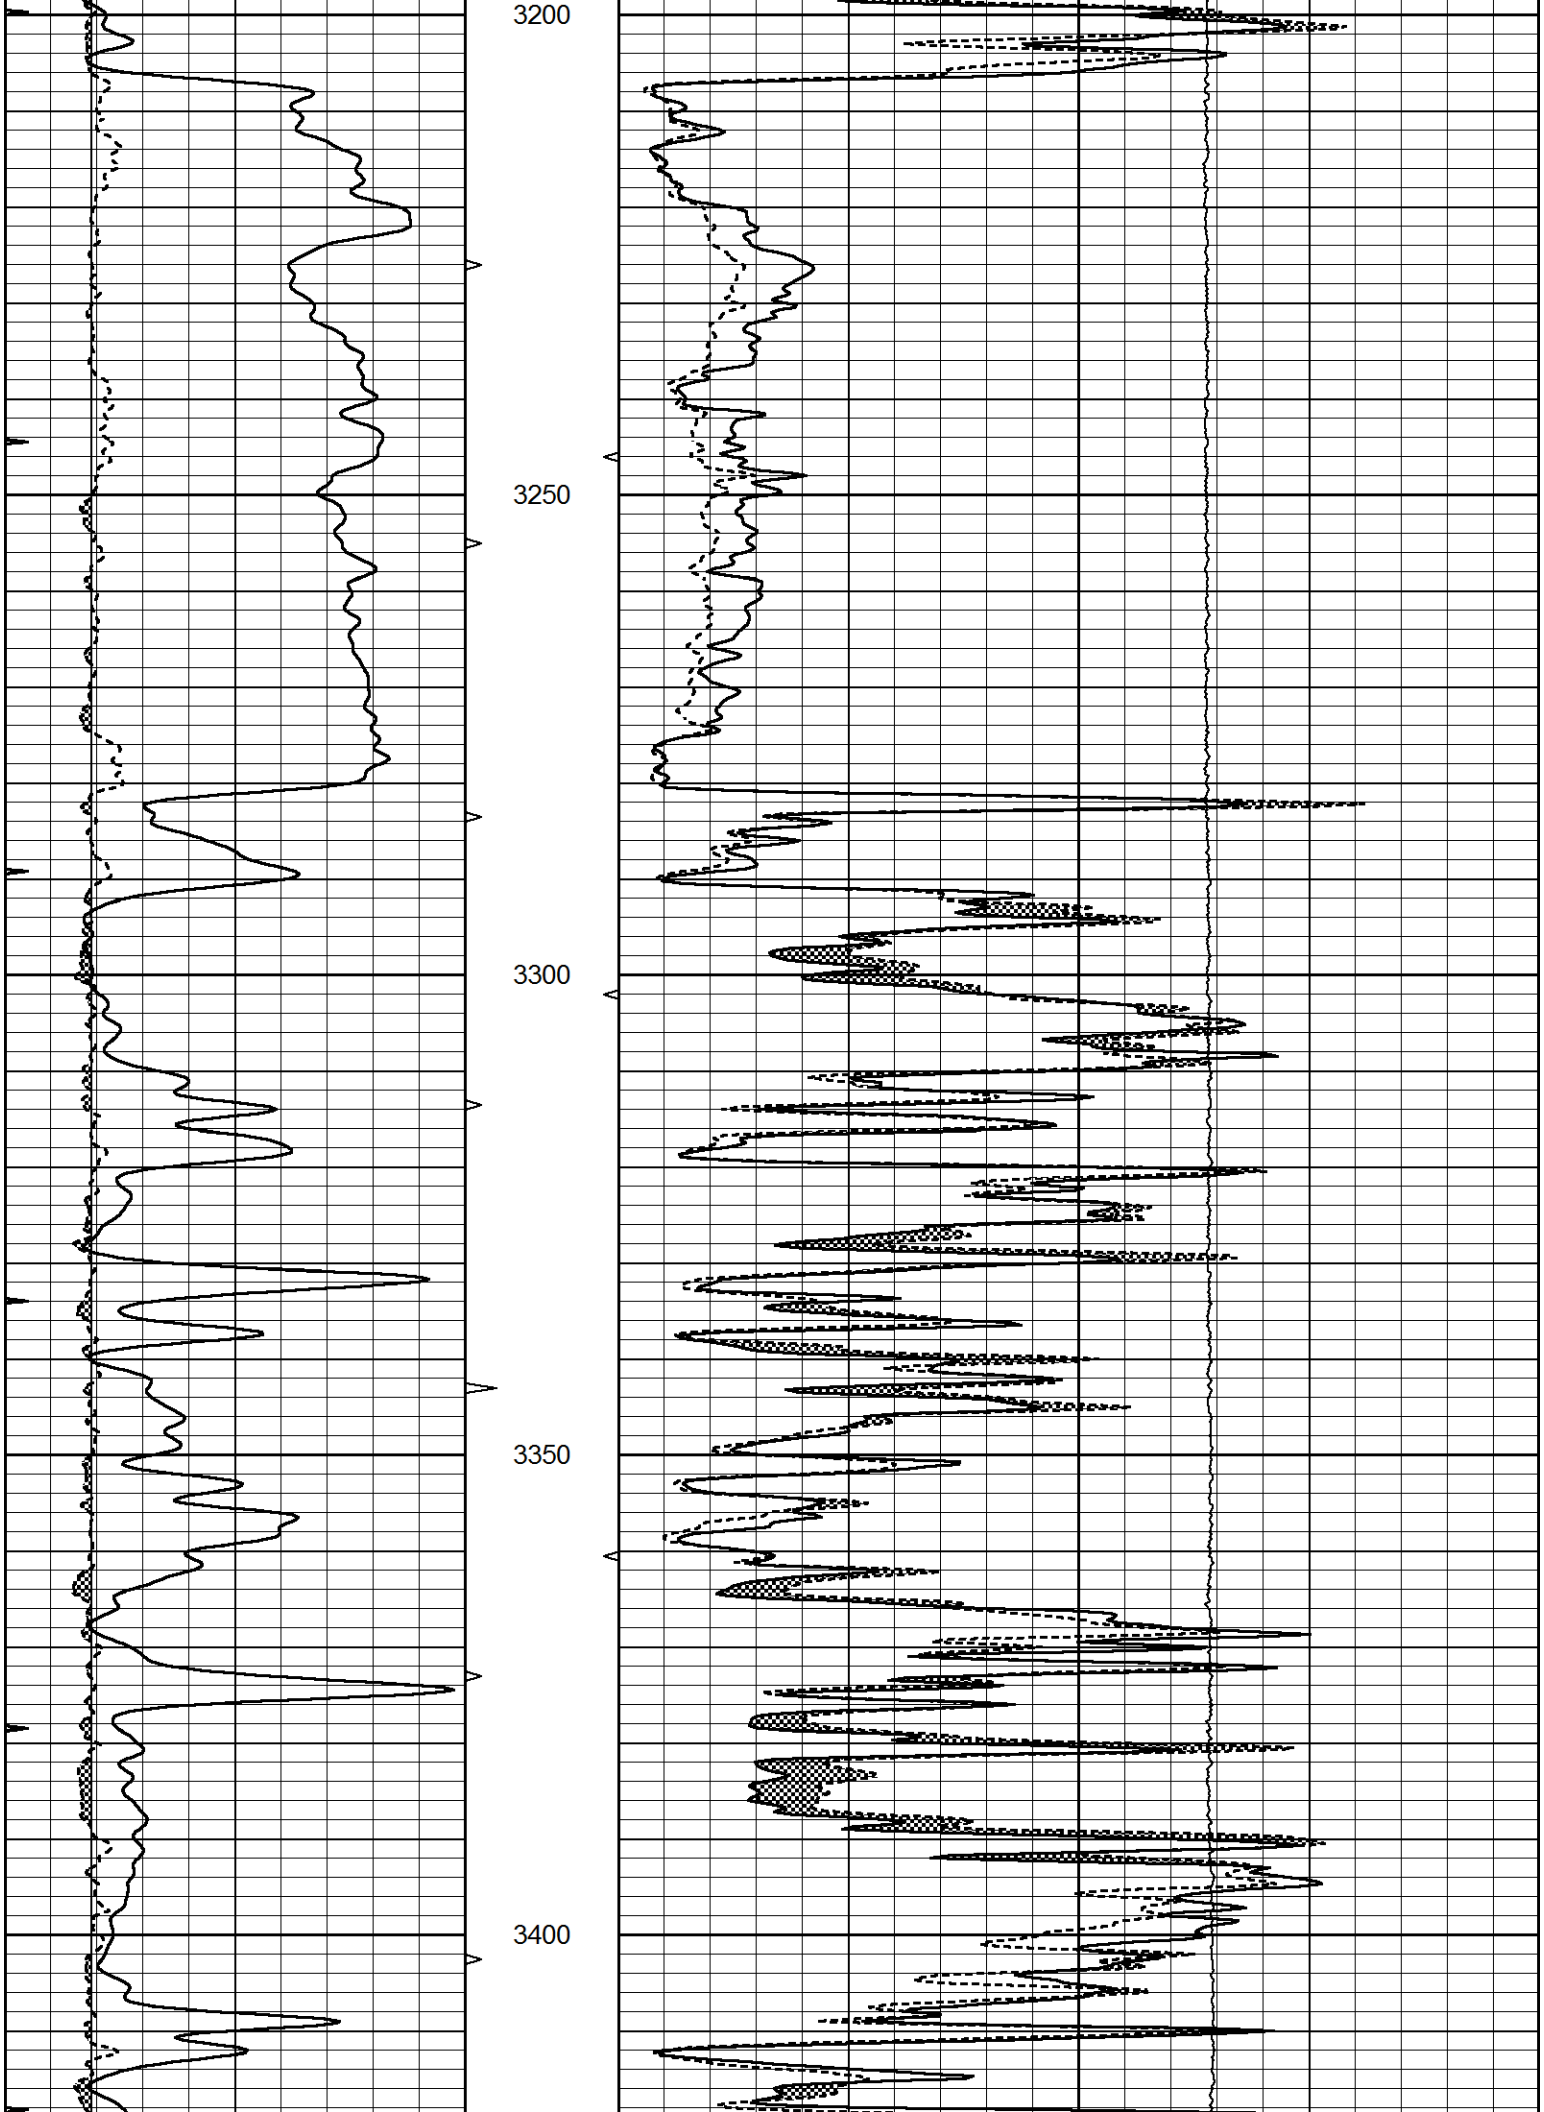
3200
3250
3300
3350
3400

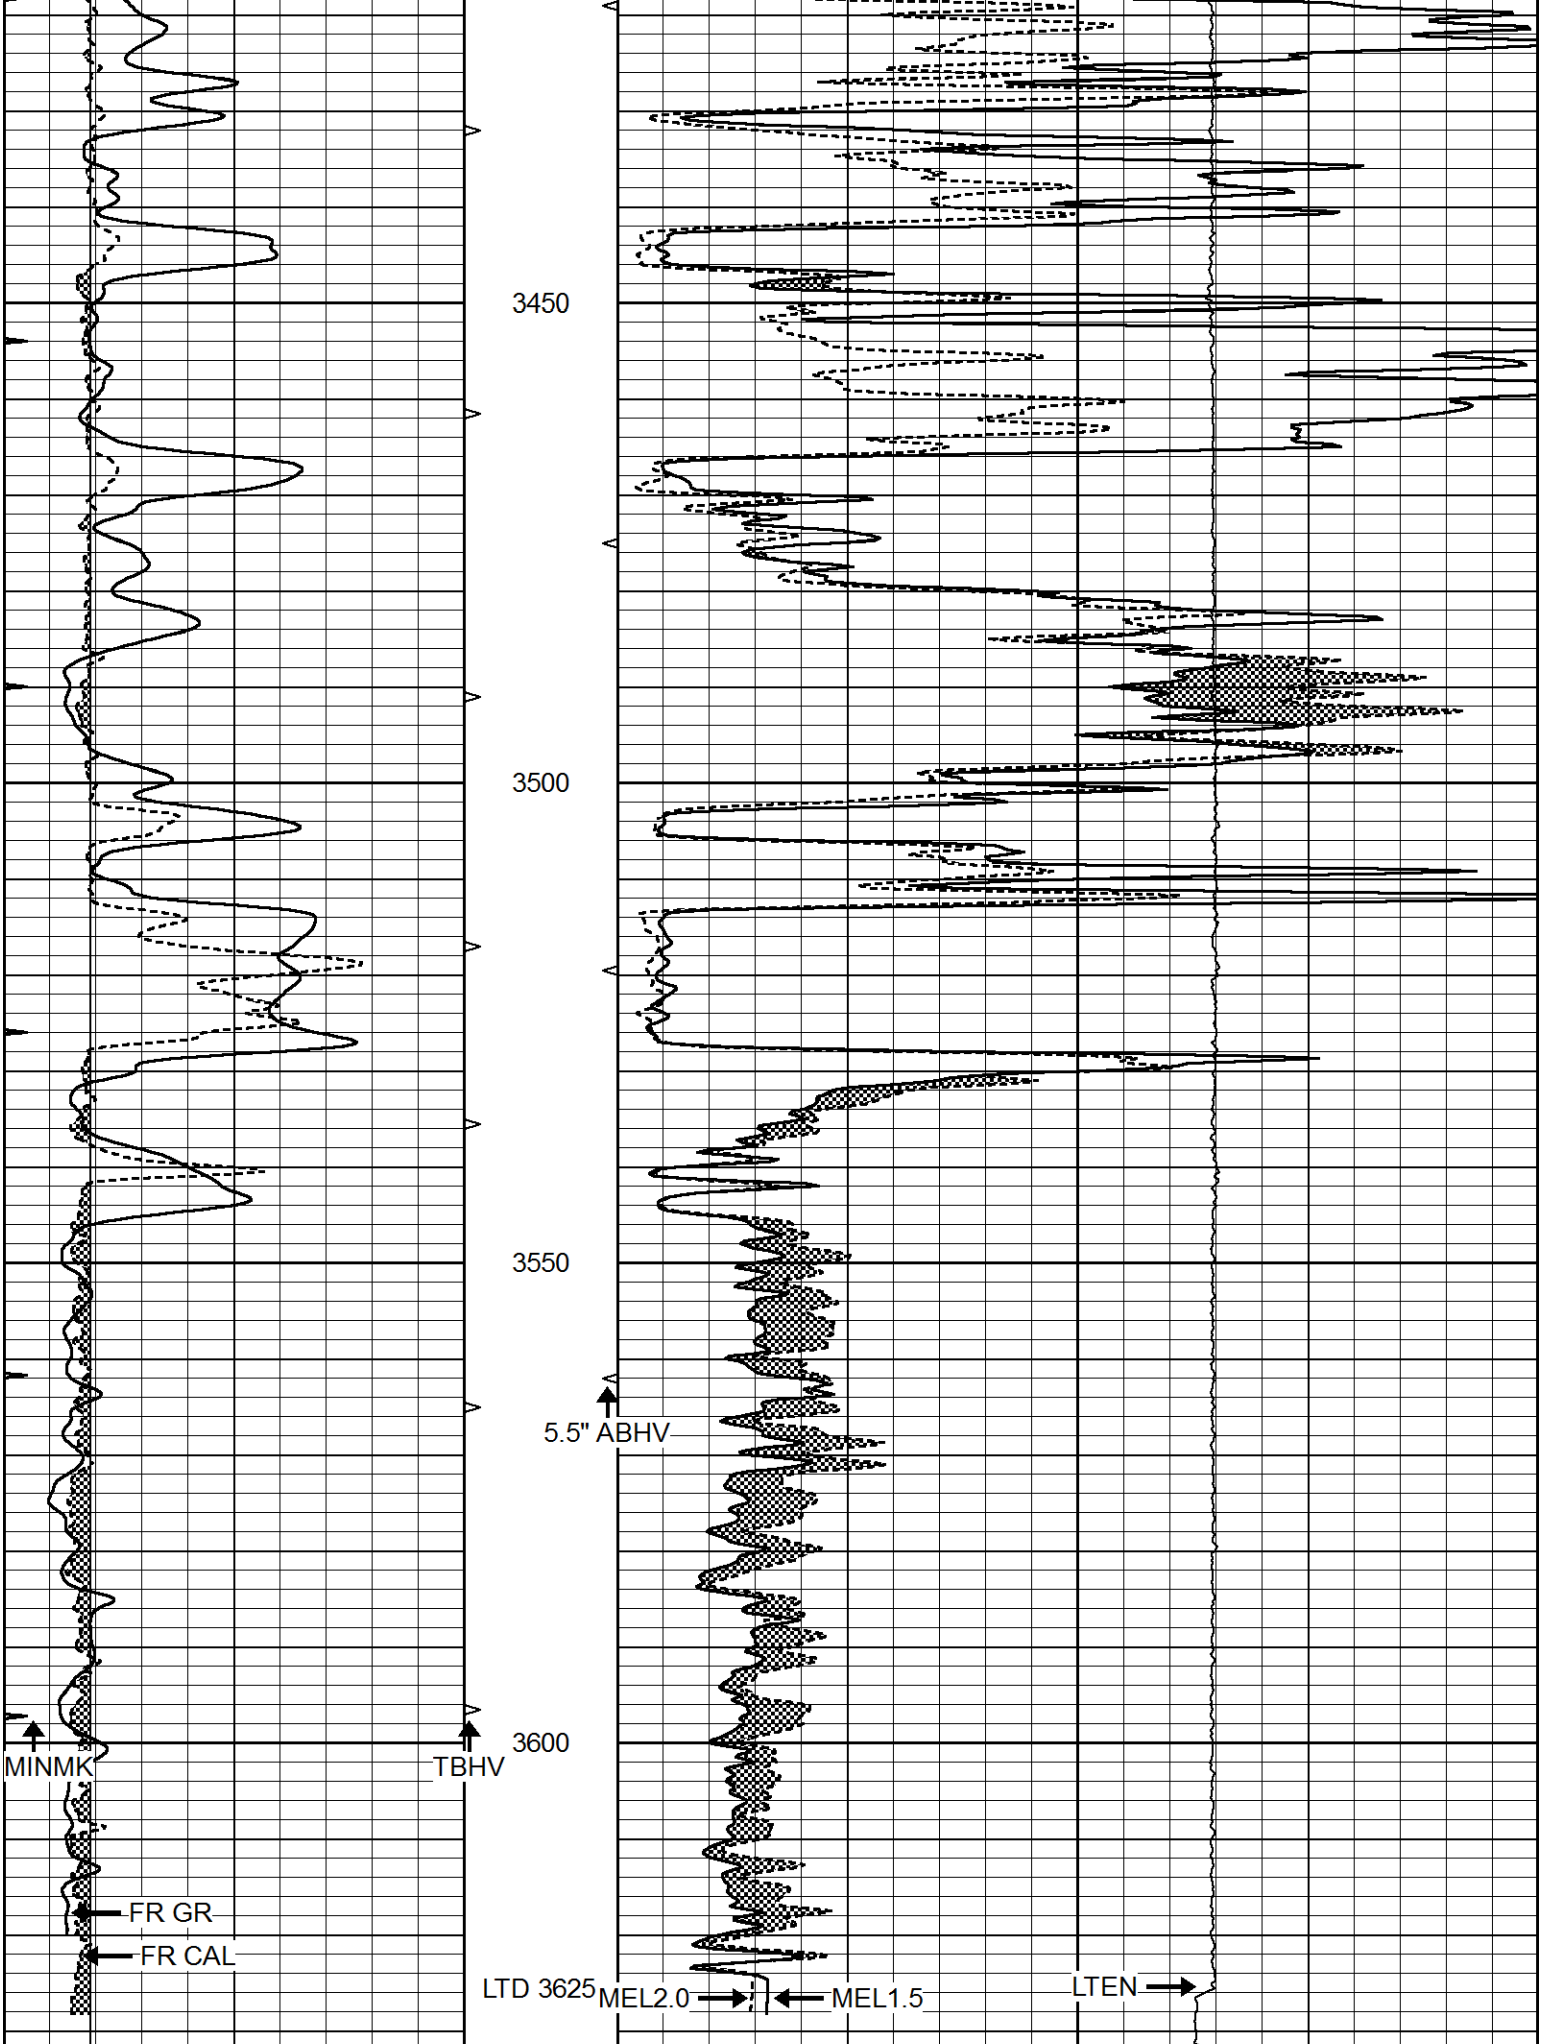

3450
3500
3550
3600
5.5" ABHV
MINMK
TBHV
FR GR
FR CAL
LTD 3625
MEL2.0
MEL1.5
LTEN
0
GAMMA RAY (GAPI)
150
ABHV
0
MEL1.5 (Ohm-m)
40


6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40	
0	MINMK	20	TBHV			0	LTEN (lb) 5000
			0 (ft3) 10				

REPEAT SECTION

Database File	8916ddn.db
Dataset Pathname	pass6R
Presentation Format	_micro
Dataset Creation	Mon Sep 02 21:06:59 2024
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40	
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40	
0	MINMK	20	TBHV			0	LTEN (lb) 5000
			0 (ft3) 10				

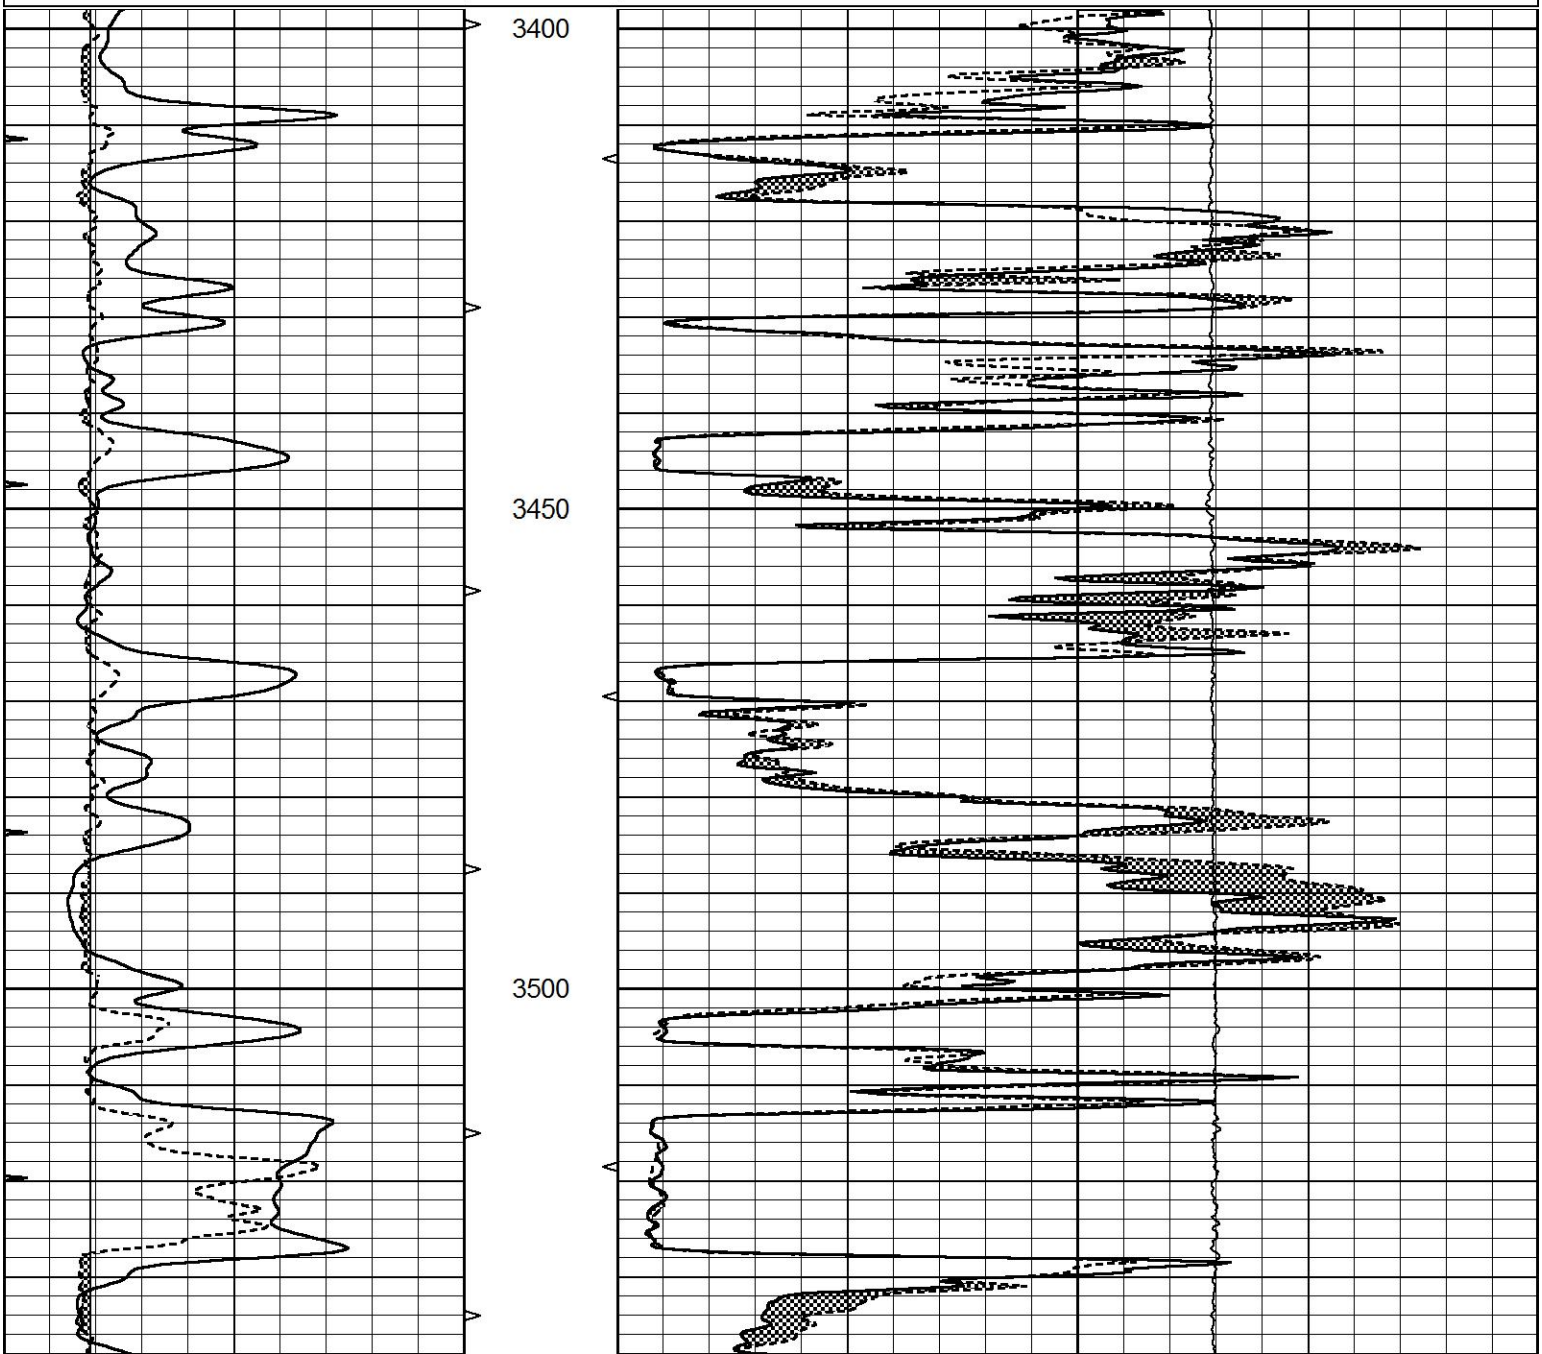

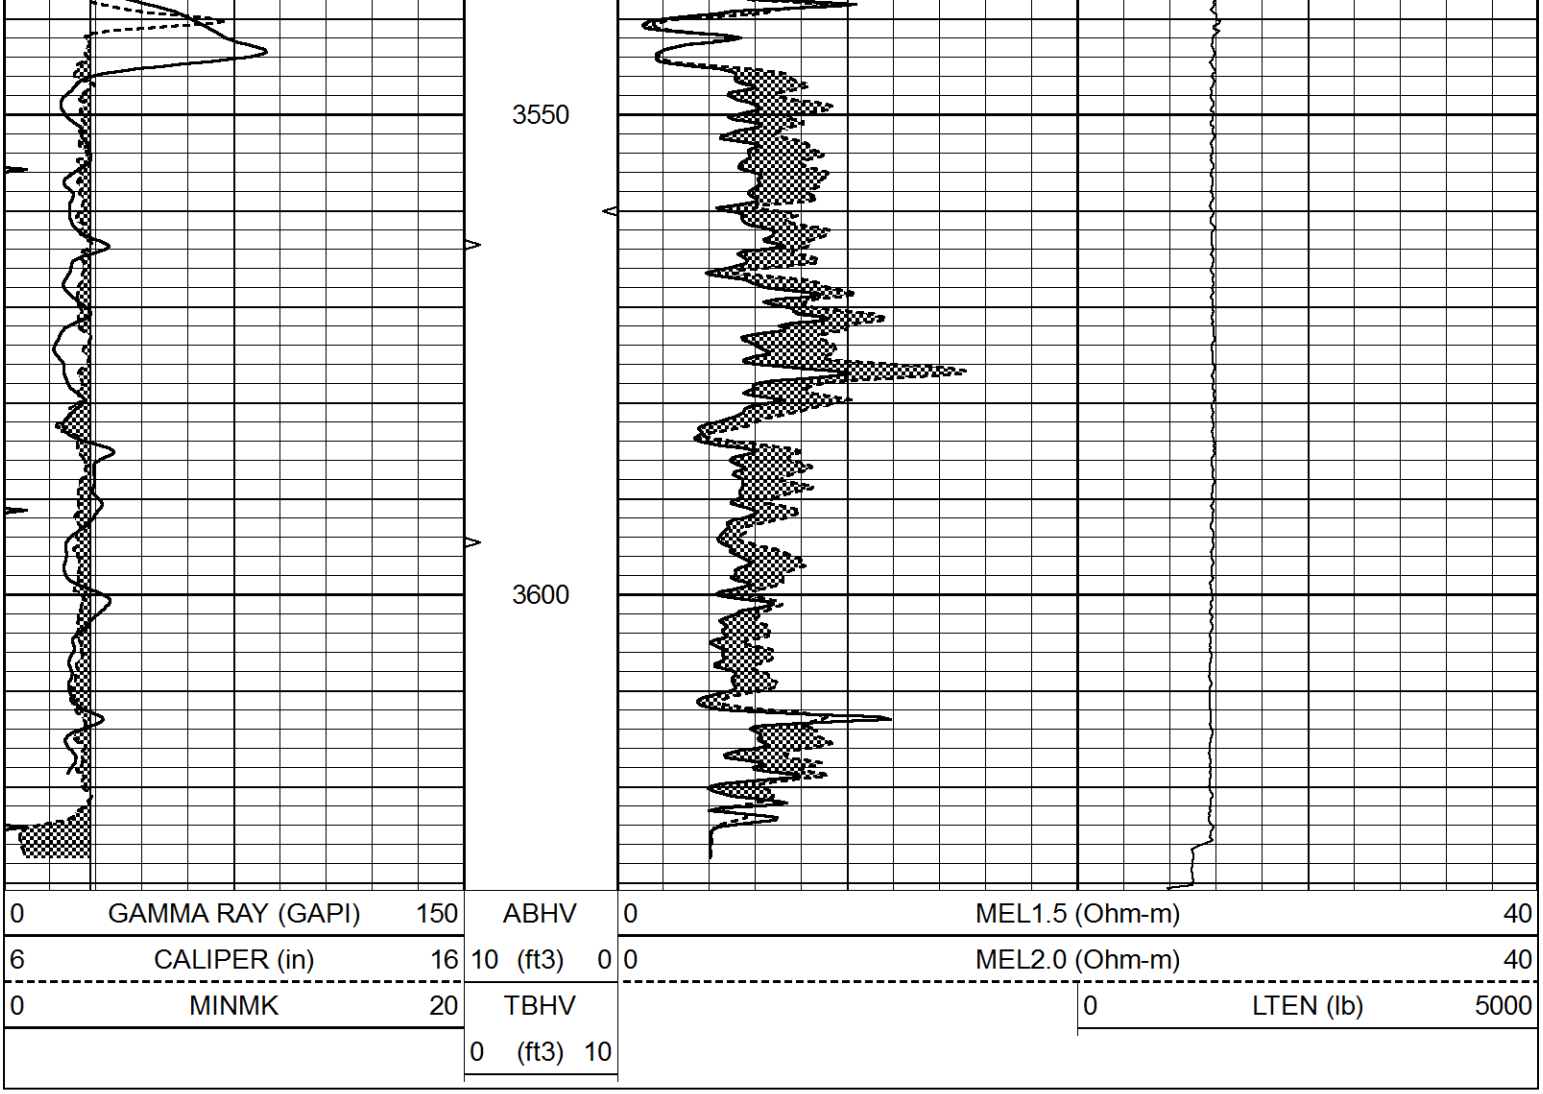

Calibration Report

Database File	8916ddn.db
Dataset Pathname	pass7.10
Dataset Creation	Mon Sep 02 21:07:29 2024

MICRO_USR Calibration Report

Serial Number:	070911	
Tool Model:	ProbeL	
Performed:	Sat Aug 03 10:15:35 2024	
Caliper Calibration:	Gain=4.259	Offset=1.600
	Low Cal	High Cal
References	8.000	14.000
Readings	1.427	2.836
1.5" Calibration:	Gain=22.000	Offset=-0.079
	Low Cal	High Cal
References	0.000	20.000
Readings	0.005	1.240
2" Calibration:	Gain=32.000	Offset=-0.300
	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	1.075

Microlog Calibration Report

Serial-Model: 070911-ProbeL
Performed: Sat May 14 04:48:25 2022

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0002	0.4836	V	0.0000	10.0000	Ohm-m	20.6908	-0.0051
Inverse	0.0018	0.6297	V	0.0000	10.0000	Ohm-m	15.9263	-0.0282
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number:	070558	
Tool Model:	Probe1	
Performed:	Sun Aug 18 00:13:44 2024	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2800	GAPI/cps