

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-171-20058-00-00  
Spot: SESENWNW Sec/Twnshp/Rge: 7-19S-31W  
1280 feet from N Section Line, 1280 feet from W Section Line  
Lease Name: BLAKE Well #: 1-7  
County: SCOTT Total Vertical Depth: 2850 feet

Operator License No.: 33476  
Op Name: FIML NATURAL RESOURCES, LLC  
Address: 410 17TH STREET, SUITE 900  
DENVER, CO 80202

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	2849	0	WITH 100 SX CMT
SURF	8.625	348		WITH 200 SX CMT

\$ 92.63

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 05/25/2007 9:00 AM

Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY

Proposal Rcvd. from: EDDIE ABERCROMBIE Company: FIML NATURAL RESOURCES Phone: (303) 893-5073

Proposed Plugging Method: SAND BACK TO 2690' BY BREAK-IN. SPOT 50 SX CMT FROM 2690-2100'. PERFORATE AT 1600'. CMT RETAINER AT 1550'. PUMP 80 SX CMT STING OUT. FILL FROM 1550' TO SURFACE WITH 135 SX CMT. PUMP 150 SX CMT DOWN BACKSIDE.

Plugging Proposal Received By: KEN JEHLIK

Witness Type: COMPLETE (100%)

Date/Time Plugging Completed: 05/25/2007 3:30 PM

KCC Agent: KEN JEHLIK

Actual Plugging Report:

1ST PLUG RUN TUBING TO 2690' & PUMP 50 SX CMT. (NO CIRCULATION). 2ND PLUG PERFORATE 5 1/2" CASING @ 1600'. RUN IN HOLE WITH CMT RETAINER AND SET AT 1540'. PUMP 65 SX CMT AT 2 BPM @ 1000#. 3RD PLUG PULL OUT OF RETAINER AND PUMP 80 SX CMT WITH FULL RETURNS. 4TH PLUG PULL TUBING TO 750' & CIRCULATE CMT TO SURFACE. PULL TUBING & TOP OFF CASING WITH 10 SX CMT. 5TH PLUG PUMP 30 SX CMT IN 8 5/8" X 5 1/2" ANNULUS. MAXIMUM PRESSURE 500#. SHUT IN PRESSURE 200#.

Perfs:

Top	Bot	Thru	Comments
2775	2777		
2764	2768		

INVOICED


DATE 6-28-07

INV. NO. 2007061958

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: TBG

District: 01

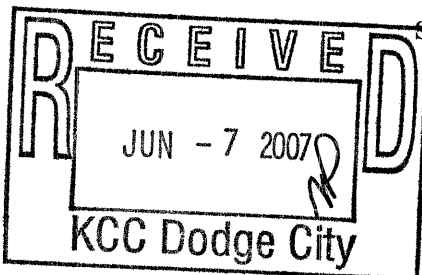

Signed

*Ken Jehlik*  
(TECHNICIAN)

RECEIVED  
KANSAS CORPORATION COMMISSION

JUN 28 2007

CONSERVATION DIVISION  
WICHITA, KS

RECEIVED Form CP-2/3  
KANSAS CORPORATION COMMISSION

JUN 19 2007

CONSERVATION DIVISION  
WICHITA, KS