

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-081-00187-00-00
Spot: NENENESW Sec/Twnshp/Rge: 17-28S-32W
2490 feet from S Section Line, 2490 feet from W Section Line
Lease Name: MCCONNELL Well #: 1
County: HASKELL Total Vertical Depth: 2767 feet

Operator License No.: 33002
Op Name: KERR-MCGEE OIL & GAS ONSHORE LP
Address: ATTN: REGULATORY GROUP PO BO
HOUSTON, TX 77251

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	2699	0	WITH 650 SX CMT
SURF	8.625	600		WITH 350 SX CMT

H 89.93

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 06/01/2007 8:00 AM
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
Proposal Rcvd. from: JOHN Company: SARGENT AND HORTON PLUGGIN Phone: (580) 854-6515

Proposed Plugging Method: PULLED 1 1/4", 3 1/2" OUT OF HOLE. NO STRETCH ON 5 1/2". RIH WITH TBG TO 900'. PUMP 25 SX CMT. POOH TO 625' & PUMP 70 SX CMT FROM 625' TO SURFACE. CHECK BACKSIDE.

Plugging Proposal Received By: JIM HOLLAND WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 06/04/2007 11:30 AM KCC Agent: KEN JEHLIK

Actual Plugging Report:

PUMP 25 SX CMT & 100# HULLS AT 2767' THROUGH 3 1/2" TUBING. PUMP 20 SX CMT AT 900' THROUGH 1 1/4" TUBING. CIRCULATE CMT TO SURFACE FROM 625' TO 0' THROUGH 1 1/4" TUBING USING 70 SX CMT. STAYED FULL. FILLED ANNULUS WITH 9 SX CMT. STAYED FULL.

Perfs:

Top	Bot	Thru	Comments
2700	2767	OH	


INVOICED

DATE 6-28-07
INV. NO. 2007061964

Remarks: USED COMMON CEMENT BY SARGENTS.

Plugged through: TBG

District: 01

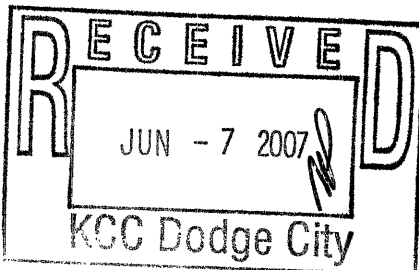

Signed

Ken Jehlik

(TECHNICIAN)

RECEIVED
KANSAS CORPORATION COMMISSION

JUN 28 2007

CONSERVATION DIVISION
WICHITA, KS

RECEIVED
KANSAS CORPORATION COMMISSION

Form CP-2/3

JUN 19 2007

CONSERVATION DIVISION
WICHITA, KS

RF