

STATE OF KANSAS
STATE CORPORATION COMMISSION
90 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-D19903 115-20588-00-01

LEASE NAME Windsor

WELL NUMBER SWD # 1

4230 Ft. from S Section Line

2970 2300 Ft. from ^W Section Line

SEC. 6 TWP. 22 RGE. 3 (E) or (W)

COUNTY Marion

Date Well Completed _____

Plugging Commenced 11-10-06

Plugging Completed 11-10-06

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

SD Senenu

KCC
PKT
11-16-06
per
A. BANK

LEASE OPERATOR Bond Oil Company

ADDRESS Box 151

PHONE# (316) 878-4323 OPERATORS LICENSE NO. 7796

Character of Well SWD D19903

(Oil, Gas, D&A, SMD, Input, Water Supply Well)

The plugging proposal was approved on 11-10-06 (date)

by Mike Wilson (KCC District Agent's Name).

Is ACO-1 filled? Yes If not, is well log attached? _____

Producing Formation Arbuckle Depth to Top 3077 Bottom 3130 T.D. 3147

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled out
Arbuckle	Water	0	191'	8 5/8	191'	0
		0	3129'	5 1/2	3129'	0
		0	3119'	4 1/2	3119'	0

RECEIVED
NOV 14 2006

KCC WICHITA

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet each set.

Ran bailer found bridge at 3050' Dump 4 s/k of c/m on plug. Cut surface off cut 5 1/2 casing off found cement between 4 1/2 and 5 1/2 Ran 3/4 pipe down 85/8 to 250' Circulated cement to surface Ran 2" down 4 1/2 to 250' Circulated cement surface Pull tubing rigged down.

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Sunflower Well Service License No. 30280

Address P.O. Box 341 Canton, KS 67428

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: Warren Windsor 1244 US Hwy 50 Peabody, KS

STATE OF Kansas COUNTY OF Marion 66866, ss.

Bud Davis, Agent

(Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.


(Signature) Bud Davis

(Address) Canton, KS 67428

Subscribed and sworn to before me this 13th day of November, 2006

Cynthia G. Beneke
Notary Public

My Commission Expires: May 15, 2010

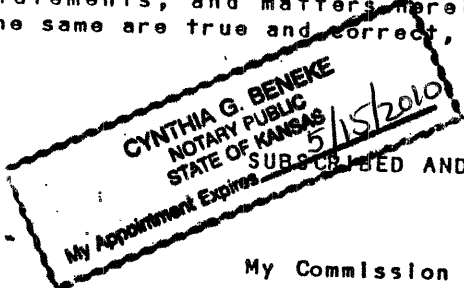

PKT