

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-135-24009-00-00  
Spot: SWNWNW Sec/Twnshp/Rge: 29-20S-21W  
990 feet from N Section Line, 330 feet from W Section Line  
Lease Name: BELTZ Well #: 1  
County: NESS Total Vertical Depth: 4344 feet

Operator License No.: 4058  
Op Name: AMERICAN WARRIOR, INC.  
Address: PO BOX 399  
GARDEN CITY, KS 67846

String	Size	Depth (ft)	Pulled (ft)	Comment
PC		1378		WITH 225 SX CMT
PROD	5.5	4341	0	WITH 175 SX CMT
SURF	8.625	210		WITH 145 SX CMT

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 07/19/2007 10:30 AM  
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.  
Proposal Rcvd. from: SCOTT CORSAIR Company: AMERICAN WARRIOR Phone: (620) 275-7461

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING.

*\$ 141.18*

Plugging Proposal Received By: MICHAEL MAIER Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 07/19/2007 4:00 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

PUMP 200# HULLS & 35 SX CMT. MIXED 24 BBL GEL WATER & SHUT OFF WITH 3000#. STOPPED MIXING AND WAITED ON PULLING UNIT. RAN TUBING TO 1400' & PUMPED 130 SX CMT. CMT CIRCULATED TO SURFACE. PULLED TUBING AND TOPPED OFF WITH 35 SX CMT. TIED ONTO BACKSIDE AND PUMPED 1/4 BBL. PRESSURED TO 500# & HELD.

Perfs:

Top	Bot	Thru	Comments
4341	4344	OH	


**INVOICED**

DATE 8-6-07  
INV. NO. 2008060226

Remarks: USED 60/40 POZMIX 6% GEL BY SWIFT SERVICES.

Plugged through: CSG

District: 01

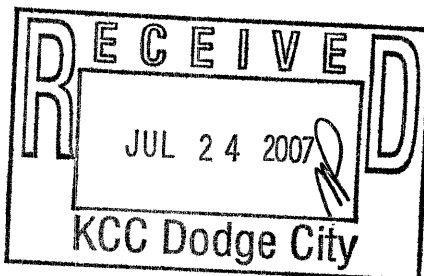

Signed

*Michael Maier*

(TECHNICIAN)

RECEIVED  
KANSAS CORPORATION COMMISSION

AUG 01 2007

CONSERVATION DIVISION  
WICHITA, KS

*PK*