


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

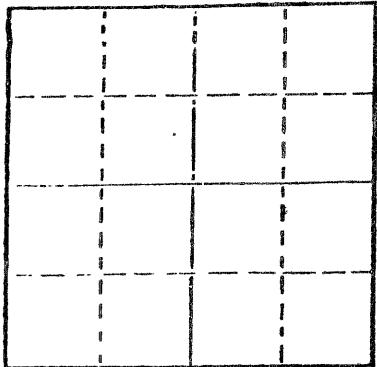

Locate well correctly on above  
Section Plat

## WELL PLUGGING RECORD

Rooks County, Sec. 23 Twp. 10 Rge. 17W E/W  
Location as "NE/CNW SW1" or footage from lines  
150' E SW SE NW

Lease Owner Bowman Oil Company  
Lease Name Gosser #1 Well No.  
Office Address Codell, Kansas 67630  
Character of Well (Completed as Oil, Gas or Dry Hole)

Date Well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 10/24/78 19  
Plugging completed 10/27/78 19  
Reason for abandonment of well or producing formation  
depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Massey  
Producing formation Depth to top Bottom Total Depth of Well 3700  
Show depth and thickness of all water, oil and gas formations.

## OIL, GAS OR WATER RECORDS

## CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	250	none
				4-1/2"	3696	2151

Describe in detail the manner in which the well was plugged, indicating where the mud fluid  
was placed and the method or methods used in introducing it into the hole. If cement or other  
plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to  
feet for each plug set.

Pushed plug to 3300' and ran 10' of sand and 3 sacks cement. Shot pipe at 2478', 2397', 2278',  
2158', pulled 66 joints. Pumped 27 sacks gel, 2 sacks hulls and 140 sacks 50-50 pos mix, 6% gel.

PLUGGING COMPLETE.

RECEIVED  
STATE CORPORATION COMMISSION  
11-07-1978  
NOV - 7 1978

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor KELSO CASTING PULLING  
CHASE KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.  
R. DARRELL KELSO (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of  
the facts, statements, and matters herein contained and the log of the above-described well  
as filed and that the same are true and correct. So help me God.

(Signature)

*R. Darrell Kelso*  
CHASE, KANSAS

(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of November, 19 78

*Margaret Melcher*  
Notary Public.

My commission expires

