

15-163-30175-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

SE NW NE County. Sec. 27 Twp. 10S Rge. 17W (E) (W)

Location as "NE/CNW/SW" or footage from lines SE NW NE

Lease Owner Bankoff & Leben

Lease Name Bice Well No. 1

Office Address P. O. Box 486, Great Bend, Kansas 67530

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 6-13-66 19

Application for plugging filed 6-13-66 19

Application for plugging approved 6-13-66 19


Plugging commenced 6-13-66 19

Plugging completed 6-13-66 19

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

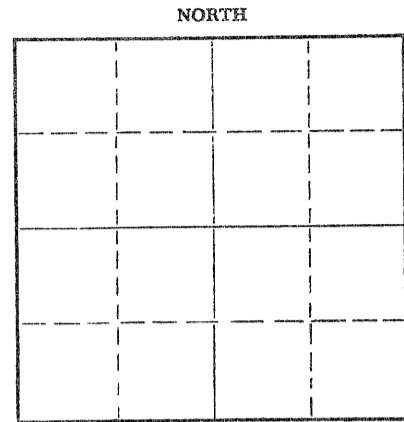

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey, Hays, Kansas

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3685 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	189'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Set Plug @ 540' w/25 sks. cement  
Set Plug @ 190' w/20 sks. cement  
Set Plug @ 40' w/1/2 sk. hulls, 10 sks. cement

RECEIVED  
STATE CORPORATION COMMISSION

JUN 20 1966  
06-20-1966  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Leben Drilling, Inc.

Address Box 486, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.

Leslie Kite (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leslie Kite

P. O. Box 486, Great Bend, Kansas 67530 (Address)

SUBSCRIBED AND SWORN TO before me this 17th day of June, 1966

My commission expires April 1, 1967

Ulanda Nichols Notary Public.

15-163-30175-00-00

DRILLER'S LOG

COMPANY: Bankoff & Leben  
 CONTRACTOR: LEBEN DRILLING, INC.  
 FARM: BICE #1  
 LOCATION: SE NW NE Sec. 27-10S-17W  
 ROOKS COUNTY, KANSAS  
 COMMENCED: 6-6-66  
 COMPLETED: 6-13-66

-----

0	40	Surface Soil, Shale
40	189	Shale, Sand, Shale
189	605	Shale
605	952	Sand, Shale
952	1245	Redbed
1245	1279	Anhydrite
1279	1685	Shale
1685	2030	Shale, Lime
2030	2757	Lime, Shale
2757	3010	Shale, Lime
3010	3114	Lime
3114	3220	Lime, Shale
3220	3590	Lime
3590	3603	Conglomerate
3603	3685	Arbuckle
	<u>3685</u>	<u>RTD - D. &amp; A.</u>

-----

8 5/8" used surface casing Set @ 189' cemented with 145 sacks  
 Common, 2% cc

-----

I, Leslie Kite, do hereby certify that the above and foregoing is  
 a true and correct copy of the log of the Bice #1 well, located  
 SE NW NE of Section 27, Township 10 South, Range 17 West, Rooks  
 County, Kansas, as reflected by the records of Leben Drilling, Inc.

*Leslie Kite*

Leslie Kite **RECEIVED**  
 STATE CORPORATION COMMISSION

JUN 20 1966

STATE OF KANSAS )  
 ) SS  
 COUNTY OF BARTON)

CONSERVATION DIVISION

Subscribed and sworn to and before me, a Notary Public,  
 in and for Barton County, Kansas, this 17th day of June, 1966.

*Ulanda Nichols*

Ulanda Nichols

My Commission Expires:  
 April 1, 1967