

15-163-20430-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

ROOKS County. Sec. 25 Twp. 10S Rge. (E) 17 (W)

Location as "NE/CNW&SW&" or footage from lines SW SW SE
Lease Owner PATRICK PETROLEUM
Lease Name WHISMAN Well No. 1
Office Address 330 Page Court
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 4/21 1972
Application for plugging filed 4/21 1972
Application for plugging approved 4/21 1972
Plugging commenced 4/21 1972
Plugging completed 4/21 1972
Reason for abandonment of well or producing formation Dry hole

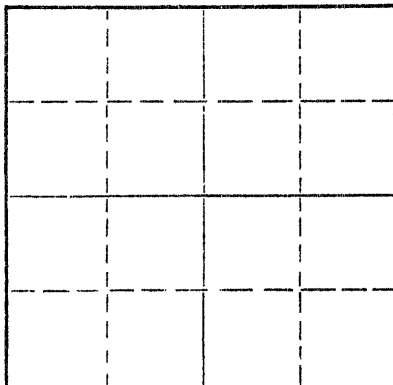

Locate well correctly on above
Section Flat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top 522 Bottom Total Depth of Well 3586 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Top soil, clay, rock		0	208	8 5/8	208	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

1st Plug 550' w/ 70 sax
2nd Plug 210' w/20 sax
3rd Plug 40' w/10 sax
Bridge RH w/2 sax


RECEIVED
STATE CORPORATION COMMISSION
APR 28 1972
CONSERVATION DIVISION
Wichita, Kansas
04-28-1972

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor GABBERT-JONES, INC.
Address 830 Sutton Place, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
GABBERT-JONES, INC. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack W. Gabbert, Exec. Vice President
830 Sutton Place, Wichita, Kansas (Address)



Subscribed and sworn to before me this 27 day of April, 1972
My commission expires Nov. 29, 1975
Marjorie Wall Notary Public

GABBERT-JONES, INC.
 WICHITA, KANSAS
 DRILLERS' WELL LOG

WHISMAN #1
 SW SW SE
 Section 25-10S-17W
 Rooks County, Kansas

Commenced: April 14, 1972
 Completed: April 21, 1972

OPERATOR: PATRICK PETROLEUM CORP.

15-163-20430-00-00

Depth		Formation	Remarks
From	To		
0	30	Surface clay - rock	Ran 5 jts of new 20# 8 5/8" csg. set @ 208' cemented w/135 sks common, 3% CC, 2% Gel. Cement Cir. P.D. @ 8:45 PM 4/14/72
30	574	Shale	
574	635	Hard sand & pyrite	
635	700	Shale	
700	845	Sand	
845	1132	Shale - sand	
1132	1175	Anhydrite	
1175	1760	Shale	
1760	1955	Shale-lime	
1955	2012	Lime-shale	
2012	2590	Shale-lime	
2590	2795	Lime	
2795	2835	Shale-lime	
2835	2960	Lime	
2960	3038	Lime-shale	
3038	3389	Lime	
3389	3450	Shale-lime	
3450	3522	Cong-	
3522	3565	Shale	
3565	3586	Arbuckle	
3586	TD		

RECEIVED
 STATE CORPORATION COMMISSION
 MAY 5 - 1972
 05-05-1972
 CONSERVATION DIVISION
 Wichita, Kansas

DRY & ABANDONED


I, James S. Sutton, II, certify this is a correct copy of the Drillers' Log for the well drilled in SW SW SE, Section 25-10S-17W, Rooks County, Kansas, to the best of my knowledge and belief.

James S. Sutton, II
 James S. Sutton, II

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 25th day of April, 1972, personally appeared James S. Sutton, II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.



Marjorie Hall
 Marjorie Hall, Notary Public