

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-23374-00-00
Spot: NENENE Sec/Twnshp/Rge: 16-18S-26W
4950 feet from S Section Line, 230 feet from E Section Line
Lease Name: BENTLEY Well #: 1-16
County: NESS Total Vertical Depth: 4650 feet

Operator License No.: 5030
Op Name: VESS OIL CORPORATION
Address: 1700 WATERFRONT PARKWAY, BLDG
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		4540		
DVT		2000		295 SX CMT TO SURFACE
SURF	8.625	207		WITH 135 SX CMT

\$ 151.13

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 05/22/2007 5:00 PM
Plug Co. License No.: 32938 Plug Co. Name: NORTH FORK WELL SERVICE LLC
Proposal Rcvd. from: GARY Company: NORTH FORK WELL SERVICE LLC Phone: (620) 793-3051

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING

Plugging Proposal Received By: STEVE DURRANT Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 05/23/2007 7:30 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

RAN TUBING TO 4520' & PUMP 30 SX CMT & 100# HULLS. PULL TUBING TO 2000' & PUMPED 190 SX CMT. LOST CIRCULATION. TIED ONTO BACKSIDE AND PUMPED 30 SX CMT. PRESSURED TO 500# & HELD. 5/23/07: RAN TUBING TO 1280' AND FOUND CMT. PUMPED 90 SX CMT. CIRCULATED TO SURFACE. PULLED TUBING & TOPPED OFF WITH 10 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4575	4579		
4496	4502		

INVOICED
DATE 6-7-07
INV. NO. 2007061874

Remarks: USED 60/40 POZMIX 6% GEL BY SWIFT SERVICES.

Plugged through: TBG

District: 0

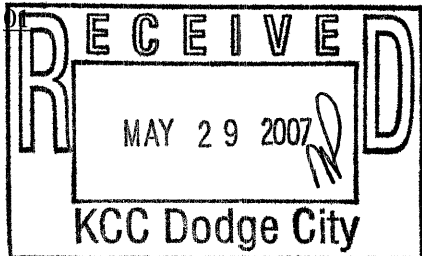

Signed

Michael Maier
(TECHNICIAN)

RECEIVED
KANSAS CORPORATION COMMISSION Form CP-2/3

JUN 05 2007

CONSERVATION DIVISION
WICHITA, KS

PKT