

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-071-20424-00-00  
Spot: SWSWNE Sec/Twnshp/Rge: 1-16S-43W  
2970 feet from S Section Line, 2310 feet from E Section Line  
Lease Name: EDSALL Well #: F-16  
County: GREELEY Total Vertical Depth: 5296 feet

Operator License No.: 3273  
Op Name: LOEB, HERMAN L.  
Address: PO BOX 524  
LAWRENCEVILLE, IL 62439

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		2134		
DVT		1806		WITH 350 SX CMT
PROD	4.5	5300	0	WITH 175 SX CMT
SURF	8.625	382		WITH 285 SX CMT

\$ 172.12

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 05/24/2007 3:00 PM  
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY  
Proposal Rcvd. from: GARY MOORE Company: MID CON TOOLS Phone: \_\_\_\_\_

Proposed Plugging Method: CIBP @ 2130'. TOC @ 600'. PERFORATE AT 390'. CIRCULATE CMT.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 05/24/2007 7:45 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

3000' OF 2 3/8" TUBING & RODS LEFT STUCK IN HOLE UNDER CIBP. SET CIBP @ 2134'. TEST 4 1/2" CASING TO 500# & HELD. RAN BOND LONG AND FOUND TOC @ 430'. PERFORATE AT 390'. RUN TUBING TO 2100' & SPOT 100 SX CMT. HOOK ON TO 4 1/2" CASING & CIRCULATE CMT OUT PERFS AT 390'. FILL CASING & ANNULUS WITH 100 SX CMT.

Perfs:

Top	Bot	Thru	Comments
5131	5137		

INVOICED  
DATE 6-12-07  
INV. NO. 2007061892

RECEIVED  
KANSAS CORPORATION COMMISSION


Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

JUN 11 2007

Plugged through: TBG

CONSERVATION DIVISION  
WICHITA, KS

District: 01

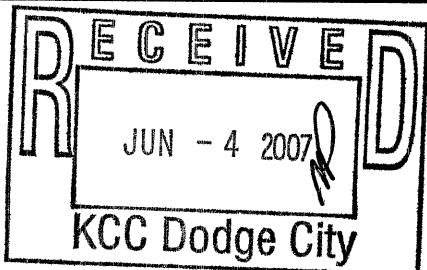

Signed

*Ken Jehlik*

(TECHNICIAN)