

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-093-20820-00-00
Spot: NENESWSW Sec/Twnshp/Rge: 22-23S-38W
1250 feet from S Section Line, 4030 feet from E Section Line
Lease Name: REXFORD Well #: 1
County: KEARNY Total Vertical Depth: 4231 feet

Operator License No.: 32832
Op Name: PETROHAWK OPERATING COMPANY
Address: 6100 S YALE, SUITE 500
TULSA, OK 71437

String	Size	Depth (ft)	Pulled (ft)	Comment	
CIBP		950			\$ 137.51
CIBP		2700		WITH 2 SX CMT	
CIBP		4000		WITH 2 SX CMT	
PROD	5.5	4231	0	WITH 440 SX CMT	
SURF	8.625	1852			

Well Type: SWD UIC Docket No: D24422.0 Date/Time to Plug: 05/14/2007 9:00 AM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: EARL OCHAMPAUGH Company: PETROHAWK Phone: (620) 272-1219

Proposed Plugging Method: CIBP @ 4000'. CIBP @ 2700'. TEST CASING TO 500#. PERFORATE AT 1700' & CIRCULATE CMT TO SURFACE. CHECK BACKSIDE.

Plugging Proposal Received By: KEN JEHLIK WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 05/14/2007 3:30 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

1ST PLUG SET CIBP @ 4000' & 2 SX CMT. 2ND PLUG SET CIBP @ 2700' & 2 SX CMT. TEST CASING, WOULD NOT HOLD PRESSURE. 3RD PLUG SET CIBP @ 950'. TEST CASING TO 500 PSI. 4TH PLUG PERFORATE CASING @ 900'. BREAK CIRCULATION & PUMP 250 SX CMT DOWN 5 1/2" X CIRCULATE CMT TO SURFACE.

Perfs:


Top	Bot	Thru	Comments
4140	4190		
2928	2938		
2897	2912		
2873	2883		

INVOICED
DATE 6-13-07
INV. NO. 2007061897

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

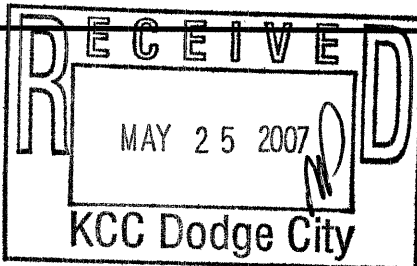

Signed

Ken Jehlik

RECEIVED
(TECHNICIAN) STATE CORPORATION COMMISSION

JUN 06 2007

CONSERVATION DIVISION
WICHITA, KS

PKT