

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-145-21282-00-00  
Spot: E2SESW Sec/Twnshp/Rge: 35-23S-17W  
660 feet from S Section Line, 2970 feet from E Section Line  
Lease Name: PENKA Well #: 3-35  
County: PAWNEE Total Vertical Depth: 4414 feet

Operator License No.: 5056  
Op Name: HOLL, F.G., COMPANY L.L.C.  
Address: 9431 E CENTRAL, SUITE 100  
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	4412	2290	WITH 225 SX CMT
SURF	8.625	333		WITH 225 SX CMT

\$143.46

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 06/27/2007 12:40 PM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: MR. ROB LONG Company: F.G. HOLL Phone: (620) 793-0915

Proposed Plugging Method: SAND TO 4190' & 4 SX CMT. PLUG AT 1150' WITH 12 SX GEL & 50 SX CMT. PLUG AT 360' WITH 50 SX CMT. PLUG AT 40' WITH 15 SX CMT.

Plugging Proposal Received By: RICHARD LACEY Witness Type: NONE  
Date/Time Plugging Completed: 06/27/2007 3:30 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED TO 4190' WITH 4 SX CMT ON TOP. 1ST PLUG AT 1150' WITH 12 SX GEL & 50 SX CMT. 2ND PLUG AT 360' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 15 SX CMT. CMT CIRCULATED.

Perfs:


Top	Bot	Thru	Comments
4244	4250		

**INVOICED**  
DATE: 7-10-07  
INV. NO. 2008060060

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

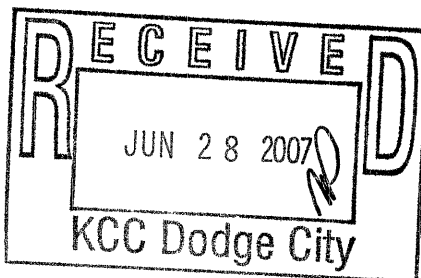

Signed Richard W. Lacey  
(TECHNICIAN)

RECEIVED  
KANSAS CORPORATION COMMISSION  
JUL 02 2007  
CONSERVATION DIVISION  
WICHITA, KS

Form CR 275

PJT