

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-047-20104-00-00  
Spot: NESW Sec/Twnshp/Rge: 16-25S-16W  
1980 feet from S Section Line, 3300 feet from E Section Line  
Lease Name: PALMITIER A Well #: 1  
County: EDWARDS Total Vertical Depth: 4475 feet

Operator License No.: 8061  
Op Name: OIL PRODUCERS INC. OF KANSAS  
Address: 1710 WATERFRONT PARKWAY  
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	4469	0	WITH 100 SX CMT
SURF	8.625	329		

145.44

Well Type: OG UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 06/19/2007 9:00 AM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 06/19/2007 11:27 AM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SQUEEZED AT 2758' WITH 150 SX CMT. SQUEEZED 400' TO 0'. SANDED TO 4290' & 5 SX CMT WITH BAILER. PERFORATED AT 1100'. RAN TUBING TO 1100'. CIRCULATED CMT TO SURFACE UP 5 1/2" WITH 100 SX CMT. PULLED TUBING OUT OF HOLE. TOPPED OFF 5 1/2" WITH 40 SX CMT. CMT STAYING TO TOP. PRESSURE TESTED 8 5/8" X 5 1/2" ANNULUS TO 500 PSIG WITH 1 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4422	4430		
4378	4390		
4368	4372		
4346	4350		

INVOICED  
DATE 7-10-07  
INV. NO. 2008060076

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: TBG

District: 01

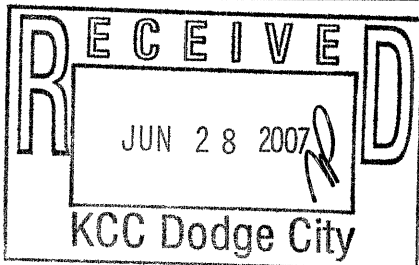

Signed

Richard W. Lacey

(TECHNICIAN)

RECEIVED  
KANSAS CORPORATION COMMISSION Form CP-2/3

JUL 02 2007

CONSERVATION DIVISION  
WICHITA, KS

*Handwritten initials/signature*