

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-145-20156-00-00
Spot: E2SESE Sec/Twnshp/Rge: 27-22S-16W
660 feet from S Section Line, 330 feet from E Section Line
Lease Name: KACHELMAN Well #: 1
County: PAWNEE Total Vertical Depth: 4070 feet

Operator License No.: 8061
Op Name: OIL PRODUCERS INC. OF KANSAS
Address: 1710 WATERFRONT PARKWAY
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	4100	0	WITH 125 SX CMT
SURF	8.625	248		WITH 250 SX CMT

132.28

Well Type: OG UIC Docket No: _____ Date/Time to Plug: 06/25/2007 10:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING.

Plugging Proposal Received By: RICHARD LACEY Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 06/25/2007 4:05 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED TO 3930' & 4 SX CMT WITH DUMP BAILER. WELL HAS HAD 300 SX CMT PUMPED DOWN 8 5/8" X 4 1/2" ANNULUS. PERFORATED 4 1/2" @ 1100'. RAN TUBING TO 1120' & PUMPED 90 SX CMT. LOST CIRCULATION. PUMPED 80 SX CMT WITH 400# HULLS MIXED IN. NO CIRCULATION. PULLED TUBING. RAN WIRE LINE AFTER 3 HOURS. TAGGED CMT @ 1510'. RAN TUBING TO 1120' & PUMPED 100 SX CMT CIRCULATING TO 0' UP 4 1/2". PULLED TUBING. TOPPED OFF 4 1/2" WITH 25 SX CMT. PUMPED 100 SX CMT DOWN 8 5/8" X 4 1/2" ANNULUS. MAXIMUM PRESSURE 300 PSIG. SHUT IN PRESSURE 50 PSIG.

Perfs:


Top	Bot	Thru	Comments
4000	4008		
3989	3993		

INVOICED
DATE 7-10-07
INV. NO. 2008060076

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: TBG

District: 01

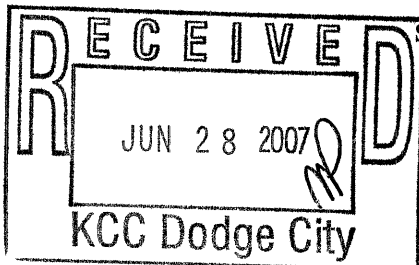

Signed Richard W. Lacey
(TECHNICIAN)

RECEIVED Form CP-2/3
KANSAS CORPORATION COMMISSION
JUL 02 2007
CONSERVATION DIVISION
WICHITA, KS

PKT