

15-163-20248-00-00


Form CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION

Get All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

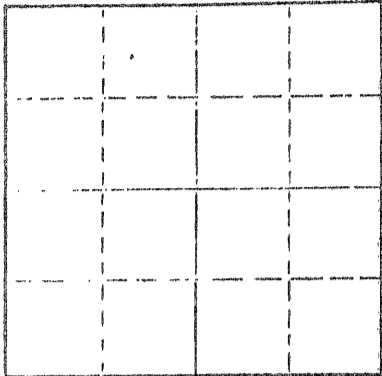

Locate well correctly on above
Section Plat

Rooks County. Sec 11 Twp. 10 Rge. 17 (E) (W)
Location as "NE/CNWSW" or footage from lines. NW NE NE
Lease Owner Leben Oil Corporation
Lease Name Darland #3 Well No. _____
Office Address Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 10/8/74 _____ 19____
Plugging completed 10/18/74 _____ 19____
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3525 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	2091	none
				5 1/2"	3523'	2094' -

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole, pushed plug to 3000' with sand and 4 sacks cement.
Loaded hole, shot pipe at 2609', 2504', 2397', 2299', 2196', 2097', pulled
65 joints. Plugged well with 120 sacks cement, 28 sacks gel and 3 sacks
hulls.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
NOV 5 1974
11-05-1974
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor KELSO CASING PULLING
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.

R. DARRELL KELSO (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of October, 19 74

My commission expires _____

MARGARET MELCHER
NOTARY PUBLIC
Rice County, Kansas
My Commission Expires
Feb. 15, 1975

Margaret Melcher
Notary Public.

ROBERT C. ARMSTRONG

PETROLEUM GEOLOGIST
WICHITA, KANSAS

OFFICE

655 FOURTH NAT'L. BLDG.
AM 5-5608

RESIDENCE

564 N. ARMOUR DRIVE
MU 3-0787

September 17, 1969

15-163-20248-00-00

TILCO #3 DARLAND
NW NE NE Sec. 11-10S-17W
Rooks County, Kansas

GENERAL

Contractor: Leben Drilling Co.
Spudded: September 5, 1969
Completed: September 11, 1969
Rotary: Surface to 3525', TD

CASING

8 5/8" cemented at 209' with 150 sacks
5 1/2" cemented at 3523' with 150 sacks

GEOLOGICAL DATA

Samples saved, drilling-time recorded from 2800' to the total depth.

Elevation 2039 derrick floor, 2042 rotary bushing; rotary bushing elevation and measurements used.

Formation tops

Anhydrite	1267	+ 775
Base Anhydrite	1305	+ 737
Topeka	2939	- 897
Heebner	3160	-1118
Toronto	3142	-1140
Lansing	3205	-1163
Base KC	3426	-1384
Marmaton Sand	3446	-1404
Arbuckle	3514	-1472
Total Depth	3525	-1483

CORES

None

RECEIVED
STATE CORPORATION COMMISSION

OCT 17 1974
10-17-1974
CONSERVATION DIVISION
Wichita, Kansas