

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-093-21354-00-00
Spot: SEWNNE Sec/Twnshp/Rge: 16-23S-35W
1250 feet from N Section Line, 1440 feet from E Section Line
Lease Name: SCHAEFER GU Well #: 2HI
County: KEARNY Total Vertical Depth: 2805 feet

Operator License No.: 5952
Op Name: BP AMERICA PRODUCTION COMPANY
Address: 2225 WEST OKLAHOMA AVENUE
ULYSSES, KS 67880

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	2805	0	WITH 450 SX CMT
SURF	8.625	1032		WITH 450 SX CMT

\$ 91.16

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 06/20/2007 10:30 AM
Plug Co. License No.: 99997 Plug Co. Name: HALLIBURTON ENERGY SERVICES
Proposal Rcvd. from: KEVIN STRUBE Company: BP AMERICA Phone: (620) 356-6955

Proposed Plugging Method: PUMP 500# HULLS & FILL 5 1/2" WITH CMT. CHECK BACKSIDE.

Plugging Proposal Received By: STEVE DURRANT Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 06/20/2007 12:15 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

PUMPED 275 SX CMT WITH 500# HULLS IN FIRST PART OF CMT. PRESSURE TO 560#. HOOK UP TO 5 1/2' X 8 5/8" ANNULUS AND FILL WITH 7 SX CMT. PRESSURE TO 900# & SHUT IN. TOP OFF 5 1/2" CASING WITH 3 SX CMT.

Perfs:


Top	Bot	Thru	Comments
2530	2594		

INVOICED
DATE: 7-7-07
INV. NO. 2008060144

Remarks: USED 60/40 POZMIX 6% GEL BY HALLIBURTON.

Plugged through: CSG

District: 01

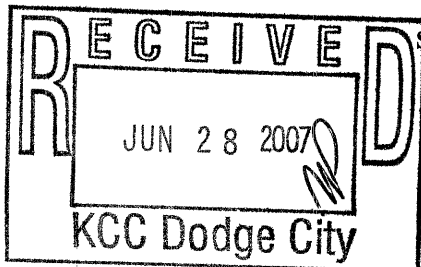

Signed: [Signature]
(TECHNICIAN)

RECEIVED
KANSAS CORPORATION COMMISSION
JUL 18 2007
CONSERVATION DIVISION
WICHITA, KS