

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-185-23425-00-00  
Spot: NWNWSW Sec/Twnshp/Rge: 18-25S-11W  
2310 feet from S Section Line, 330 feet from W Section Line  
Lease Name: GATHINGS Well #: 1  
County: STAFFORD Total Vertical Depth: 4187 feet

Operator License No.: 5046  
Op Name: RAYMOND OIL COMPANY, INC.  
Address: 155 N. MARKET - SUITE 800 PO BOX 4  
WICHITA, KS 67201

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	4182	2425	WITH 185 SX CMT
SURF	8.625	263		WITH 225 SX CMT

*\$136.08*

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 07/02/2007 9:00 AM

Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.

Proposal Rcvd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 3950' & 5 SX CMT. PLUG AT 600' WITH 50 SX CMT. PLUG AT 290' WITH 50 SX CMT. PLUG AT 40' WITH 15 SX CMT.

Plugging Proposal Received By: RICHARD LACEY

WitnessType: COMPLETE (100%)

Date/Time Plugging Completed: 07/02/2007 11:27 AM

KCC Agent: RICHARD LACEY

Actual Plugging Report:

SAND TO 3950' & 5 SX CMT WITH DUMP BAILER. SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 600' WITH 50 SX CMT. 2ND PLUG AT 290' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 15 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3980	4000		


INVOICED

DATE 7-11-07  
INV. NO. 2008060100

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND ACID.

Plugged through: CSG

District: 01

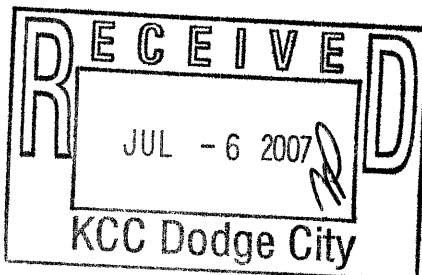

Signed Richard W. Lacey  
(TECHNICIAN)

RECEIVED  
KANSAS CORPORATION COMMISSION Form CP-2/3

JUL 09 2007  
CONSERVATION DIVISION  
WICHITA, KS

*[Handwritten signature]*